

802.11a - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3484.375 PK	55.13	74	-18.87	-48.06	-50.83	6.09	-40.13
2	3512.5 AV	33.92	54	-20.08	-70.21	-70.68	6.09	-61.34
3	6987.5 PK	60.66	68.2	-7.54	-42.32	-45.72	6.09	-34.6
4	10490.625 PK	53.7	74	-20.3	-50.3	-51.06	6.09	-41.56
5	10481.25 AV	33.72	54	-20.28	-70.67	-70.61	6.09	-61.54
6	15731 PK	53.5	74	-20.5	-50.36	-51.43	6.09	-41.76
7	15731 AV	42.24	54	-11.76	-62.3	-61.95	6.09	-53.02

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

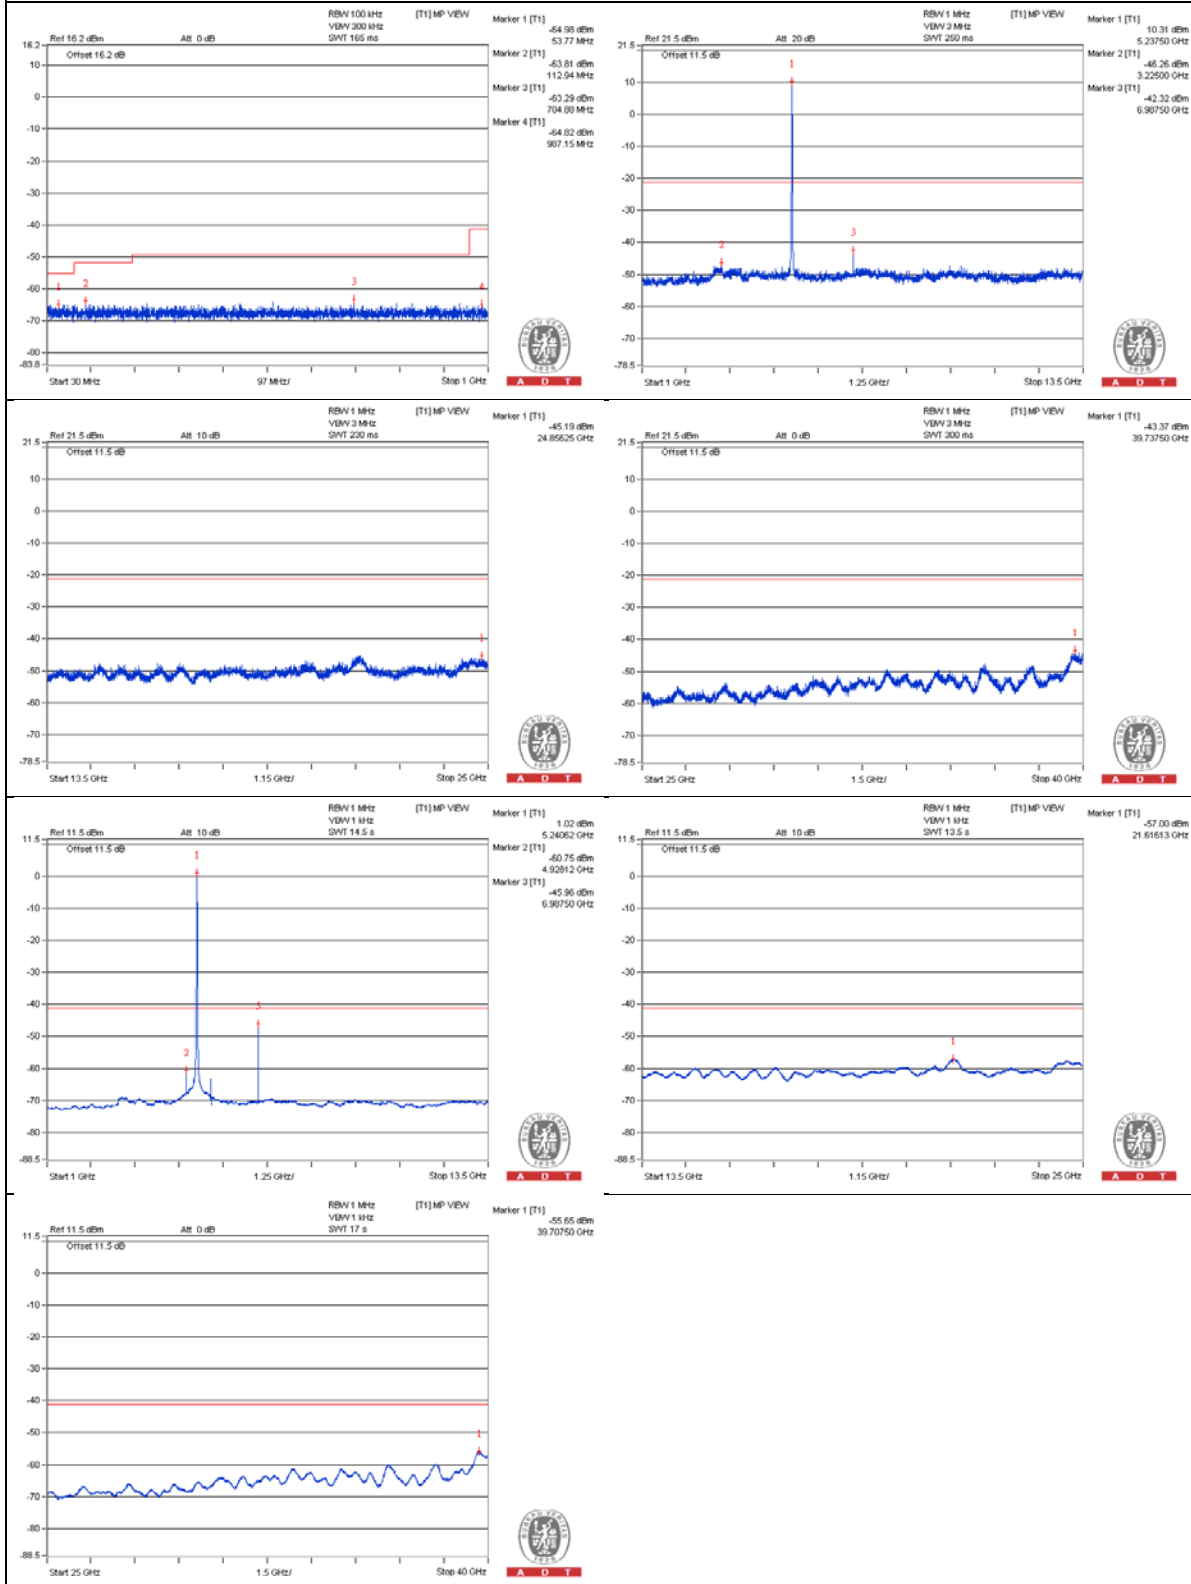

Chain 1

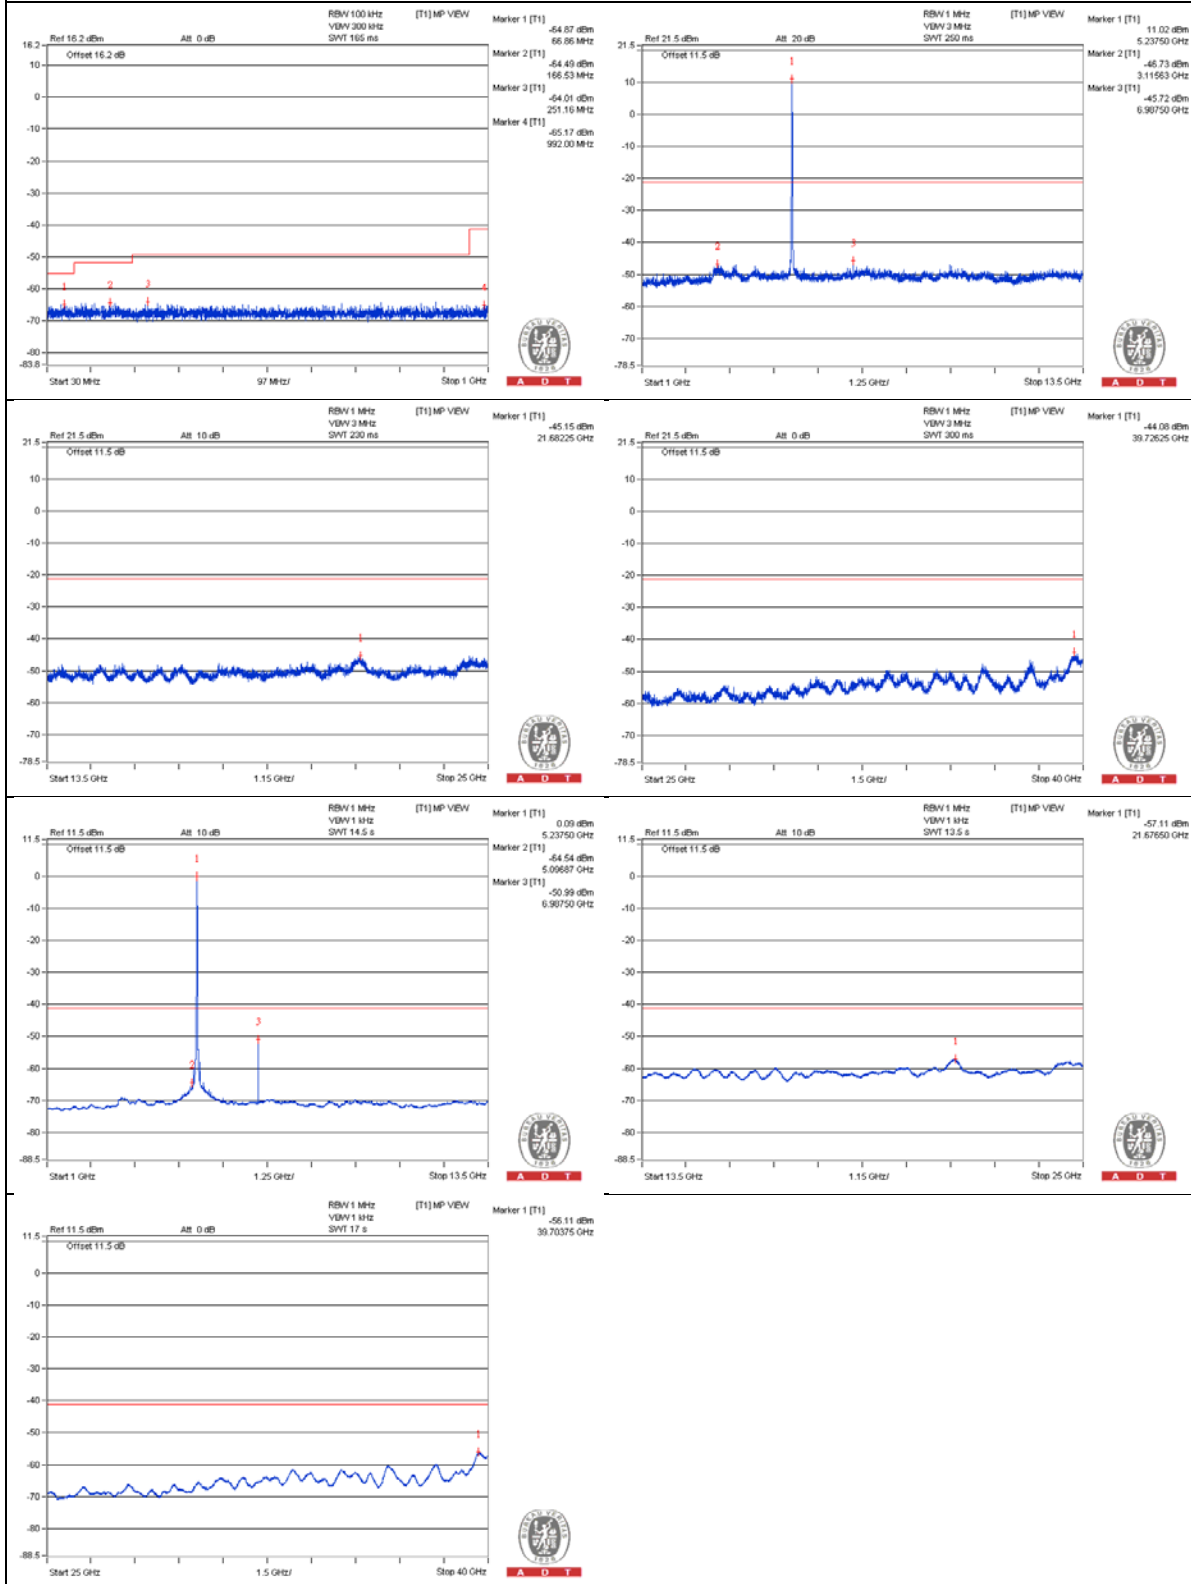

802.11a - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3515.625 PK	55.39	74	-18.61	-49	-48.95	6.09	-39.87
2	3521.875 AV	34.22	54	-19.78	-70.11	-70.18	6.09	-61.04
3	7012.5 PK	59.75	68.2	-8.45	-43.65	-45.84	6.09	-35.51
4	10531.25 PK	54.58	74	-19.42	-49.34	-50.27	6.09	-40.68
5	10525 AV	33.96	54	-20.04	-70.1	-70.72	6.09	-61.3
6	15788.5 PK	54.17	74	-19.83	-49.73	-50.7	6.09	-41.09
7	15791.375 AV	42.99	54	-11.01	-61.34	-61.41	6.09	-52.27

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

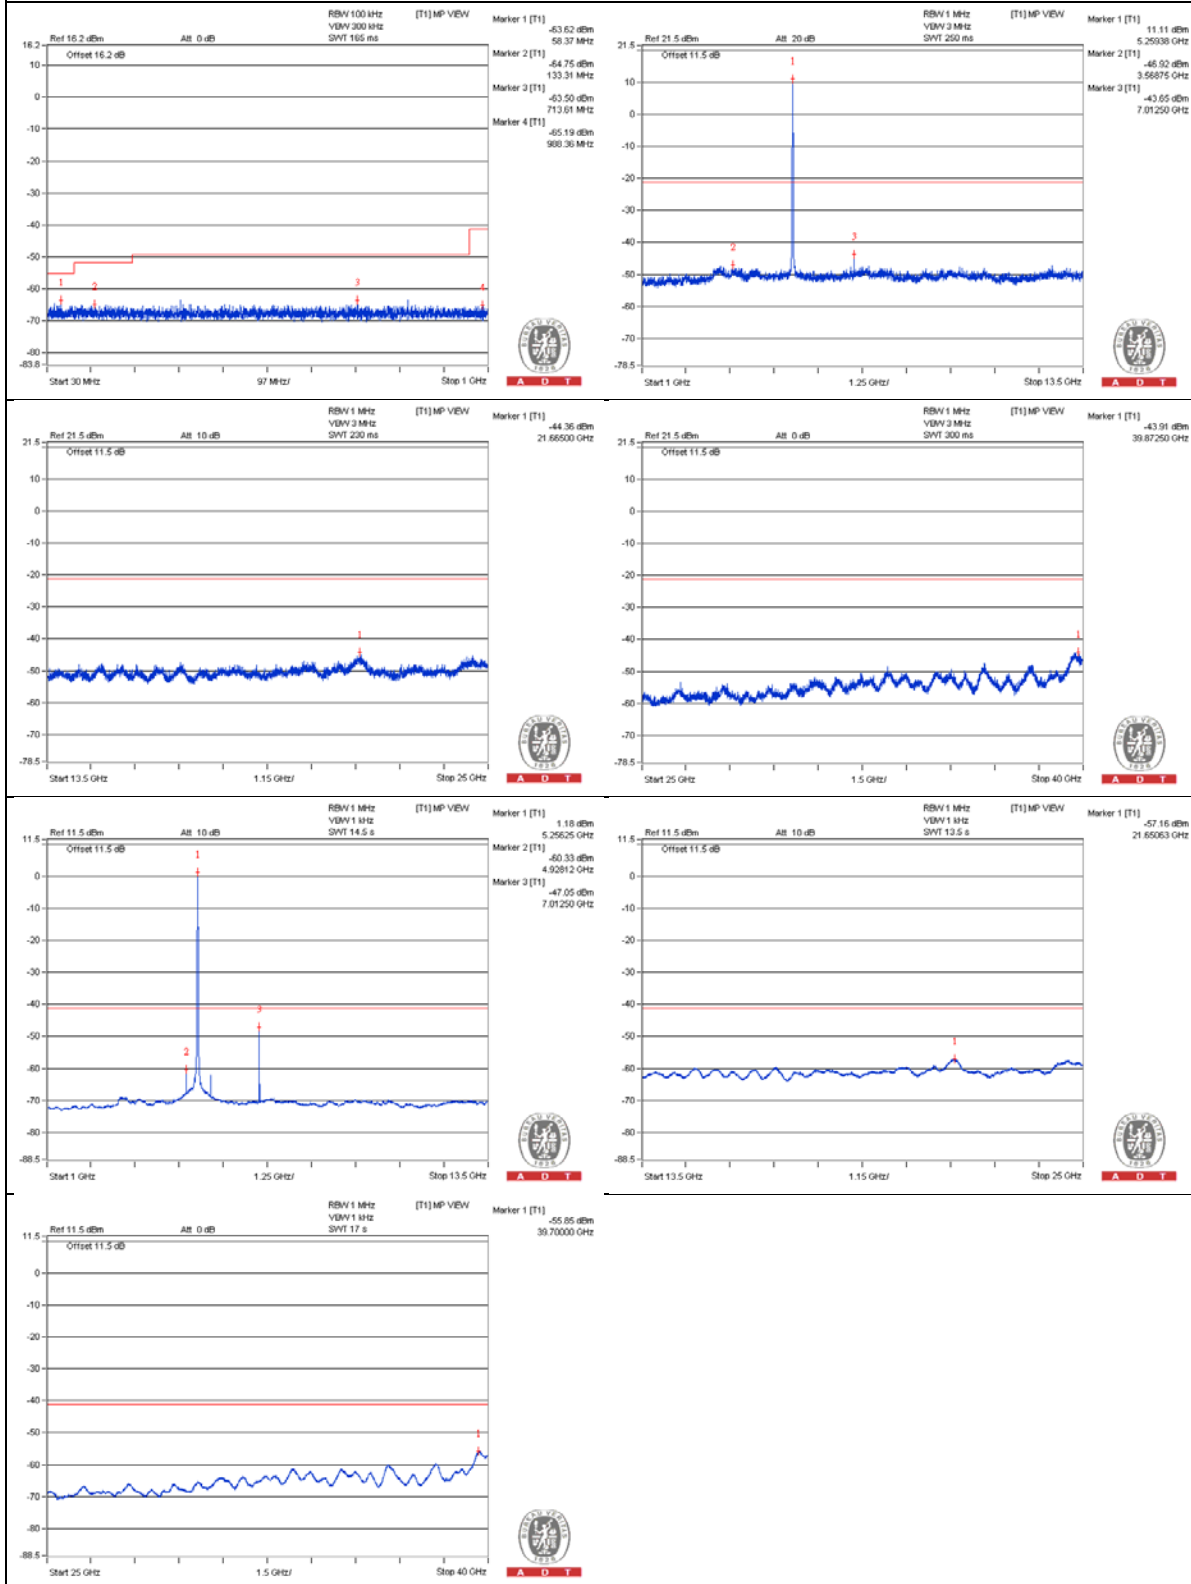

Chain 1

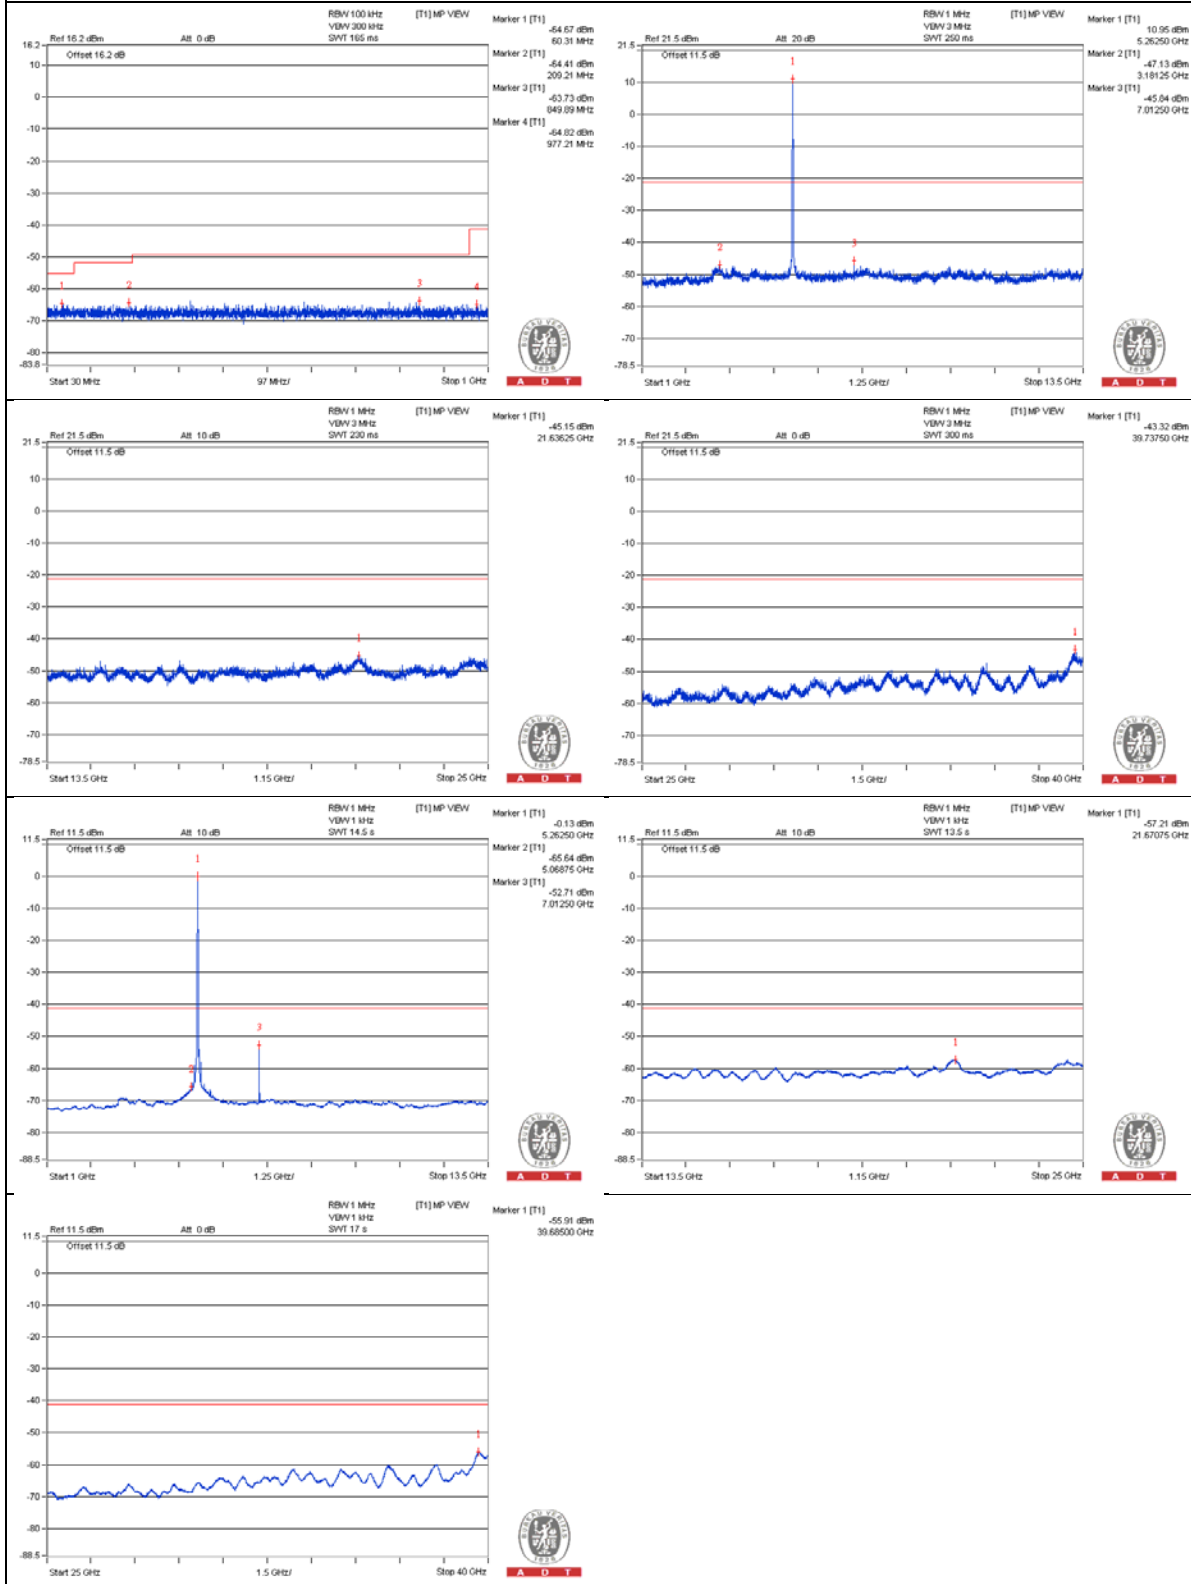

802.11a - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3550 PK	55.57	74	-18.43	-49.21	-48.4	6.09	-39.69
2	3550 AV	34.38	54	-19.62	-69.96	-70.01	6.09	-60.88
3	7068.75 PK	58.99	68.2	-9.21	-44.12	-47.14	6.09	-36.27
4	10584.375 PK	54.63	74	-19.37	-49.22	-50.31	6.09	-40.63
5	10600 AV	33.73	54	-20.27	-70.45	-70.81	6.09	-61.53
6	15892 PK	54.58	74	-19.42	-49.27	-50.37	6.09	-40.68
7	15897.75 AV	43.1	54	-10.9	-61.23	-61.29	6.09	-52.16

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

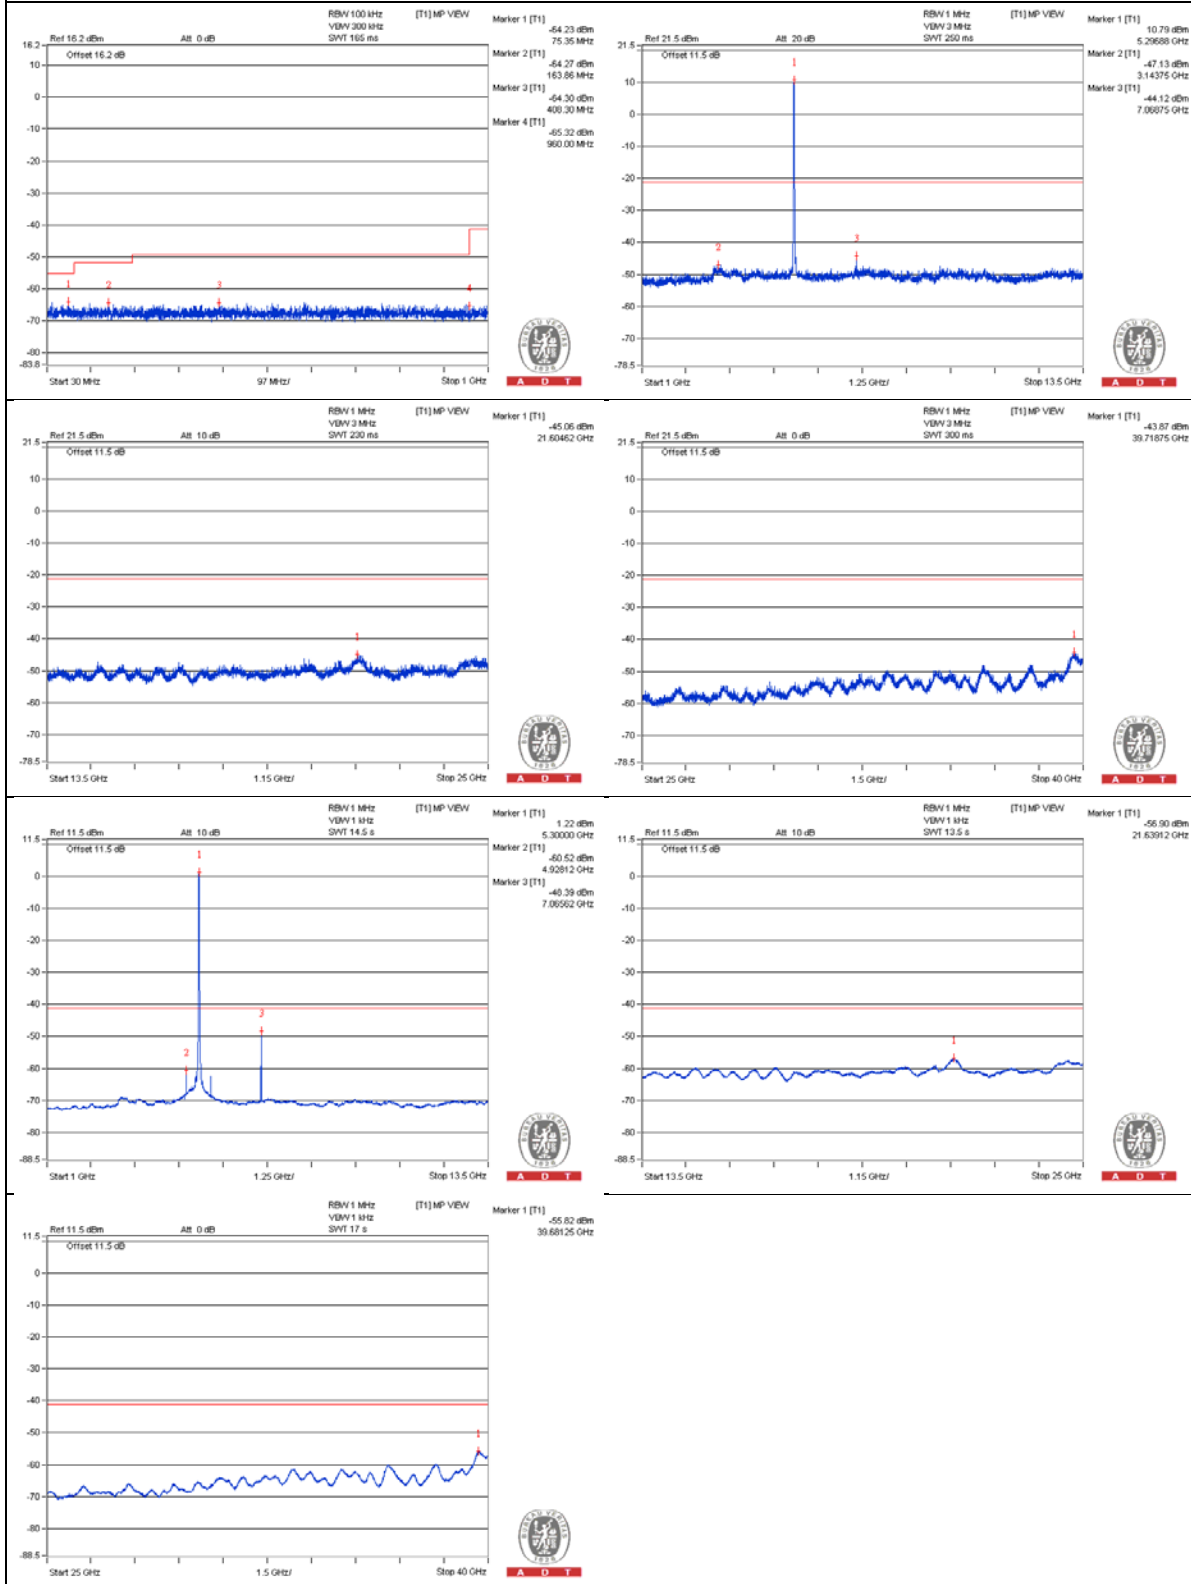

Chain 1

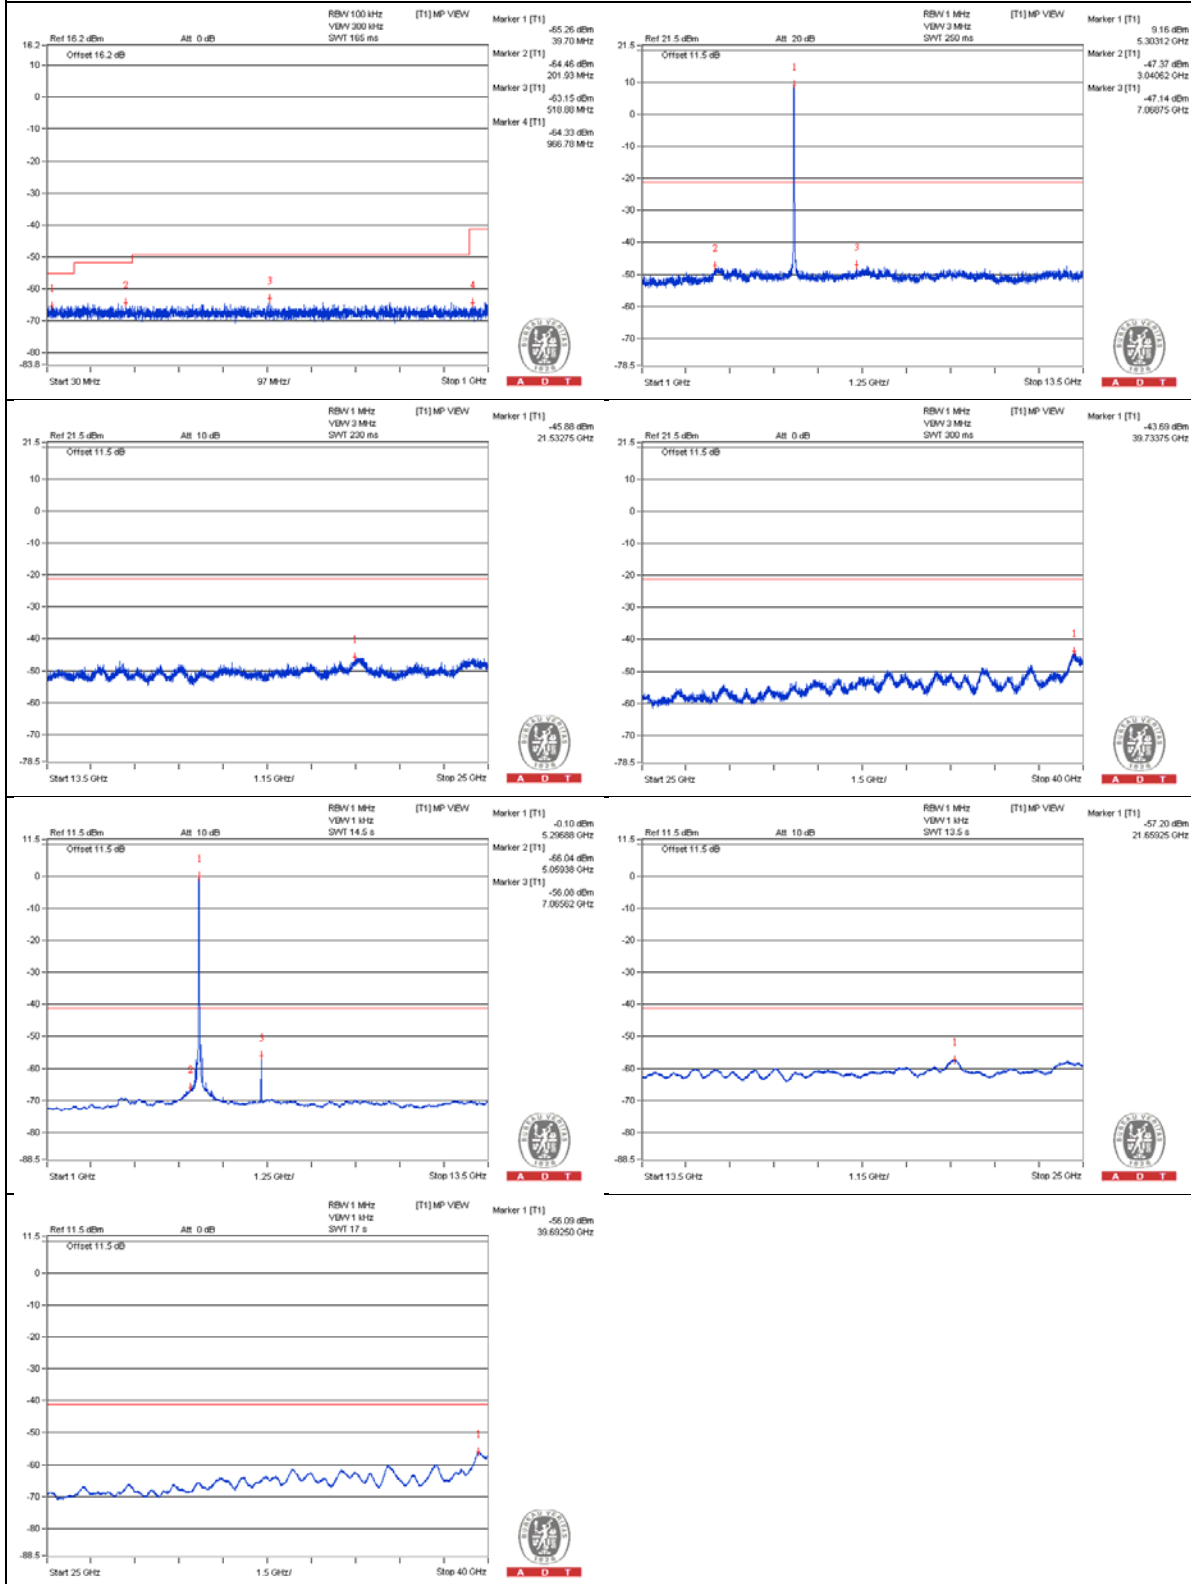

802.11a - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3553.125 PK	55.58	74	-18.42	-47.91	-49.86	6.09	-39.68
2	3546.875 AV	34.62	54	-19.38	-69.73	-69.75	6.09	-60.64
3	7093.75 PK	58.85	68.2	-9.35	-43.64	-48.85	6.09	-36.41
4	10631.25 PK	54.56	74	-19.44	-48.34	-52	6.09	-40.7
5	10628.125 AV	33.7	54	-20.3	-70.69	-70.64	6.09	-61.56
6	15963.875 PK	53.3	74	-20.7	-50.73	-51.42	6.09	-41.96
7	15940.875 AV	42.37	54	-11.63	-61.98	-62.01	6.09	-52.89

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

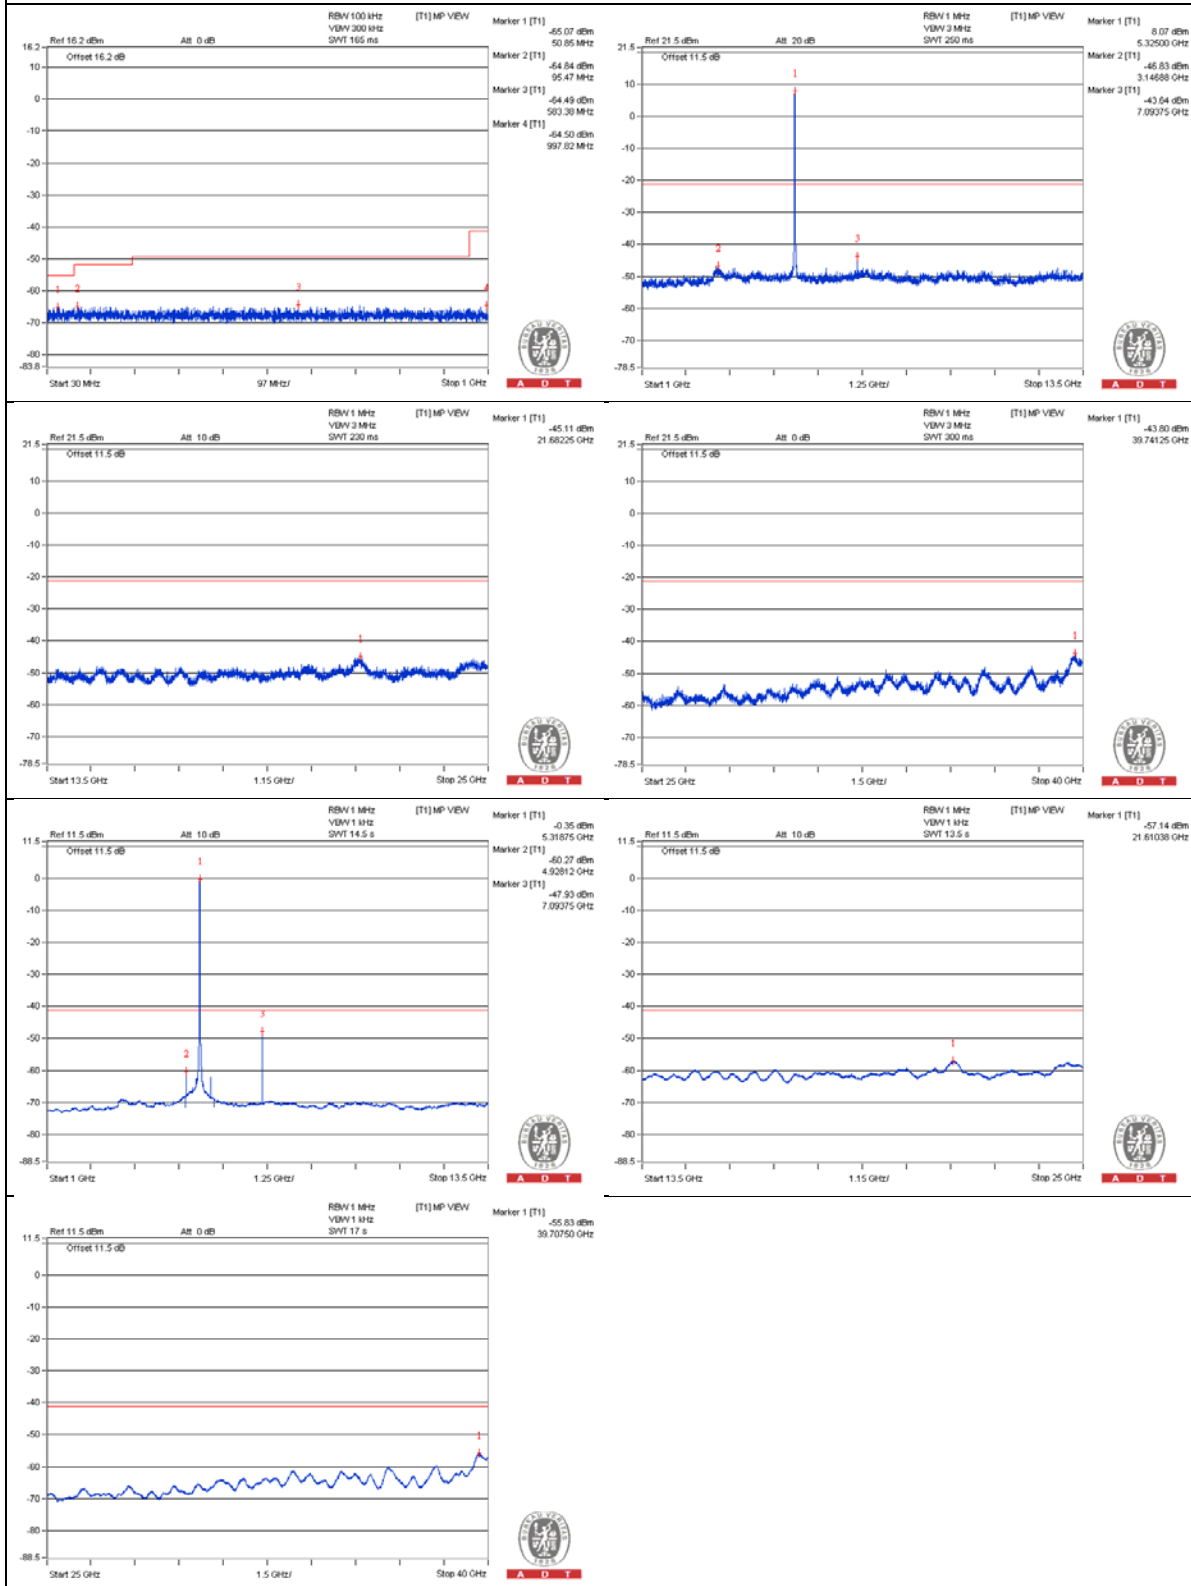

Chain 1

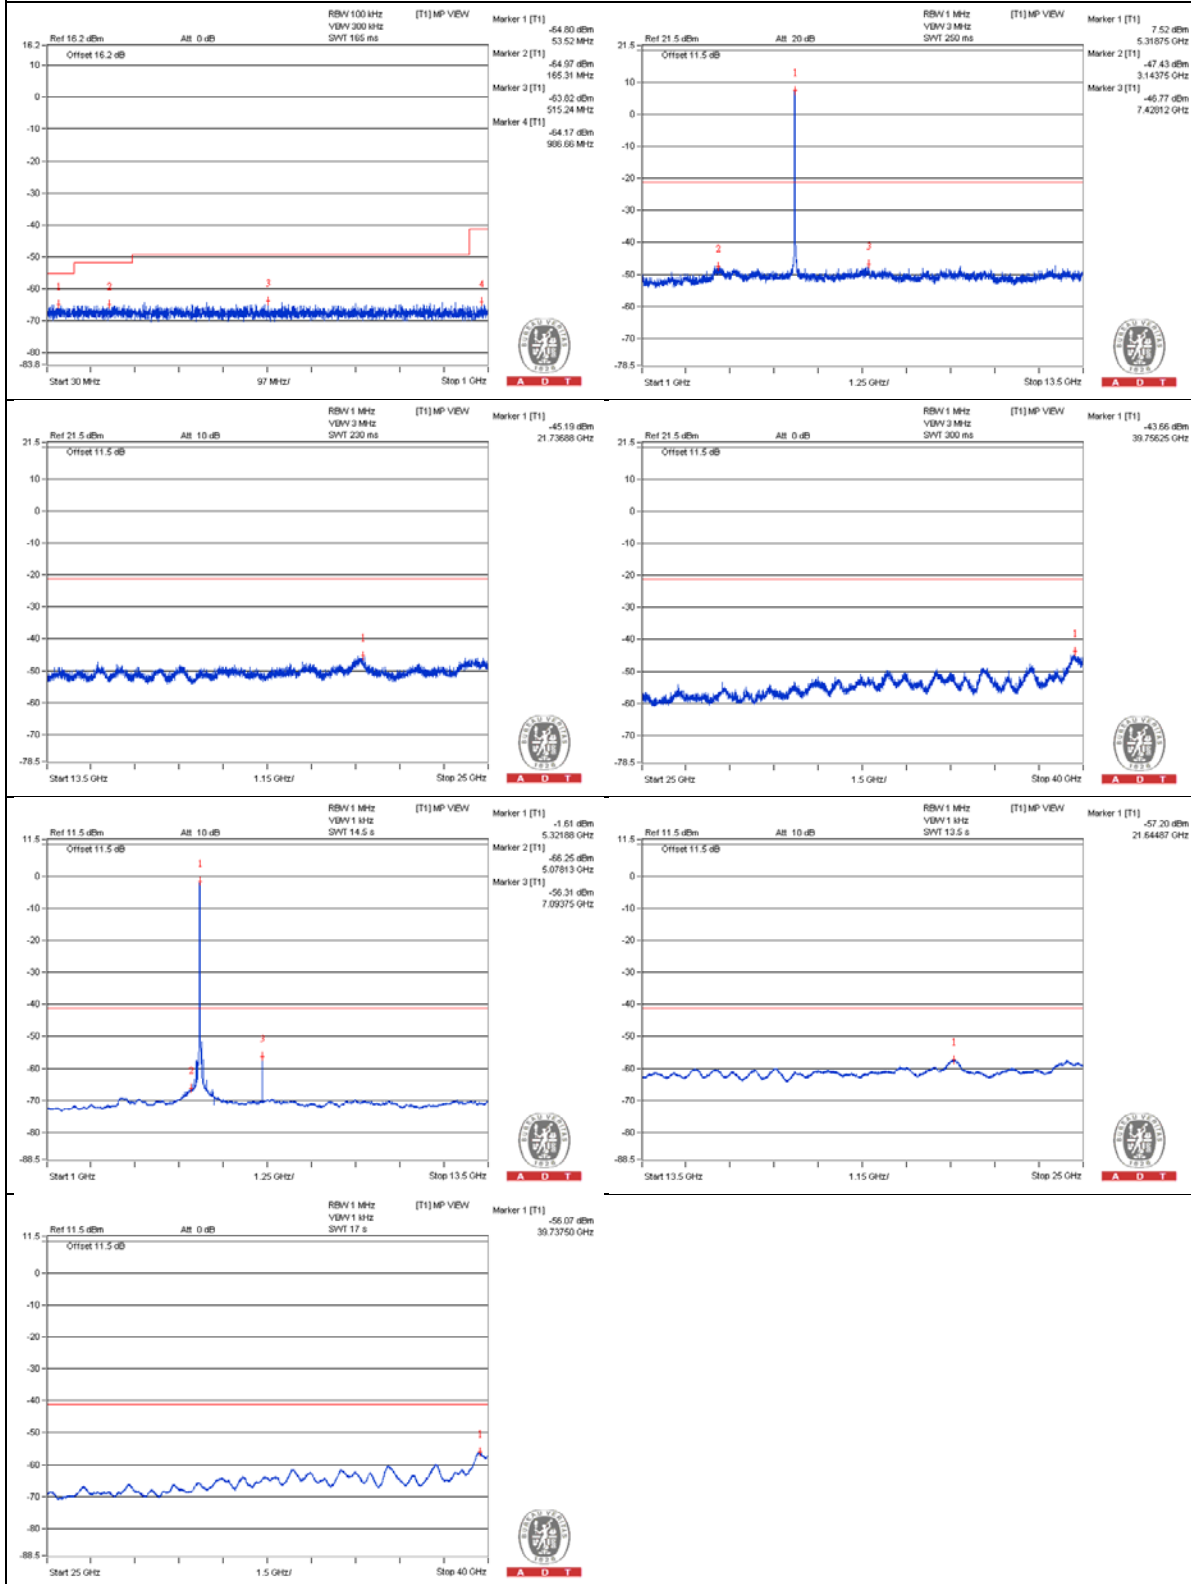

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.15 PK	61.5	74	-12.5	-42.39	-43.39	6.09	-33.76
2	5368 AV	50.6	54	-3.4	-58.06	-51.64	6.09	-44.66

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

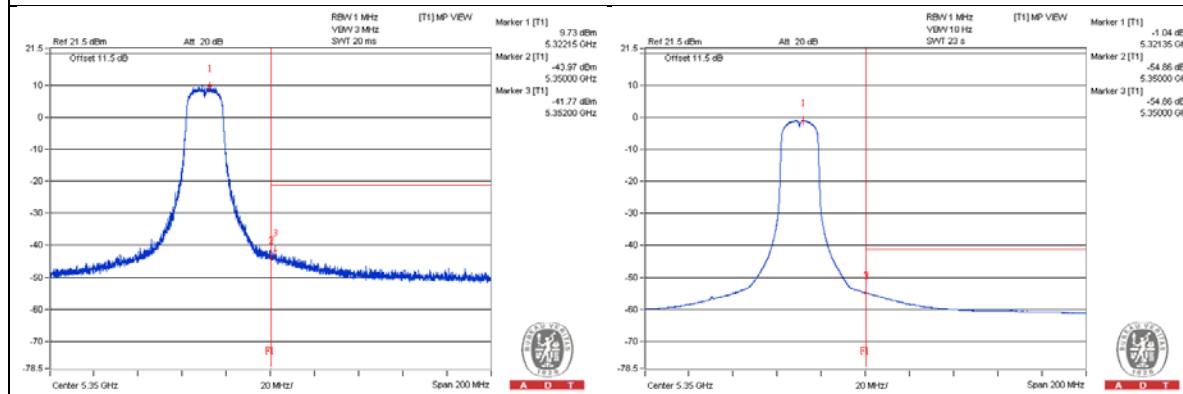

Chain 1

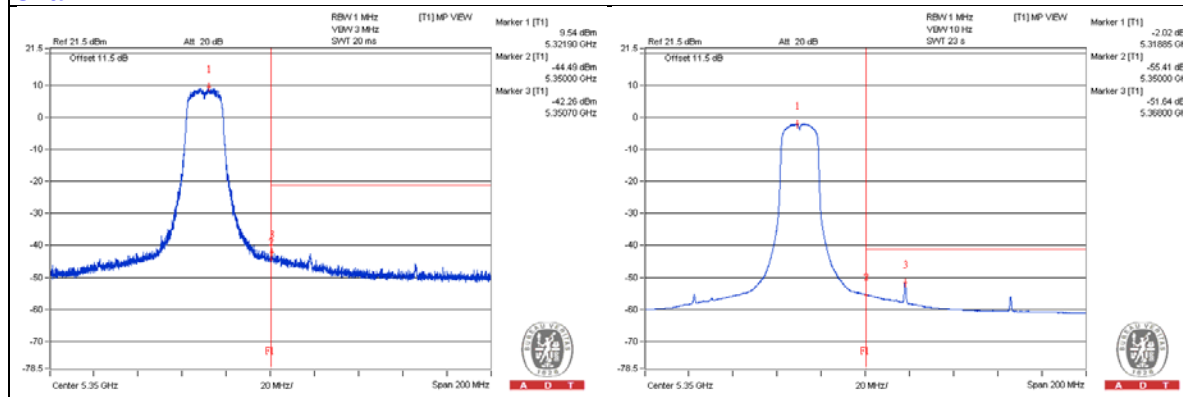

802.11a - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3662.5 PK	56.81	74	-17.19	-49.27	-49.19	7.77	-38.45
2	3650 AV	36.02	54	-17.98	-69.91	-70.14	7.77	-59.24
3	7334.375 PK	58.29	74	-15.71	-46.62	-49.28	7.77	-36.97
4	7334.375 AV	49.55	54	-4.45	-53.77	-65.36	7.77	-45.71
5	10990.625 PK	55.08	74	-18.92	-50.5	-51.47	7.77	-40.18
6	10984.375 AV	34.44	54	-19.56	-71.43	-71.78	7.77	-60.82
7	16504.375 PK	56.46	74	-17.54	-50	-49.19	7.77	-38.8
8	16481.375 AV	45.16	54	-8.84	-60.8	-60.97	7.77	-50.1

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

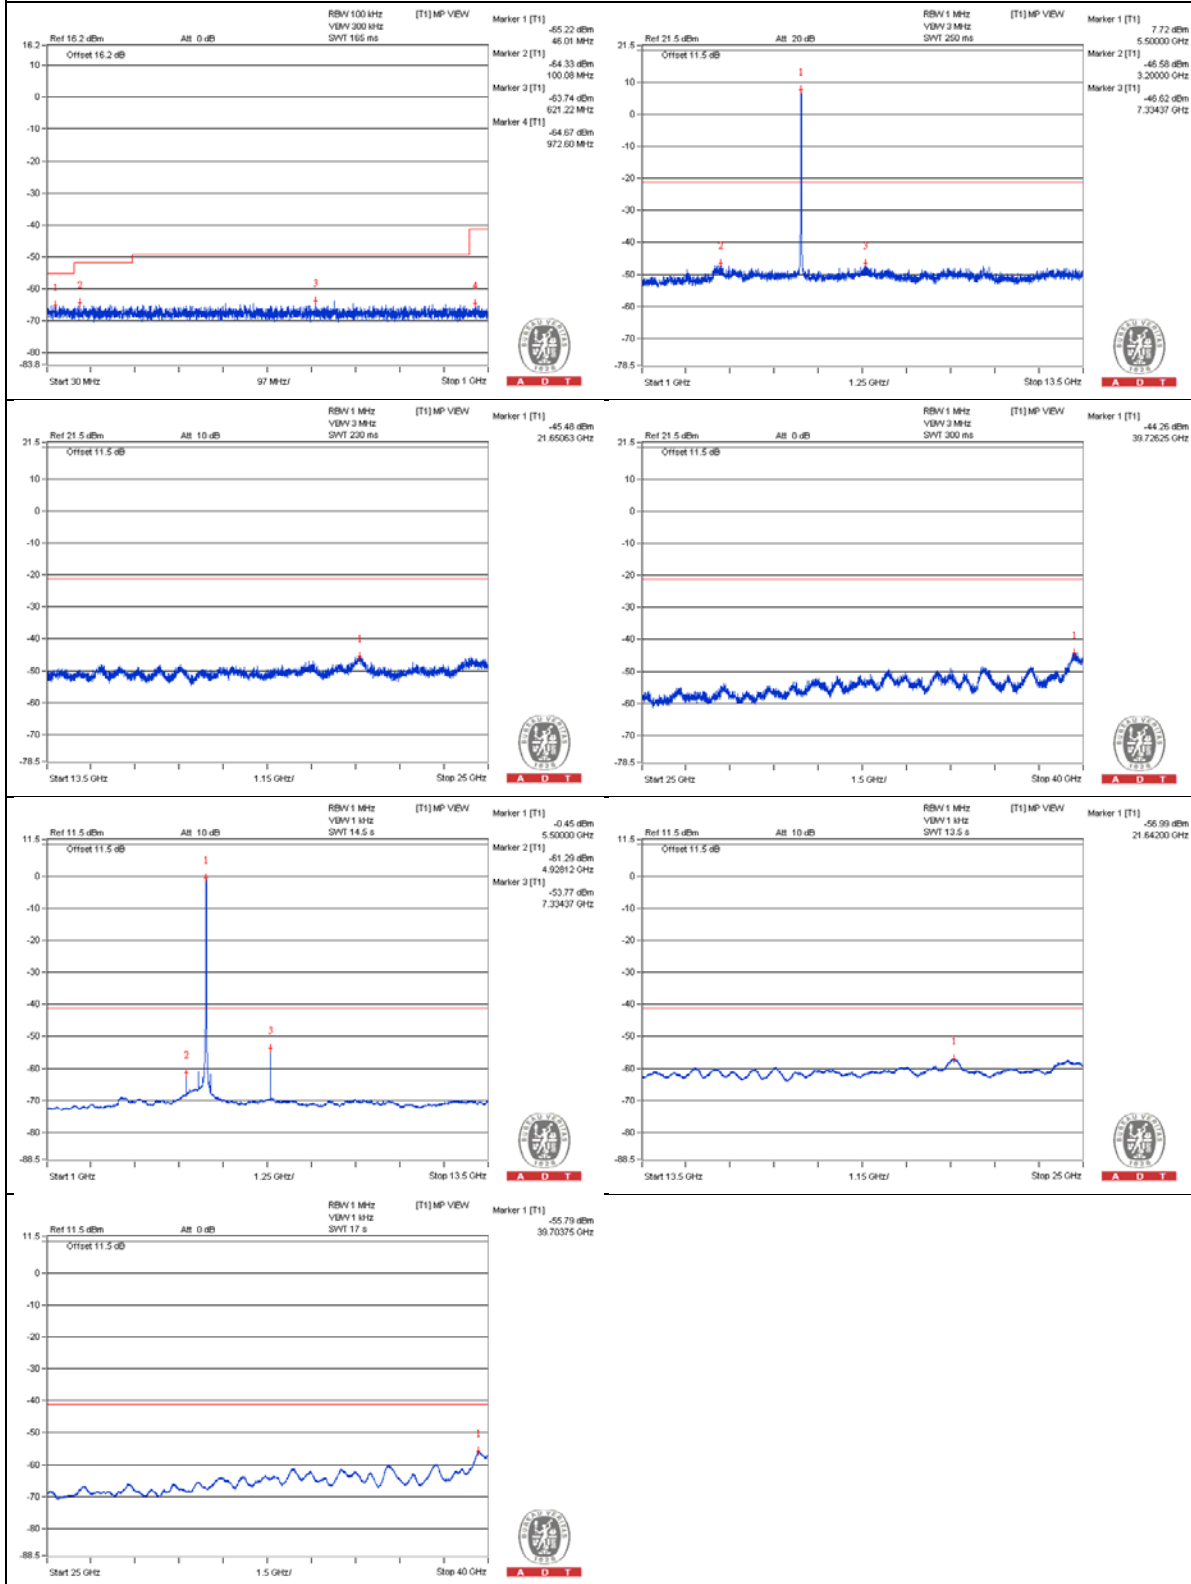

Chain 1

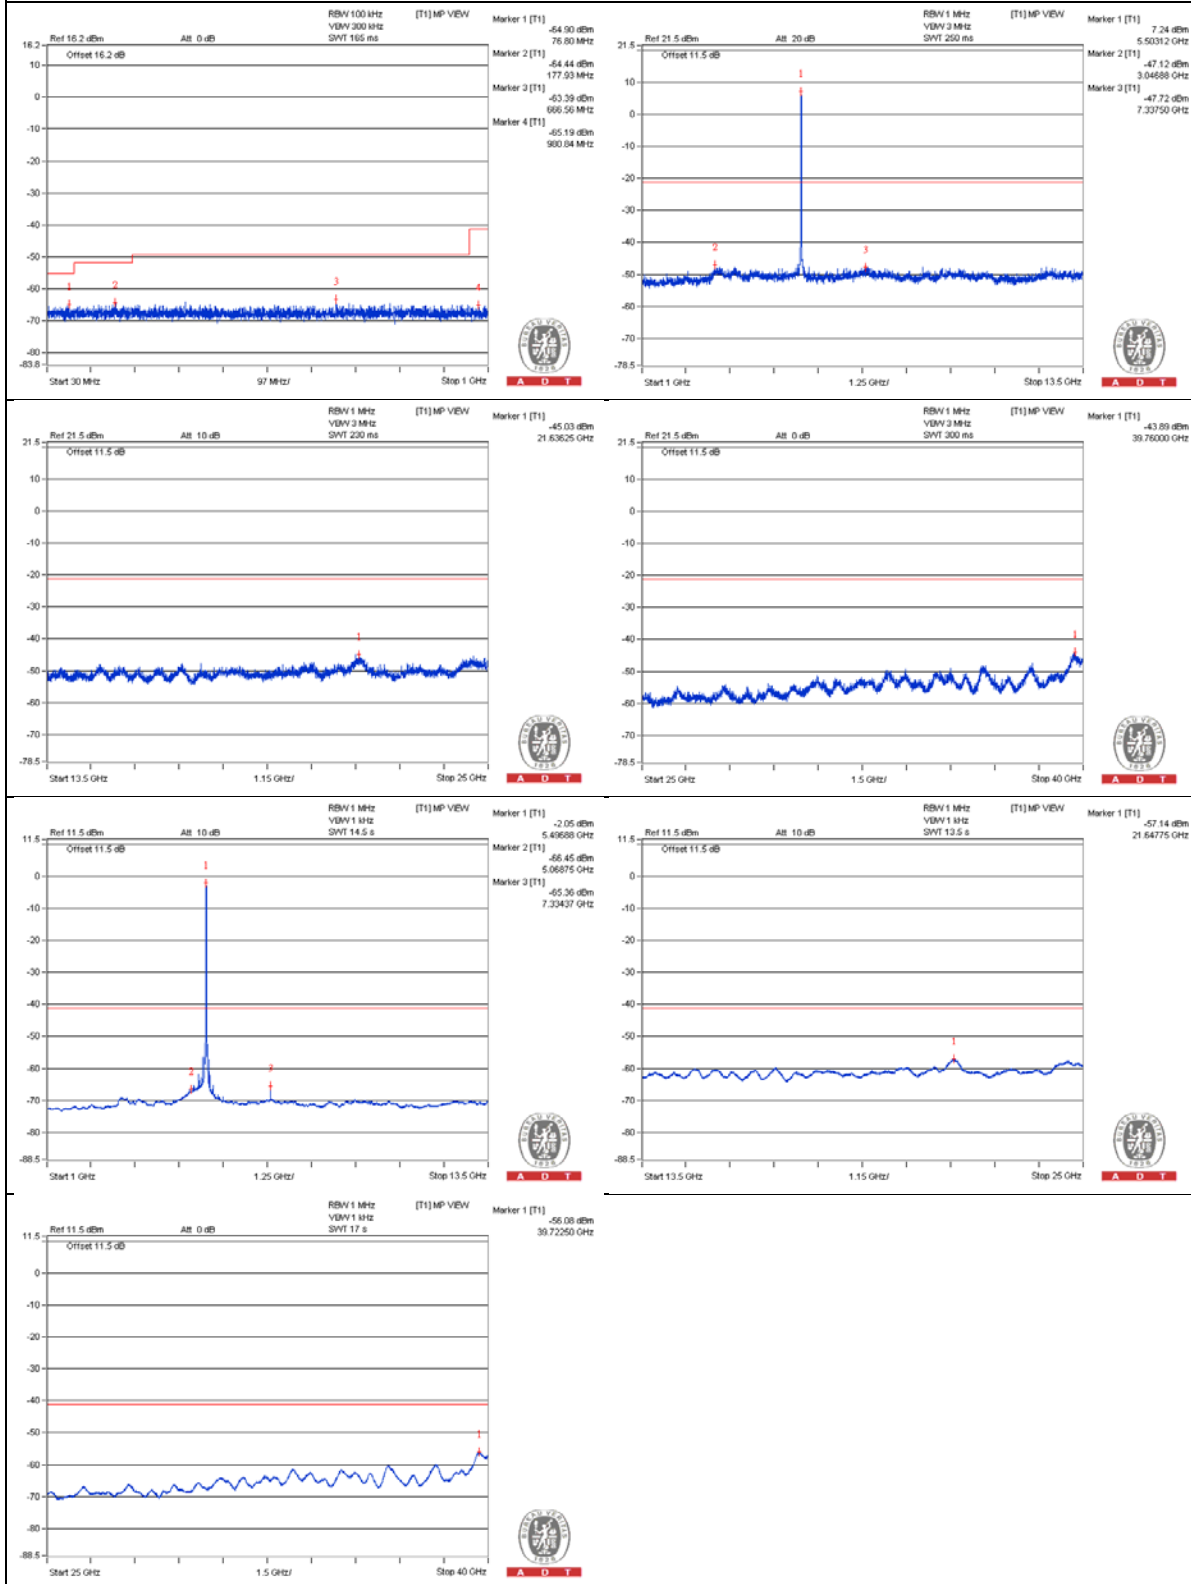

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5469.375 PK	62.2	74	-11.8	-43.52	-44.18	7.77	-33.06
2	5470 AV	50.48	54	-3.52	-55.16	-56.01	7.77	-44.78

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

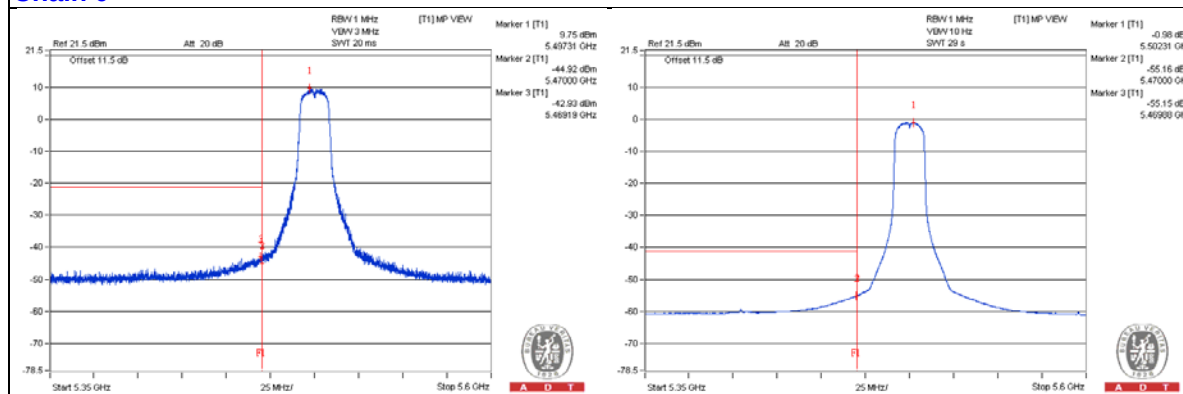

Chain 1

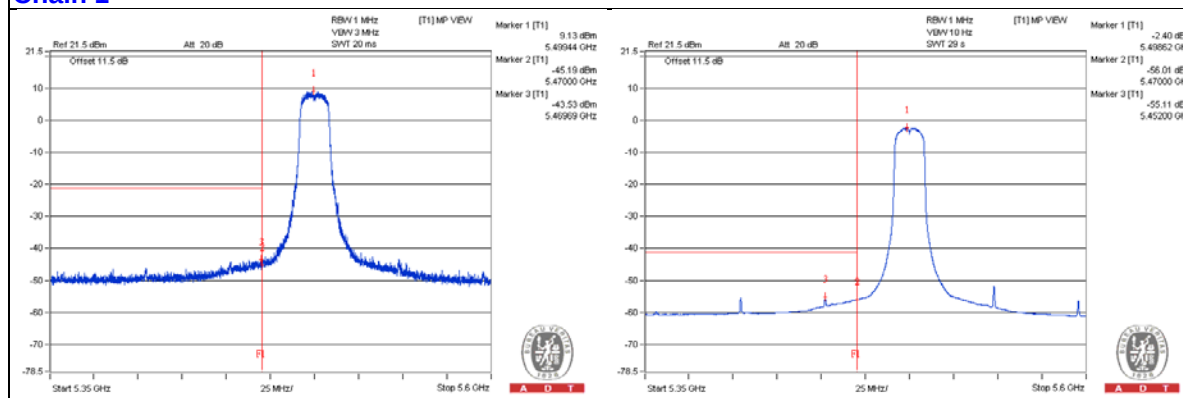

802.11a - Channel 120

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3753.125 PK	56.82	74	-17.18	-49.7	-48.79	7.77	-38.44
2	3734.375 AV	35.75	54	-18.25	-70.16	-70.42	7.77	-59.51
3	7462.5 PK	56.98	74	-17.02	-49.76	-48.45	7.77	-38.28
4	7465.625 AV	43.33	54	-10.67	-60.12	-70.05	7.77	-51.93
5	11190.625 PK	56.09	74	-17.91	-49.44	-50.53	7.77	-39.17
6	11200 AV	34.87	54	-19.13	-71.15	-71.2	7.77	-60.39
7	16794.75 PK	55.79	74	-18.21	-48.98	-52.04	7.77	-39.47
8	16817.75 AV	44.37	54	-9.63	-61.53	-61.81	7.77	-50.89

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

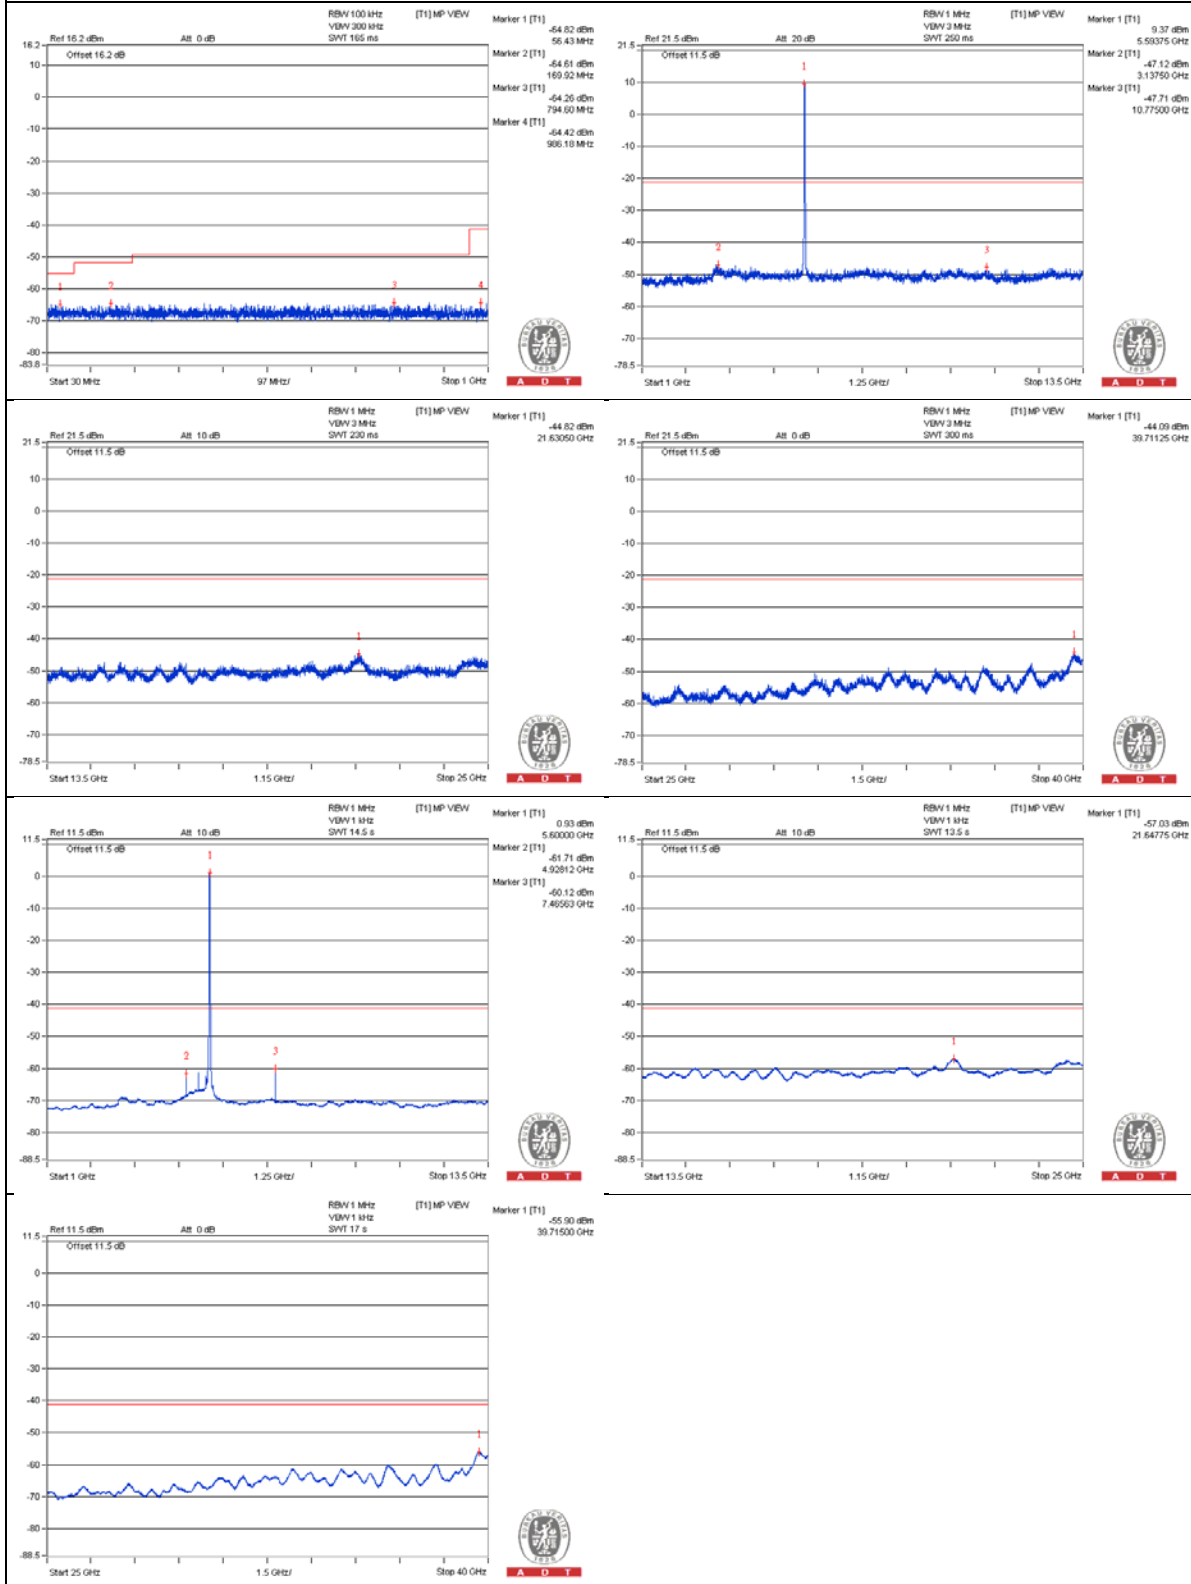

Chain 1

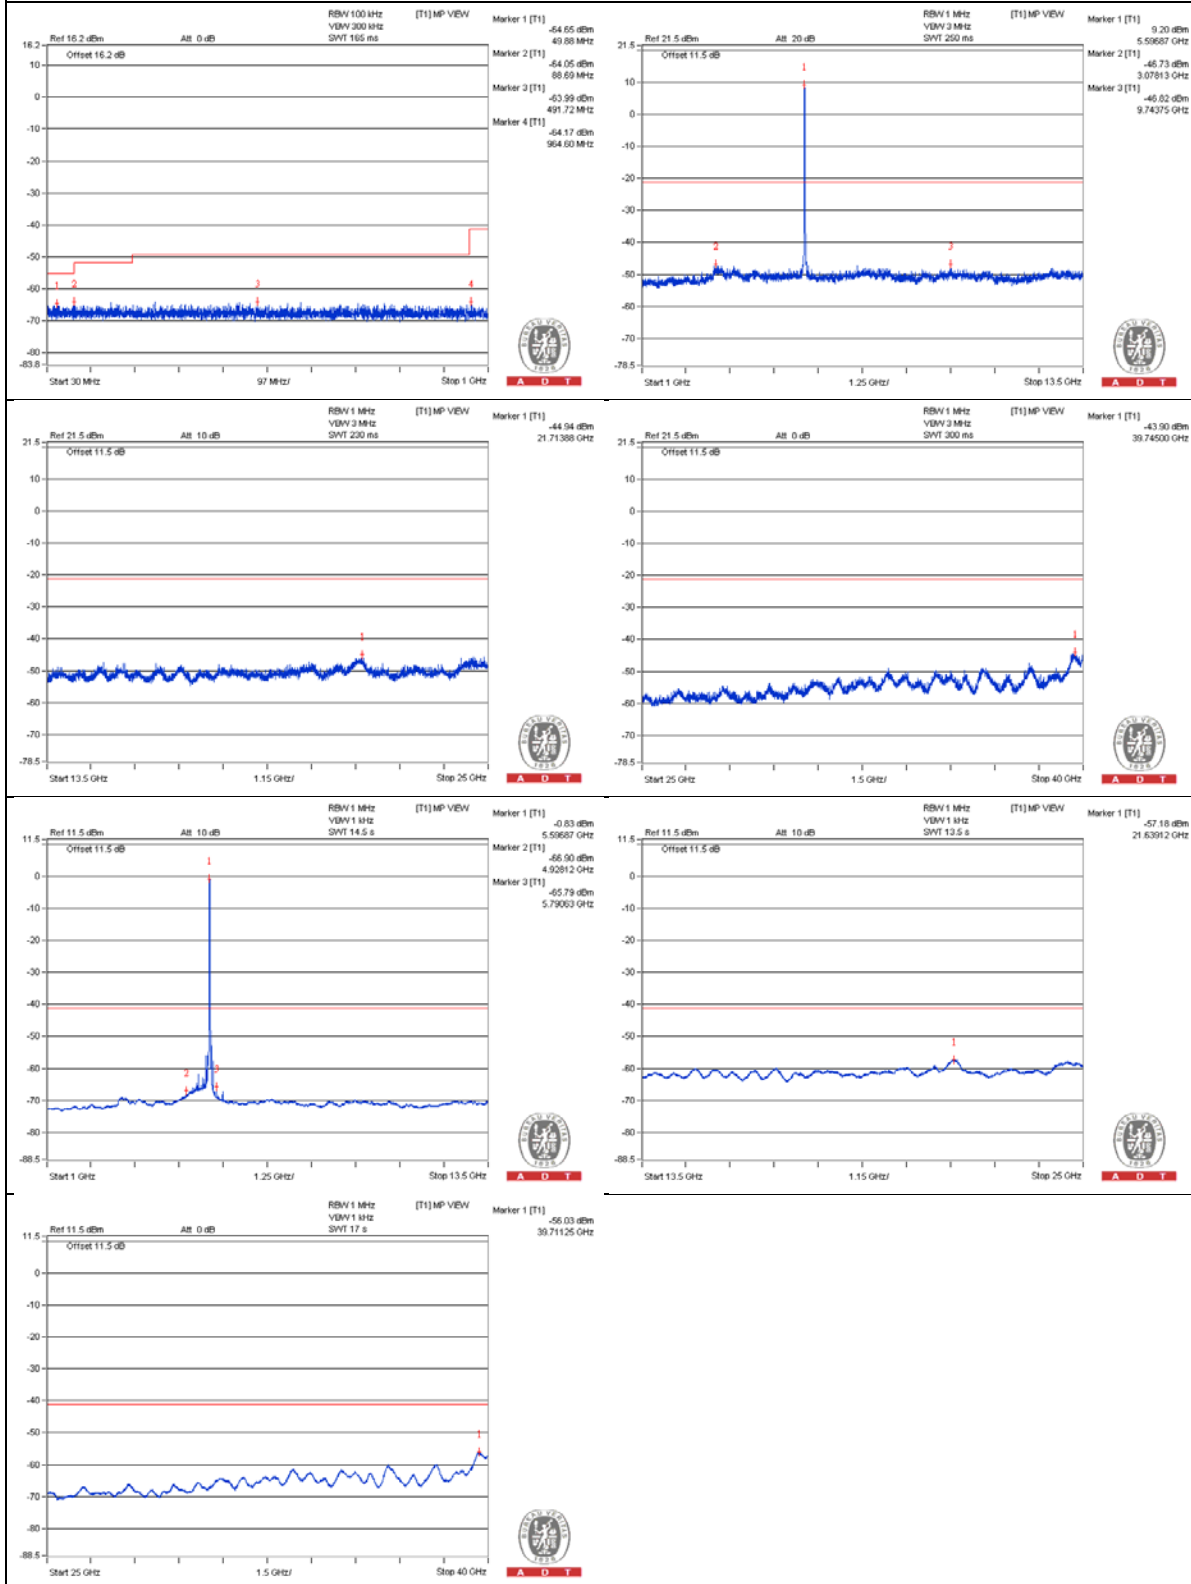

802.11a - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3809.375 PK	55.92	74	-18.08	-49.57	-50.75	7.77	-39.34
2	3781.25 AV	35.33	54	-18.67	-70.56	-70.86	7.77	-59.93
3	7590.625 PK	56.55	74	-17.45	-49.17	-49.83	7.77	-38.71
4	7600 AV	40.16	54	-13.84	-63.63	-70.81	7.77	-55.1
5	11396.875 PK	56.05	74	-17.95	-50.22	-49.77	7.77	-39.21
6	11390.625 AV	34.49	54	-19.51	-71.6	-71.5	7.77	-60.77
7	17085.125 PK	56.7	74	-17.3	-49.95	-48.8	7.77	-38.56
8	17096.625 AV	44.72	54	-9.28	-61.08	-61.58	7.77	-50.54

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

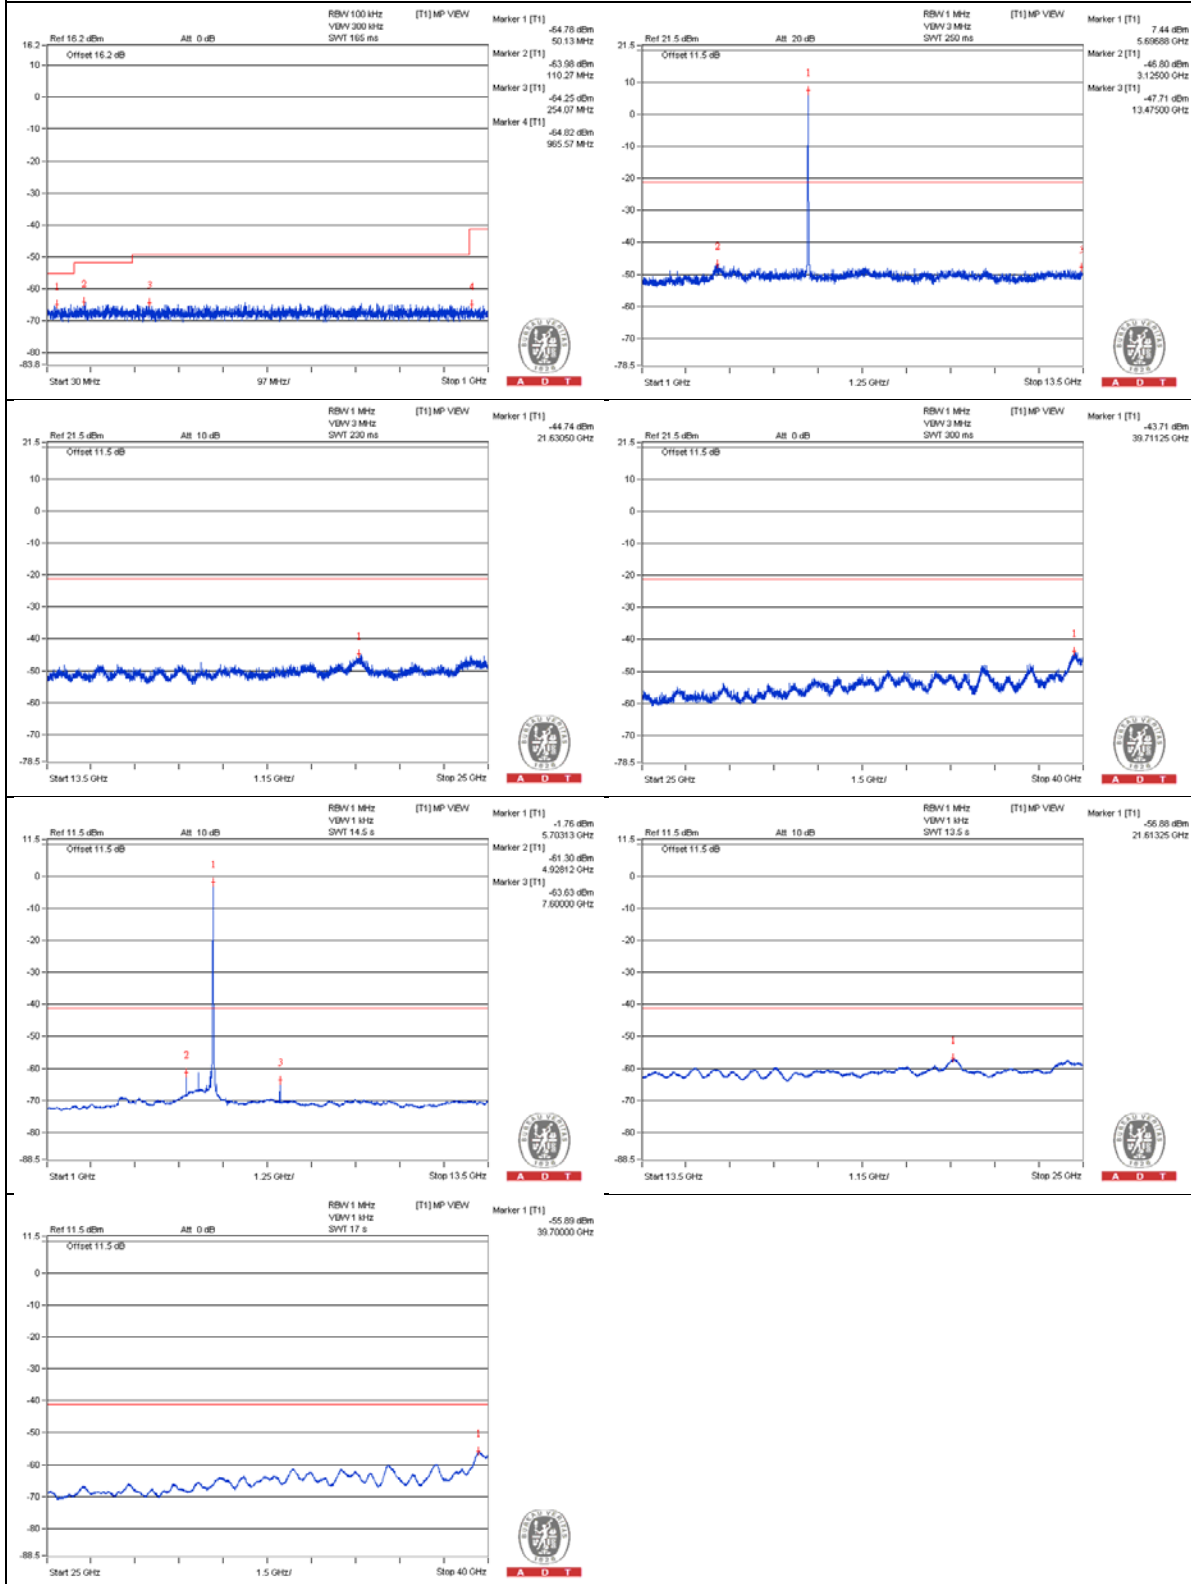

Chain 1

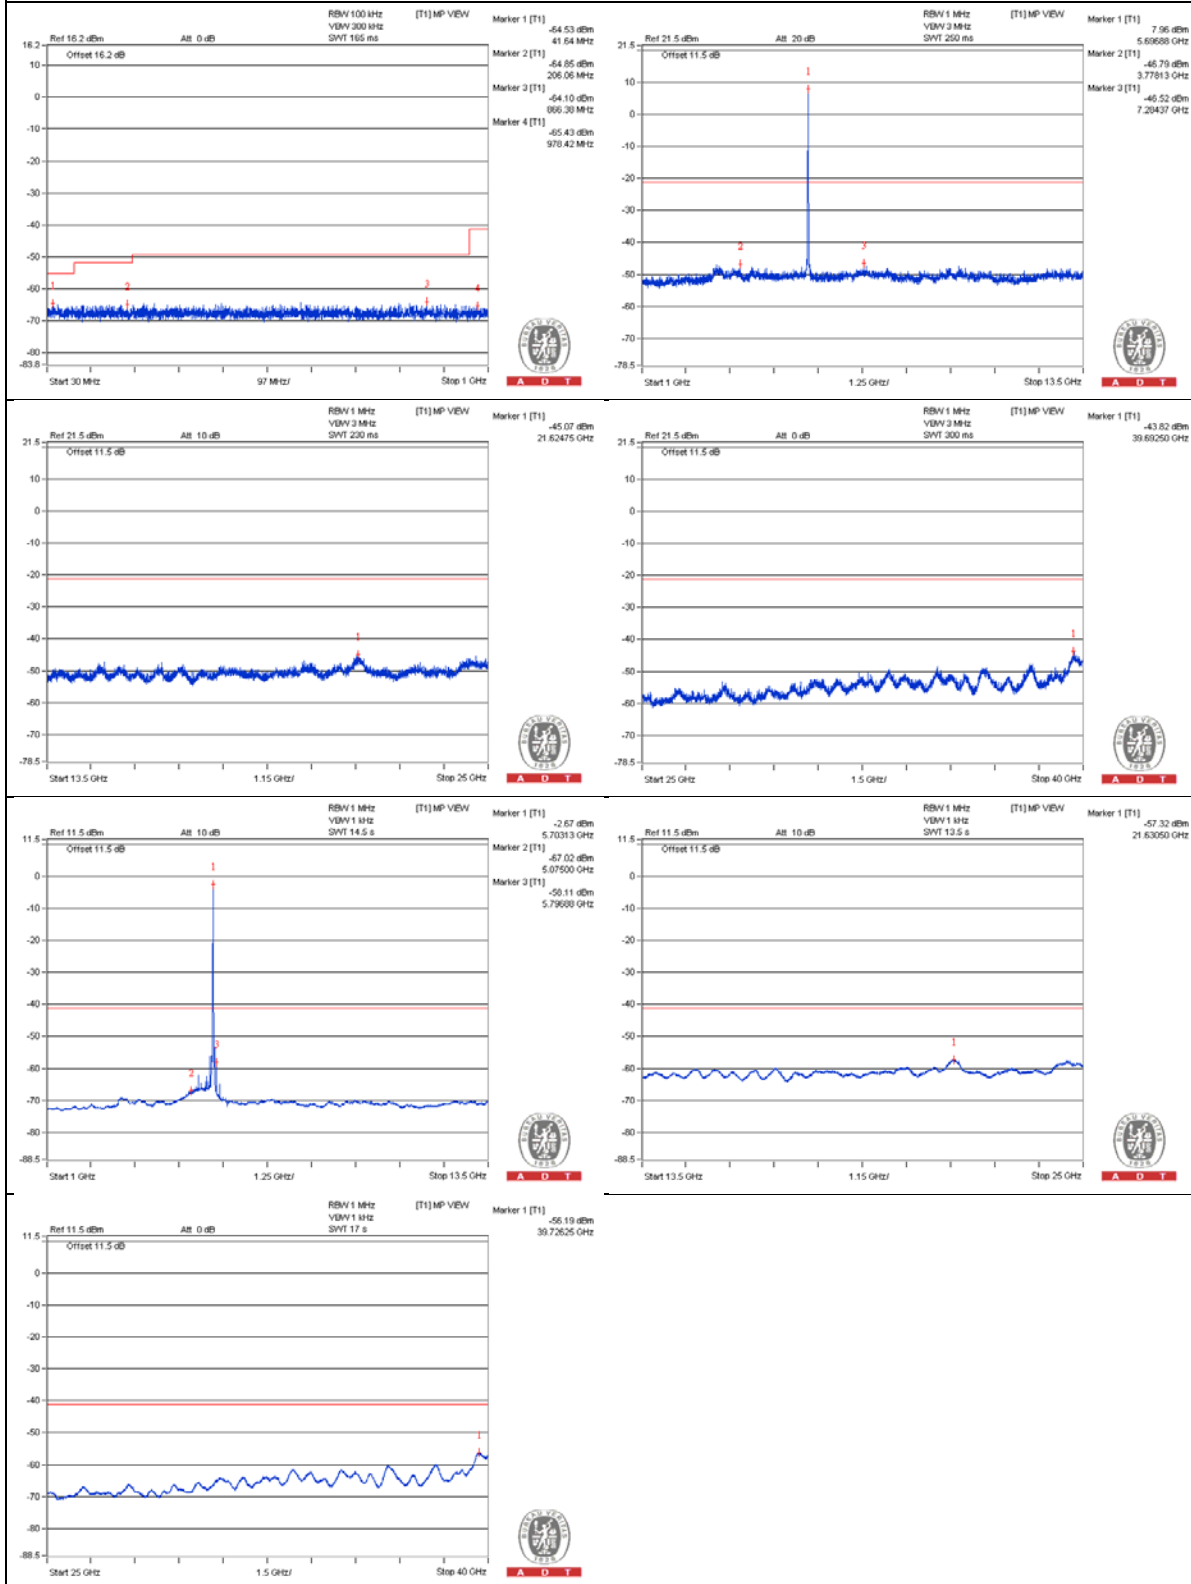

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5726.9 PK	62.22	74	-11.78	-44.87	-42.97	7.77	-33.04
2	5748 AV	51.14	54	-2.86	-59.81	-52.66	7.77	-44.12

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

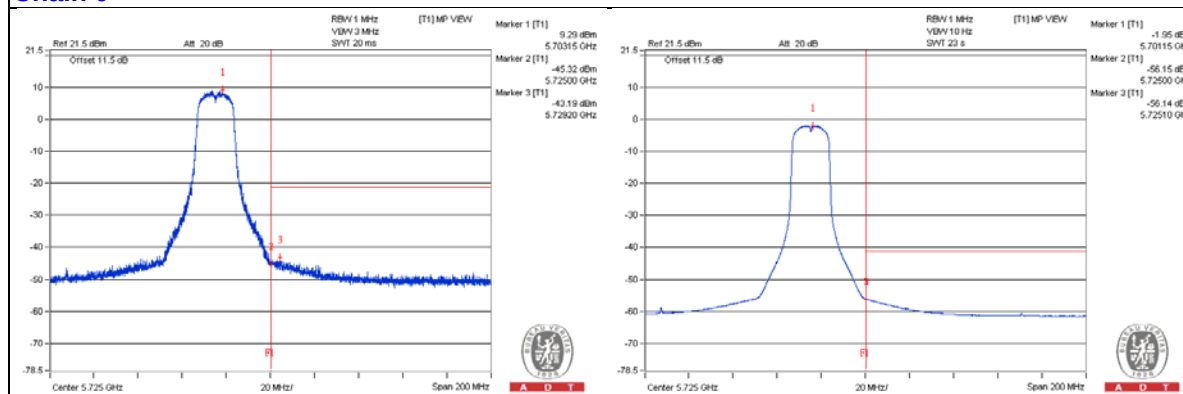

Chain 1

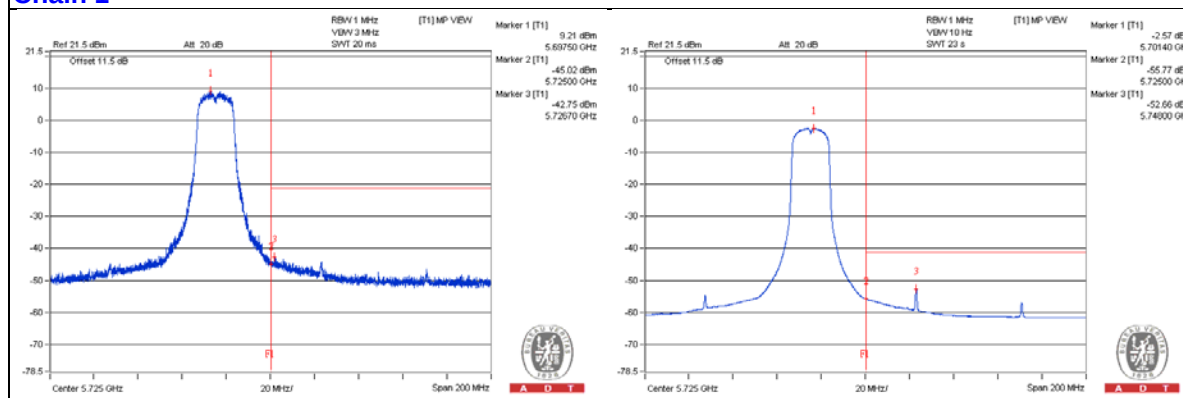

802.11a - Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	56.06	74	-17.94	-50.74	-49.33	7.77	-39.2
2	3796.875 AV	34.6	54	-19.4	-71.38	-71.5	7.77	-60.66
3	7618.75 PK	55.83	74	-18.17	-50.52	-49.93	7.77	-39.43
4	7628.125 AV	35.9	54	-18.1	-69.22	-71.32	7.77	-59.36
5	11450 PK	54.77	74	-19.23	-51.83	-50.78	7.77	-40.49
6	11446.875 AV	33.83	54	-20.17	-72.34	-72.08	7.77	-61.43
7	17154.125 PK	54.48	74	-19.52	-51.74	-51.39	7.77	-40.78
8	17145.5 AV	43.4	54	-10.6	-62.62	-62.67	7.77	-51.86

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

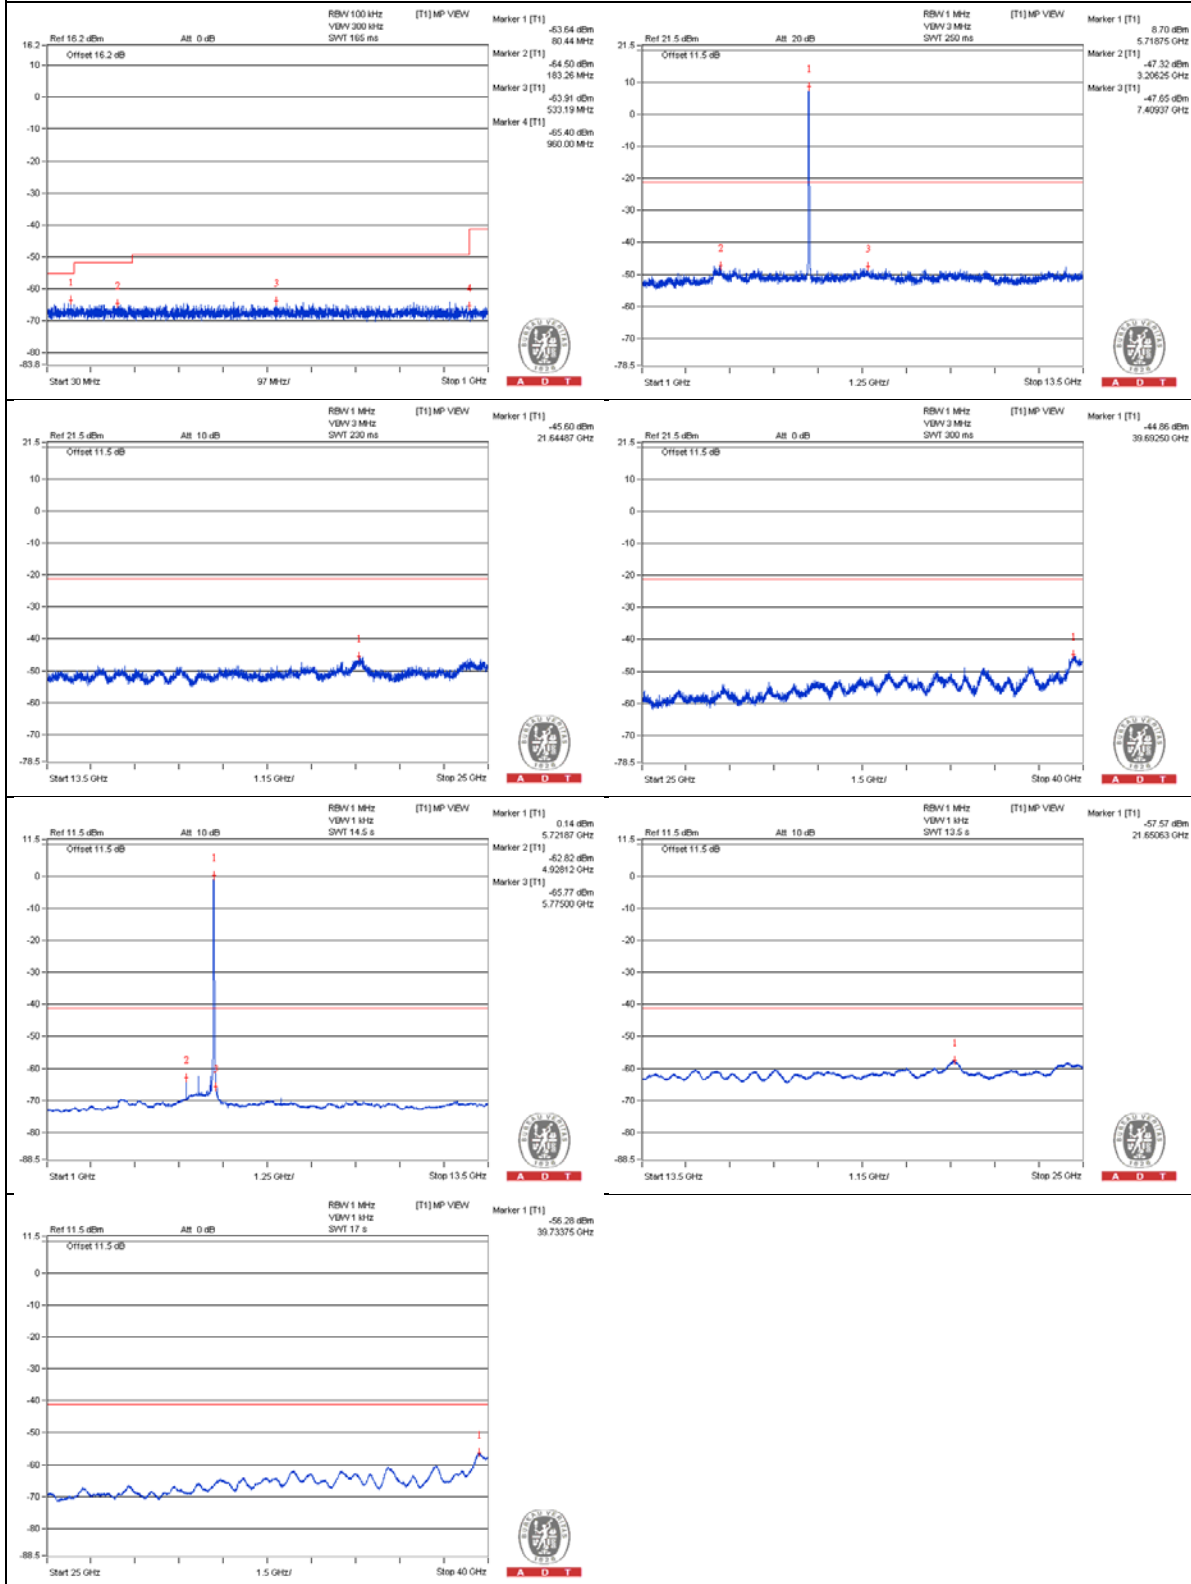

Chain 1

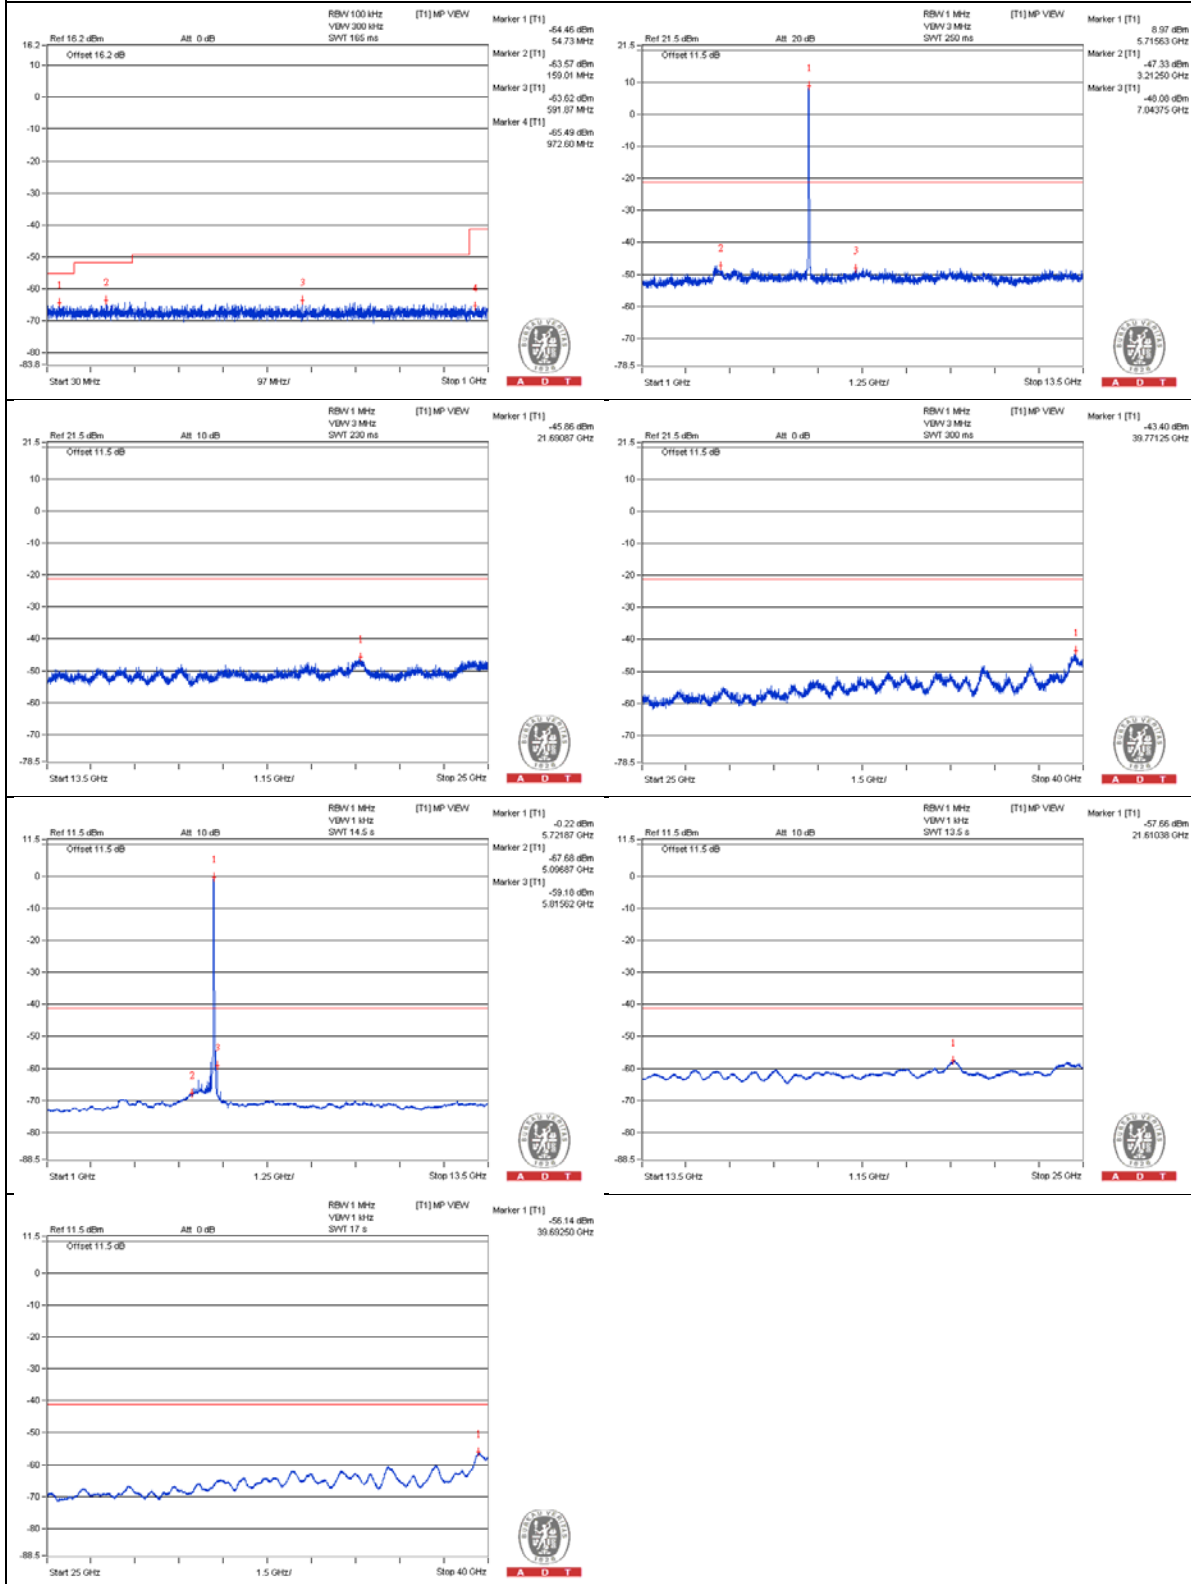

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5848.075 PK	56.7	74	-17.3	-49.14	-49.55	7.77	-38.56
2	5912.05 AV	44.15	54	-9.85	-62.31	-61.5	7.77	-51.11

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

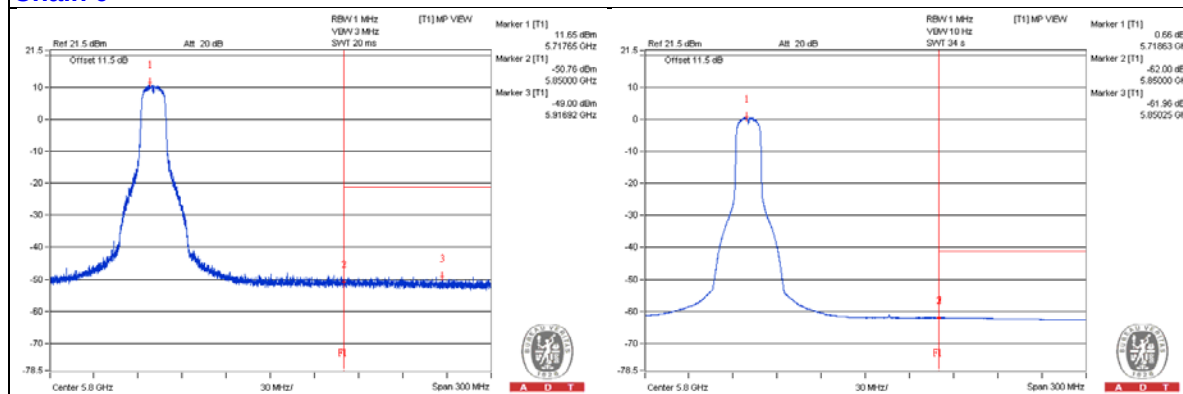

Chain 1

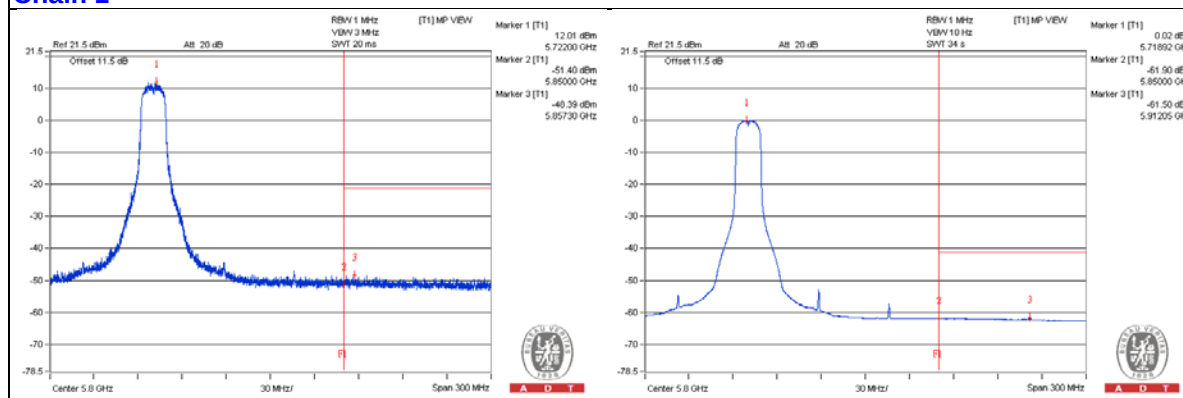

802.11ac (VHT20) - Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3446.875 PK	54.84	74	-19.16	-49.27	-49.78	6.09	-40.42
2	3434.375 AV	33.68	54	-20.32	-70.69	-70.67	6.09	-61.58
3	6906.25 PK	61.28	68.2	-6.92	-42.29	-44.04	6.09	-33.98
4	10356.25 PK	54.92	74	-19.08	-48.96	-49.99	6.09	-40.34
5	10365.625 AV	34.34	54	-19.66	-69.7	-70.37	6.09	-60.92
6	15541.25 PK	54.38	74	-19.62	-48.98	-51.29	6.09	-40.88
7	15521.125 AV	43.18	54	-10.82	-60.96	-61.41	6.09	-52.08

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

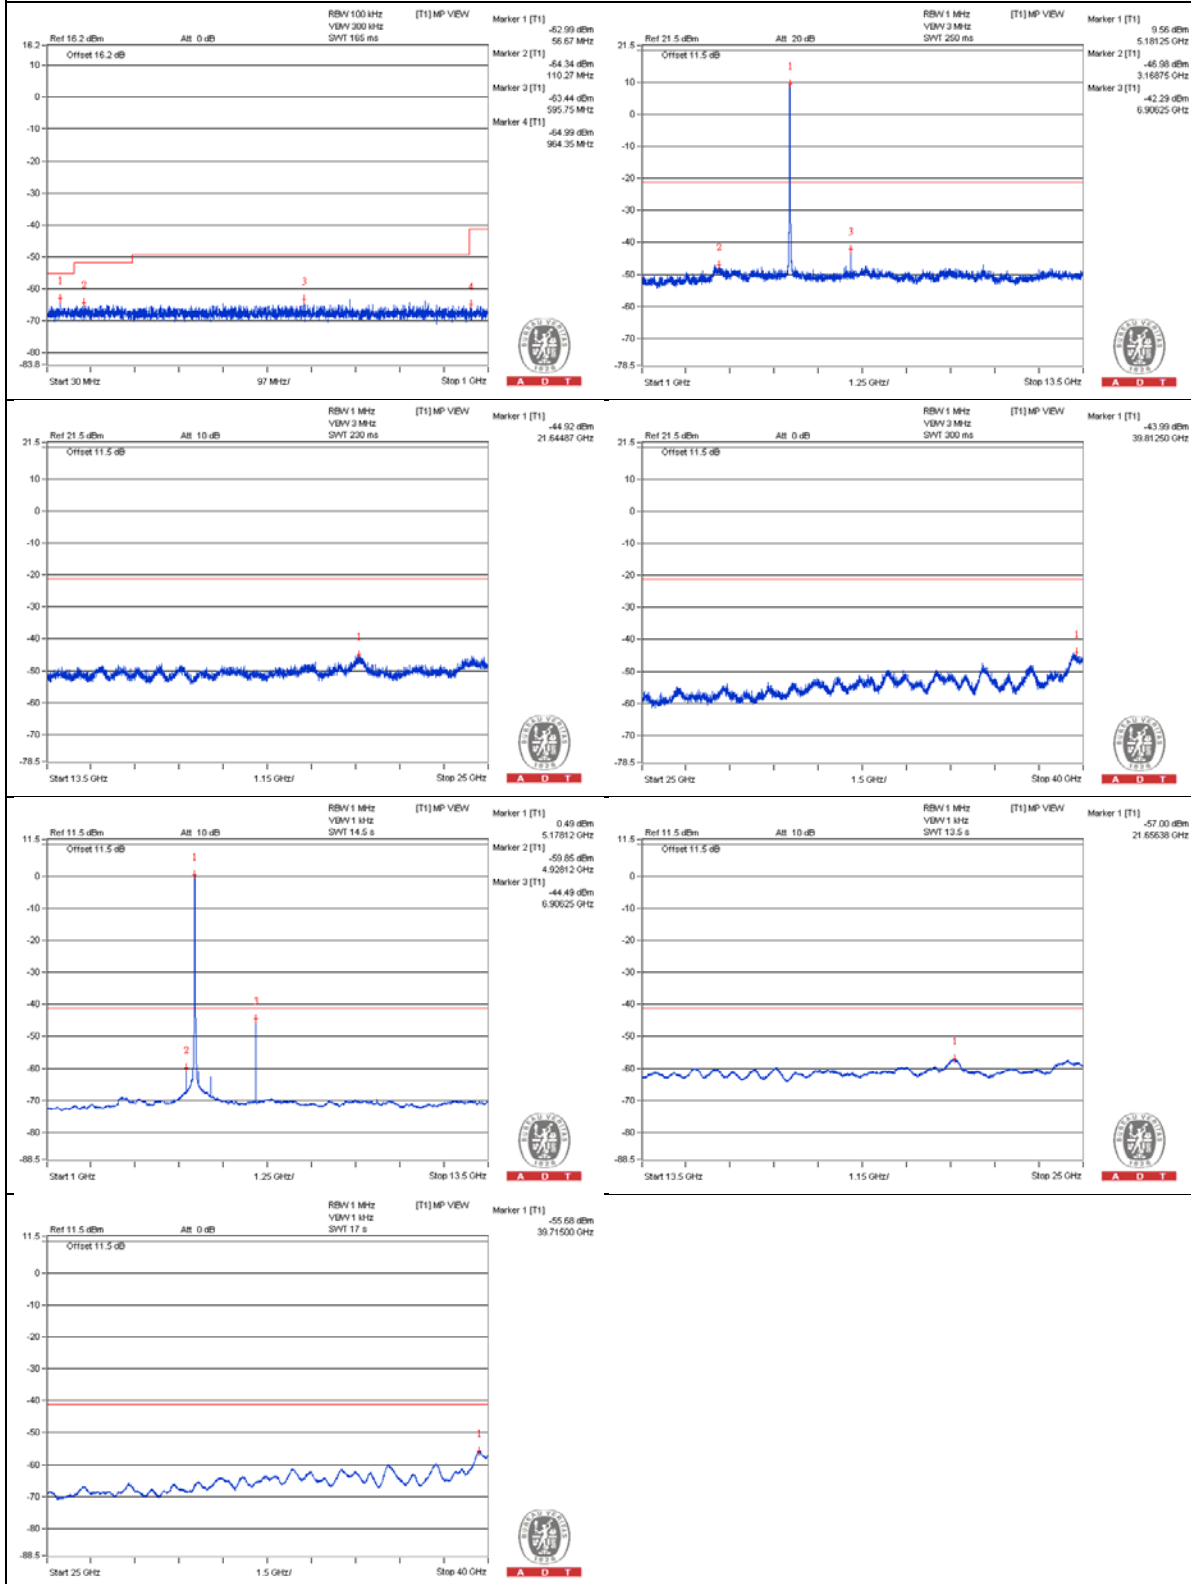

Chain 1

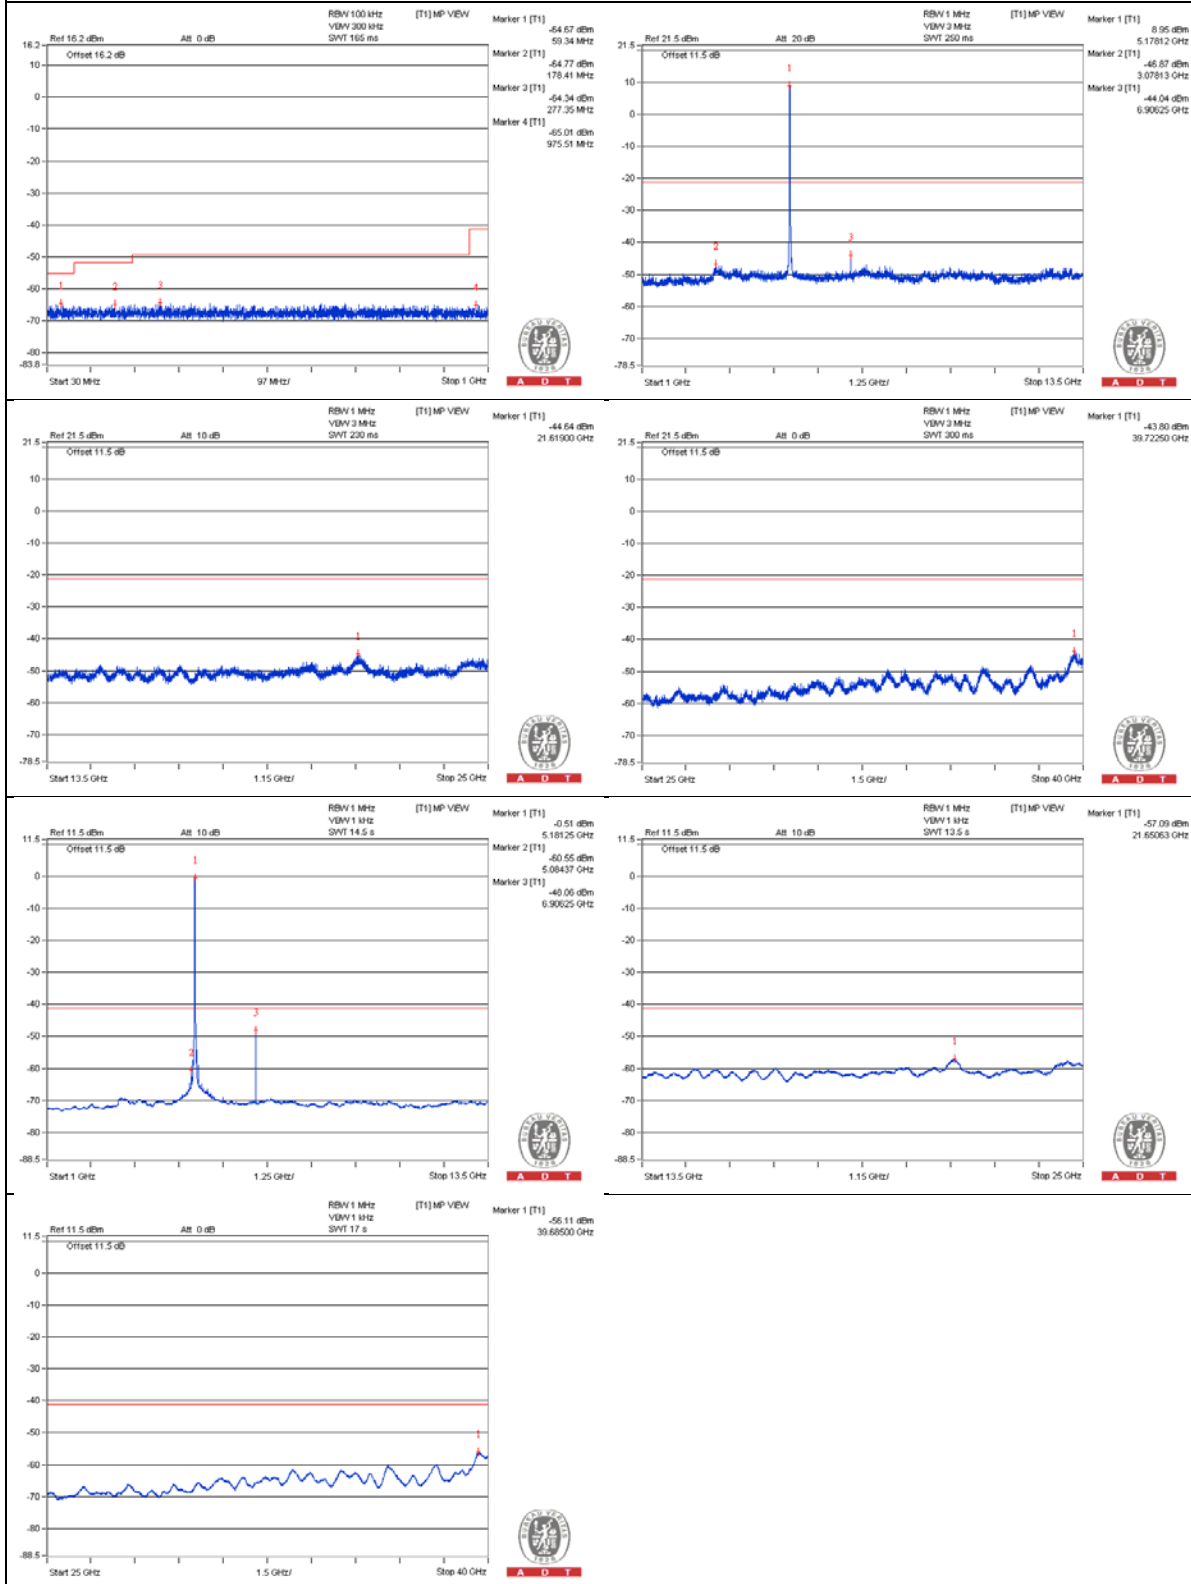

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.8 PK	63.89	74	-10.11	-38.97	-42.79	6.09	-31.37
2	5150 AV	50.14	54	-3.86	-53.35	-55.31	6.09	-45.12

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

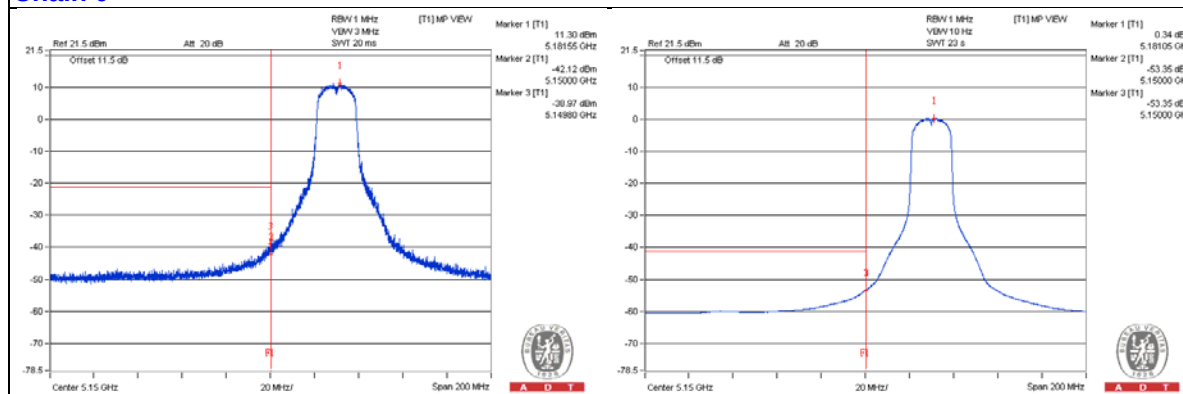

Chain 1

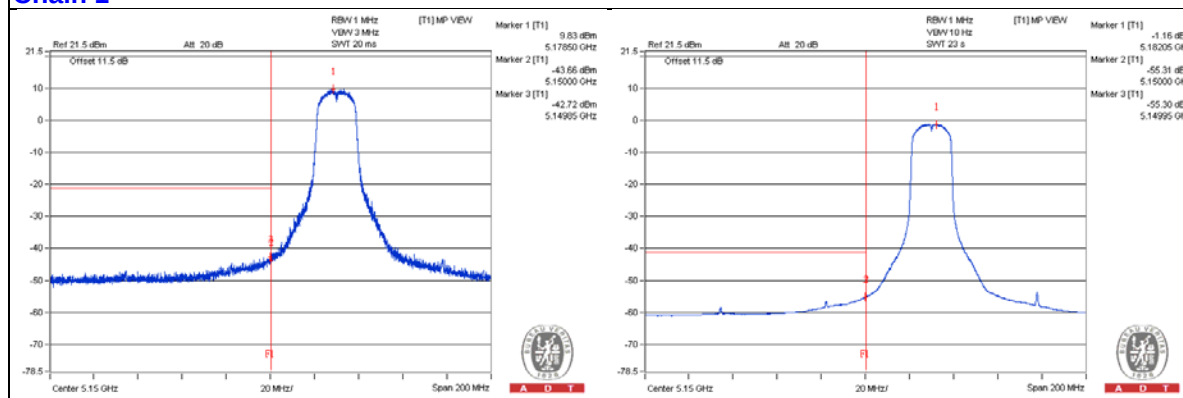

802.11ac (VHT20) - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3475 PK	55.43	74	-18.57	-47.64	-50.78	6.09	-39.83
2	3459.375 AV	33.6	54	-20.4	-70.6	-70.93	6.09	-61.66
3	6934.375 PK	60.46	68.2	-7.74	-42.87	-45.25	6.09	-34.8
4	10384.375 PK	54.53	74	-19.47	-49.99	-49.67	6.09	-40.73
5	10403.125 AV	34.13	54	-19.87	-70.1	-70.36	6.09	-61.13
6	15613.125 PK	54.31	74	-19.69	-51.82	-48.8	6.09	-40.95
7	15587.25 AV	42.14	54	-11.86	-62.25	-62.19	6.09	-53.12

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

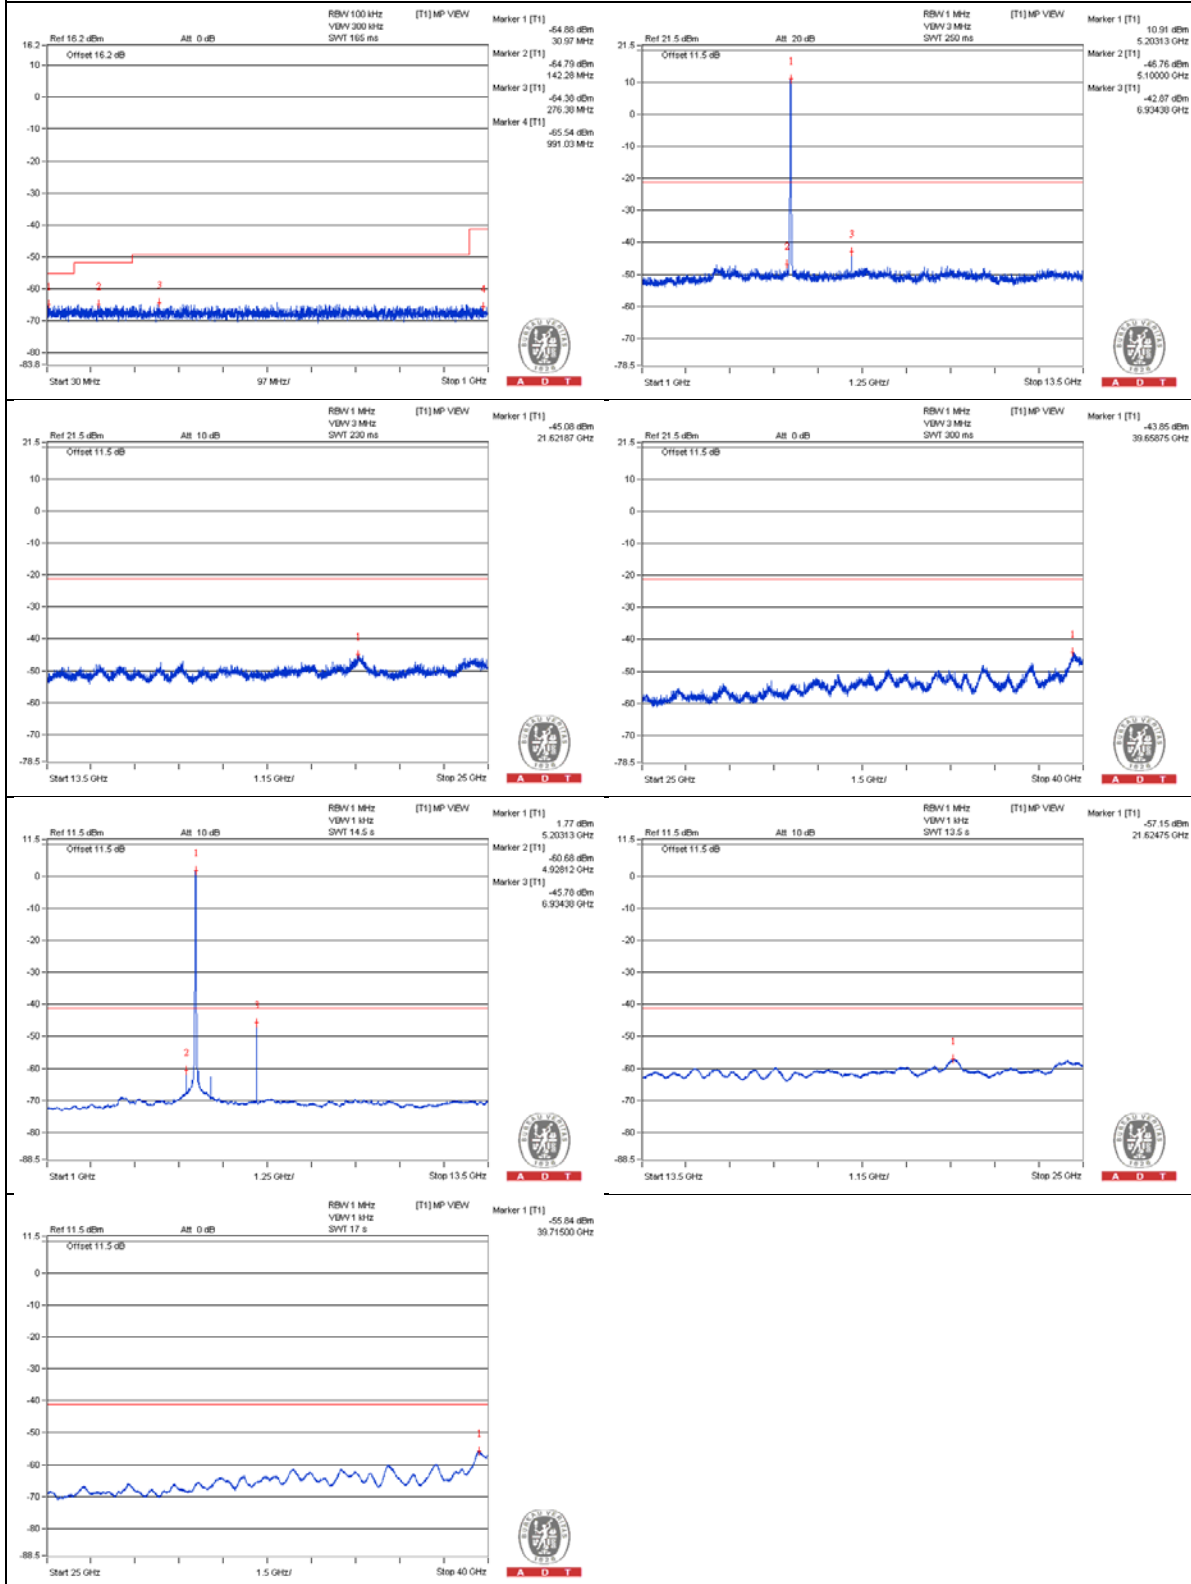

Chain 1

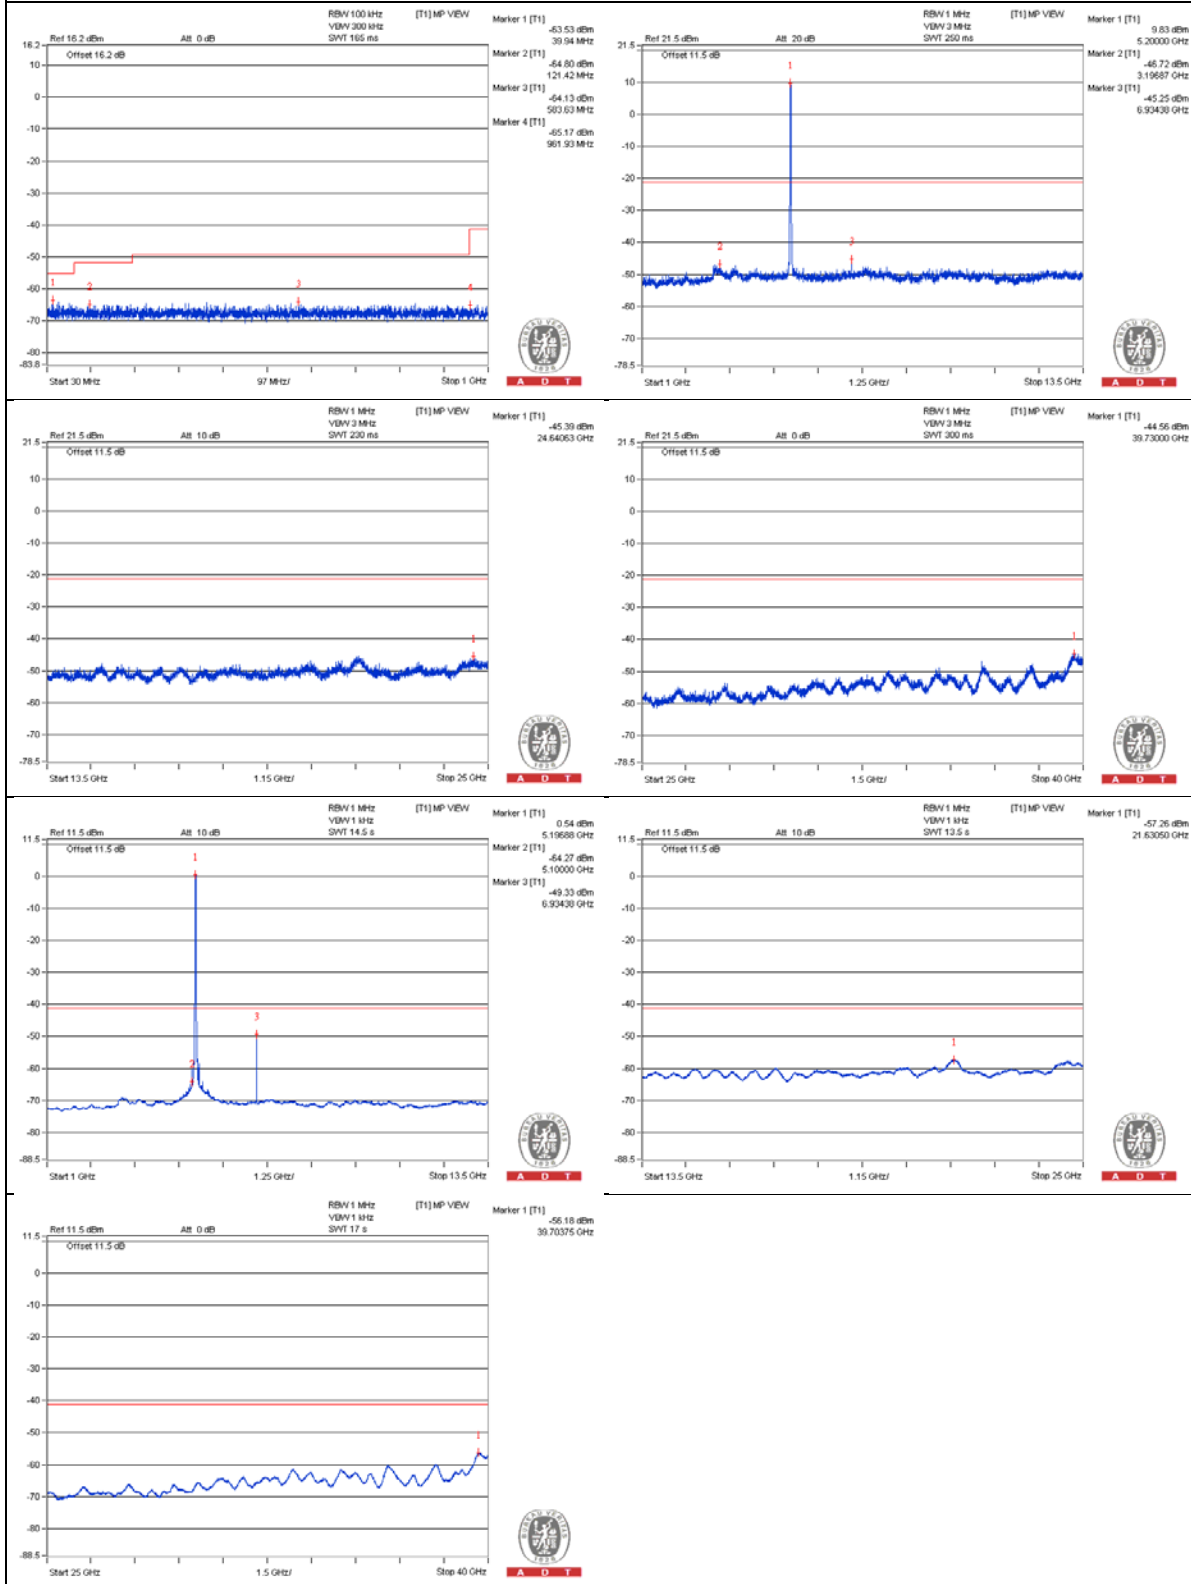

802.11ac (VHT20) - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3478.125 PK	54.86	74	-19.14	-49.46	-49.55	6.09	-40.4
2	3509.375 AV	33.99	54	-20.01	-70.33	-70.41	6.09	-61.27
3	6987.5 PK	59.48	68.2	-8.72	-43.38	-47.2	6.09	-35.78
4	10487.5 PK	54.07	74	-19.93	-50.19	-50.4	6.09	-41.19
5	10484.375 AV	33.7	54	-20.3	-70.46	-70.87	6.09	-61.56
6	15736.75 PK	53.46	74	-20.54	-51	-50.8	6.09	-41.8
7	15736.75 AV	42.08	54	-11.92	-62.34	-62.23	6.09	-53.18

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

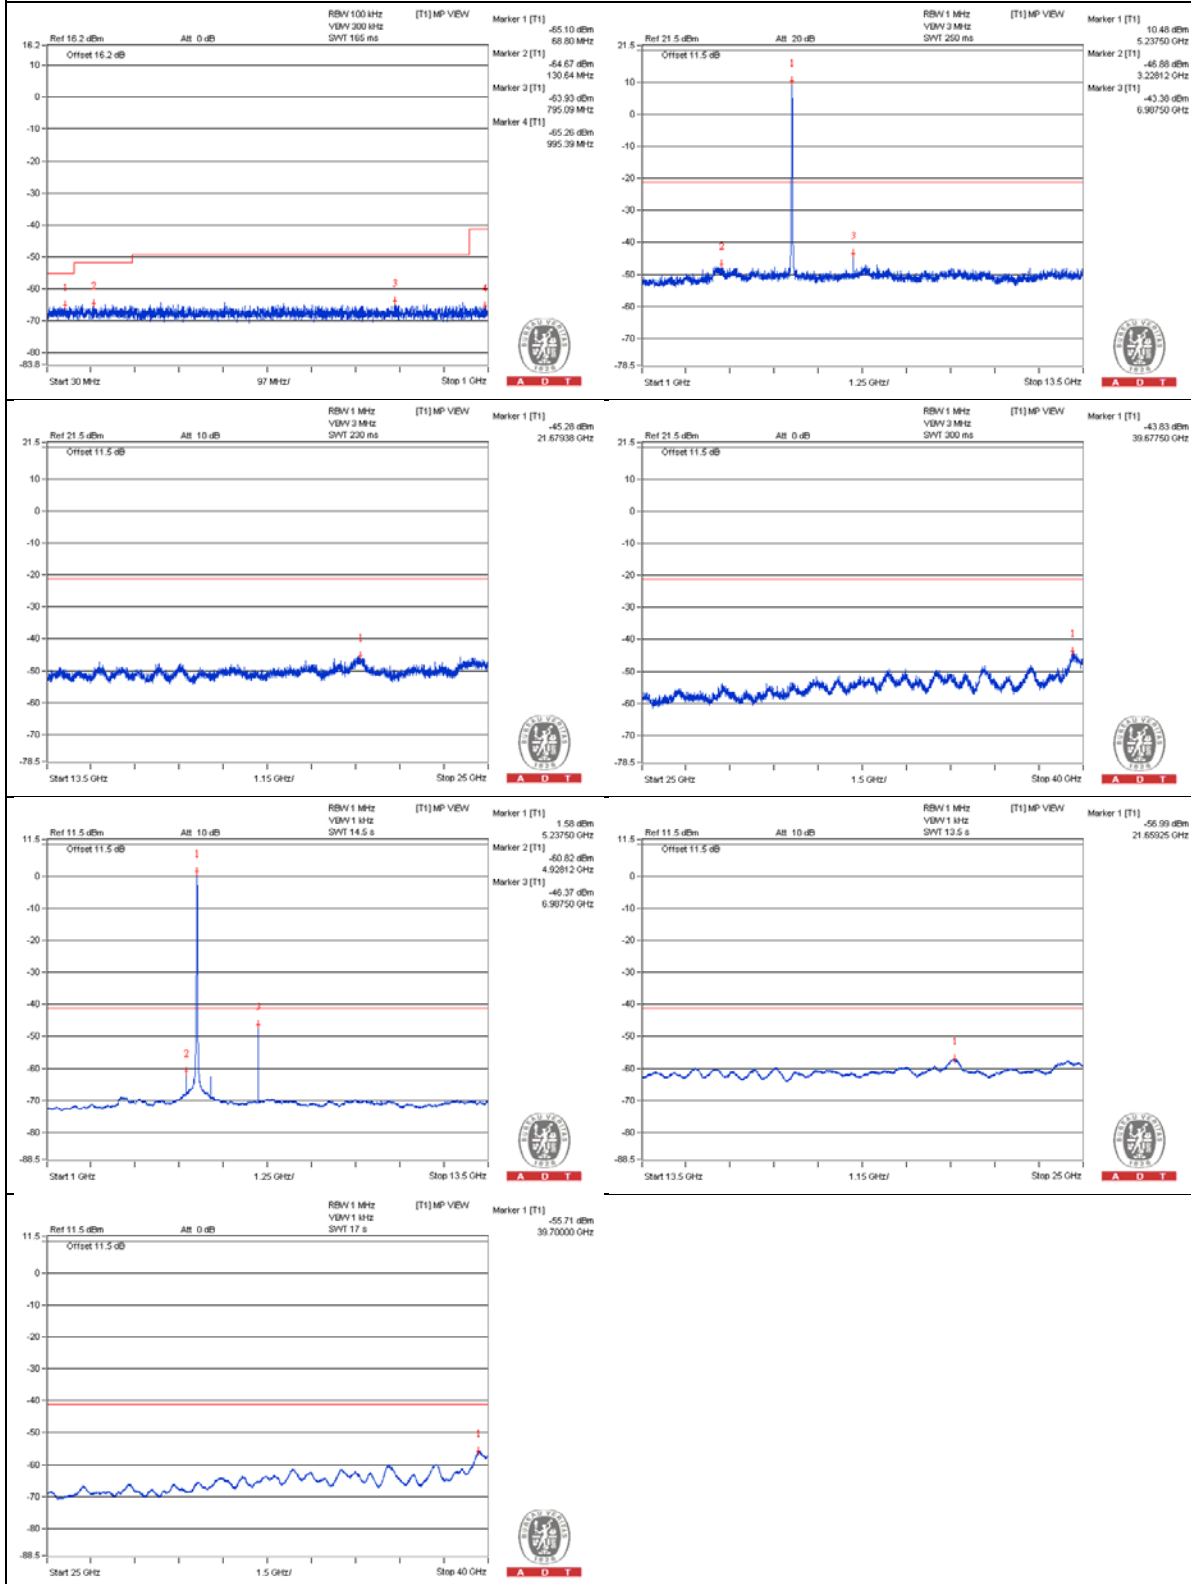

Chain 1

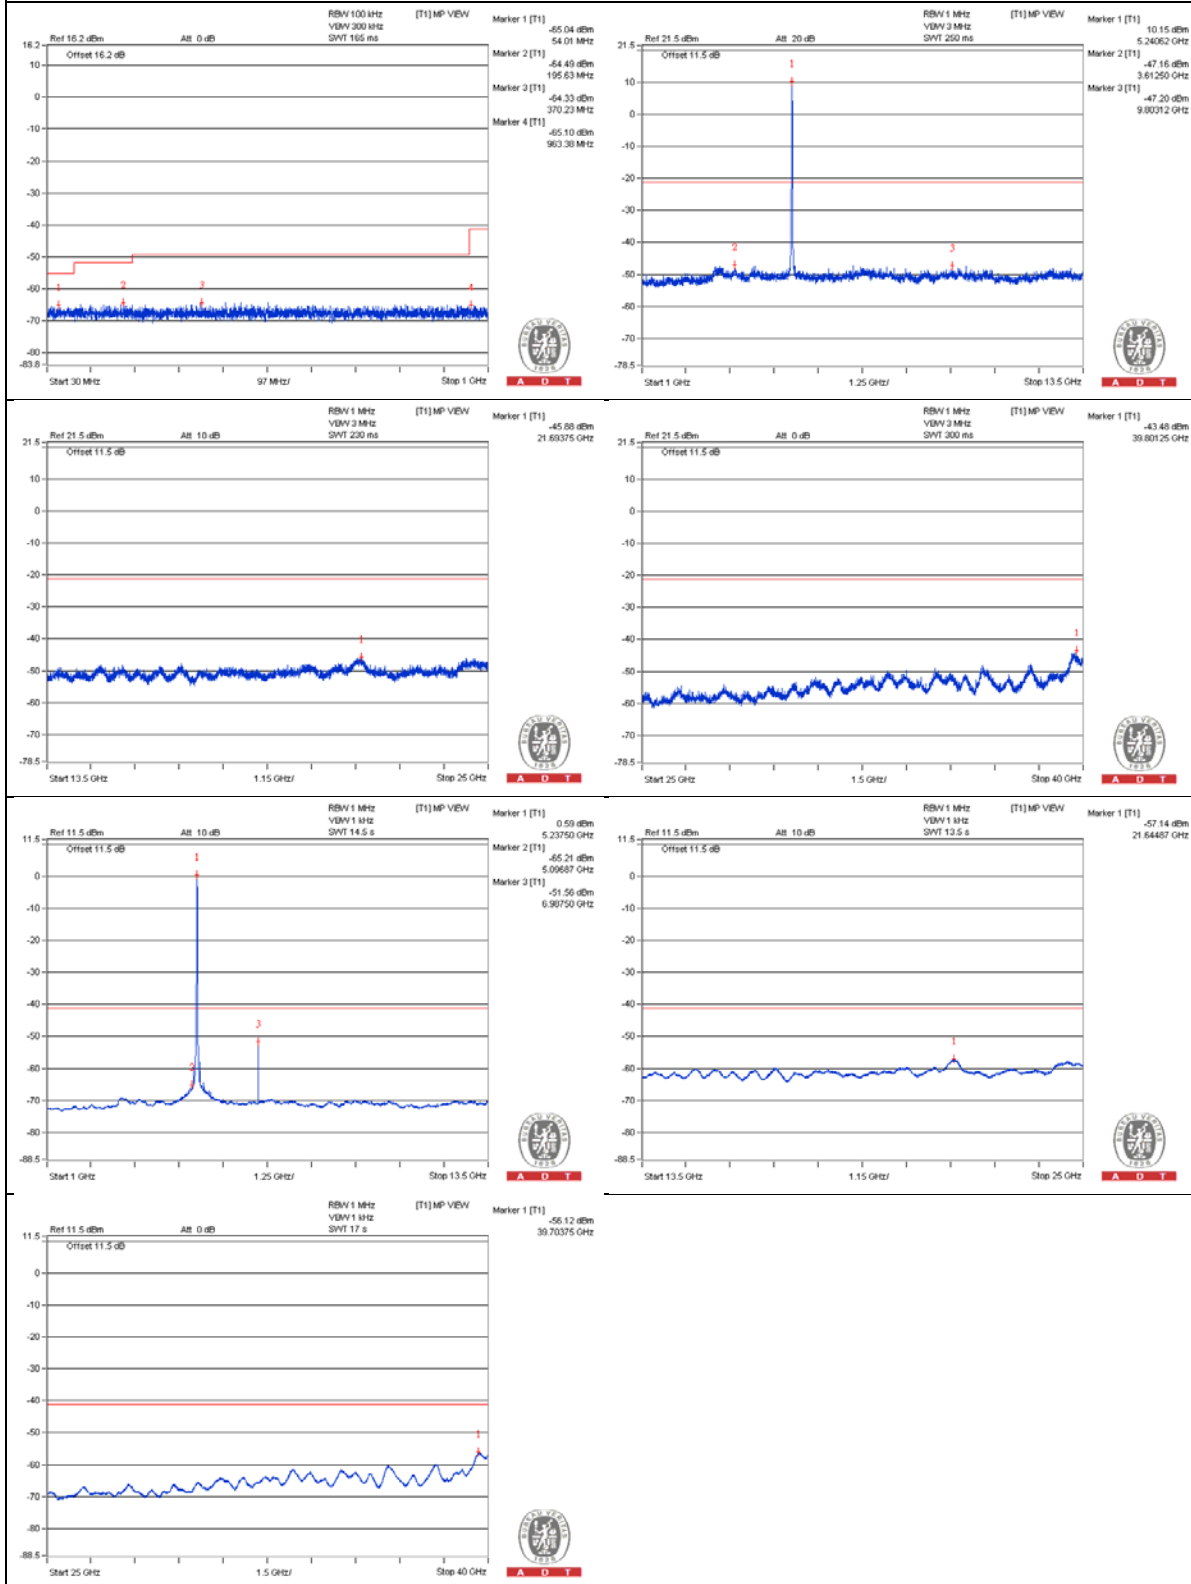

802.11ac (VHT20) - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3515.625 PK	55.21	74	-18.79	-49.43	-48.89	6.09	-40.05
2	3525 AV	34.14	54	-19.86	-70.3	-70.15	6.09	-61.12
3	7012.5 PK	58.89	68.2	-9.31	-44.47	-46.77	6.09	-36.37
4	10534.375 PK	54.08	74	-19.92	-49.62	-51.05	6.09	-41.18
5	10525 AV	33.79	54	-20.21	-70.39	-70.76	6.09	-61.47
6	15782.75 PK	53.94	74	-20.06	-49.98	-50.91	6.09	-41.32
7	15797.125 AV	43.1	54	-10.9	-61.11	-61.41	6.09	-52.16

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

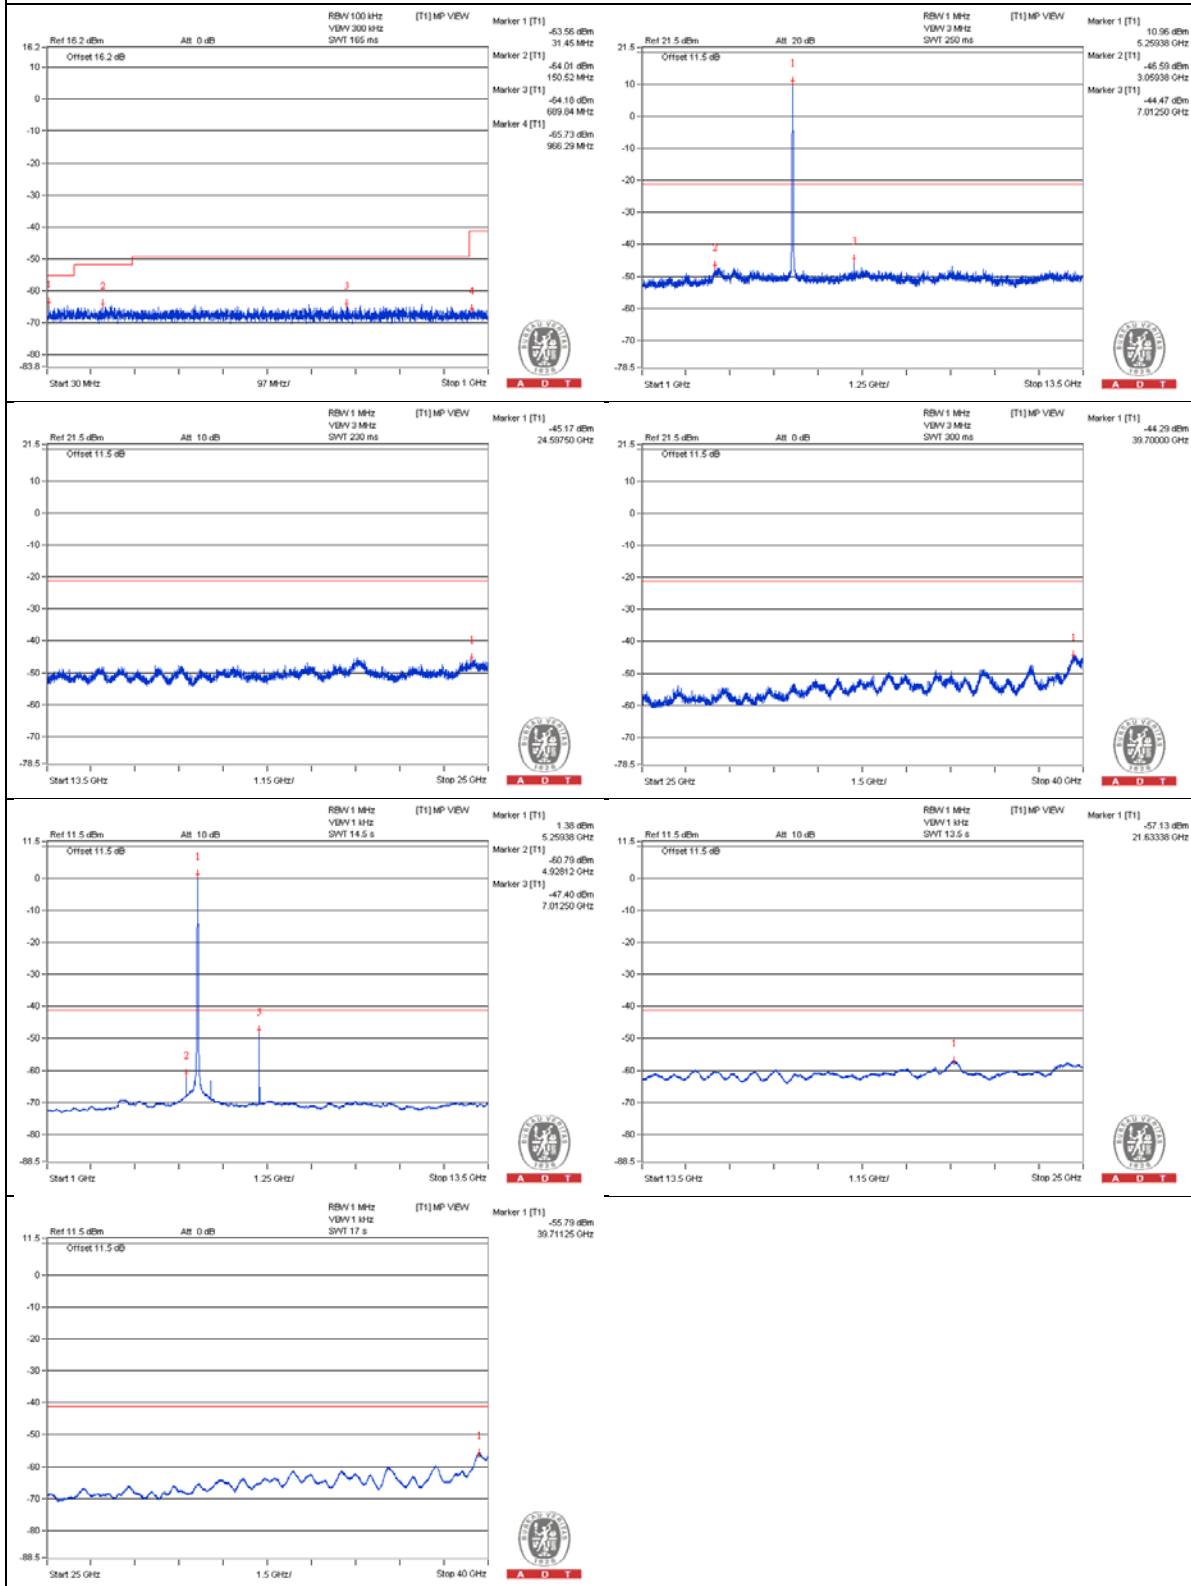

Chain 1

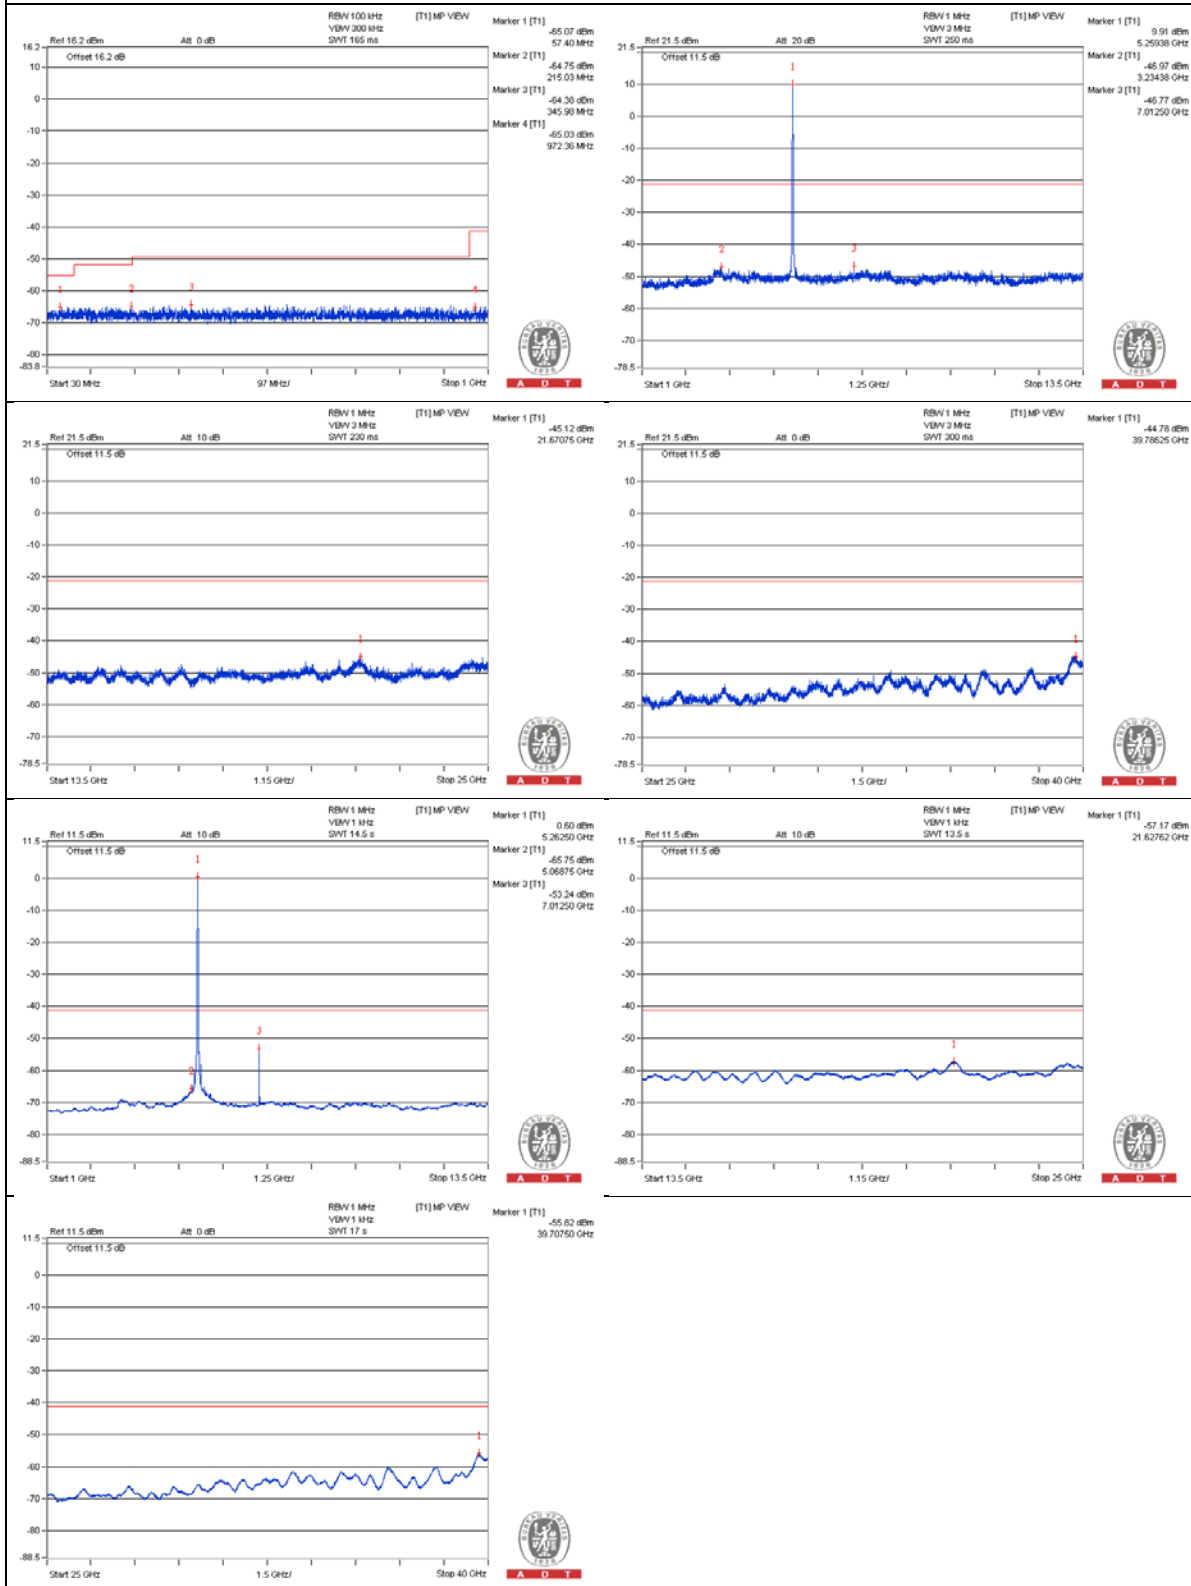

802.11ac (VHT20) - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3528.125 PK	55.51	74	-18.49	-49.08	-48.64	6.09	-39.75
2	3550 AV	34.38	54	-19.62	-69.97	-70	6.09	-60.88
3	7068.75 PK	58.52	68.2	-9.68	-45.08	-46.76	6.09	-36.74
4	10606.25 PK	53.96	74	-20.04	-50.57	-50.24	6.09	-41.3
5	10603.125 AV	33.79	54	-20.21	-70.38	-70.76	6.09	-61.47
6	15903.5 PK	54.56	74	-19.44	-50.48	-49.21	6.09	-40.7
7	15880.5 AV	43.03	54	-10.97	-61.3	-61.36	6.09	-52.23

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

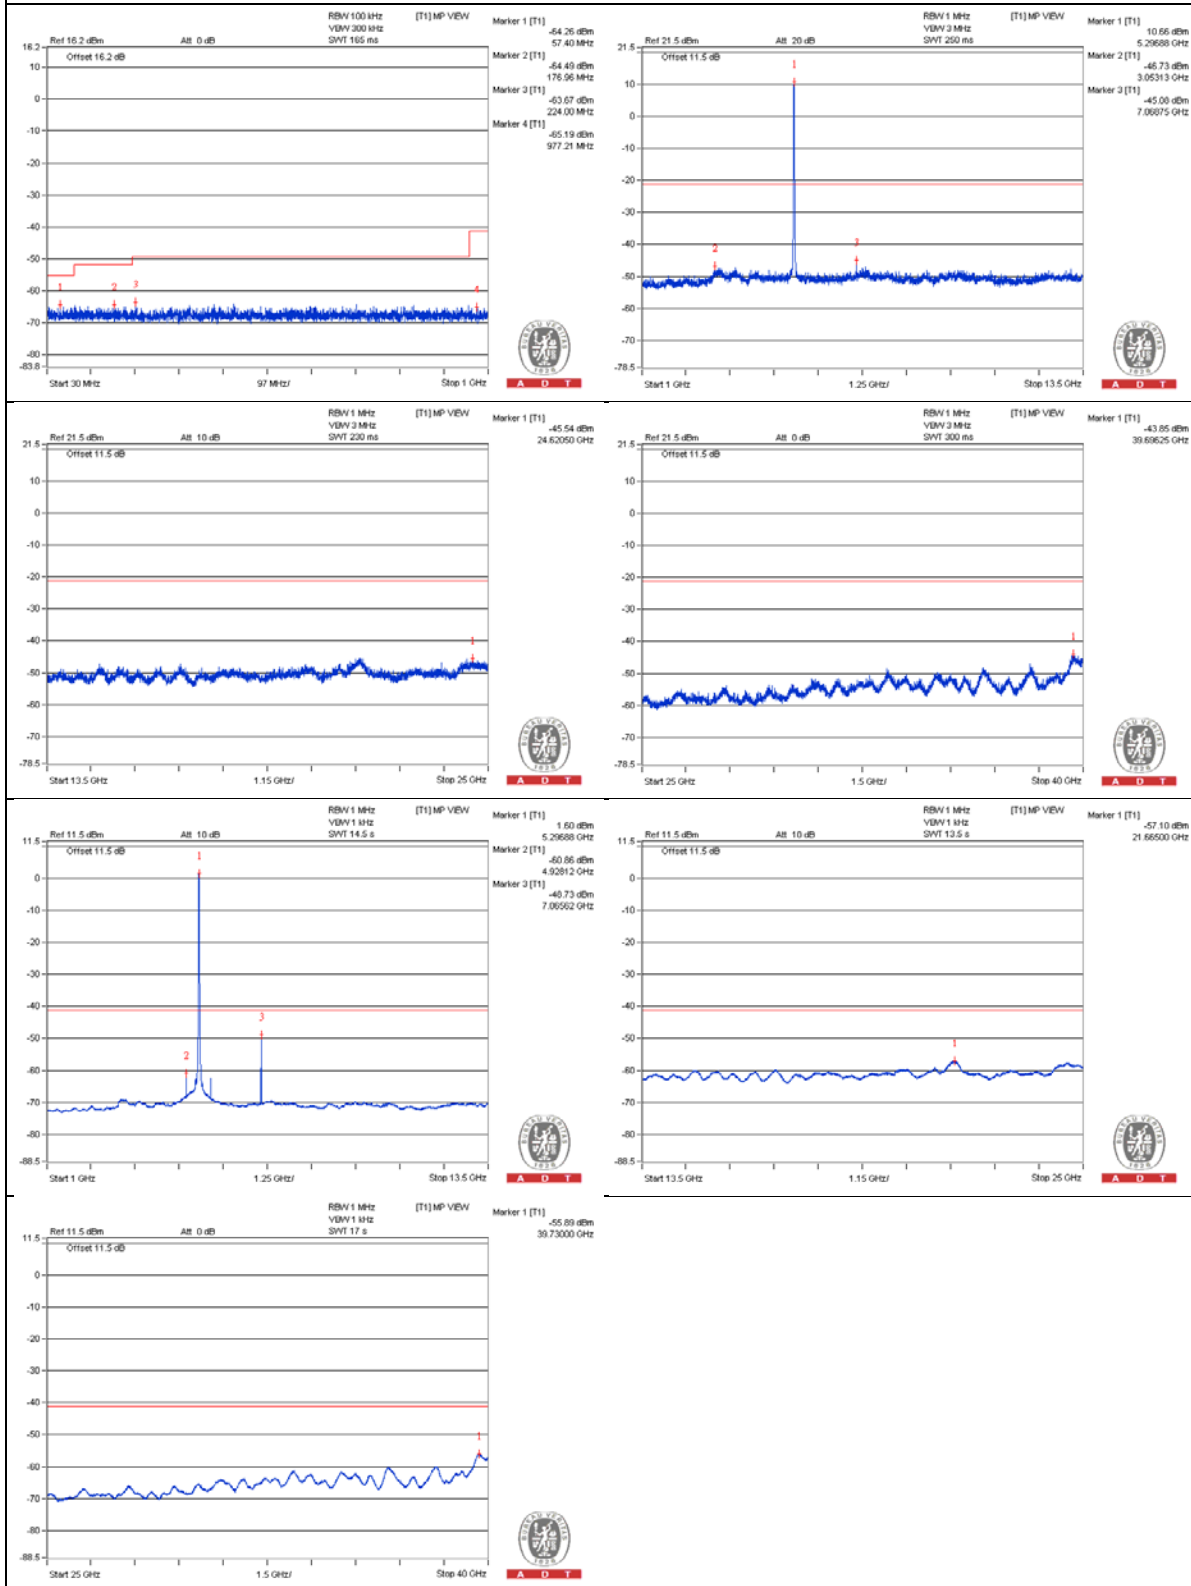

Chain 1

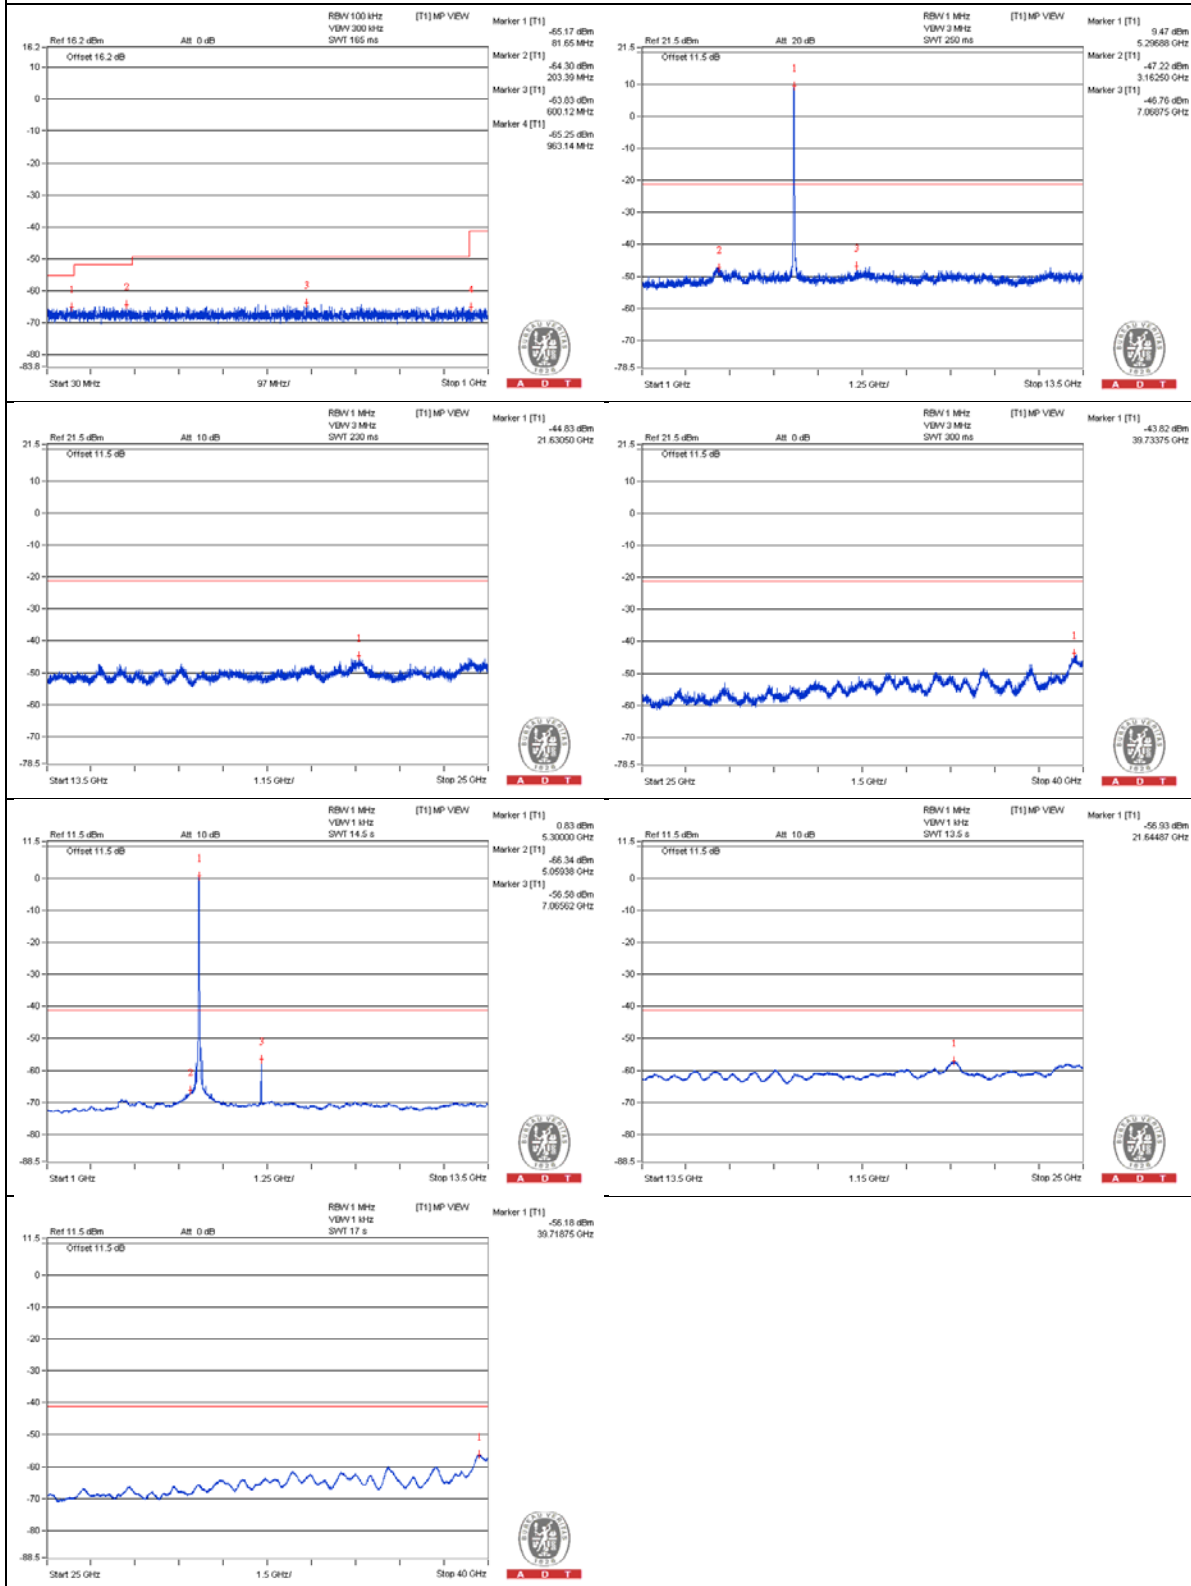

802.11ac (VHT20) - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3556.25 PK	55.33	74	-18.67	-48.21	-50.05	6.09	-39.93
2	3562.5 AV	34.42	54	-19.58	-69.92	-69.96	6.09	-60.84
3	7093.75 PK	59.24	68.2	-8.96	-43.29	-48.36	6.09	-36.02
4	10631.25 PK	54.47	74	-19.53	-50.4	-49.43	6.09	-40.79
5	10659.375 AV	33.58	54	-20.42	-70.79	-70.77	6.09	-61.68
6	15952.375 PK	53.44	74	-20.56	-50.37	-51.54	6.09	-41.82
7	15972.5 AV	42.37	54	-11.63	-61.82	-62.17	6.09	-52.89

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

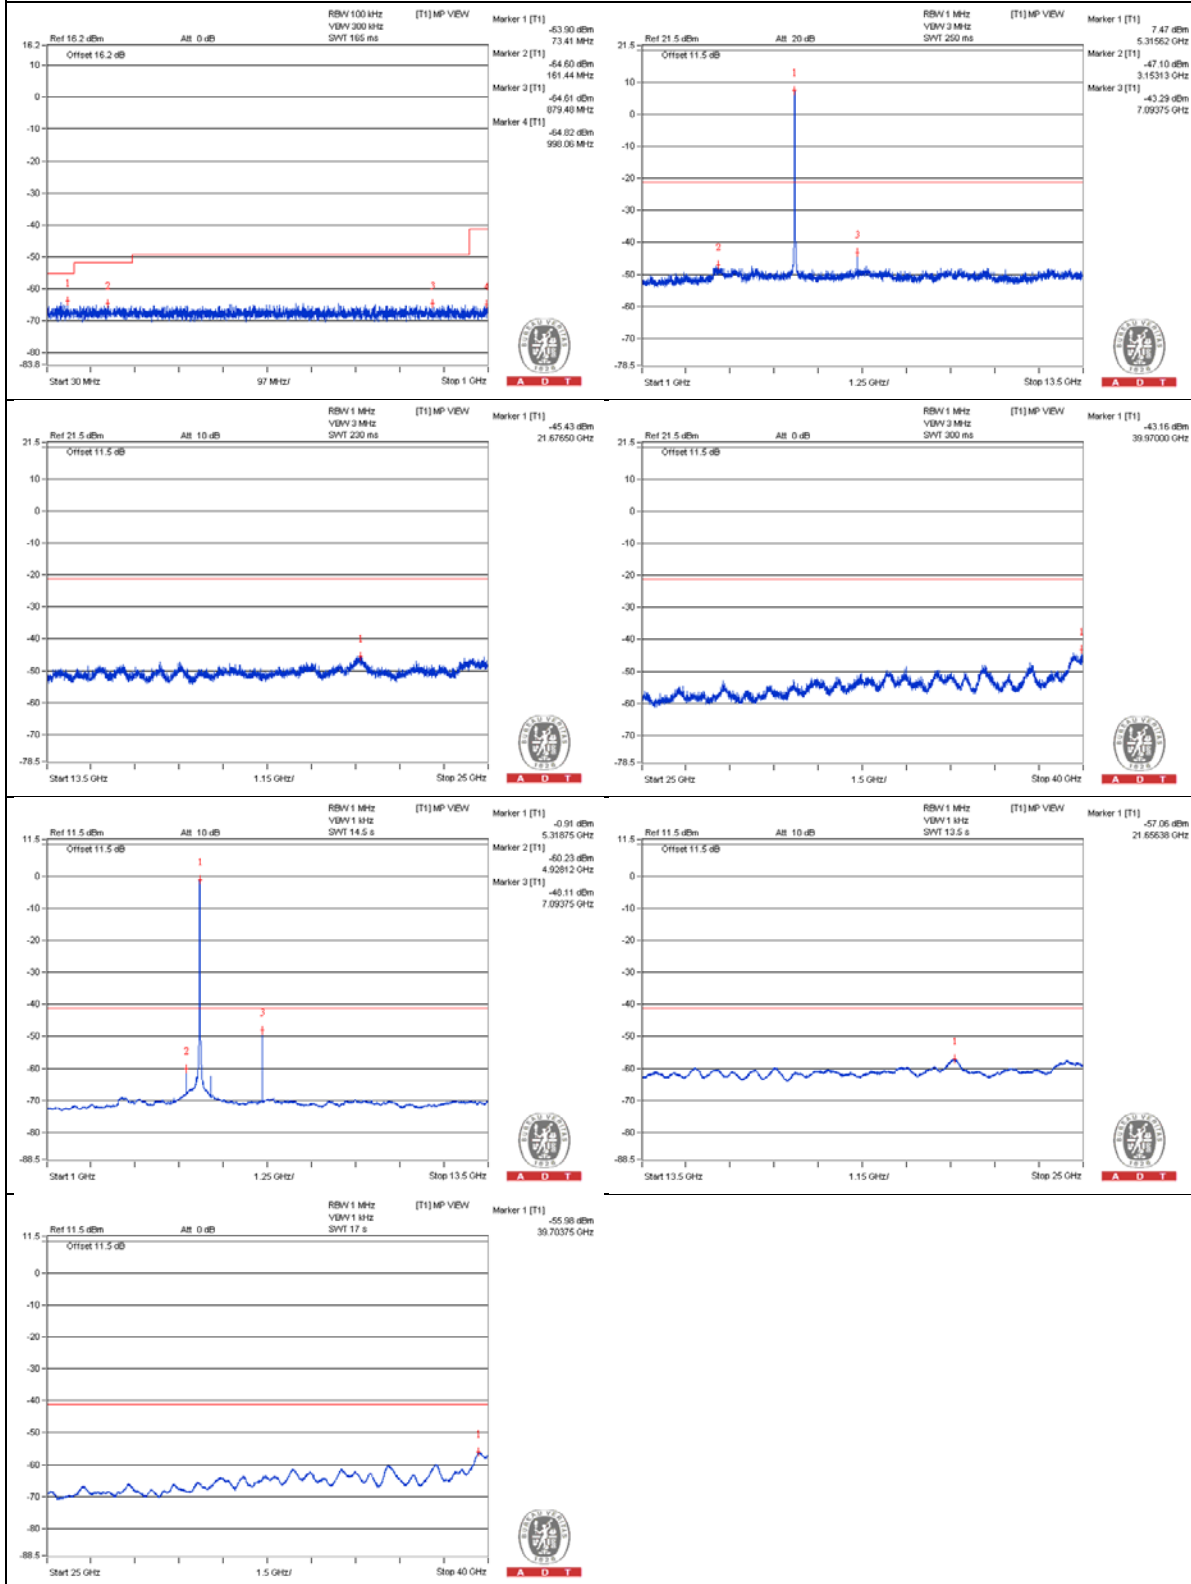

Chain 1

