

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.45 PK	61.58	74	-12.42	-42.43	-43.17	6.09	-33.68
2	5368 AV	50.58	54	-3.42	-58.11	-51.65	6.09	-44.68

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

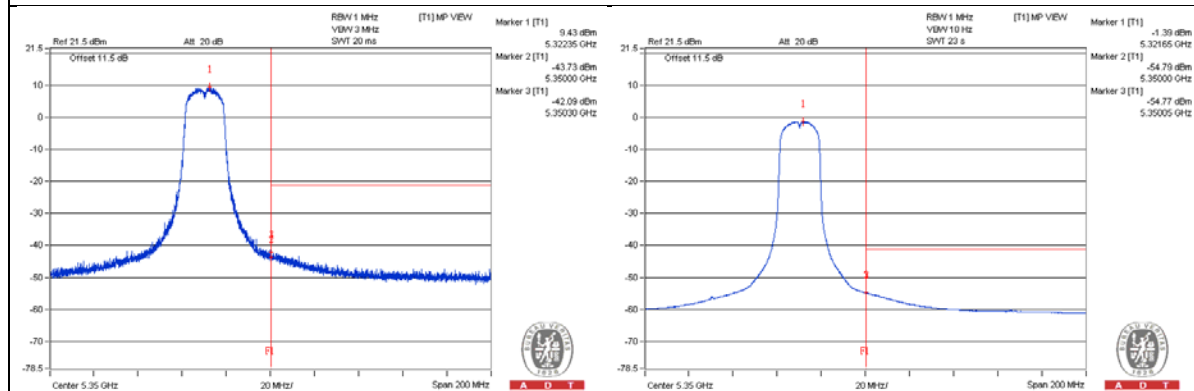

Chain 1

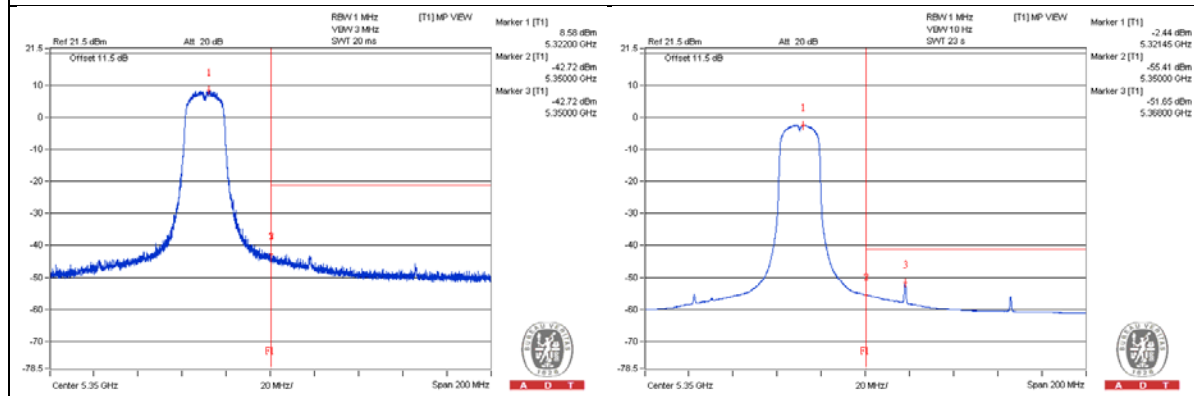

802.11ac (VHT20) - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3656.25 PK	56.65	74	-17.35	-49.36	-49.43	7.77	-38.61
2	3653.125 AV	35.95	54	-18.05	-69.95	-70.24	7.77	-59.31
3	7334.375 PK	58.42	74	-15.58	-46.62	-48.93	7.77	-36.84
4	7334.375 AV	49.69	54	-4.31	-53.63	-65.27	7.77	-45.57
5	11018.75 PK	55.63	74	-18.37	-50.56	-50.27	7.77	-39.63
6	11000 AV	34.59	54	-19.41	-71.57	-71.33	7.77	-60.67
7	16501.5 PK	56.21	74	-17.79	-50	-49.66	7.77	-39.05
8	16481.375 AV	44.96	54	-9.04	-61.07	-61.09	7.77	-50.3

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

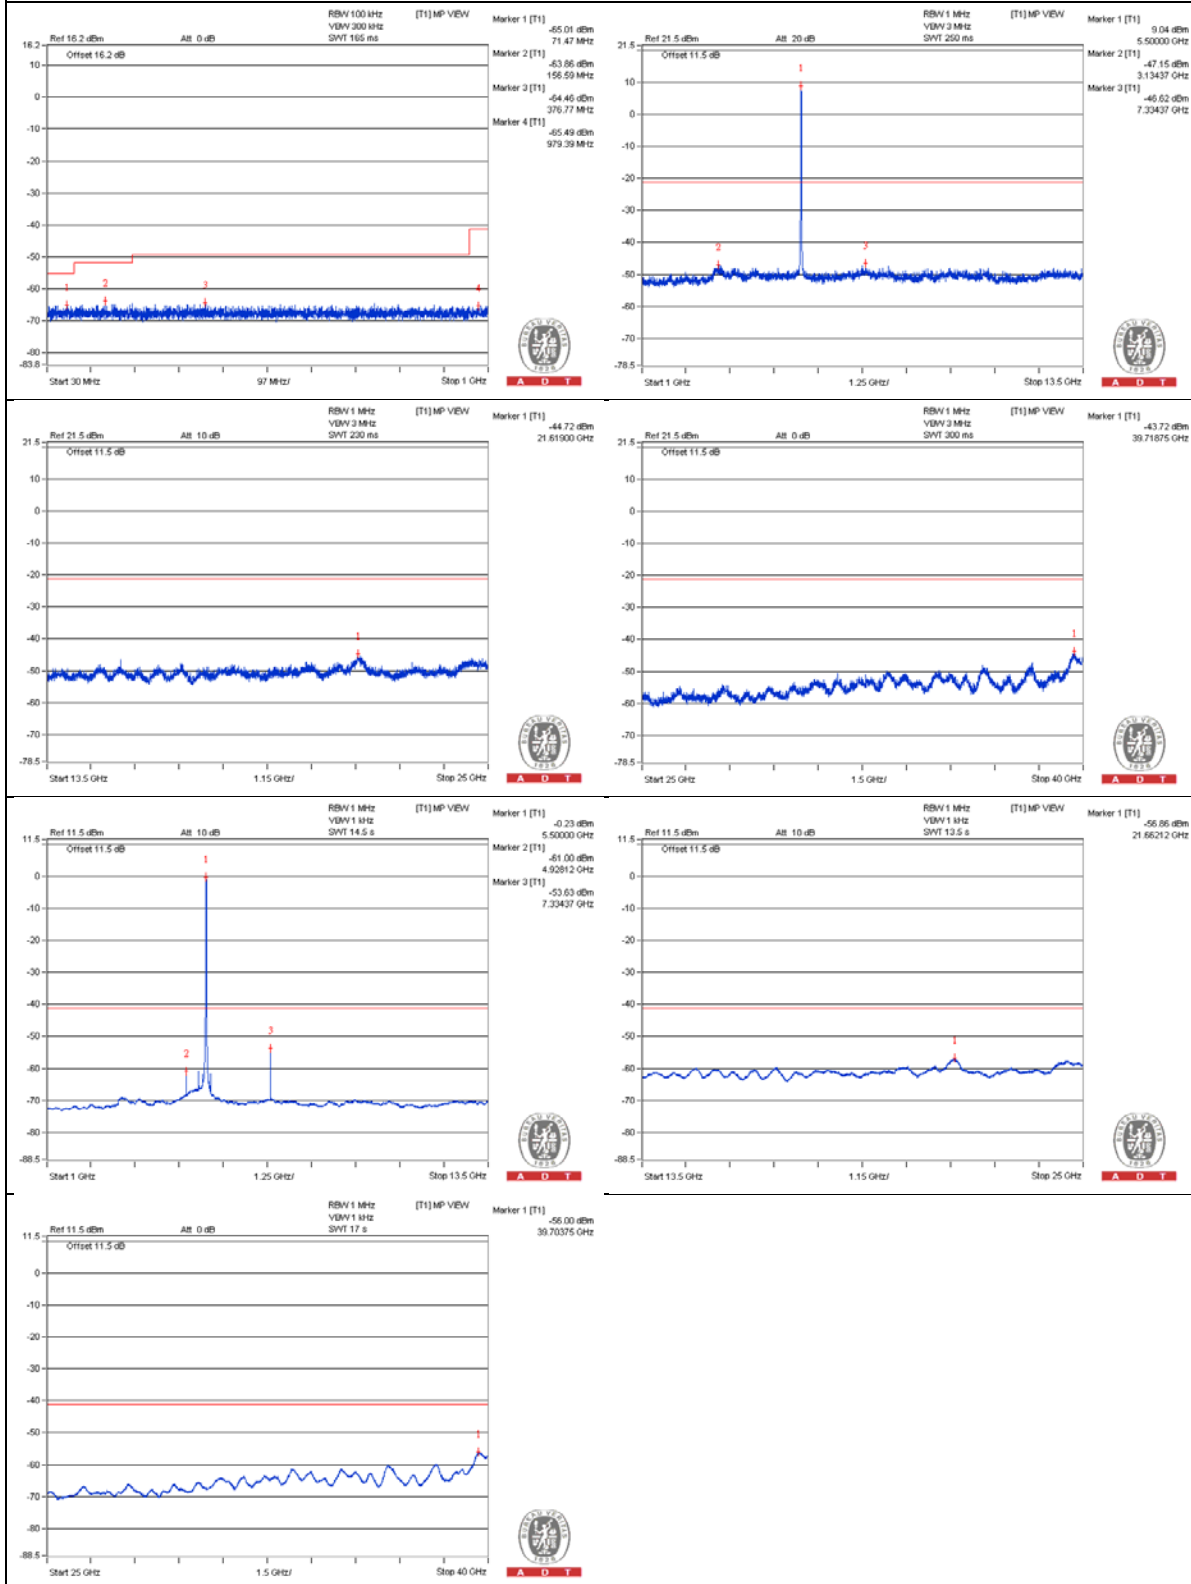

Chain 1

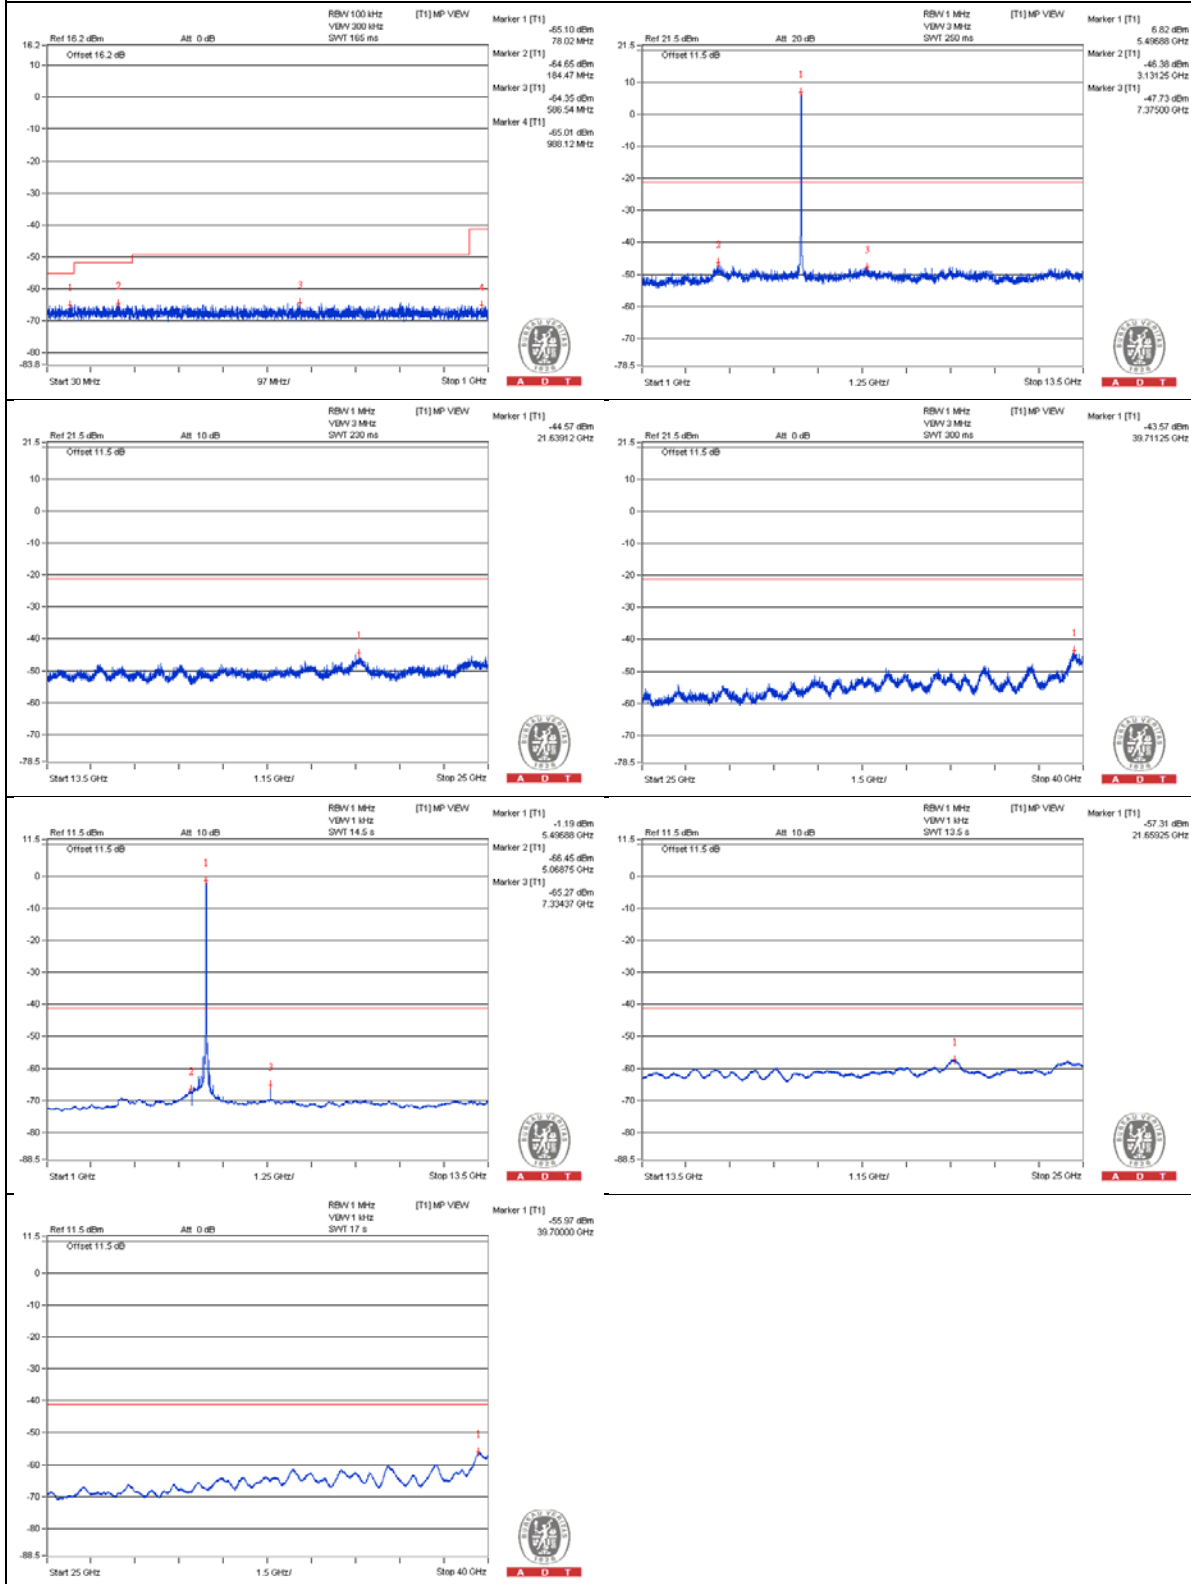

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5469.1875 PK	63.31	74	-10.69	-42.23	-43.29	7.77	-31.95
2	5470 AV	51.02	54	-2.98	-54.37	-55.79	7.77	-44.24

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

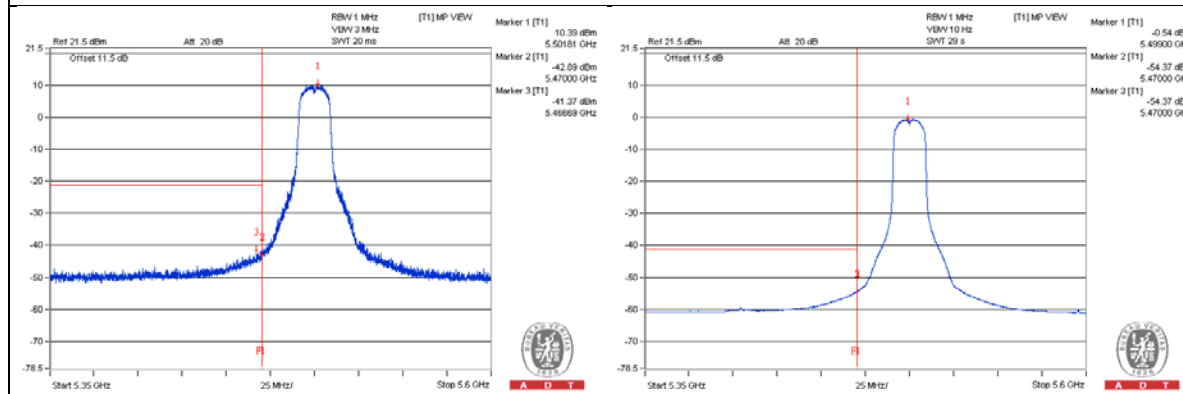

Chain 1

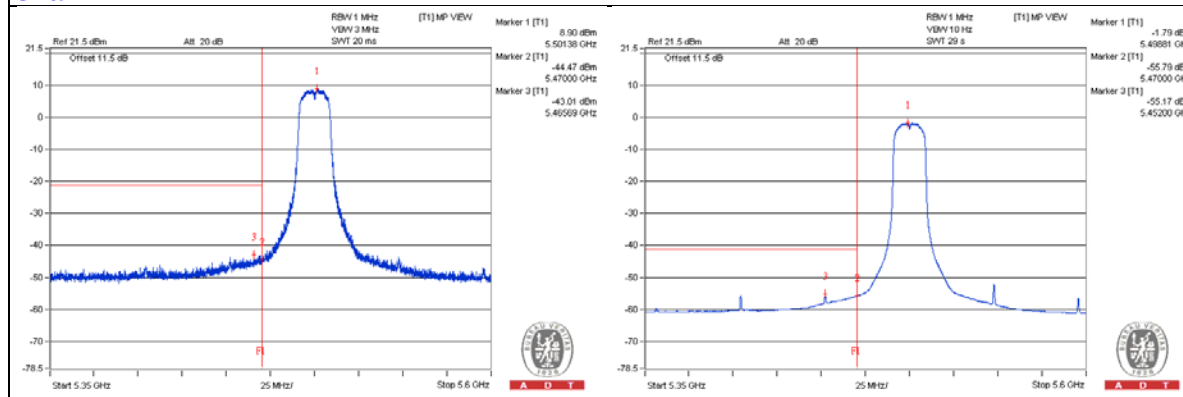

802.11ac (VHT20) - Channel 120

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3746.875 PK	56.61	74	-17.39	-49.43	-49.43	7.77	-38.65
2	3740.625 AV	35.72	54	-18.28	-70.24	-70.4	7.77	-59.54
3	7456.25 PK	56.57	74	-17.43	-50.24	-48.81	7.77	-38.69
4	7465.625 AV	42.64	54	-11.36	-60.86	-70.32	7.77	-52.62
5	11206.25 PK	56.72	74	-17.28	-48.99	-49.67	7.77	-38.54
6	11200 AV	34.78	54	-19.22	-71.41	-71.12	7.77	-60.48
7	16809.125 PK	55.03	74	-18.97	-50.4	-51.71	7.77	-40.23
8	16817.75 AV	44.3	54	-9.7	-61.64	-61.85	7.77	-50.96

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

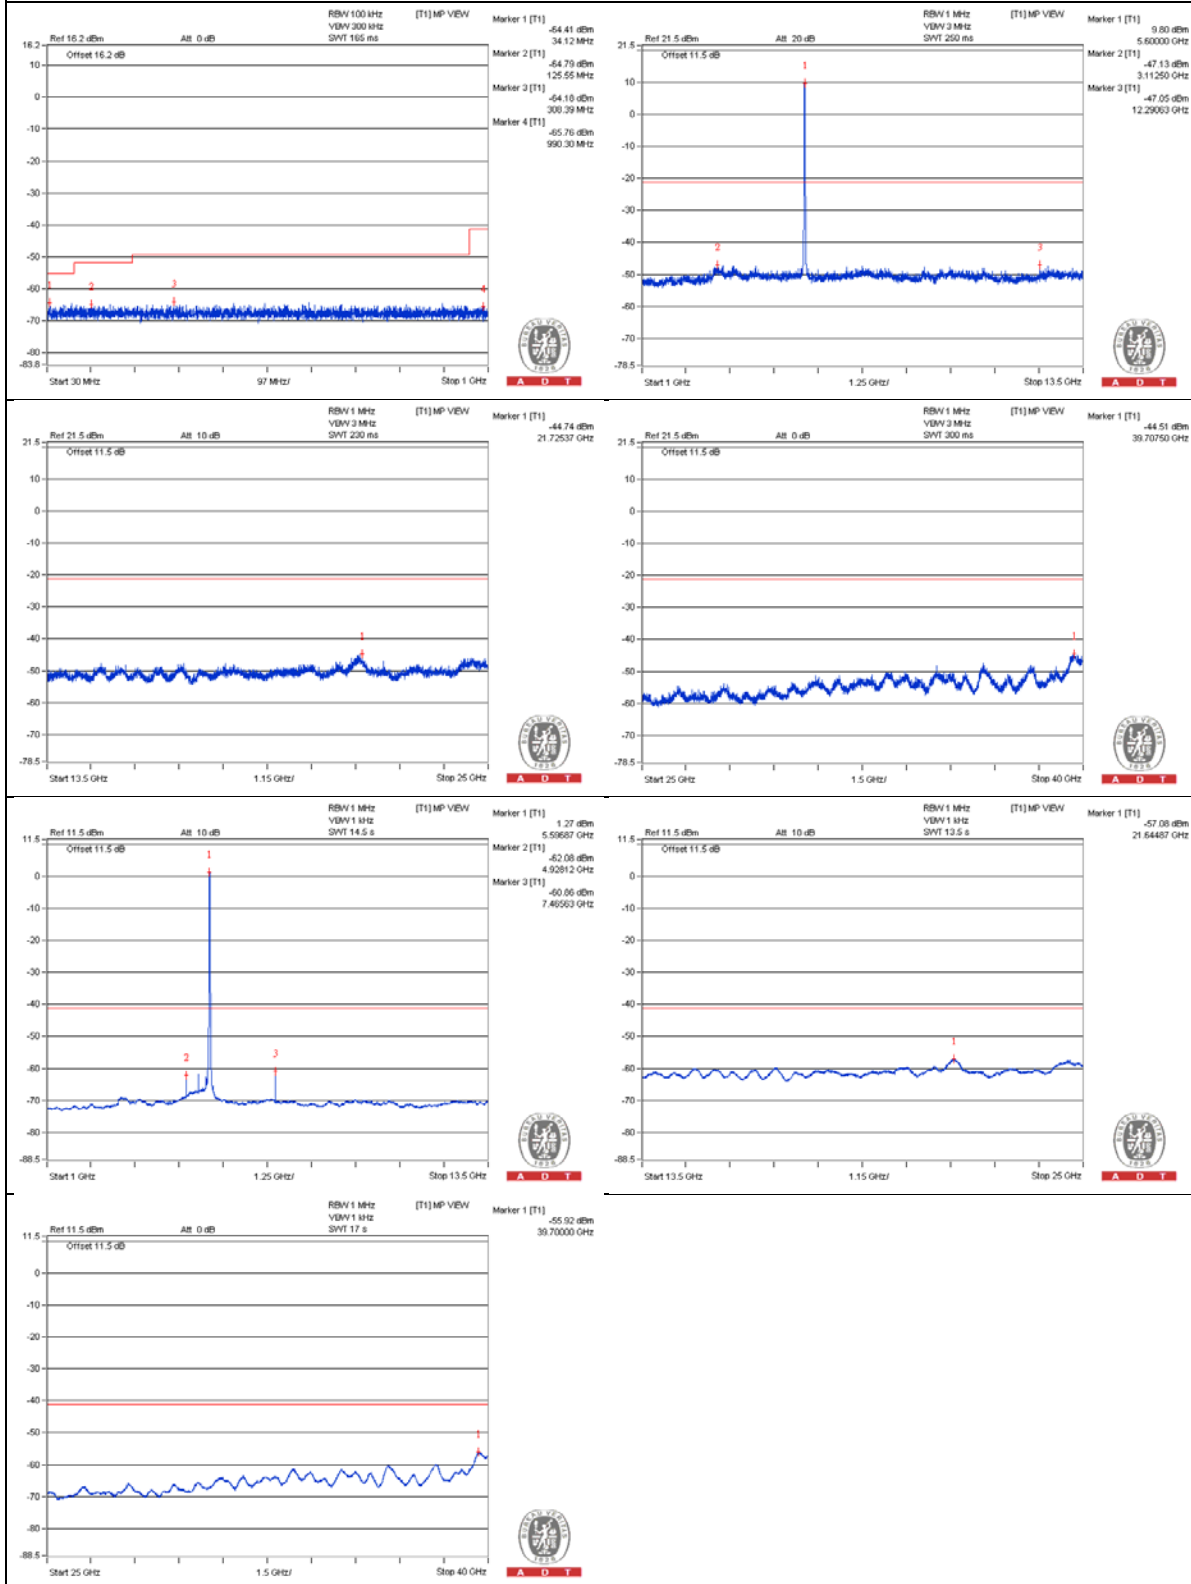

Chain 1

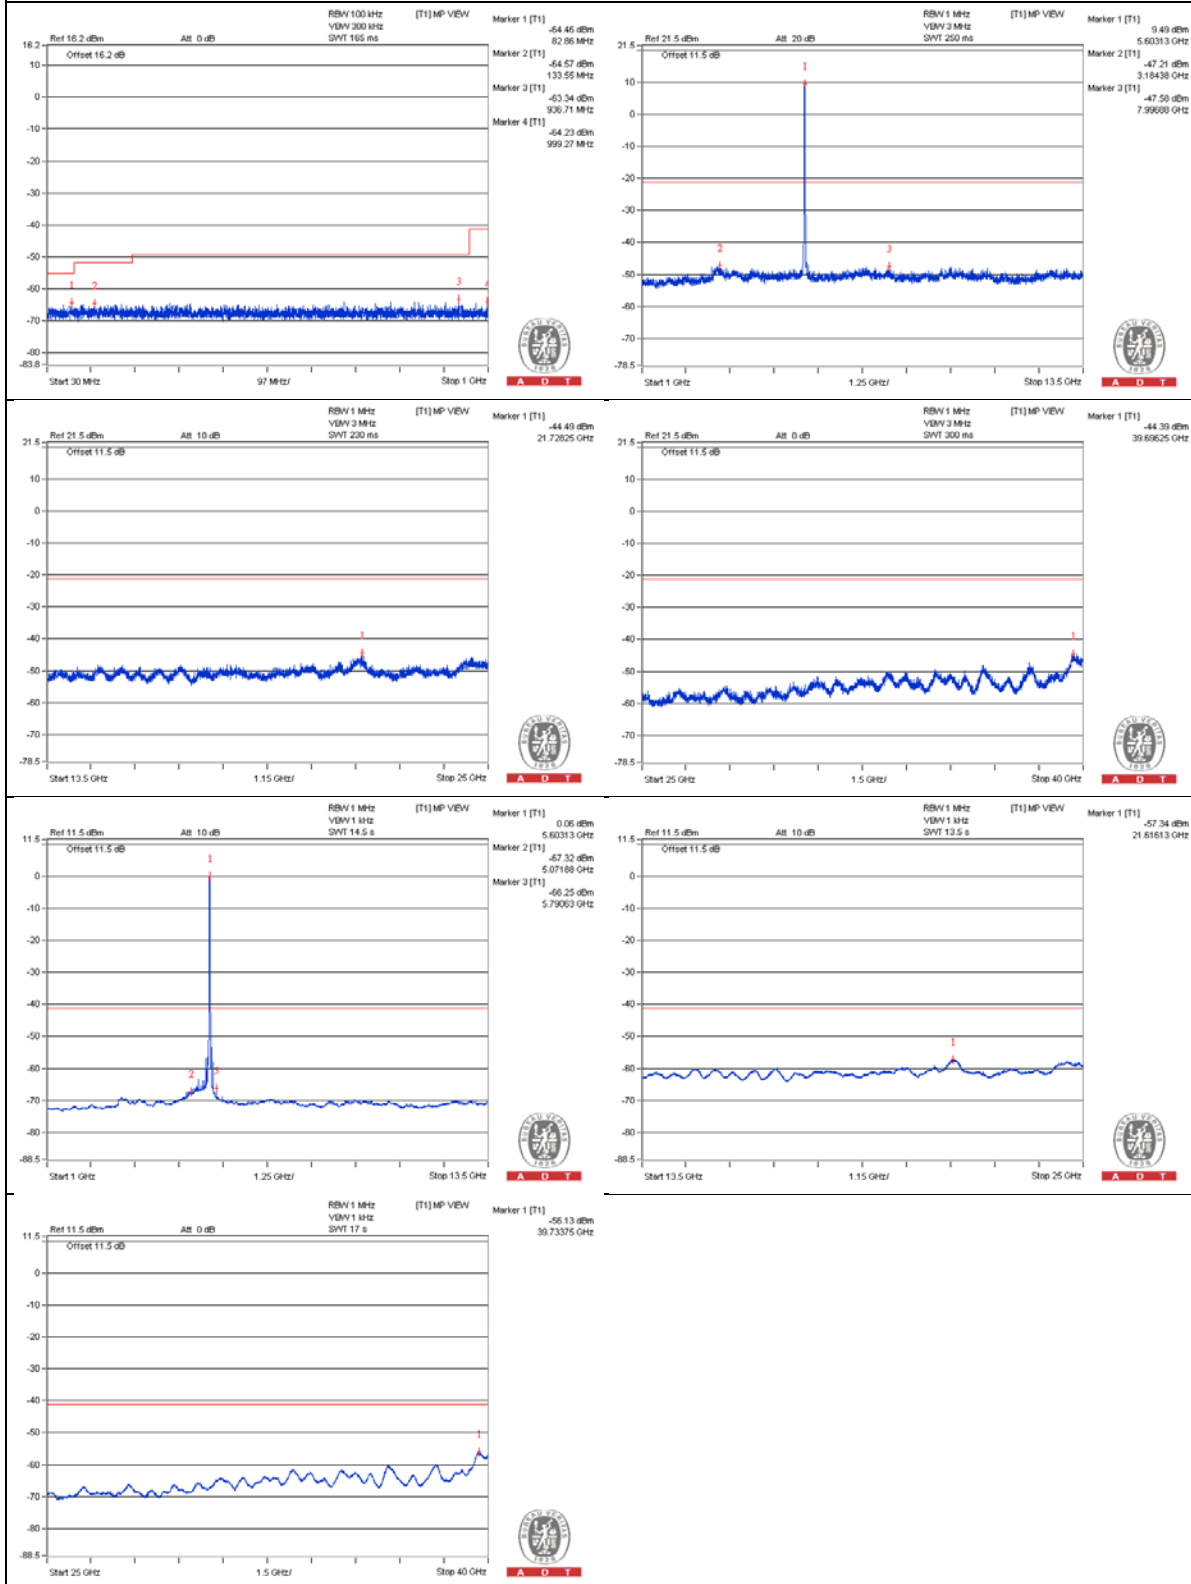

802.11ac (VHT20) - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3787.5 PK	56.26	74	-17.74	-49.31	-50.3	7.77	-39
2	3784.375 AV	35.29	54	-18.71	-70.87	-70.64	7.77	-59.97
3	7600 PK	56.59	74	-17.41	-49.93	-49.02	7.77	-38.67
4	7600 AV	40.29	54	-13.71	-63.5	-70.68	7.77	-54.97
5	11412.5 PK	55.08	74	-18.92	-50.46	-51.52	7.77	-40.18
6	11390.625 AV	34.36	54	-19.64	-71.59	-71.77	7.77	-60.9
7	17082.25 PK	55.97	74	-18.03	-49.8	-50.36	7.77	-39.29
8	17090.875 AV	44.67	54	-9.33	-61.44	-61.31	7.77	-50.59

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

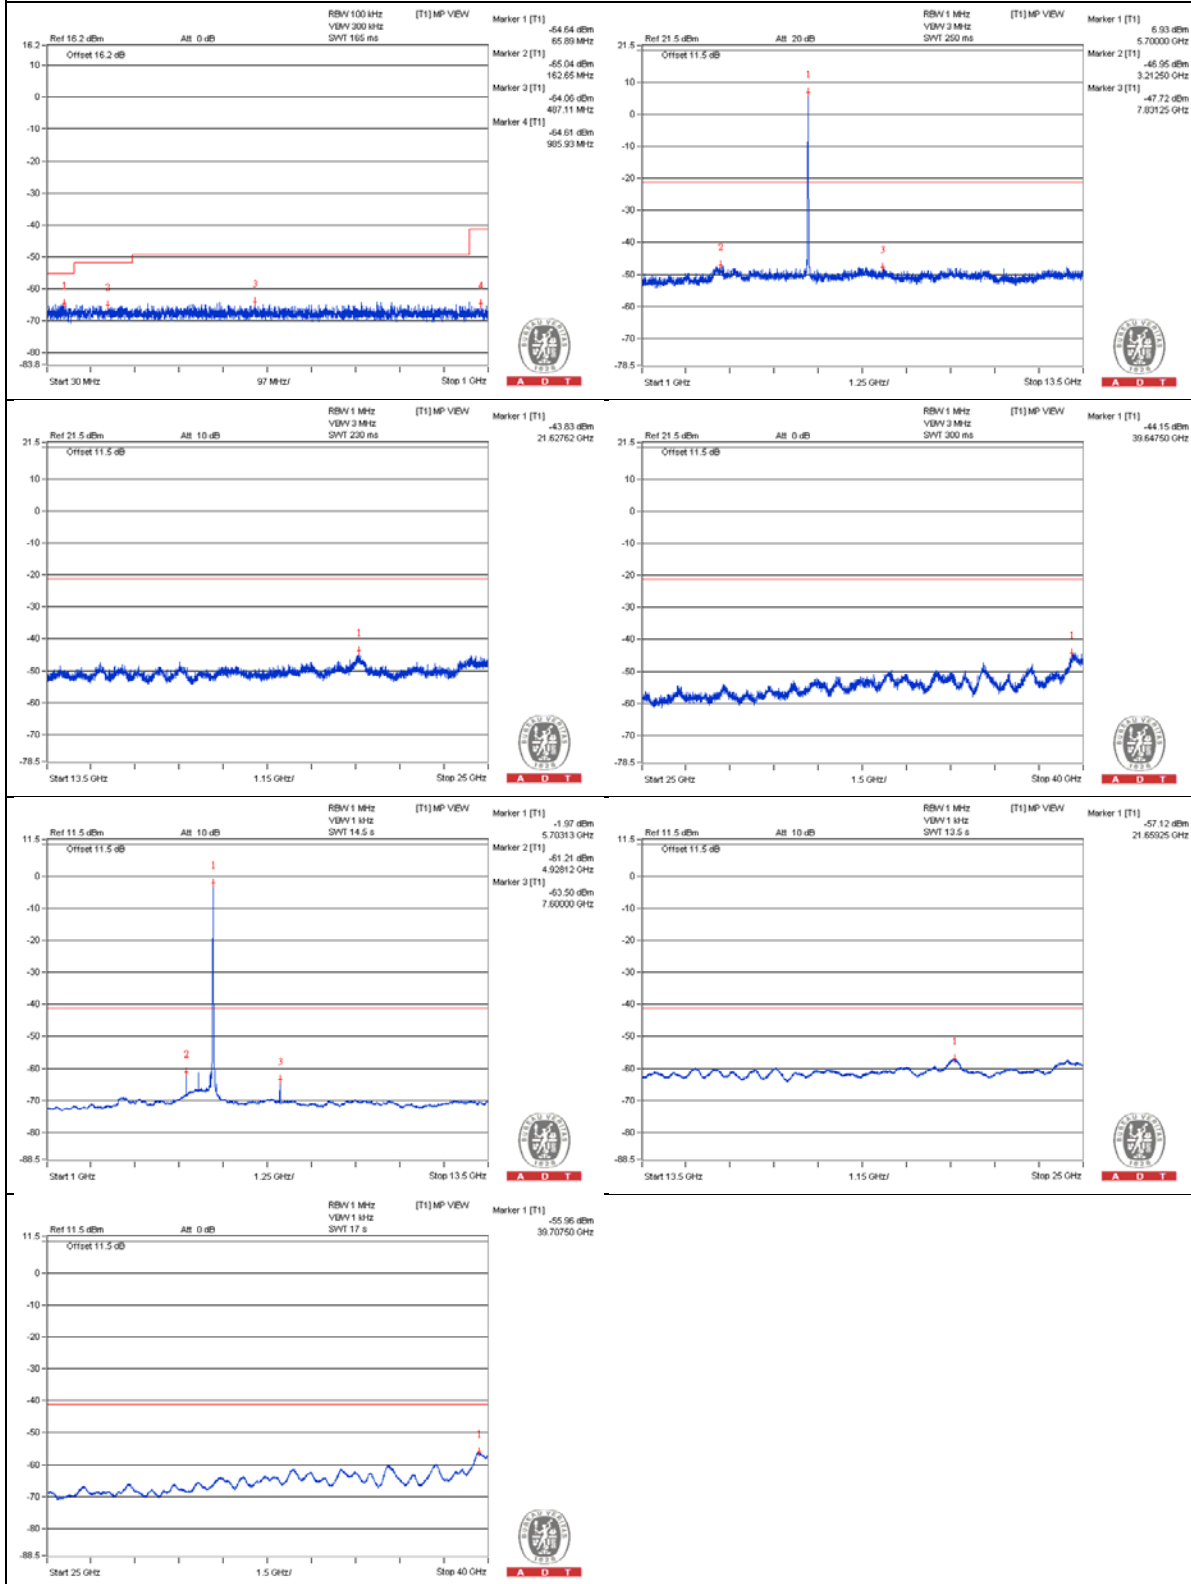

Chain 1

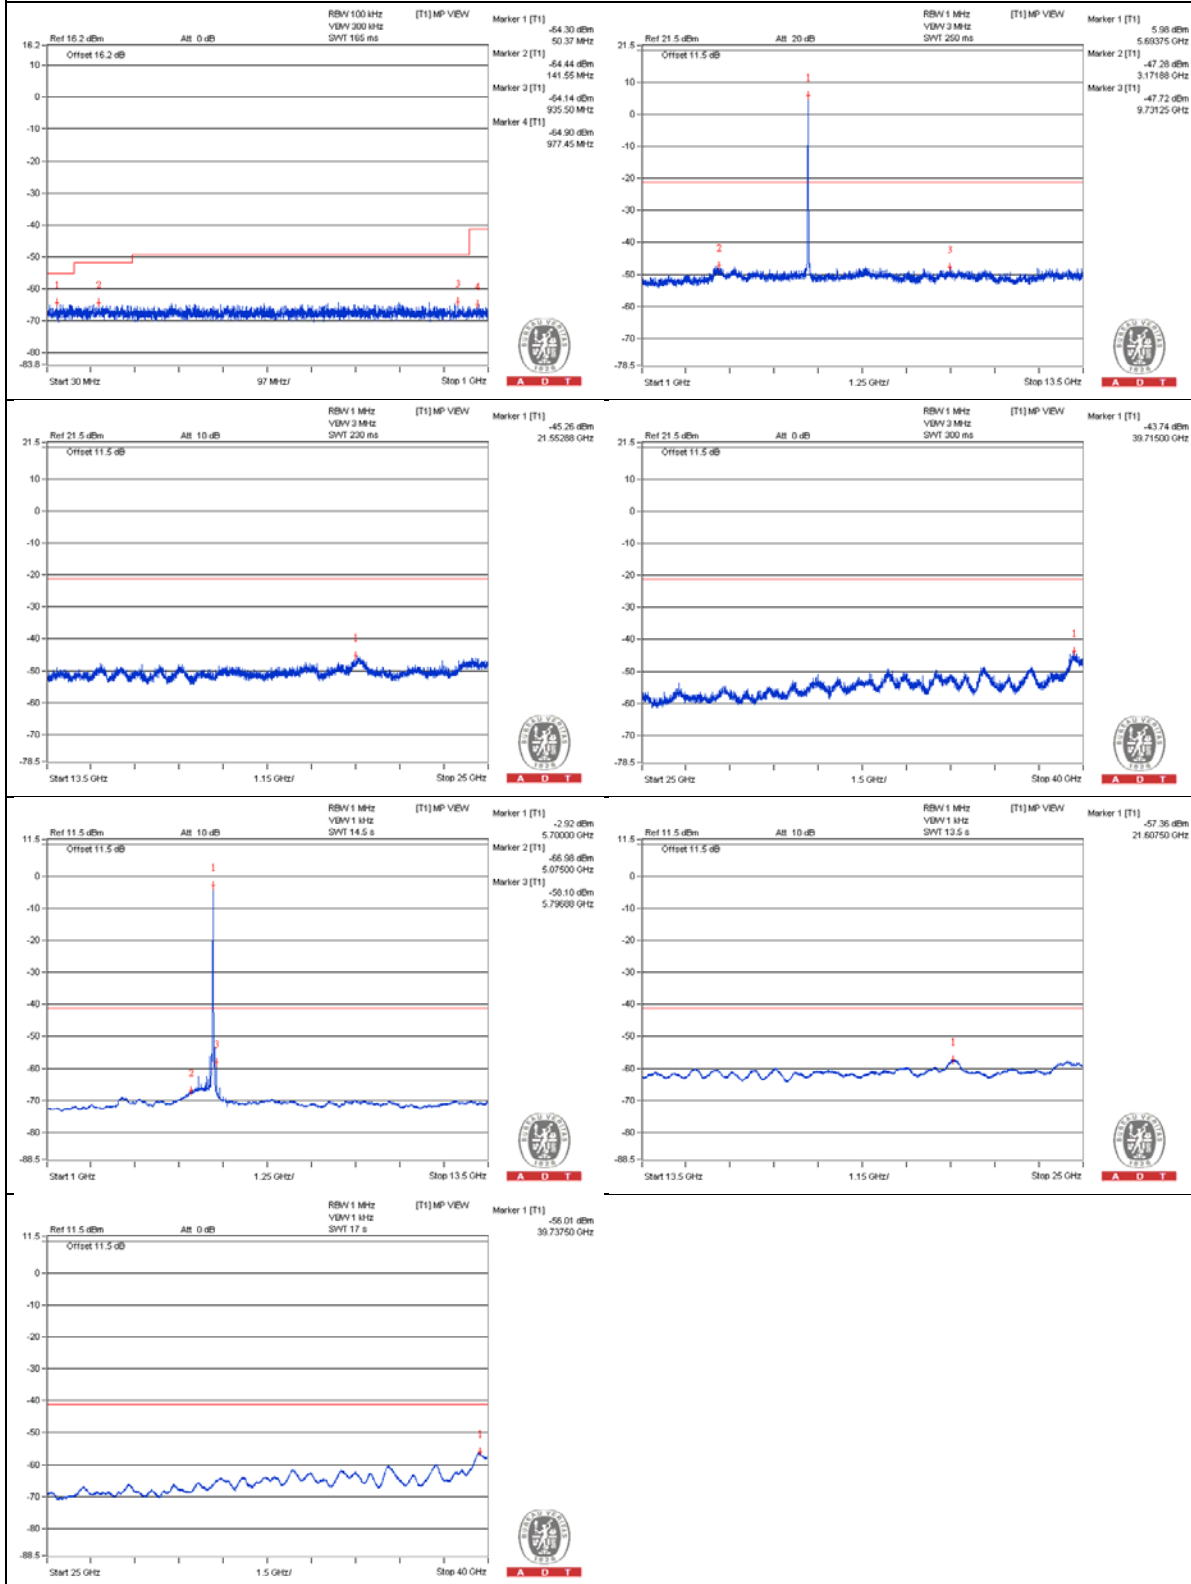

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725.5 PK	62.84	74	-11.16	-43.22	-43.19	7.77	-32.42
2	5747.95 AV	51.12	54	-2.88	-59.85	-52.67	7.77	-44.14

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

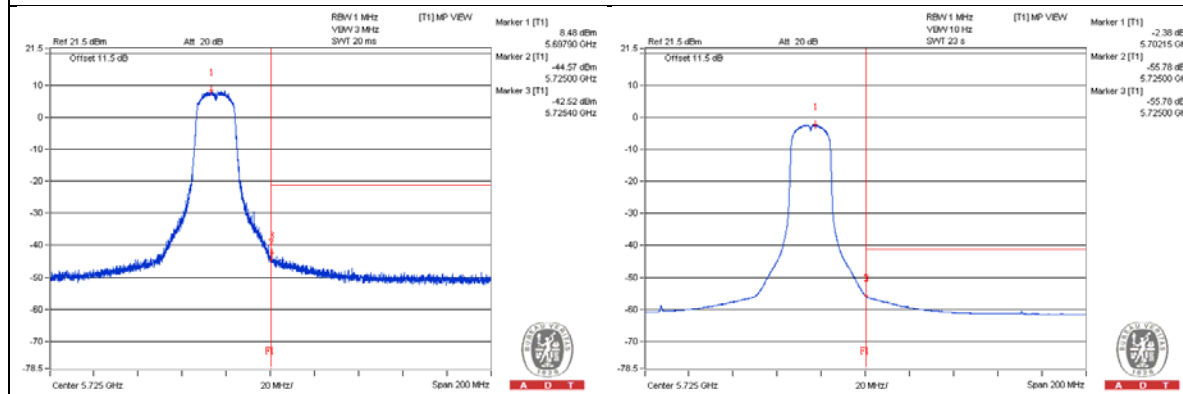

Chain 1

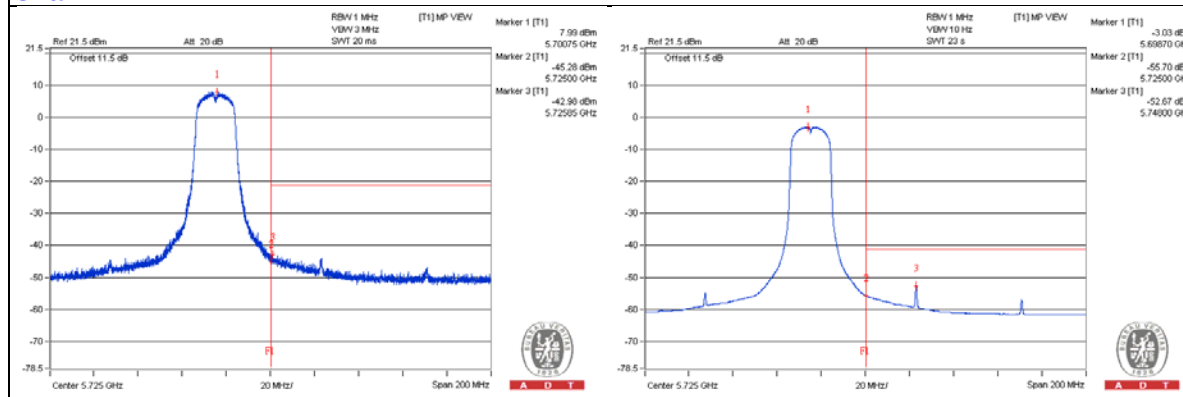

802.11ac (VHT20) - Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	55.65	74	-18.35	-51.35	-49.6	7.77	-39.61
2	3793.75 AV	34.55	54	-19.45	-71.43	-71.56	7.77	-60.71
3	7640.625 PK	56.23	74	-17.77	-48.89	-50.99	7.77	-39.03
4	7628.125 AV	35.83	54	-18.17	-69.29	-71.38	7.77	-59.43
5	11450 PK	55.27	74	-18.73	-50.13	-51.51	7.77	-39.99
6	11440.625 AV	33.77	54	-20.23	-72.5	-72.06	7.77	-61.49
7	17148.375 PK	54.25	74	-19.75	-51.8	-51.79	7.77	-41.01
8	17145.5 AV	43.33	54	-10.67	-62.76	-62.66	7.77	-51.93

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

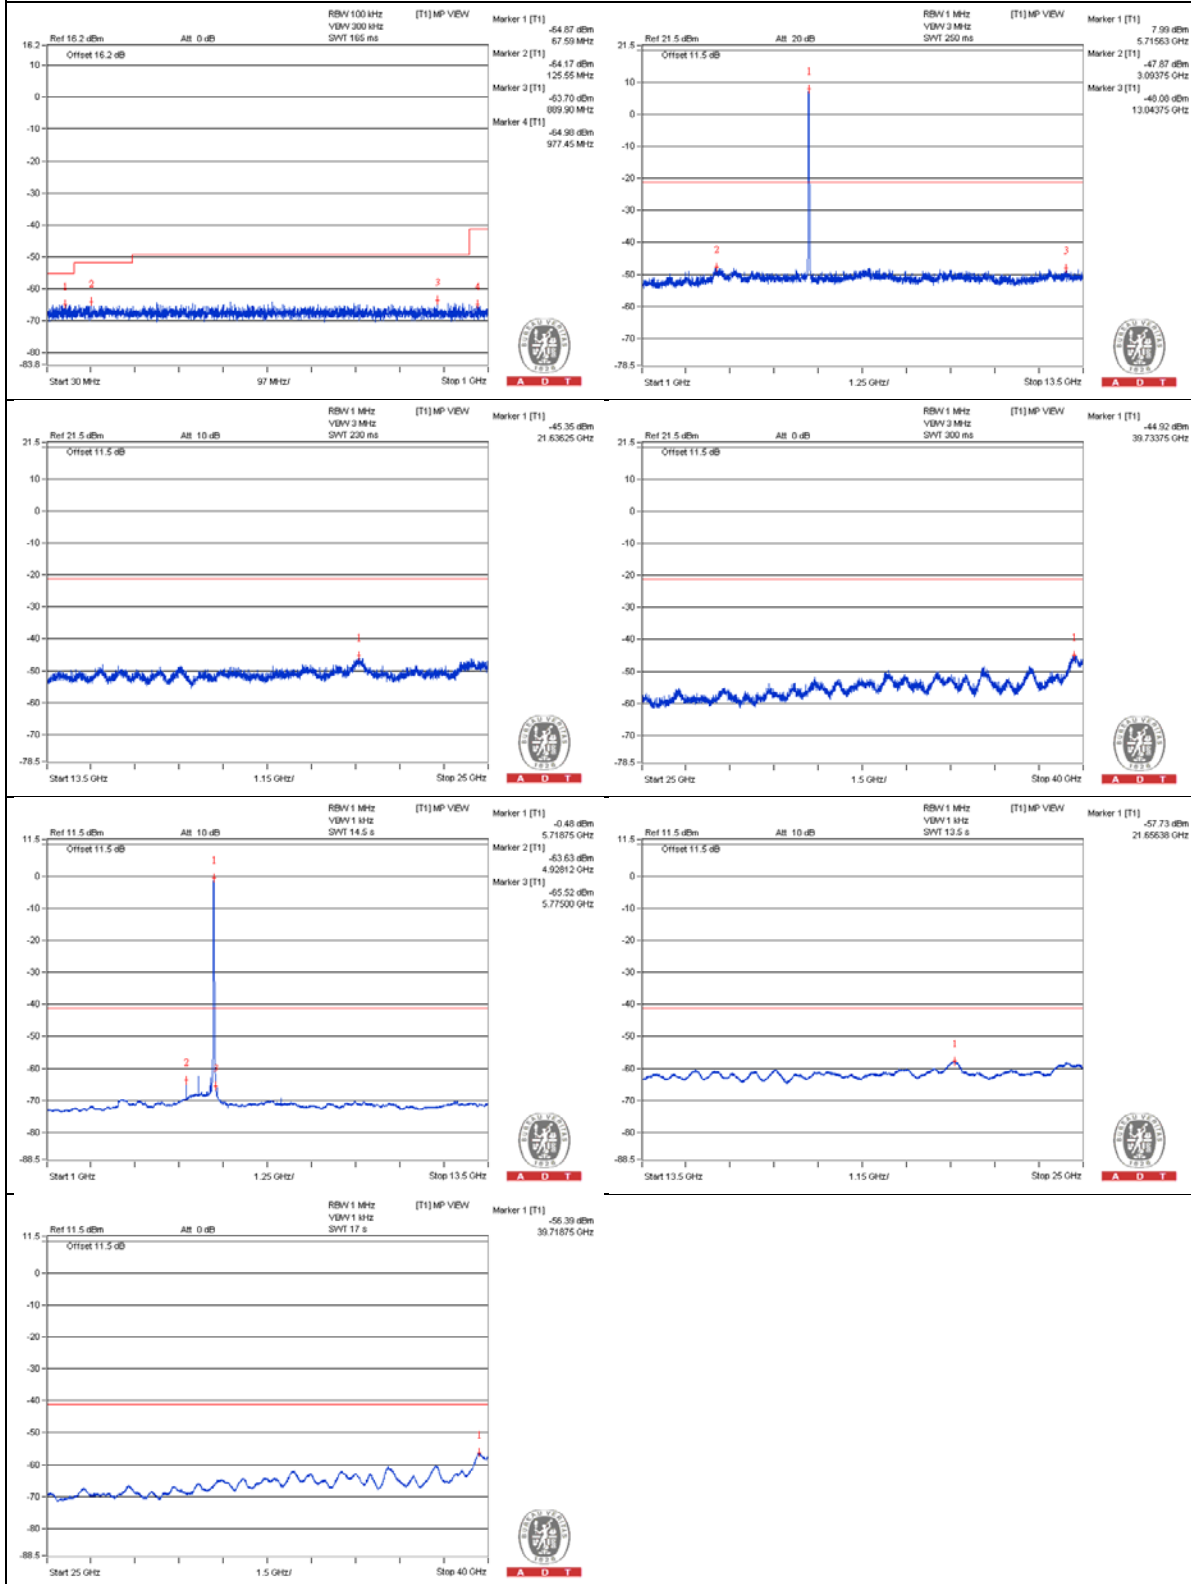

Chain 1

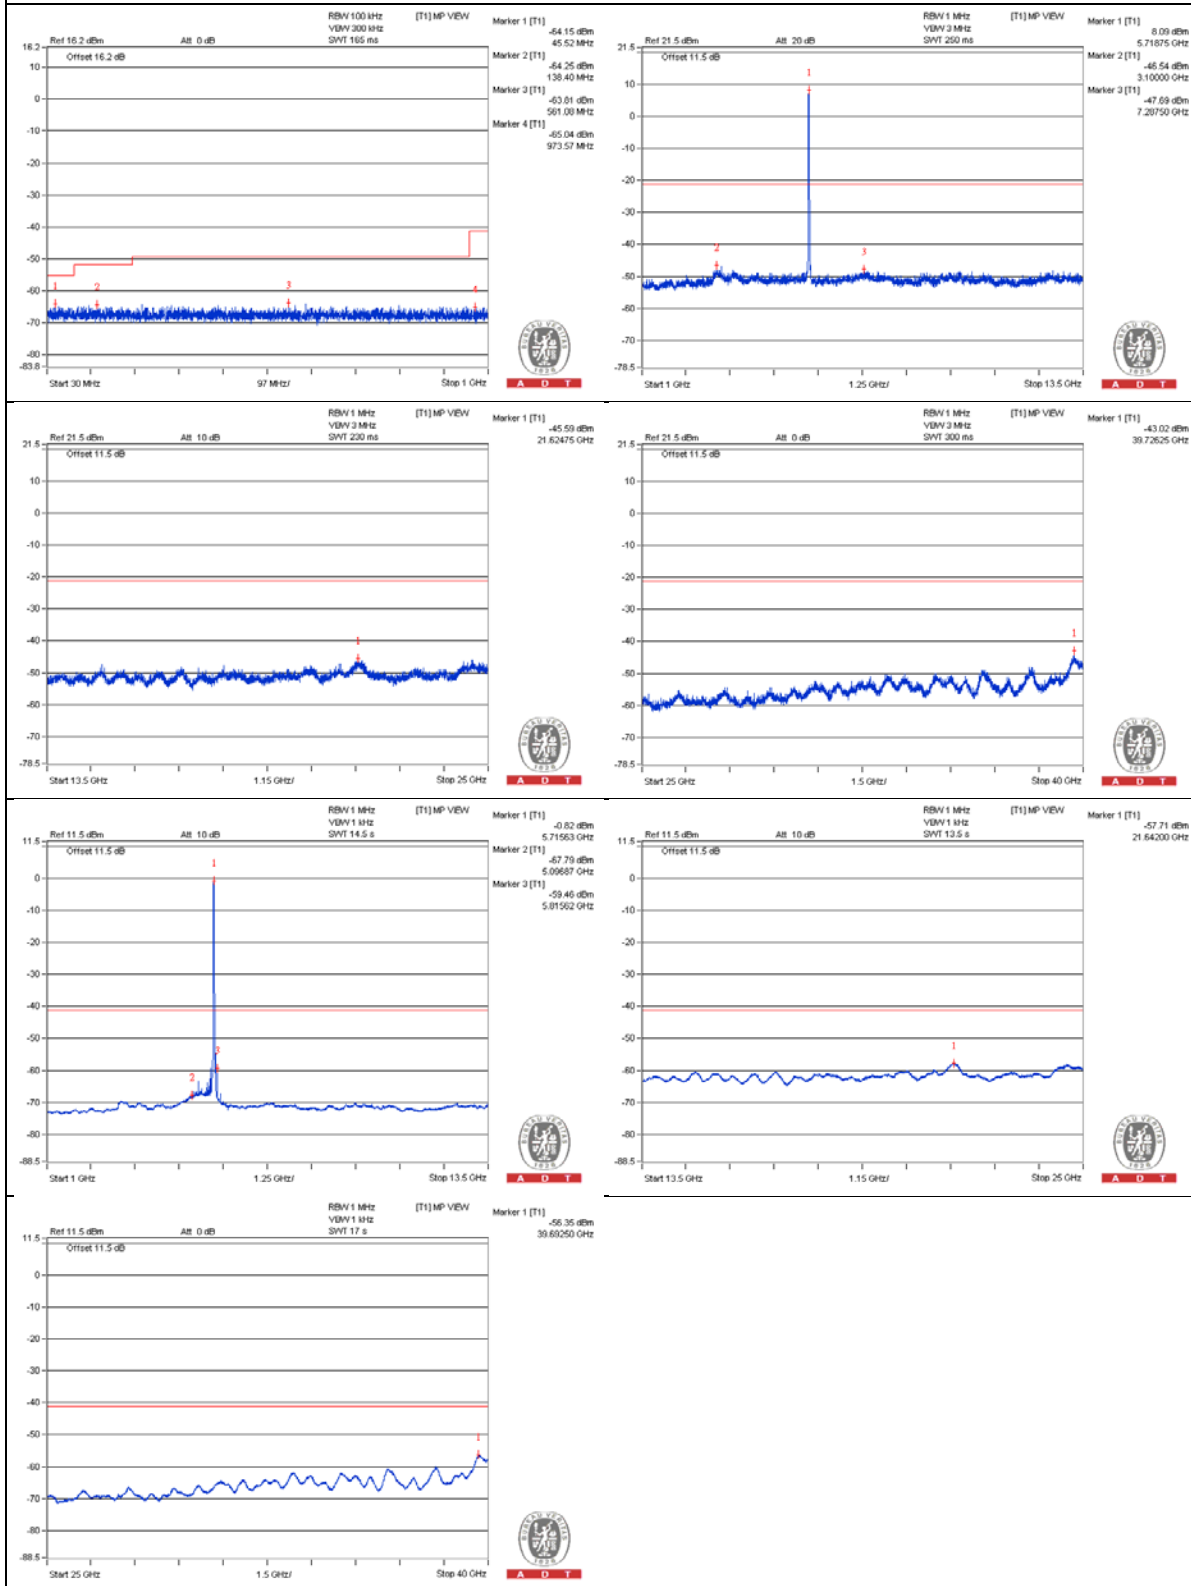

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5838.325 PK	56.47	74	-17.53	-50.25	-48.98	7.77	-38.79
2	5912.05 AV	44.07	54	-9.93	-62.35	-61.63	7.77	-51.19

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

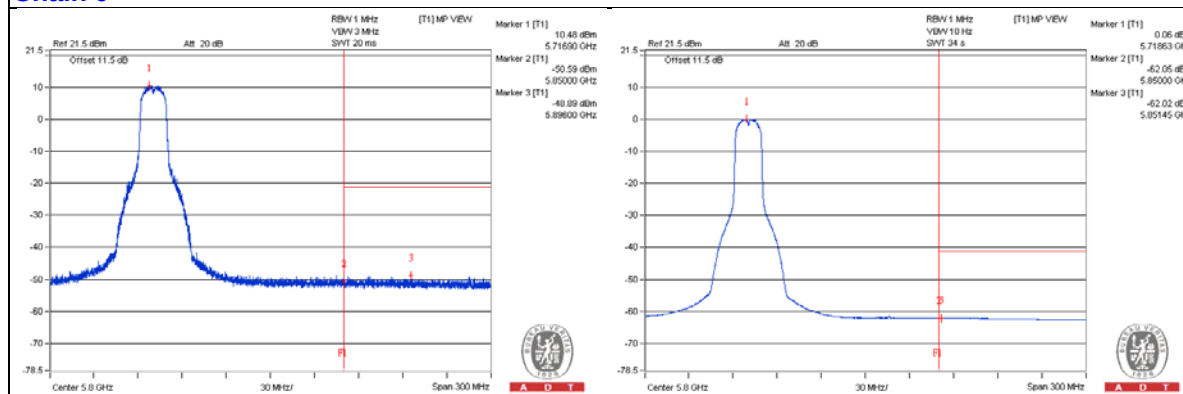

Chain 1

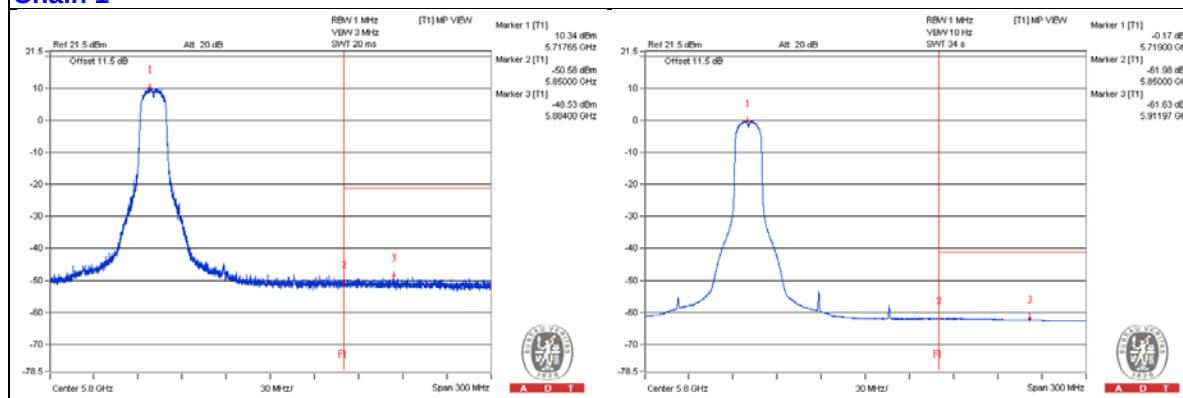

802.11ac (VHT40) - Channel 38

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3450 PK	54.43	74	-19.57	-49.56	-50.34	6.09	-40.83
2	3462.5 AV	33.6	54	-20.4	-70.68	-70.84	6.09	-61.66
3	6921.875 PK	61.64	68.2	-6.56	-41.88	-43.77	6.09	-33.62
4	10387.5 PK	54.48	74	-19.52	-49.46	-50.35	6.09	-40.78
5	10362.5 AV	33.69	54	-20.31	-70.58	-70.77	6.09	-61.57
6	15555.625 PK	53.74	74	-20.26	-49.65	-51.88	6.09	-41.52
7	15552.75 AV	42.57	54	-11.43	-61.82	-61.76	6.09	-52.69

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

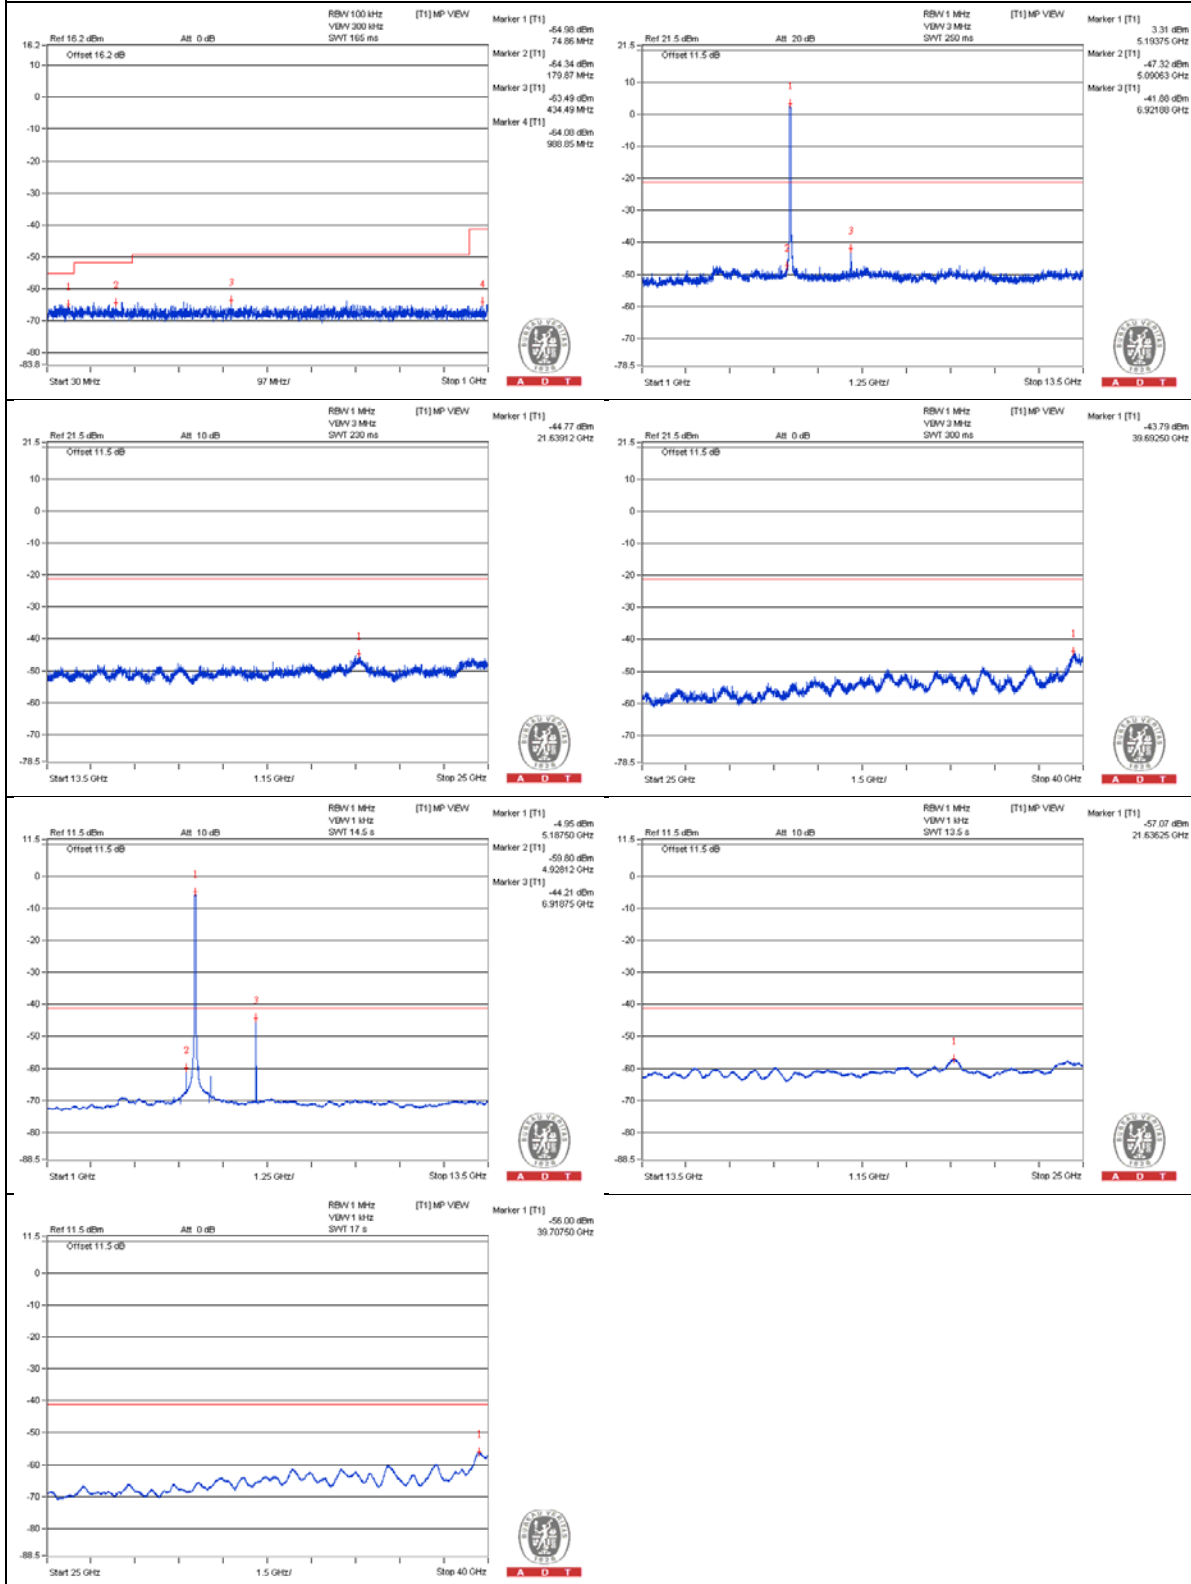

Chain 1

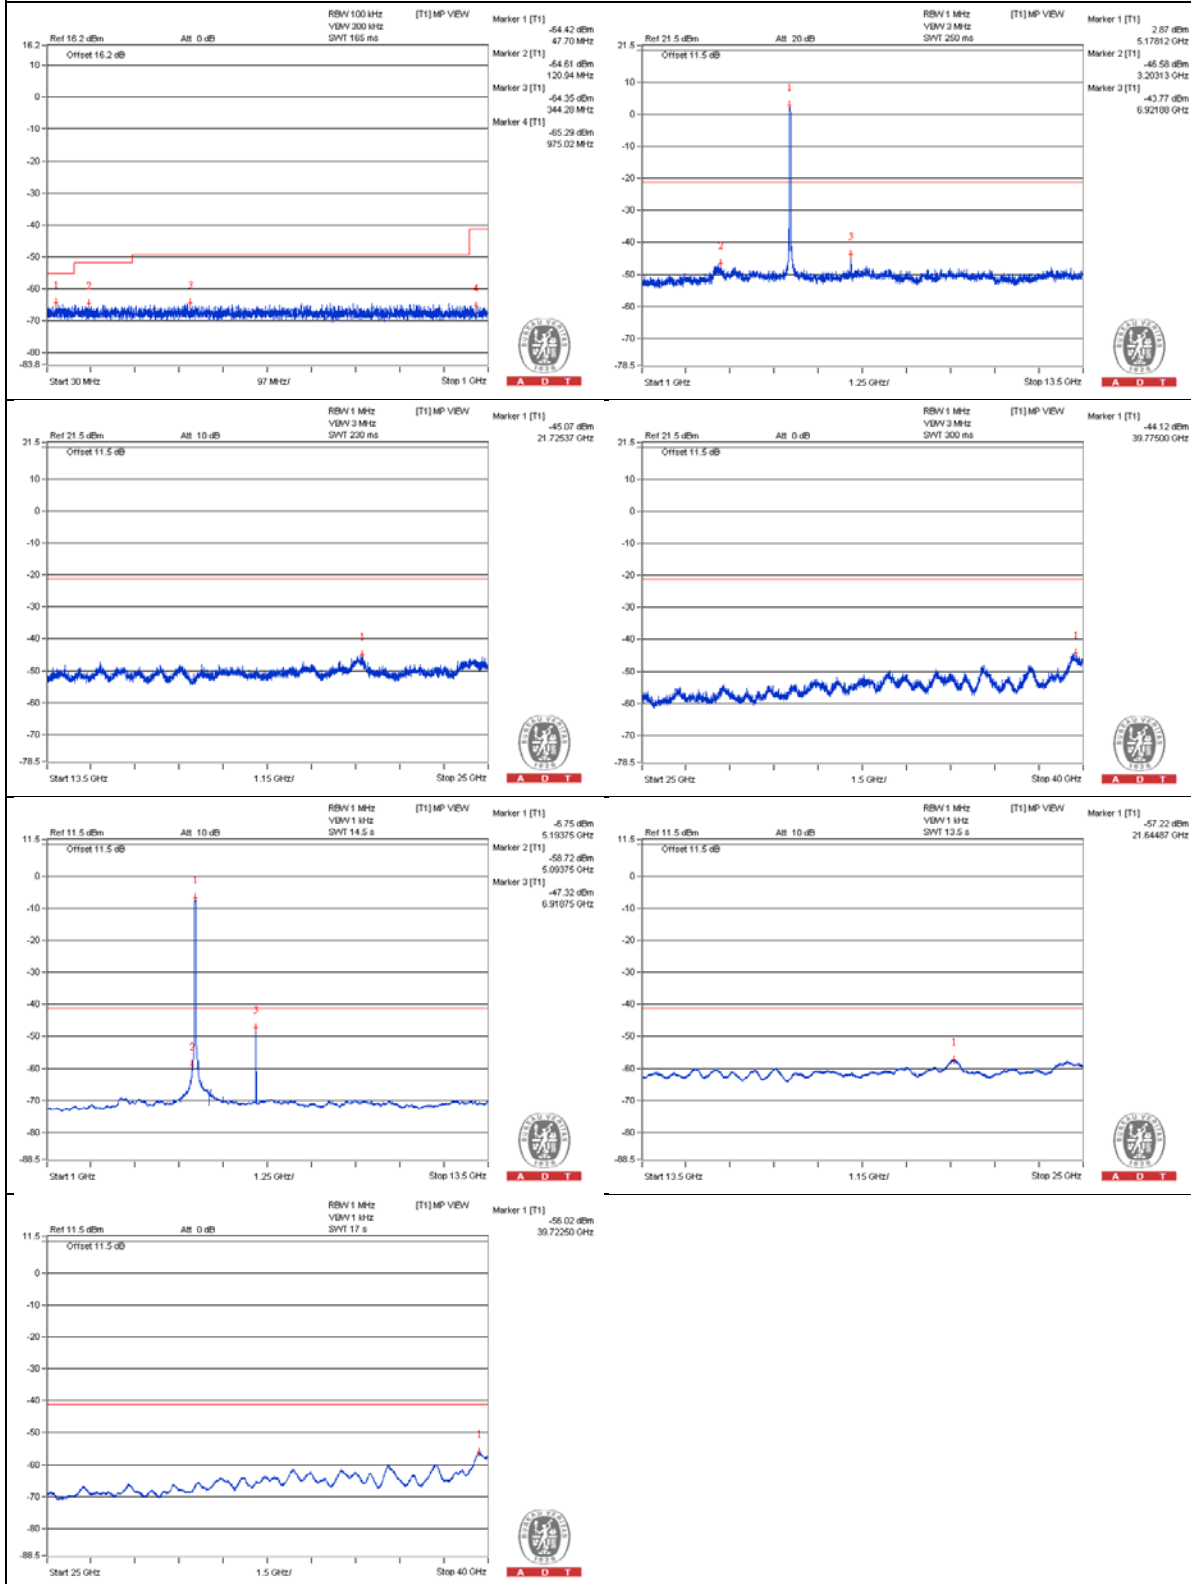

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.4 PK	68.17	74	-5.83	-33.6	-43.57	6.09	-27.09
2	5149.9 AV	51.11	54	-2.89	-52.26	-54.54	6.09	-44.15

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

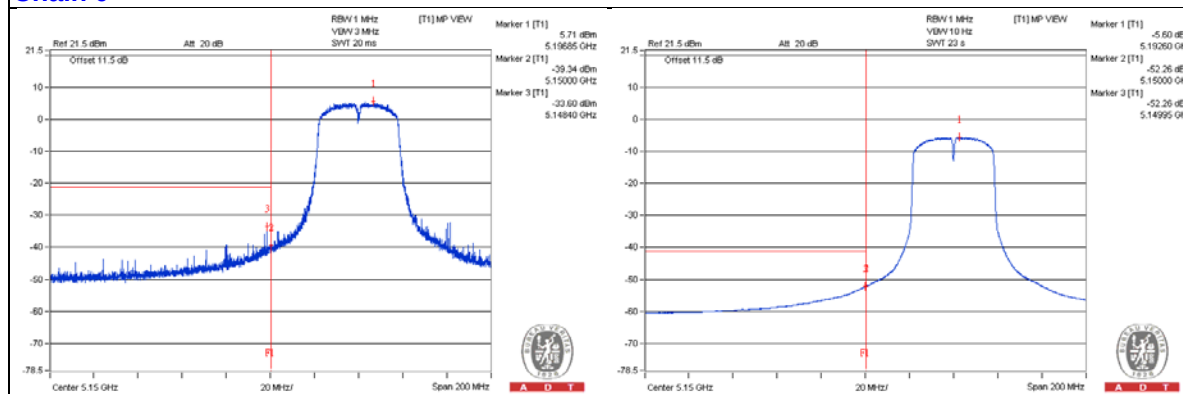

Chain 1

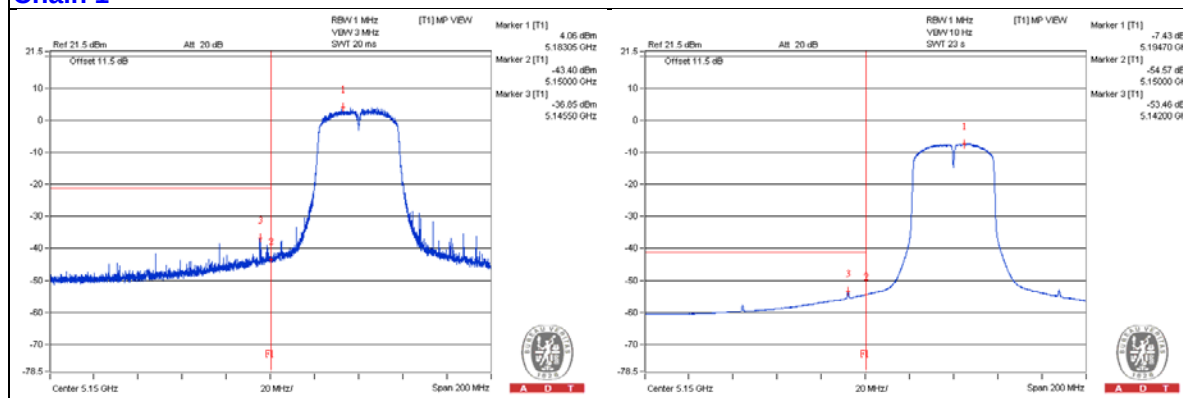

802.11ac (VHT40) - Channel 46

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3475 PK	54.96	74	-19.04	-50.4	-48.59	6.09	-40.3
2	3506.25 AV	33.77	54	-20.23	-70.59	-70.6	6.09	-61.49
3	6975 PK	60.63	68.2	-7.57	-42.95	-44.68	6.09	-34.63
4	10478.125 PK	53.89	74	-20.11	-50.15	-50.81	6.09	-41.37
5	10456.25 AV	33.25	54	-20.75	-70.89	-71.35	6.09	-62.01
6	15670.625 PK	53.47	74	-20.53	-50.65	-51.14	6.09	-41.79
7	15702.25 AV	41.97	54	-12.03	-62.34	-62.45	6.09	-53.29

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

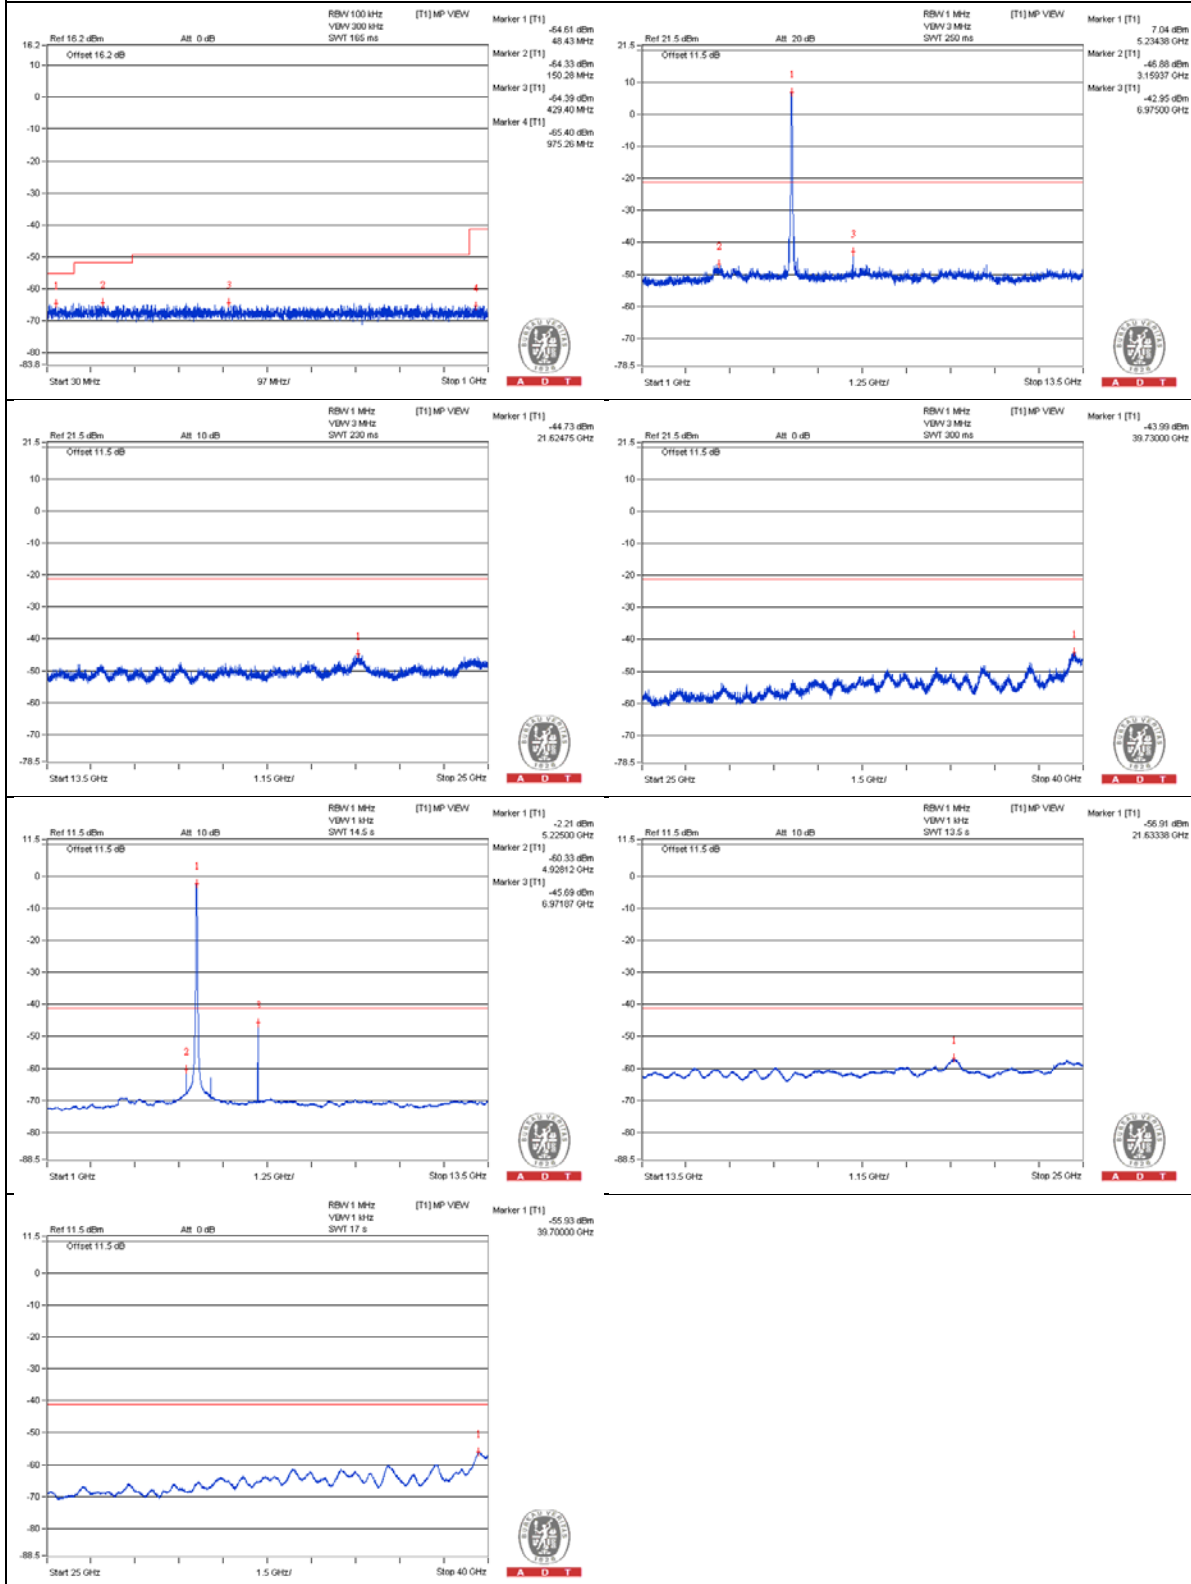

Chain 1

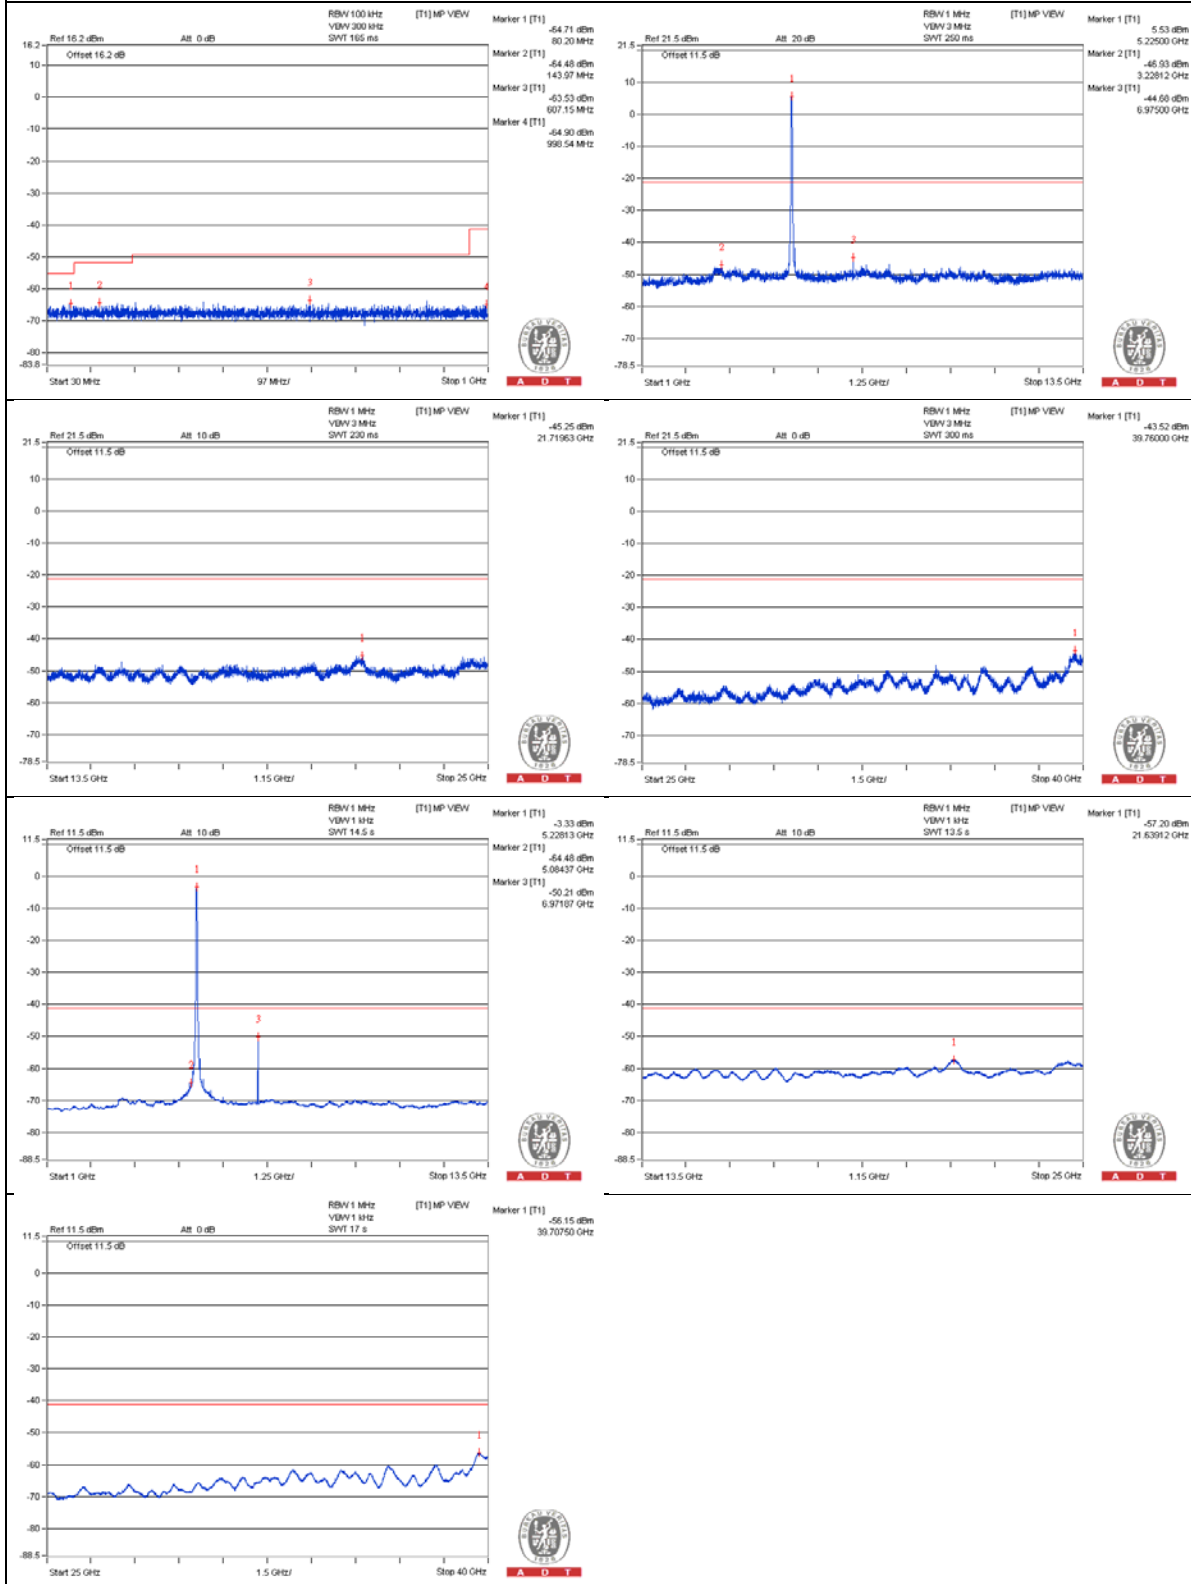

802.11ac (VHT40) - Channel 54

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3525 PK	55.35	74	-18.65	-50.33	-48	6.09	-39.91
2	3521.875 AV	34.26	54	-19.74	-70.05	-70.16	6.09	-61
3	7028.125 PK	58.3	74	-15.7	-43.97	-50.23	6.09	-36.96
4	7025 AV	51.46	54	-2.54	-49.93	-70.57	6.09	-43.8
5	10550 PK	54.4	74	-19.6	-49.99	-49.94	6.09	-40.86
6	10546.875 AV	33.62	54	-20.38	-70.68	-70.8	6.09	-61.64
7	15811.5 PK	54.74	74	-19.26	-49.28	-49.99	6.09	-40.52
8	15805.75 AV	43.09	54	-10.91	-61.11	-61.44	6.09	-52.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

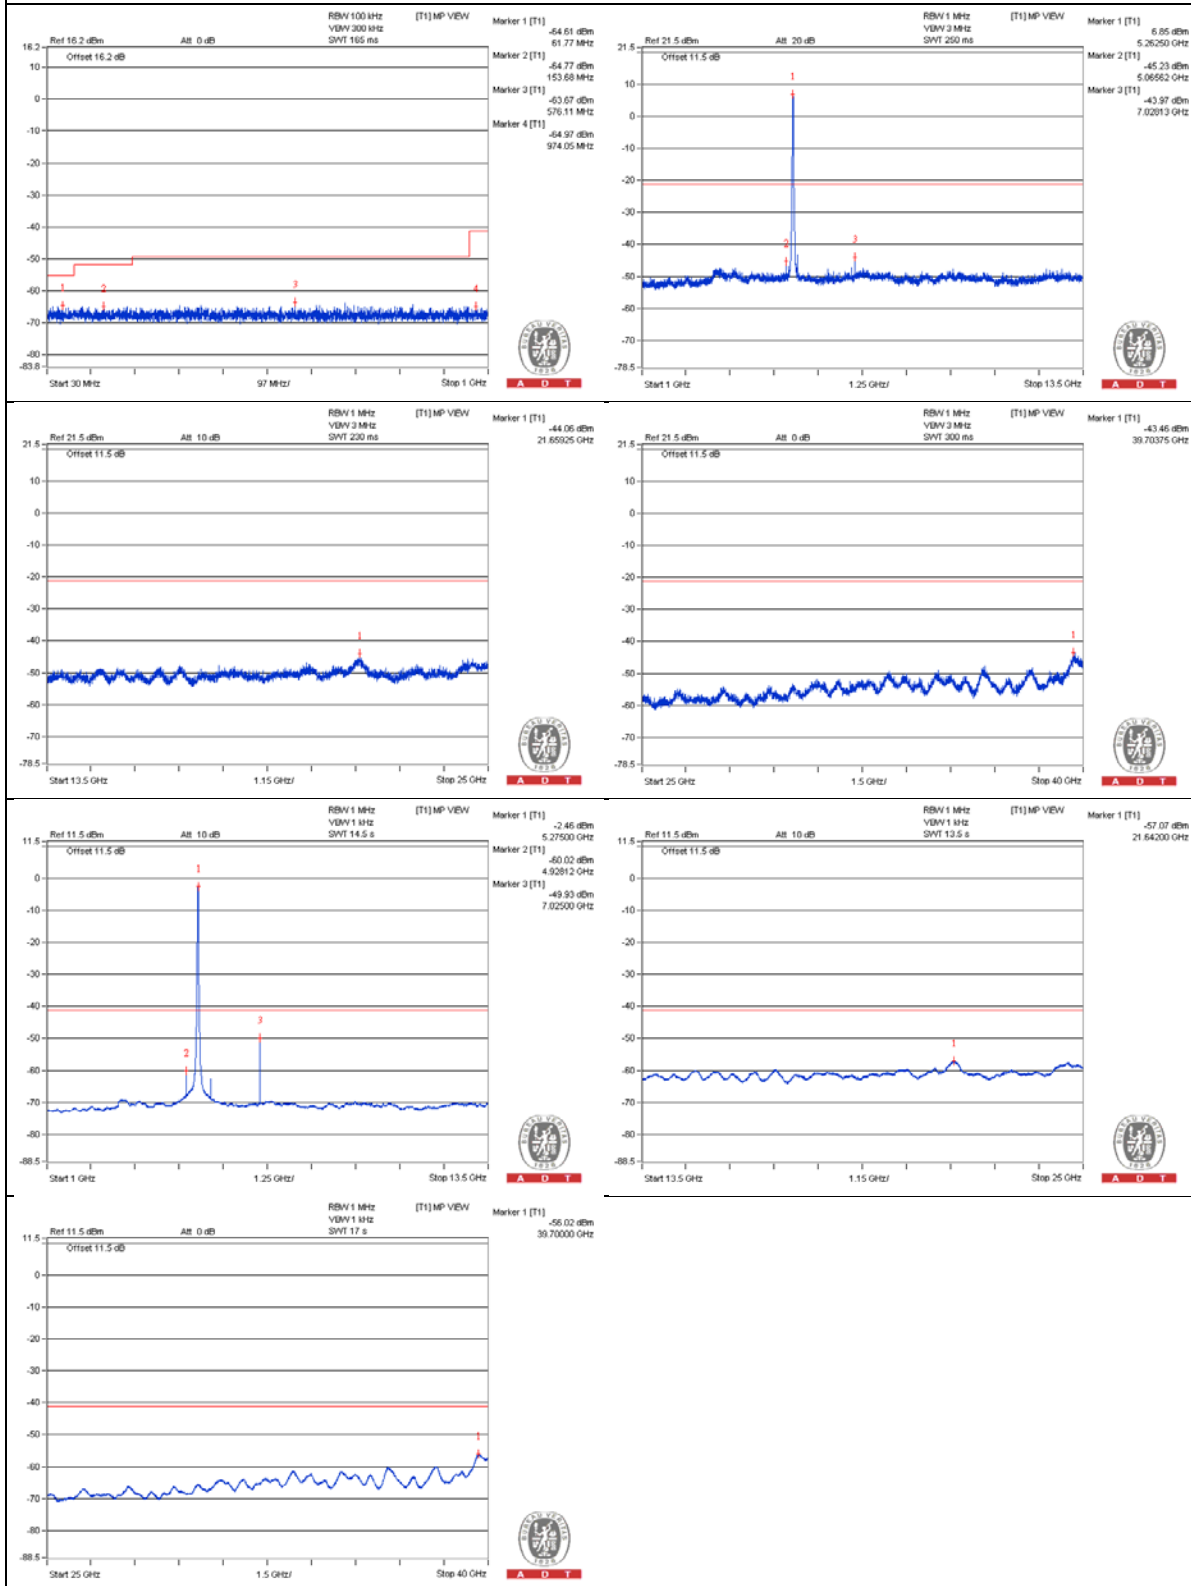

Chain 1

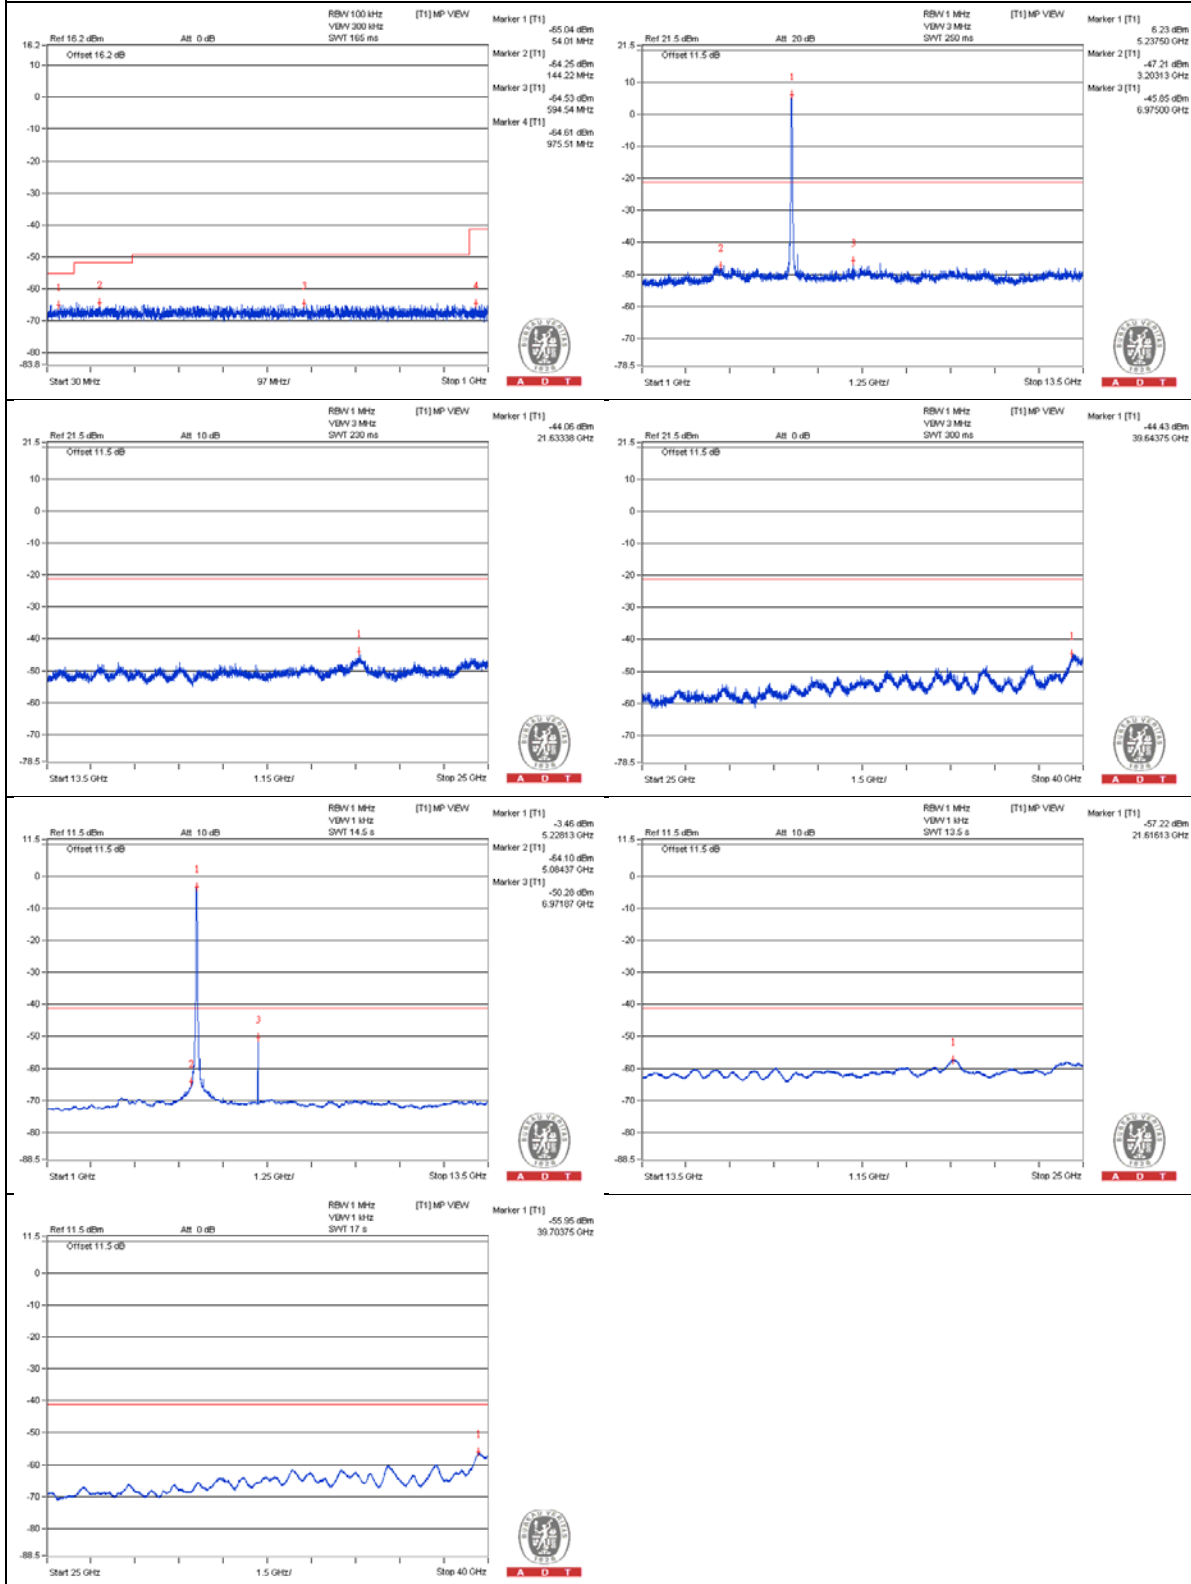

802.11ac (VHT40) - Channel 62

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3525 PK	55.49	74	-18.51	-48.28	-49.55	6.09	-39.77
2	3556.25 AV	34.48	54	-19.52	-69.81	-69.96	6.09	-60.78
3	7081.25 PK	59.11	68.2	-9.09	-43.65	-47.81	6.09	-36.15
4	10621.875 PK	54.55	74	-19.45	-48.82	-51.1	6.09	-40.71
5	10618.75 AV	33.51	54	-20.49	-70.88	-70.83	6.09	-61.75
6	15923.625 PK	54.54	74	-19.46	-49.35	-50.34	6.09	-40.72
7	15915 AV	42.55	54	-11.45	-61.69	-61.94	6.09	-52.71

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

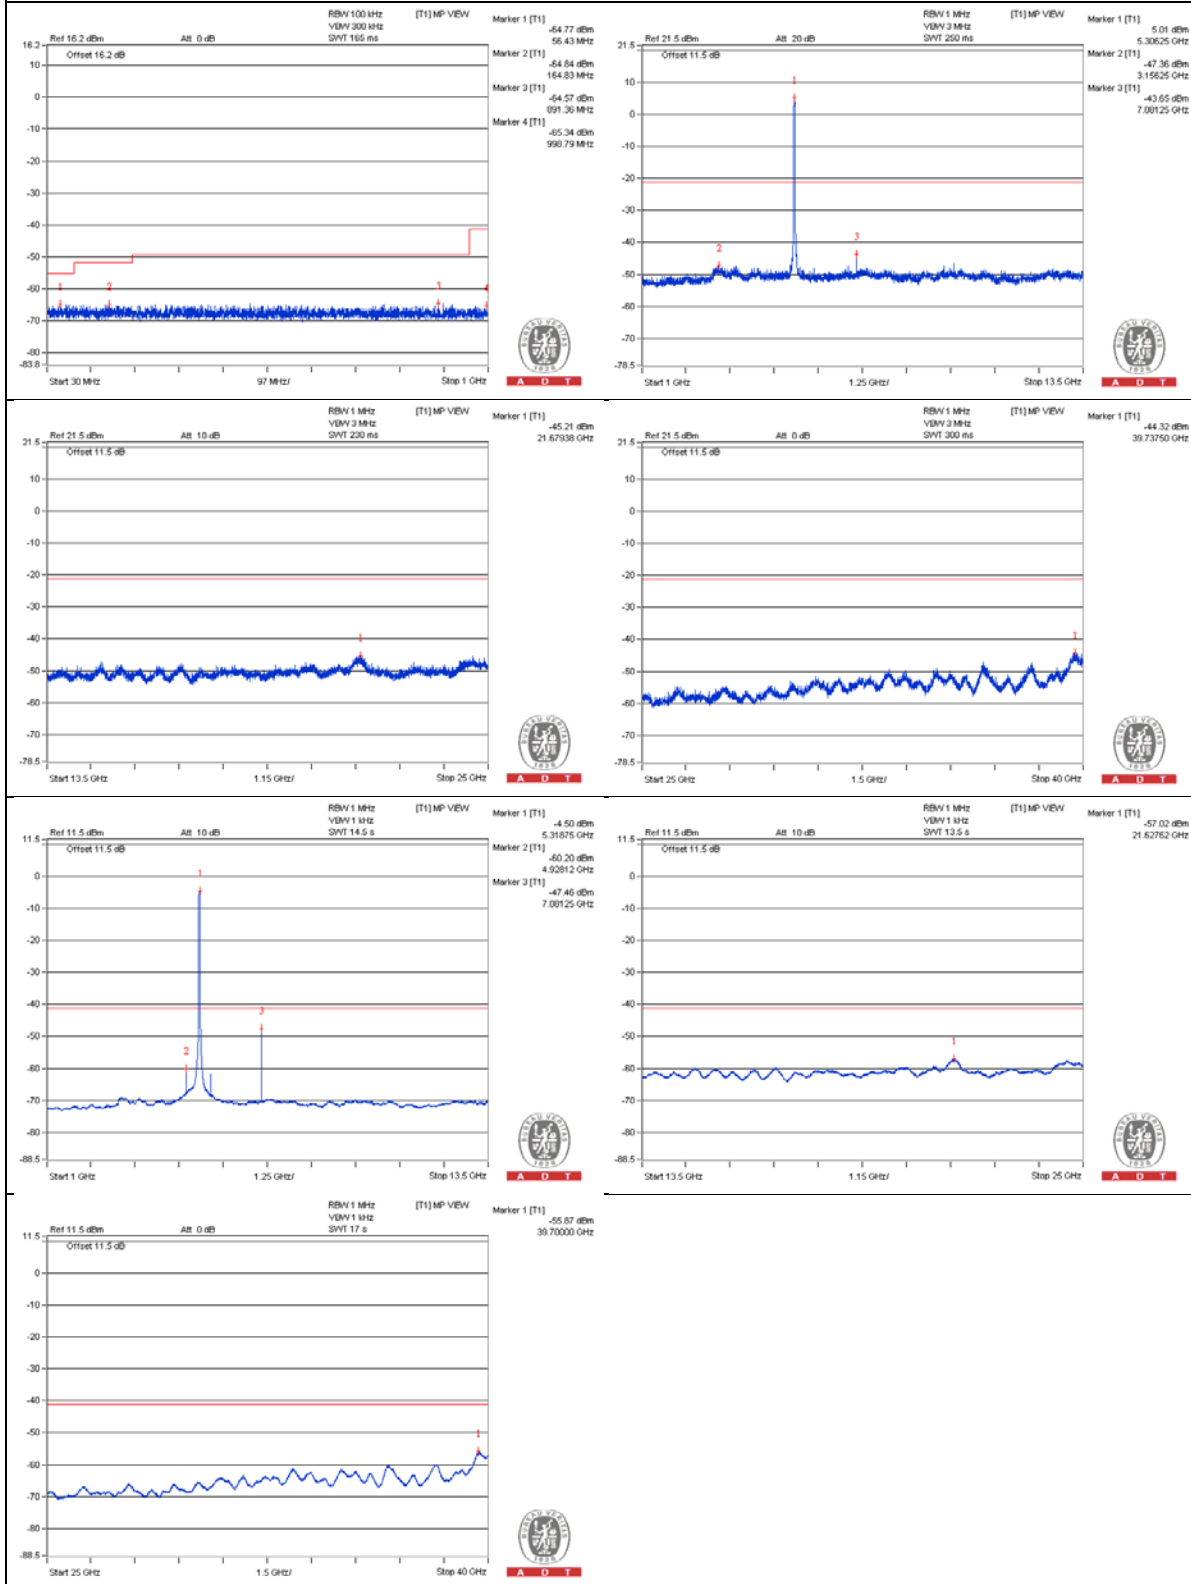

Chain 1

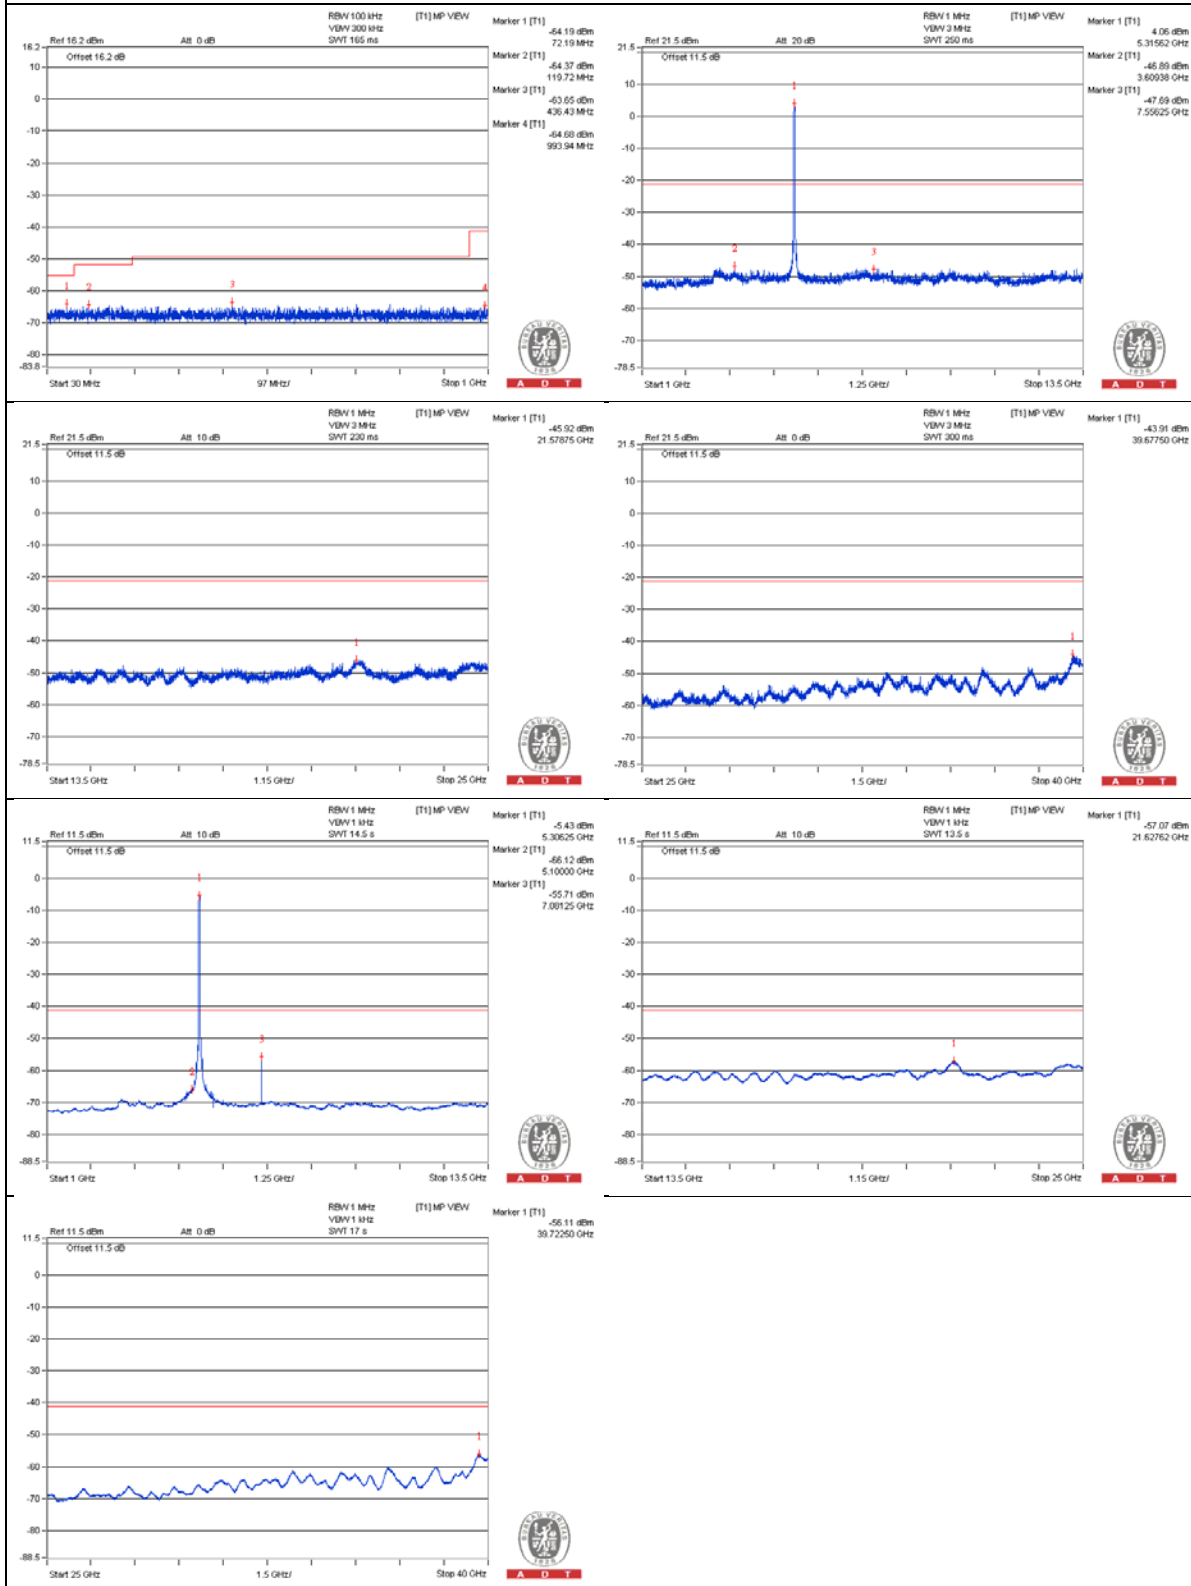

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.05 PK	68.15	74	-5.85	-33.99	-41.02	6.09	-27.11
2	5350 AV	52.17	54	-1.83	-51.72	-52.71	6.09	-43.09

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

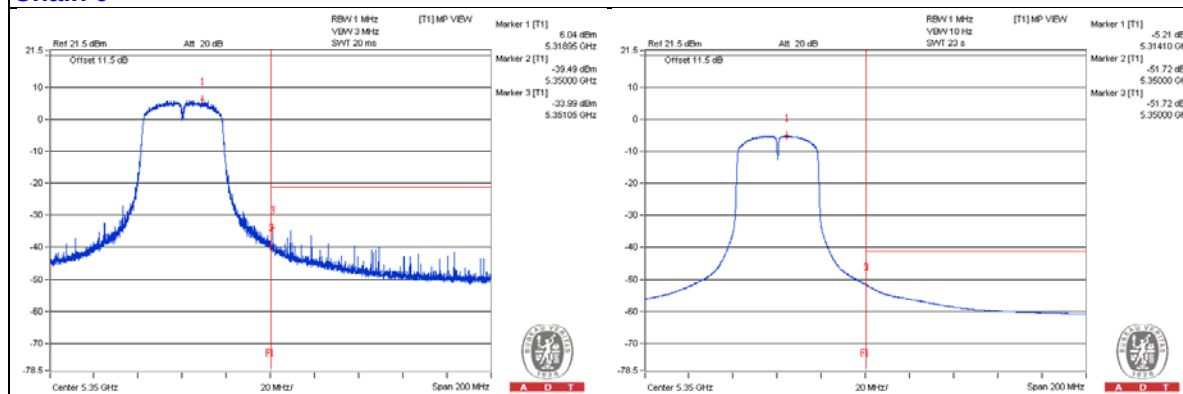

Chain 1

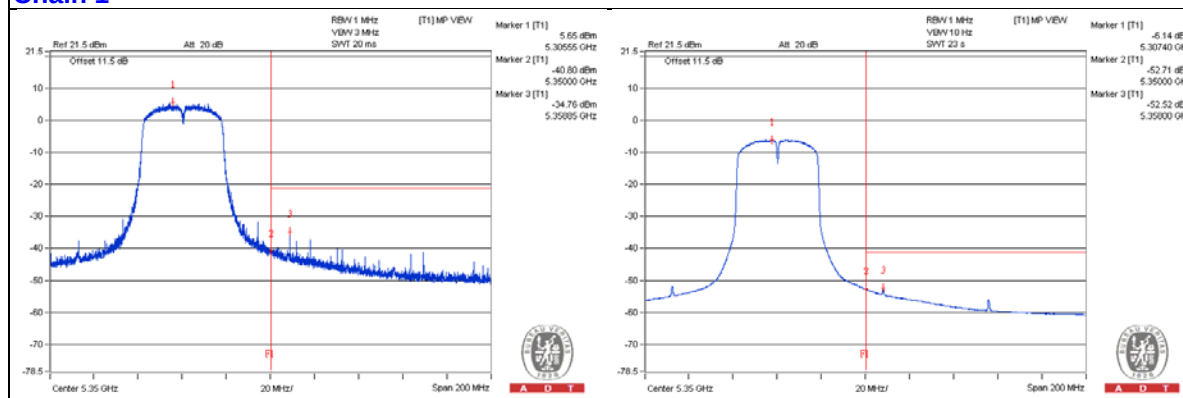

802.11ac (VHT40) - Channel 102

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3678.125 PK	57.97	74	-16.03	-50.12	-46.68	7.77	-37.29
2	3656.25 AV	35.69	54	-18.31	-70.31	-70.39	7.77	-59.57
3	7346.875 PK	58.63	74	-15.37	-47.34	-47.48	7.77	-36.63
4	7346.875 AV	50.33	54	-3.67	-52.96	-64.98	7.77	-44.93
5	11000 PK	54.88	74	-19.12	-50.43	-52.04	7.77	-40.38
6	11000 AV	34.26	54	-19.74	-71.95	-71.62	7.77	-61
7	16533.125 PK	55.53	74	-18.47	-49.76	-51.41	7.77	-39.73
8	16510.125 AV	44.48	54	-9.52	-61.58	-61.55	7.77	-50.78

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

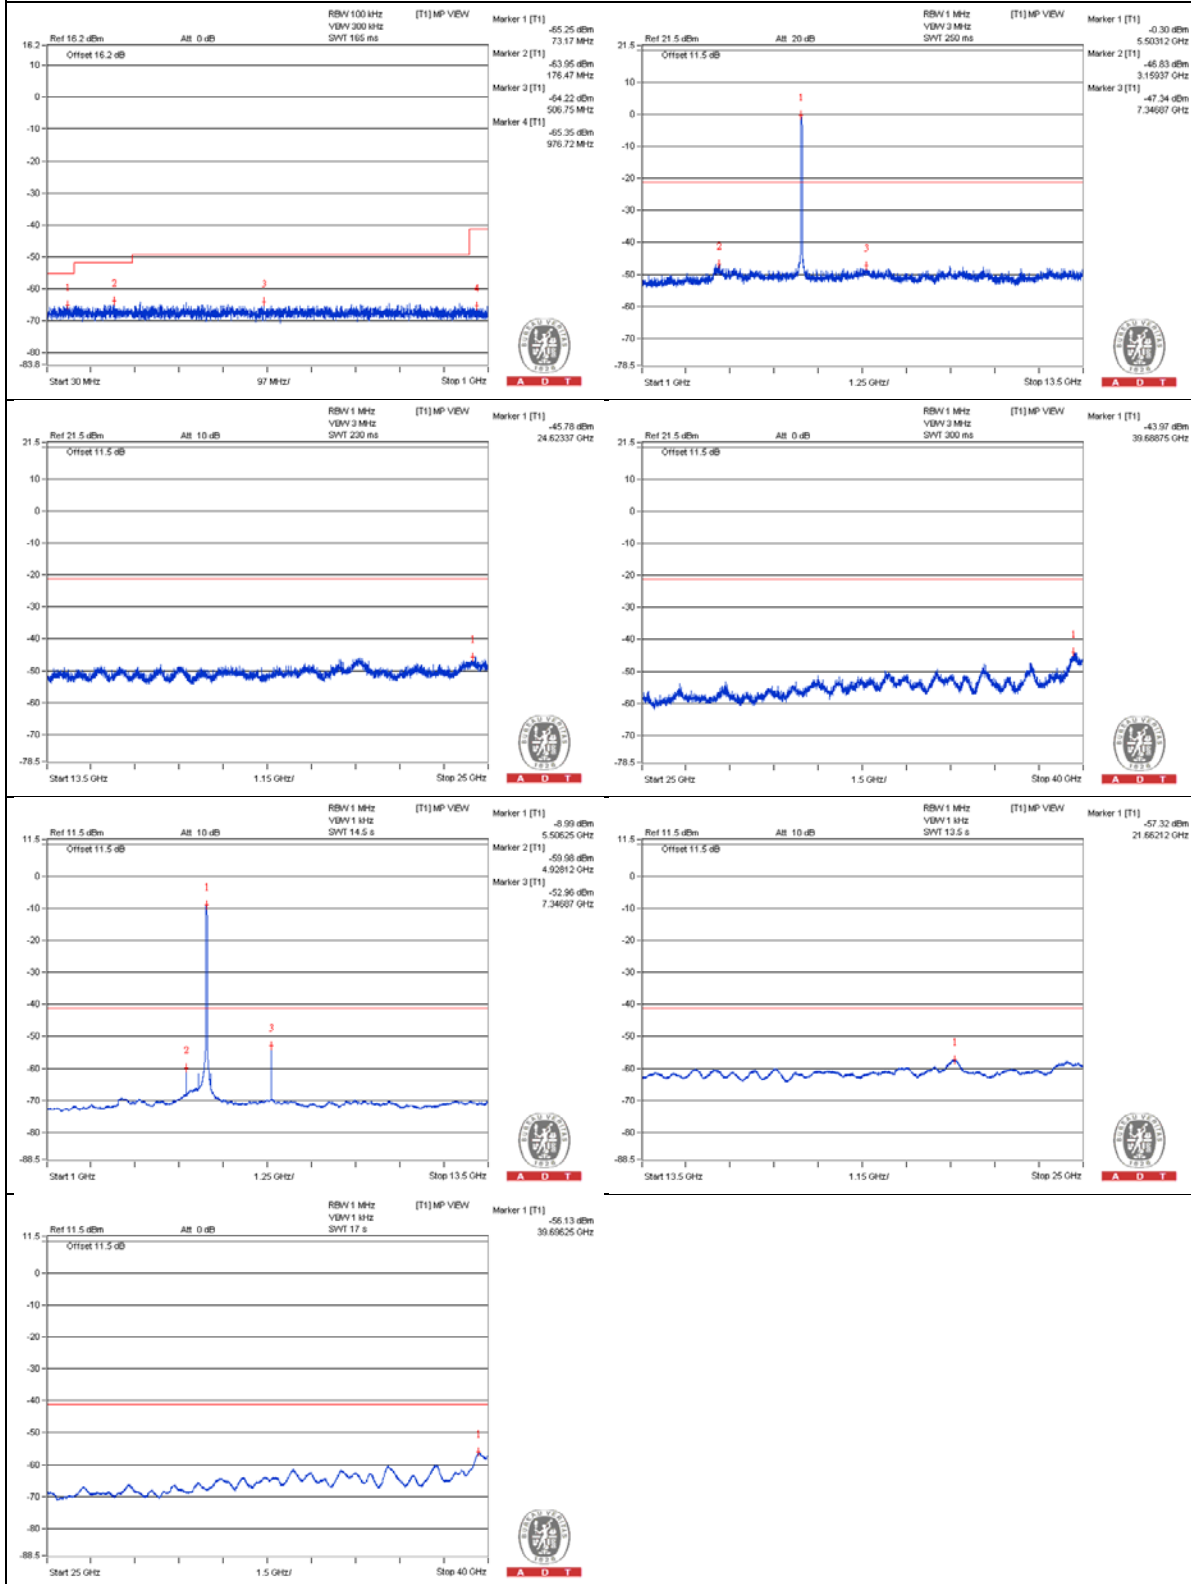

Chain 1

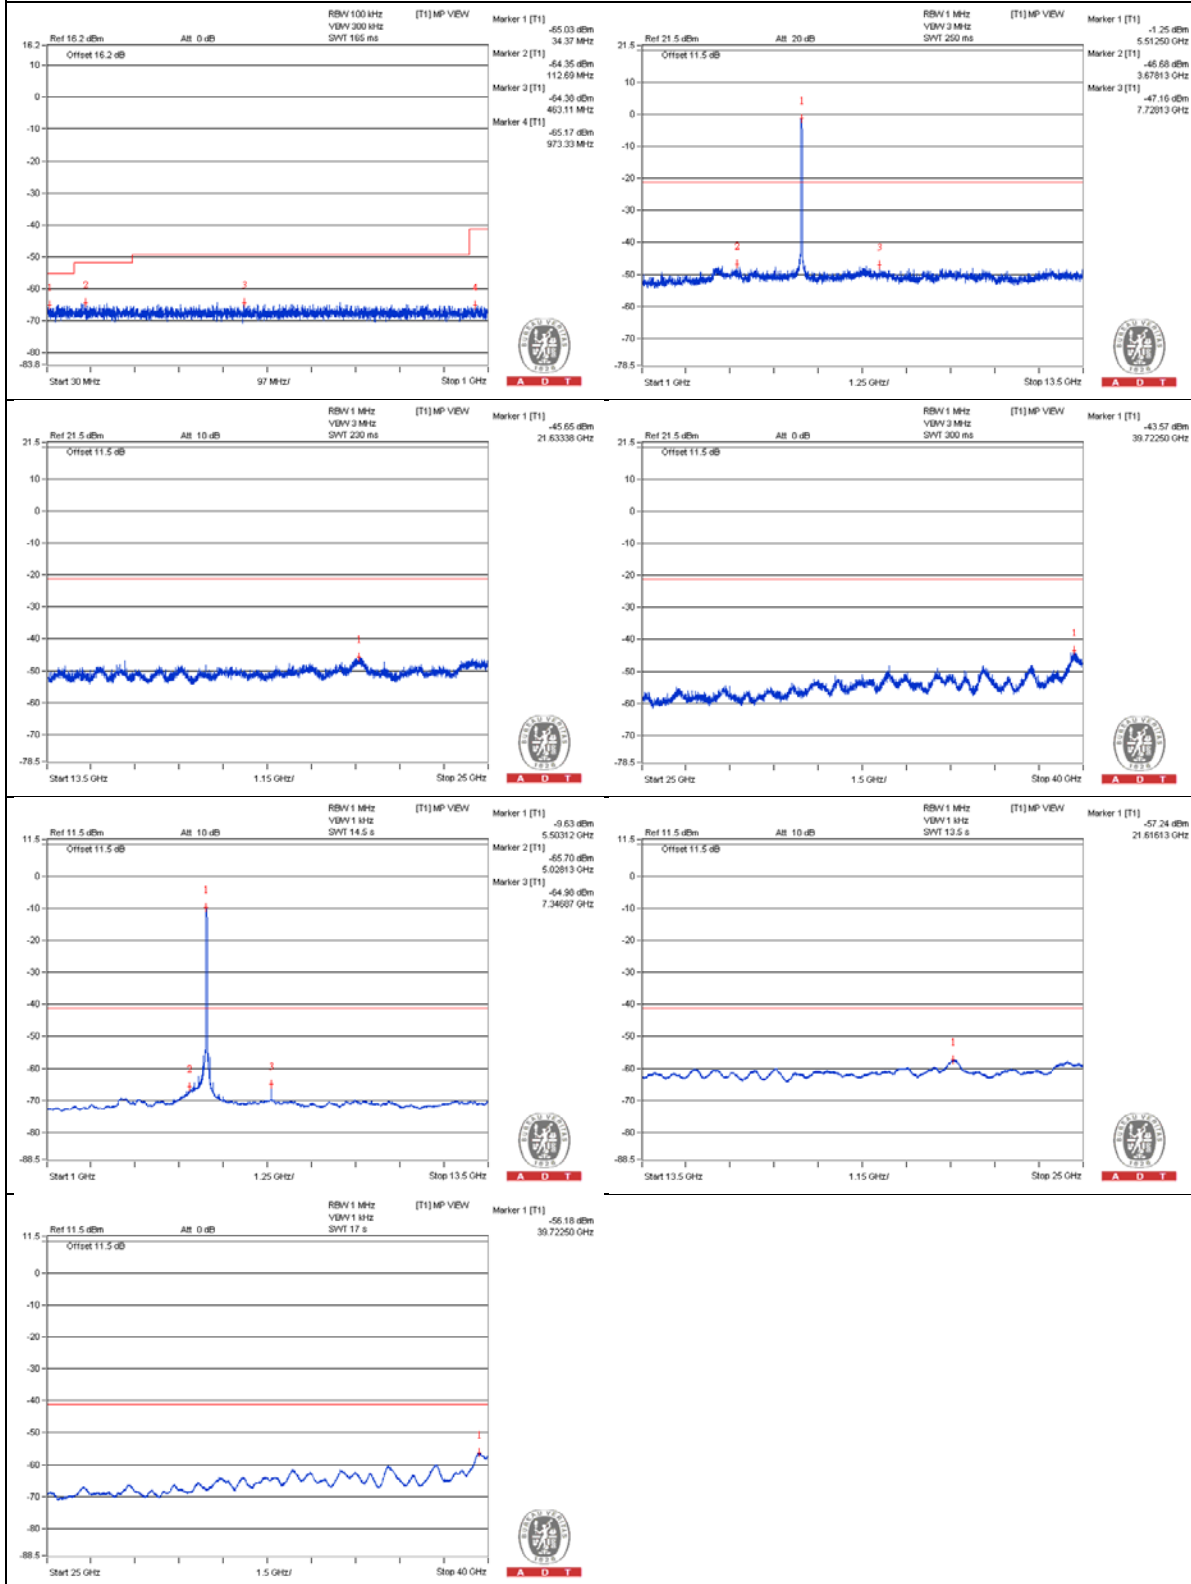

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5463.5 PK	73	74	-1	-30.23	-43.39	7.77	-22.26
2	5470 AV	56.21	54	* 2.21	-47.64	-54.44	7.77	-39.05


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX A)

Chain 0

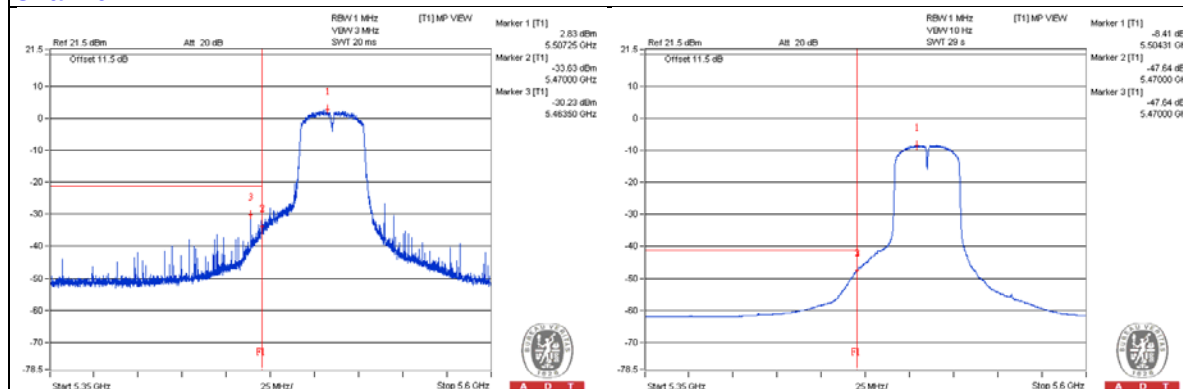

Chain 1

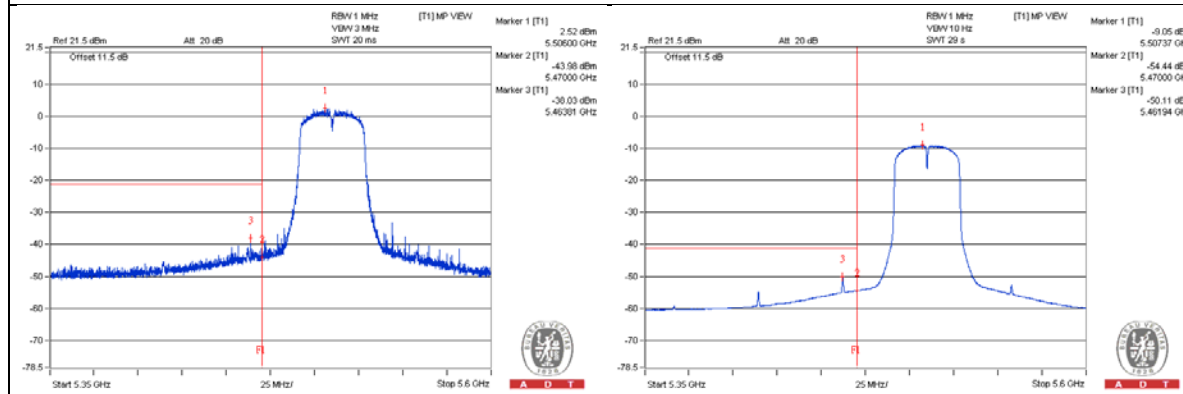

802.11ac (VHT40) - Channel 118

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3743.75 PK	56.7	74	-17.3	-48.51	-50.37	7.77	-38.56
2	3734.375 AV	35.63	54	-18.37	-70.31	-70.52	7.77	-59.63
3	7440.625 PK	56.99	74	-17.01	-49.74	-48.45	7.77	-38.27
4	7453.125 AV	42.94	54	-11.06	-60.56	-69.98	7.77	-52.32
5	11184.375 PK	55.25	74	-18.75	-50.98	-50.6	7.77	-40.01
6	11184.375 AV	34.54	54	-19.46	-71.58	-71.42	7.77	-60.72
7	16751.625 PK	55.31	74	-18.69	-51.42	-50.13	7.77	-39.95
8	16780.375 AV	44.1	54	-9.9	-62.08	-61.81	7.77	-51.16

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

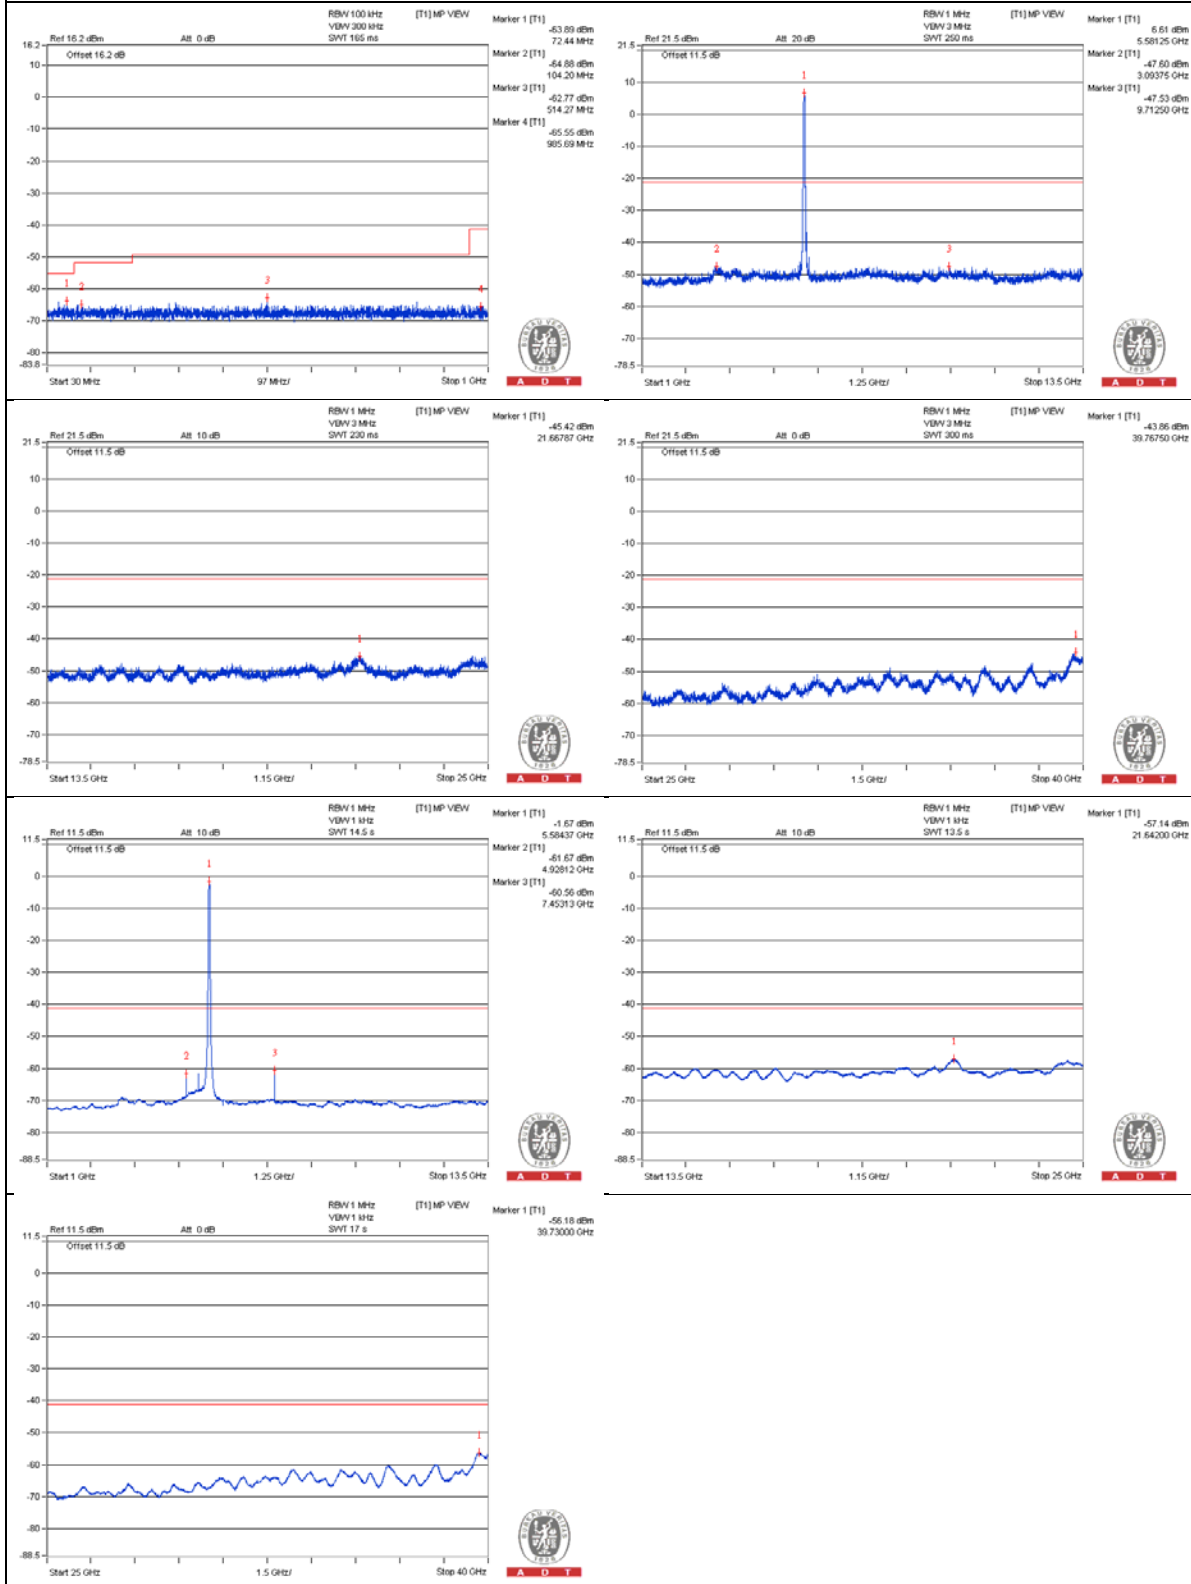

Chain 1

