

WIFI 802.11 b-Body Rear CH1 Chain0	2
WIFI 802.11 b-Body Rear CH6 Chain0	3
WIFI 802.11 b-Body Rear CH11 Chain0	4
WIFI 802.11 b-Body Edge 1 Rear CH6 Chain0	5
2.4GHz-Body Rear CH78 Chain0	6
2.4GHz-Body Edge 1 CH78 Chain0	7
WIFI 802.11 a-Body Rear CH40 Chain0	8
WIFI 802.11 a-Body Rear CH56 Chain0	9
WIFI 802.11 a-Body Rear CH128 Chain0	10
WIFI 802.11 a-Body Rear CH157 Chain0	11
WIFI 802.11 a-Body Edge 1 CH36 Chain0	12
WIFI 802.11 a-Body Edge 1 CH40 Chain0	13
WIFI 802.11 a-Body Edge 1 CH56 Chain0	14
WIFI 802.11 a-Body Edge 1 CH64 Chain0	15
WIFI 802.11 a-Body Edge 1 CH128 Chain0	16
WIFI 802.11 a-Body Edge 1 CH132 Chain0	17
WIFI 802.11 a-Body Edge 1 CH149 Chain0	18
WIFI 802.11 a-Body Edge 1 CH157 Chain0	19
WIFI 802.11 b-Body Rear CH6 Chain0 repeat	20
WIFI 802.11 a-Body Edge 1 CH40 Chain0 repeat	21
WIFI 802.11 a-Body Edge 1 CH64 Chain0 repeat	22
WIFI 802.11 a-Body Edge 1 CH132 Chain0 repeat	23
WIFI 802.11 a-Body Edge 1 CH157 Chain0 repeat	24
WIFI 802.11 b-Body Bottom CH1 Chain0	25
2.4GHz-Body Rear CH78 Chain0	26
WIFI 802.11 a-Body Edge 1 CH40 Chain0	27
WIFI 802.11 a-Body Edge 1 CH64 Chain0	28
WIFI 802.11 a-Body Edge 1 CH132 Chain0	29
WIFI 802.11 a-Body Edge 1 CH157 Chain0	30

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WiFi 802.11 b-Body Rear CH1 Chain0

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.913$ S/m; $\epsilon_r = 52.36$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi 2.4GHz/IEEE802.11b Body Rear CH1 Chain0/Area Scan (10x13x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.61 W/kg

WiFi 2.4GHz/IEEE802.11b Body Rear CH1 Chain0/Zoom Scan (7x7x5)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.845 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.464 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

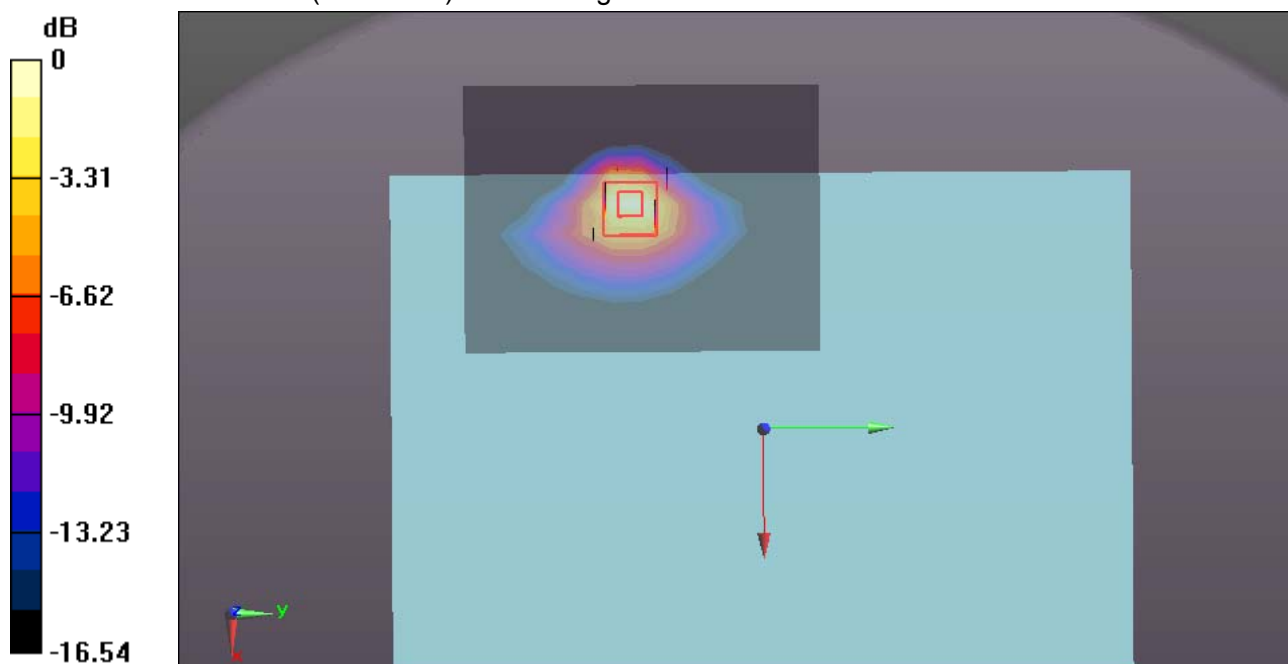

0 dB = 1.65 W/kg = 2.17 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WiFi 802.11 b-Body Rear CH6 Chain0

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 52.47$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi 2.4GHz/IEEE802.11b Body Rear CH6 Chain0/Area Scan (10x13x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.60 W/kg

WiFi 2.4GHz/IEEE802.11b Body Rear CH6 Chain0/Zoom Scan (7x7x5)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.971 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.465 W/kg

Maximum value of SAR (measured) = 1.68 W/kg

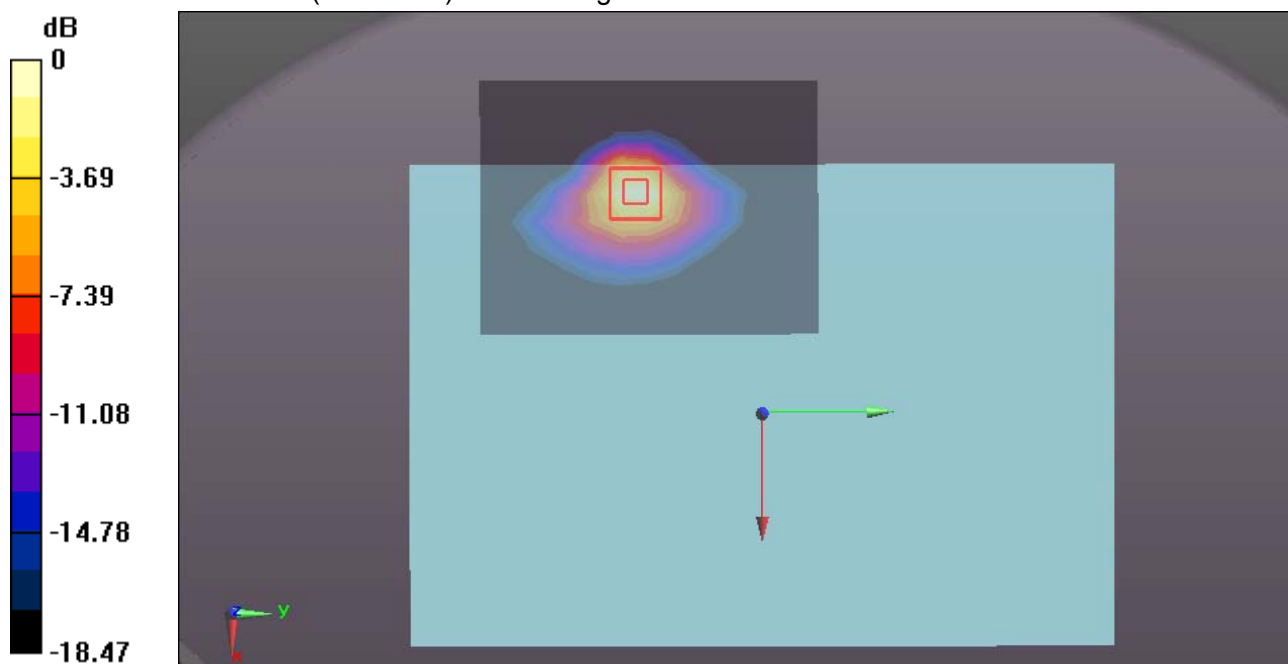

0 dB = 1.68 W/kg = 2.25 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WiFi 802.11 b-Body Rear CH11 Chain0

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.925$ S/m; $\epsilon_r = 52.341$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi 2.4GHz/IEEE802.11b Body Rear CH11 Chain0/Area Scan (10x13x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.55 W/kg

WiFi 2.4GHz/IEEE802.11b Body Rear CH11 Chain0/Zoom Scan (7x7x5)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.699 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.957 W/kg; SAR(10 g) = 0.421 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

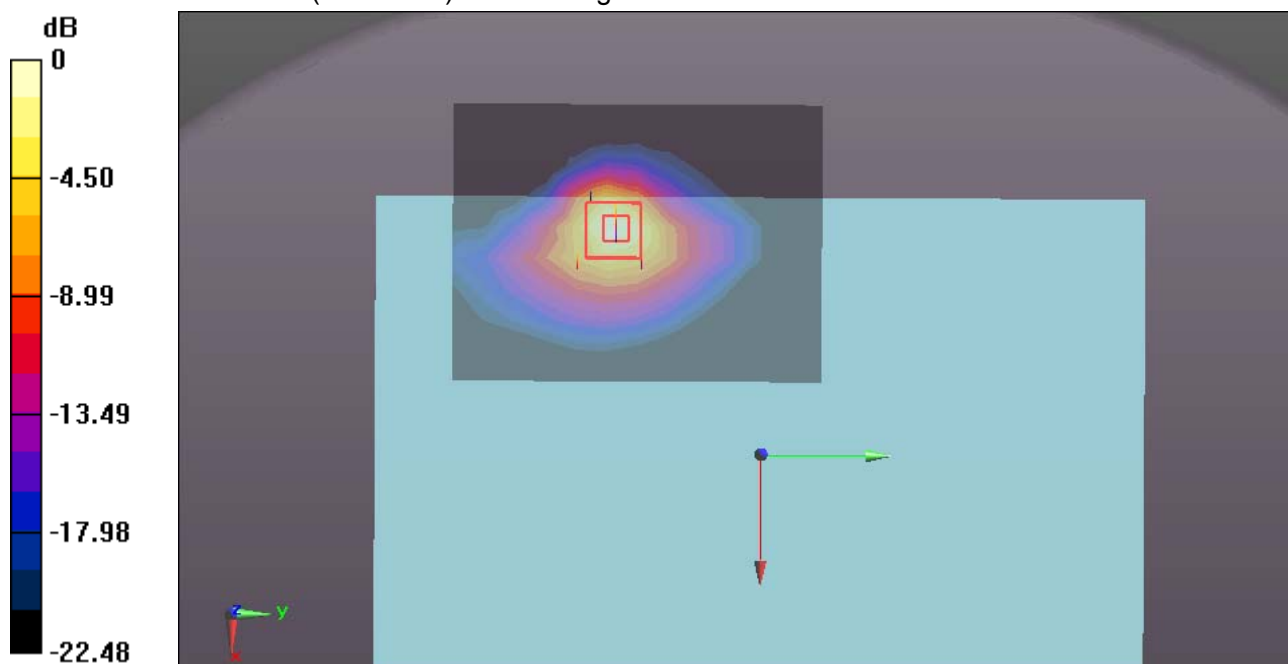

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WiFi 802.11 b-Body Edge 1 Rear CH6 Chain0

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 52.47$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi 2.4GHz/IEEE802.11b Body Rear CH6 Chain0/Area Scan (10x13x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.383 W/kg

WiFi 2.4GHz/IEEE802.11b Body Rear CH6 Chain0/Zoom Scan (7x7x5)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.795 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.329 W/kg

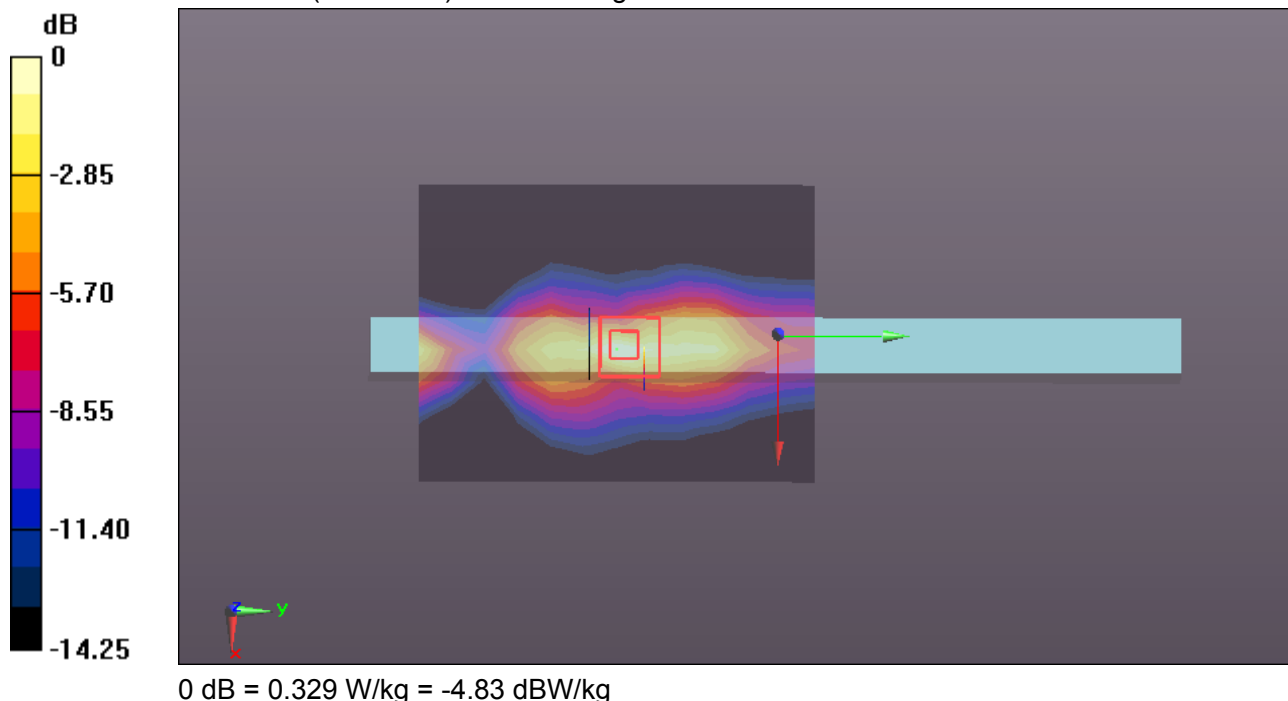

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

2.4GHz-Body Rear CH78 Chain0

Communication System: UID 0, Bluetooth (0); Communication System Band: ISM 2.4Ghz Band;

Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 2480$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 52.251$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi 2.4GHz/2.4GHz Body Rear CH78 Chain0/Area Scan (10x13x1): Measurement grid: dx=12mm, dy=12mm[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0517 W/kg

WiFi 2.4GHz/2.4GHz Body Rear CH78 Chain0/Zoom Scan (7x7x5)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.411 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.017 W/kg[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0573 W/kg

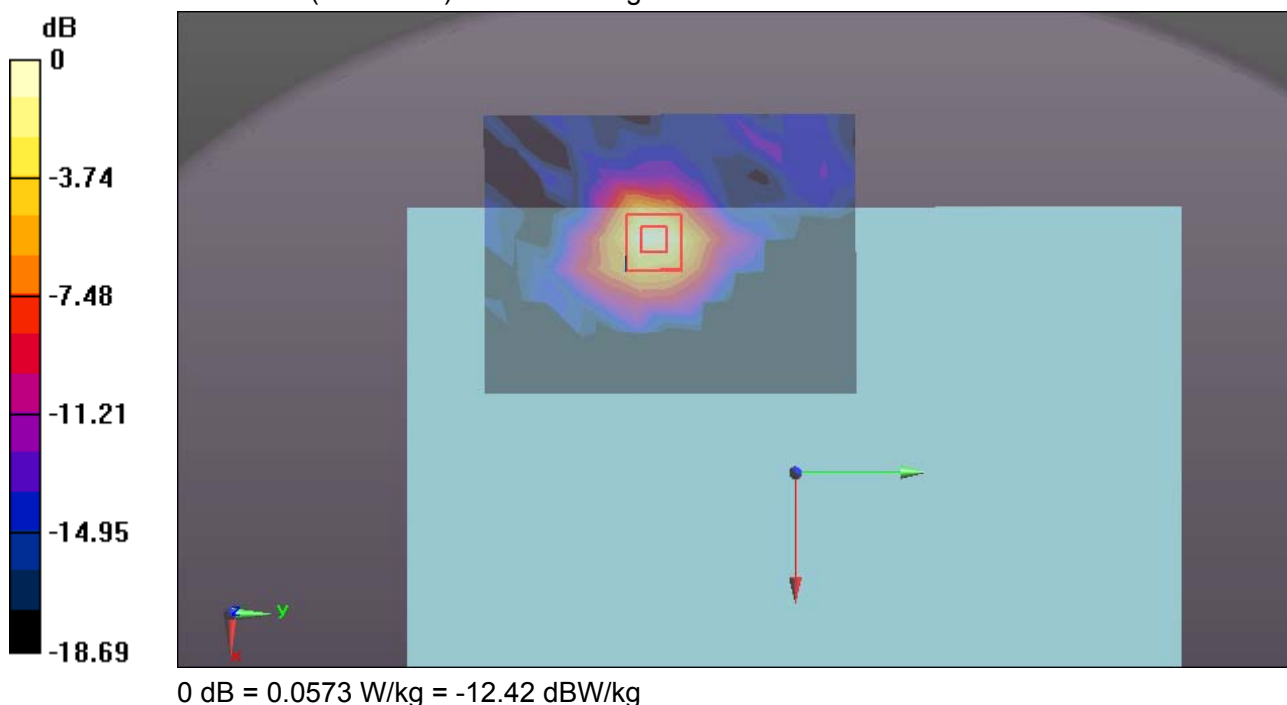

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

2.4GHz-Body Edge 1 CH78 Chain0

Communication System: UID 0, Bluetooth (0); Communication System Band: ISM 2.4Ghz Band;

Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 2480 \text{ MHz}$; $\sigma = 1.96 \text{ S/m}$; $\epsilon_r = 52.251$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi 2.4GHz/2.4GHz Body Edge 1 CH78 Chain0/Area Scan (10x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.00914 W/kg

WiFi 2.4GHz/2.4GHz Body Edge 1 CH78 Chain0/Zoom Scan (7x7x5)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.230 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.00559 W/kg; SAR(10 g) = 0.00134 W/kg

Maximum value of SAR (measured) = 0.0106 W/kg

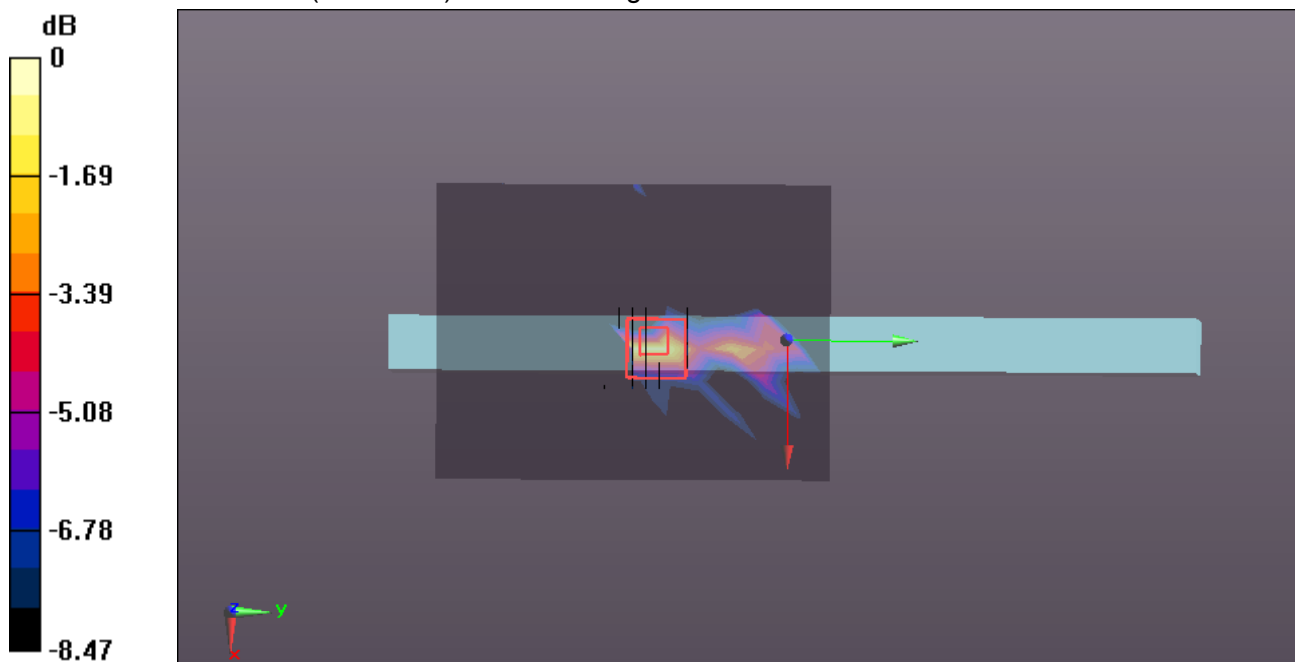

0 dB = 0.0106 W/kg = -19.75 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Rear CH40 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band I; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.276$ S/m; $\epsilon_r = 49.123$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Rear CH40 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.21 W/kg


WIFI/IEEE802.11a Body Rear CH40 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.124 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.59 W/kg

SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

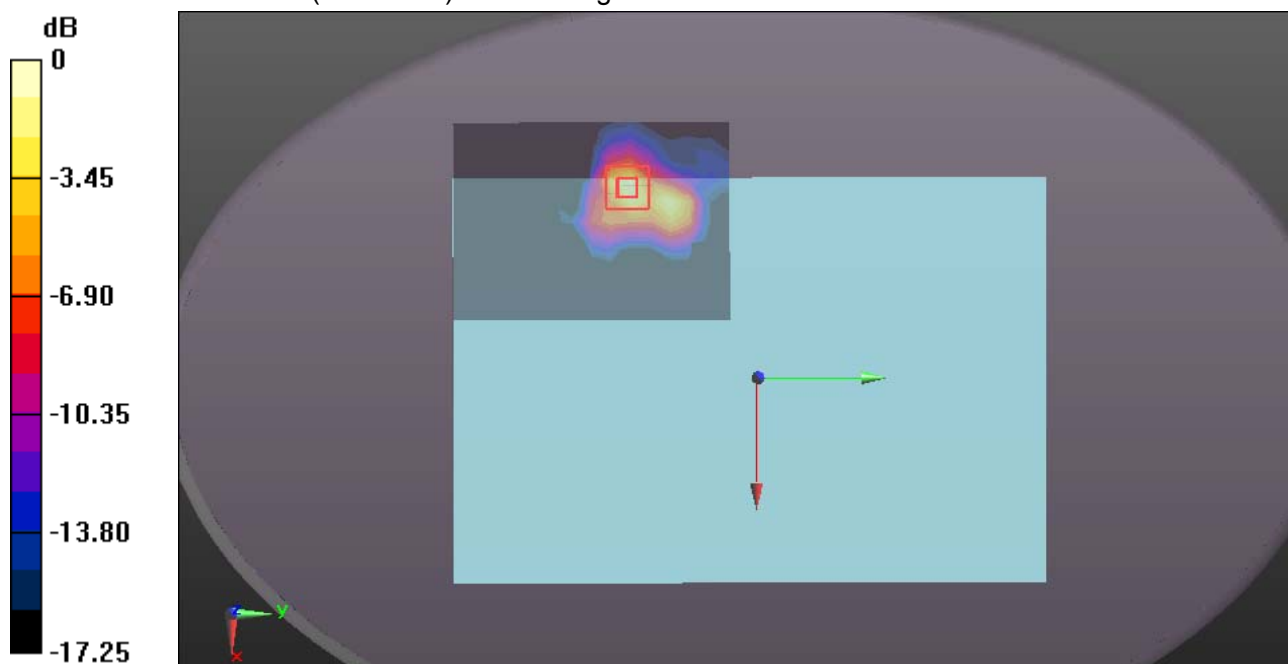

0 dB = 1.29 W/kg = 1.11 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Rear CH56 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band II; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 48.919$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Rear CH56 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.63 W/kg


WIFI/IEEE802.11a Body Rear CH56 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.897 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

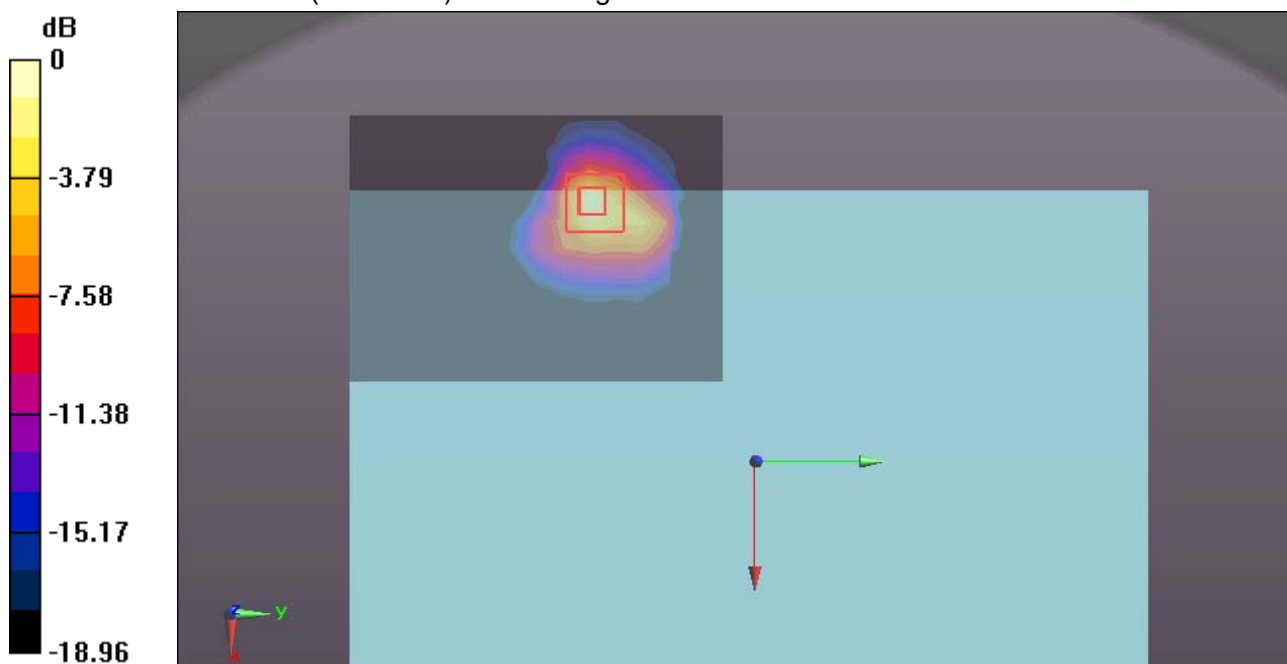

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Rear CH128 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band III;

Frequency: 5640 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5640$ MHz; $\sigma = 5.92$ S/m; $\epsilon_r = 48.083$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.18, 4.18, 4.18); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Rear CH128 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 W/kg

WIFI/IEEE802.11a Body Rear CH128 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.124 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

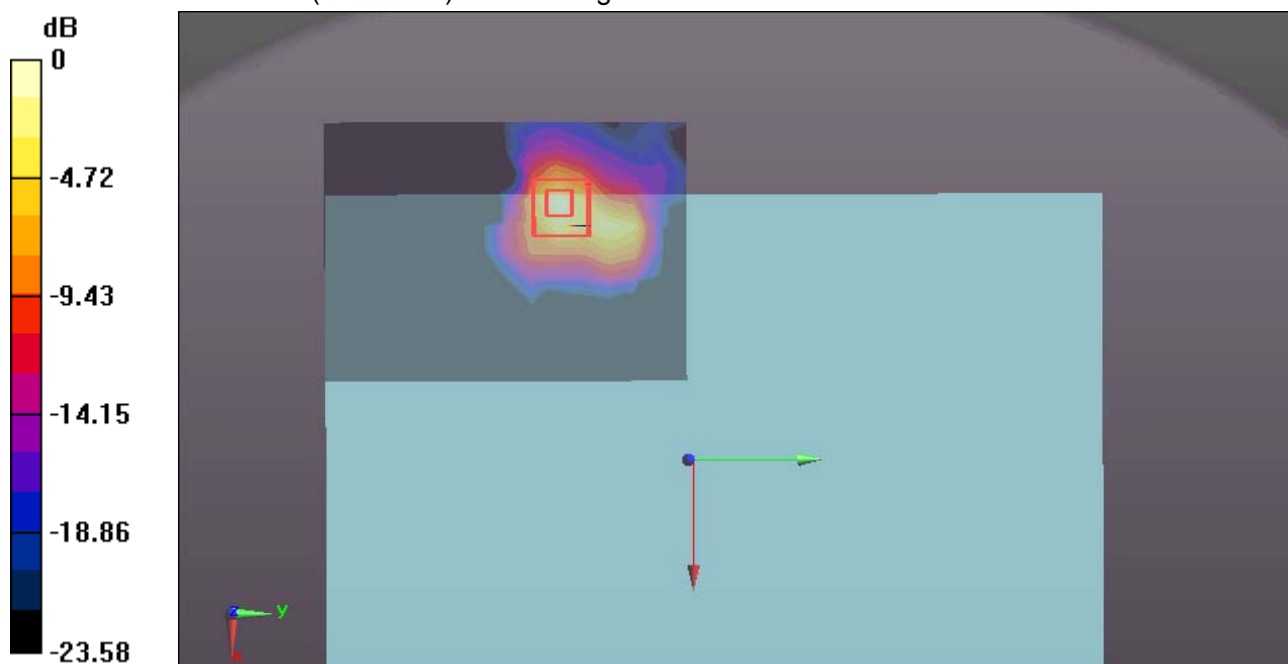

0 dB = 1.14 W/kg = 0.57 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Rear CH157 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band IV;

Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.164$ S/m; $\epsilon_r = 47.787$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.34, 4.34, 4.34); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Rear CH157 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.15 W/kg

WIFI/IEEE802.11a Body Rear CH157 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.619 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

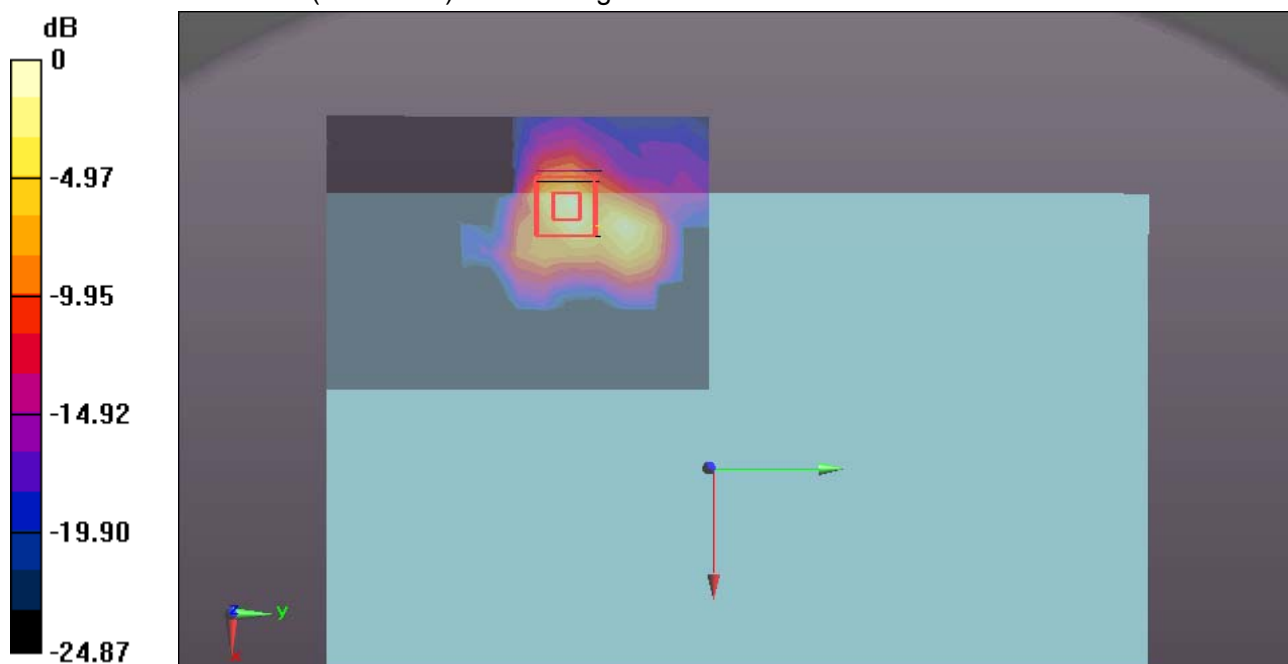

0 dB = 1.43 W/kg = 1.55 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH36 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band I; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.254$ S/m; $\epsilon_r = 49.164$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.77, 4.77, 4.77); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH36 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.86 W/kg

WIFI/IEEE802.11a Body Edge 1 CH36 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.052 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 4.29 W/kg

SAR(1 g) = 0.901 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 2.55 W/kg

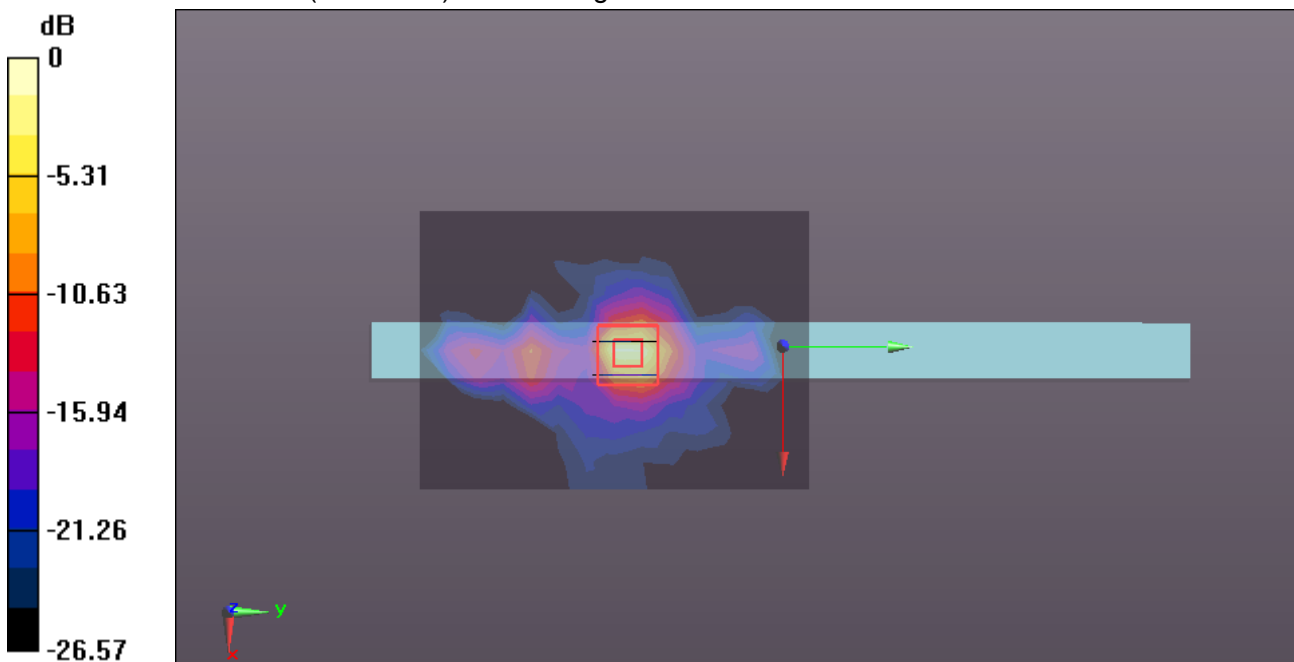

0 dB = 2.55 W/kg = 4.07 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH40 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band I; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.276$ S/m; $\epsilon_r = 49.123$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.77, 4.77, 4.77); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH40 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.10 W/kg

WIFI/IEEE802.11a Body Edge 1 CH40 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.938 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 4.60 W/kg

SAR(1 g) = 0.957 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 2.65 W/kg

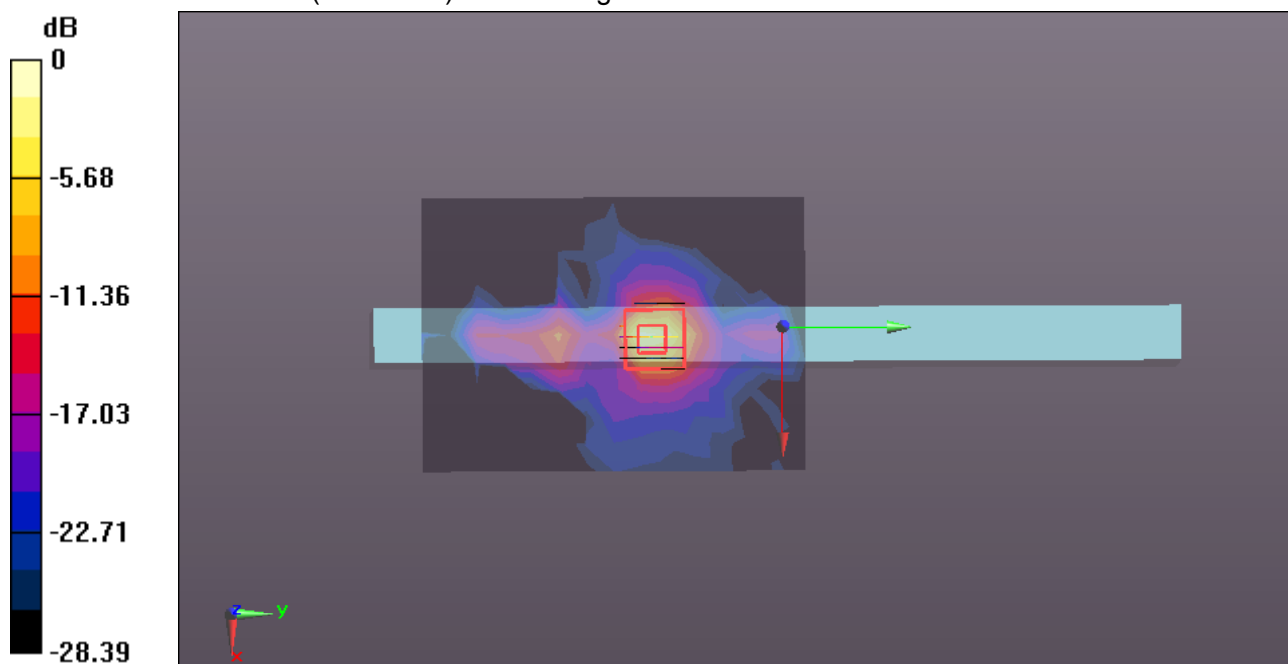

0 dB = 2.65 W/kg = 4.23 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH56 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band II; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 48.919$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH56 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.69 W/kg

WIFI/IEEE802.11a Body Edge 1 CH56 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.915 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 6.77 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 3.89 W/kg

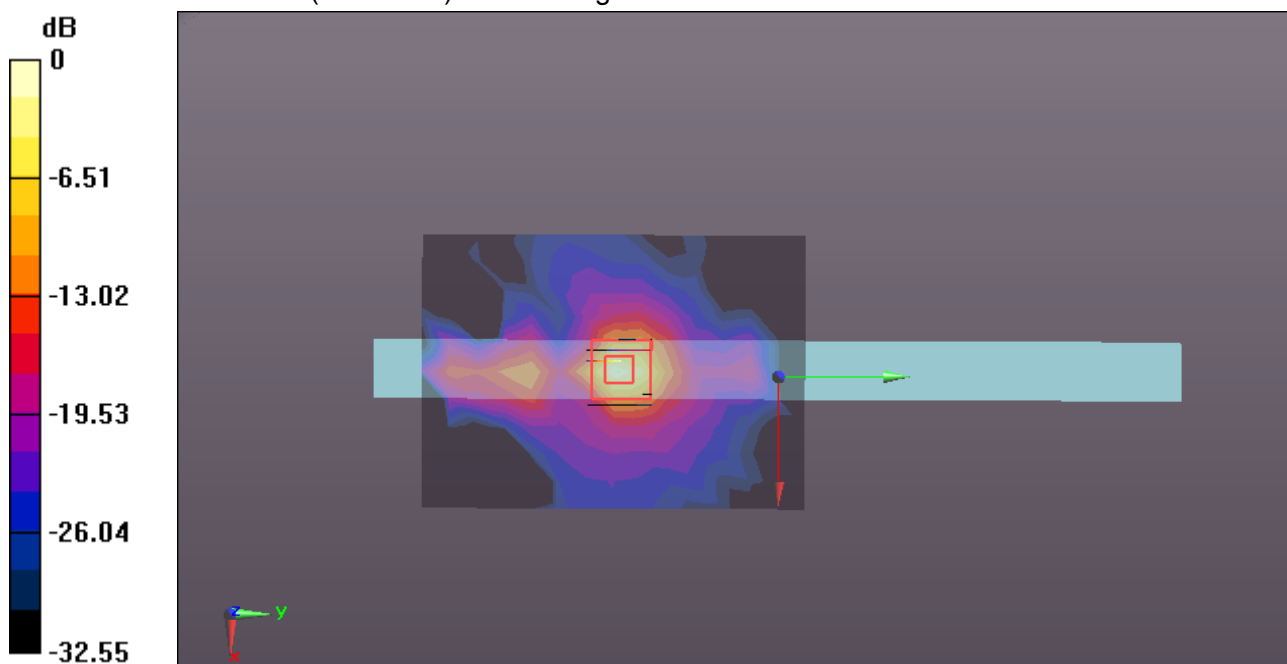

0 dB = 3.89 W/kg = 5.90 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH64 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band II; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.444$ S/m; $\epsilon_r = 48.826$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH64 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.09 W/kg


WIFI/IEEE802.11a Body Edge 1 CH64 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.206 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 6.70 W/kg

SAR(1 g) = 1.20 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 3.84 W/kg

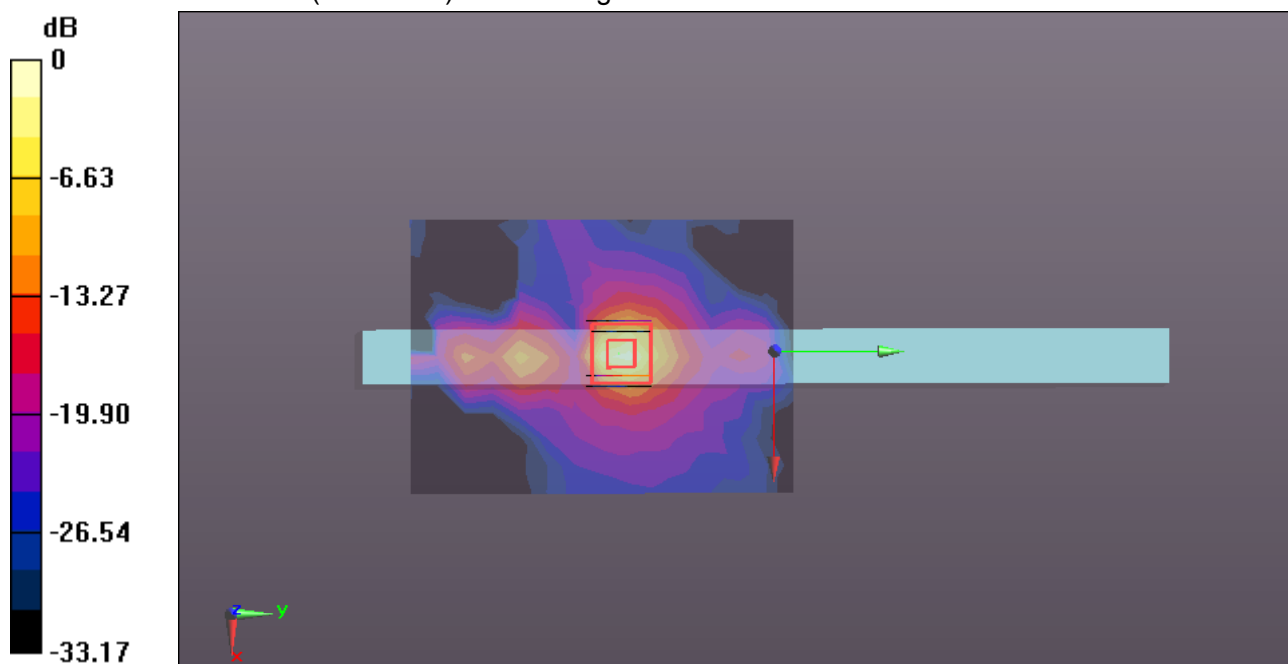

0 dB = 3.84 W/kg = 5.84 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH128 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band III;

Frequency: 5640 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5640$ MHz; $\sigma = 5.92$ S/m; $\epsilon_r = 48.083$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.18, 4.18, 4.18); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH128 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.41 W/kg

WIFI/IEEE802.11a Body Edge 1 CH128 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.257 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 4.58 W/kg

SAR(1 g) = 0.803 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 2.43 W/kg

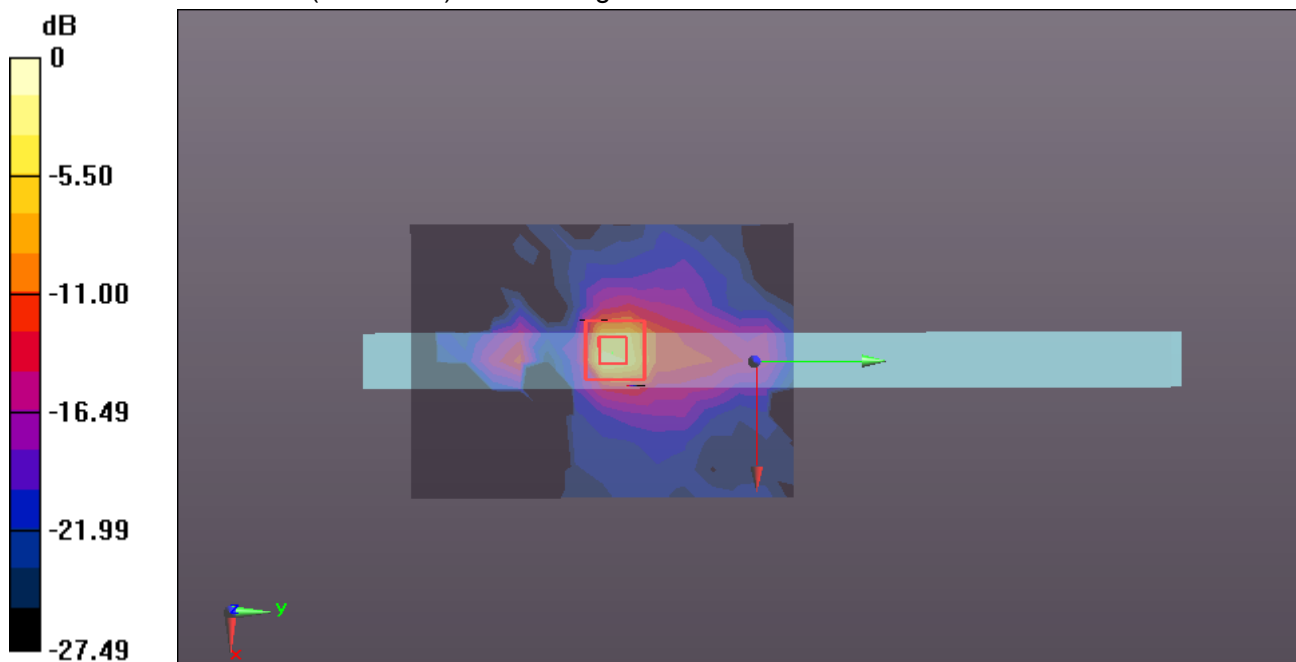

0 dB = 2.43 W/kg = 3.86 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH132 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band III;

Frequency: 5660 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5660$ MHz; $\sigma = 5.959$ S/m; $\epsilon_r = 48.032$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.18, 4.18, 4.18); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH132 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.33 W/kg

WIFI/IEEE802.11a Body Edge 1 CH132 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.744 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 4.54 W/kg

SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 2.35 W/kg

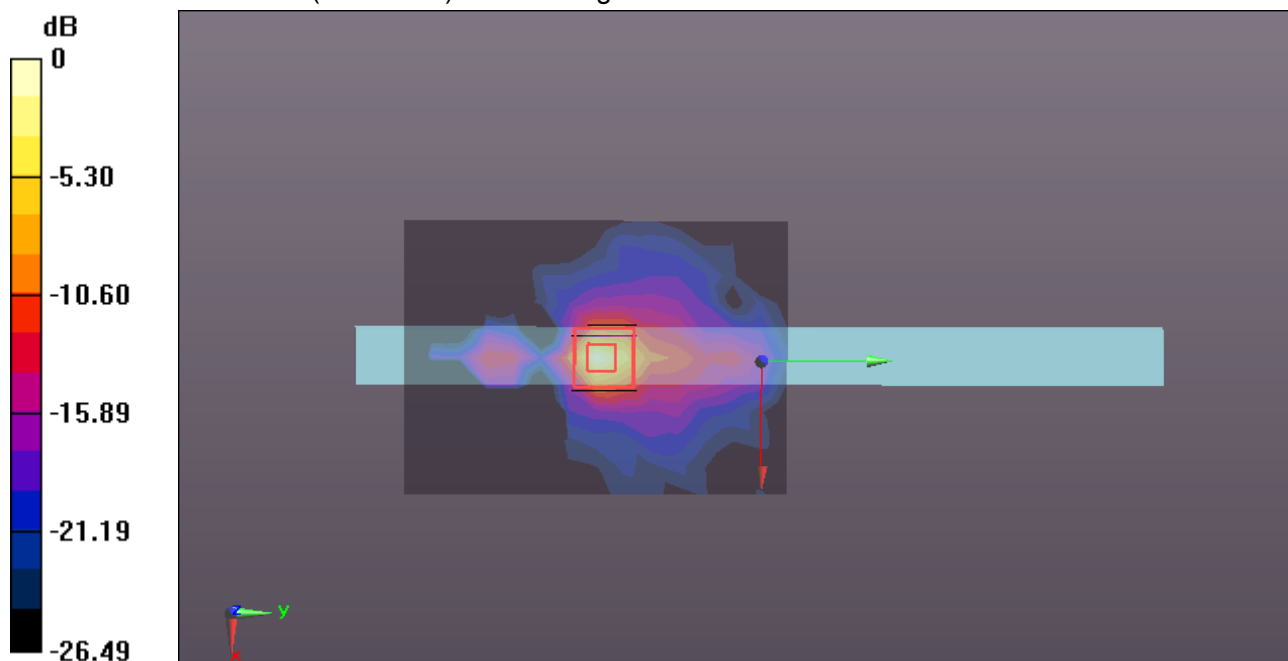

0 dB = 2.35 W/kg = 3.71 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH149 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band IV;

Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.077$ S/m; $\epsilon_r = 47.877$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.34, 4.34, 4.34); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH149 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.99 W/kg

WIFI/IEEE802.11a Body Edge 1 CH149 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.387 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 4.71 W/kg

SAR(1 g) = 0.820 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 2.48 W/kg

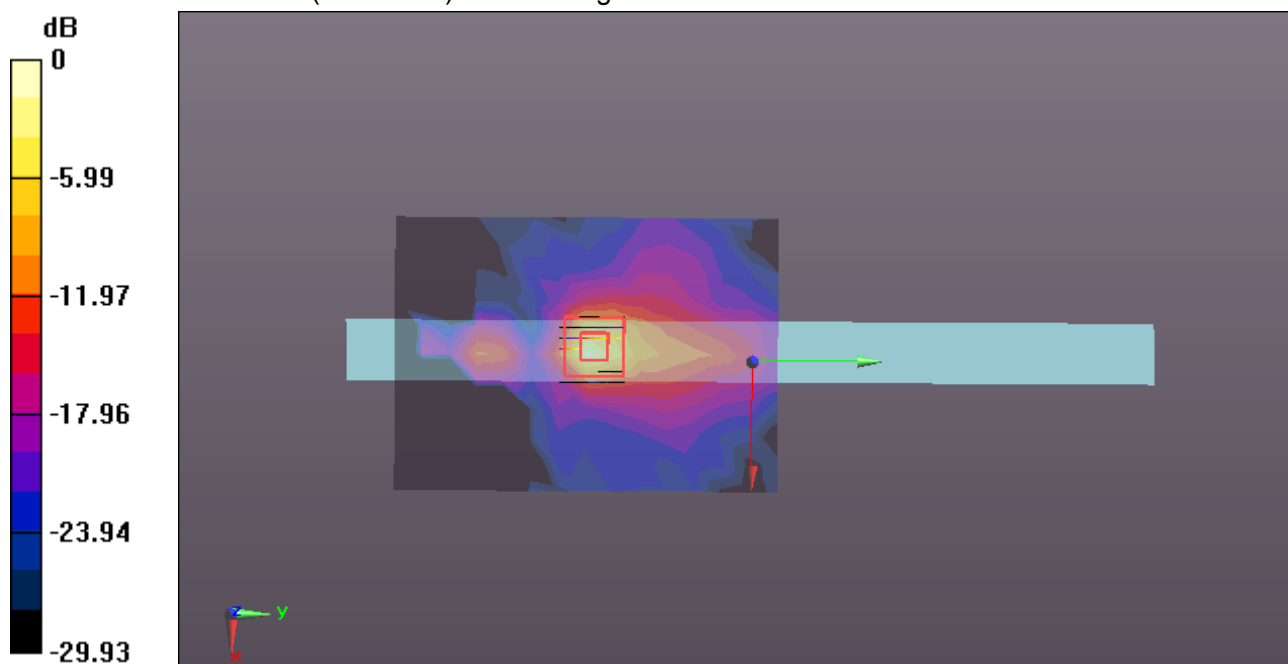

0 dB = 2.48 W/kg = 3.94 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH157 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band IV;

Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.164$ S/m; $\epsilon_r = 47.787$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.34, 4.34, 4.34); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH157 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.41 W/kg

WIFI/IEEE802.11a Body Edge 1 CH157 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.398 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 5.11 W/kg

SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 2.59 W/kg

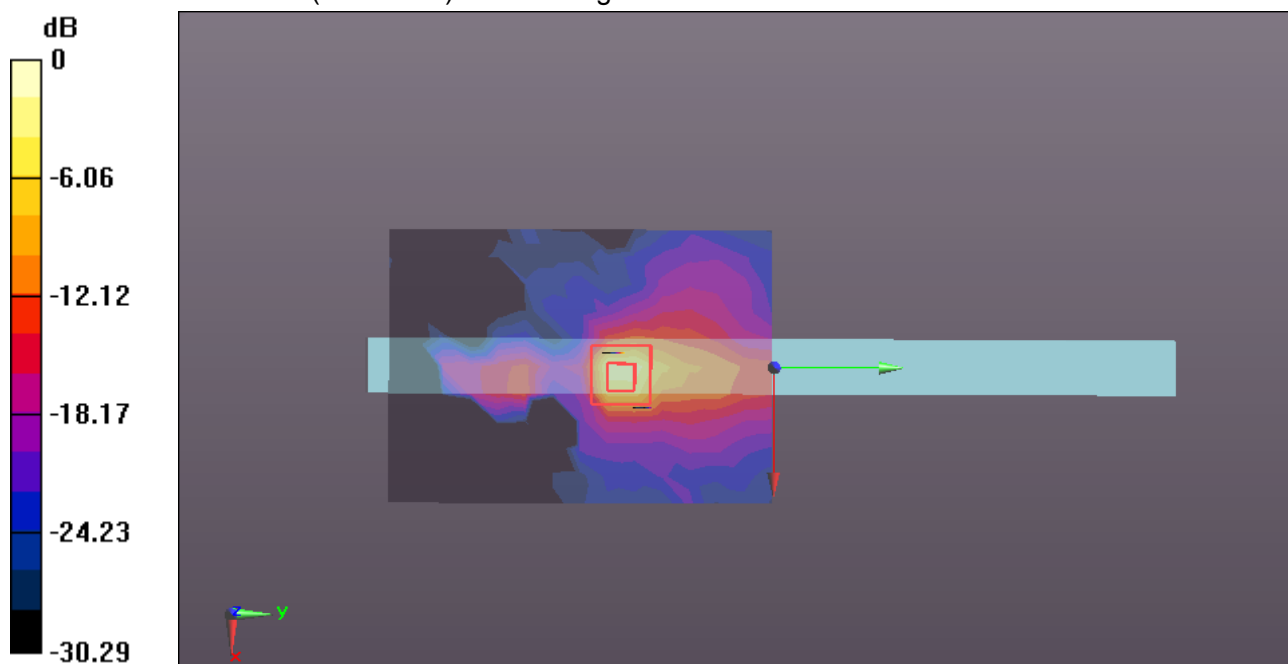

0 dB = 2.59 W/kg = 4.13 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WiFi 802.11 b-Body Rear CH6 Chain0 repeat

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 52.47$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi 2.4GHz/IEEE802.11b Body Rear CH6 Chain0 repeat/Area Scan (10x13x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.71 W/kg

WiFi 2.4GHz/IEEE802.11b Body Rear CH6 Chain0 repeat/Zoom Scan (7x7x5)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.573 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.22 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 1.59 W/kg

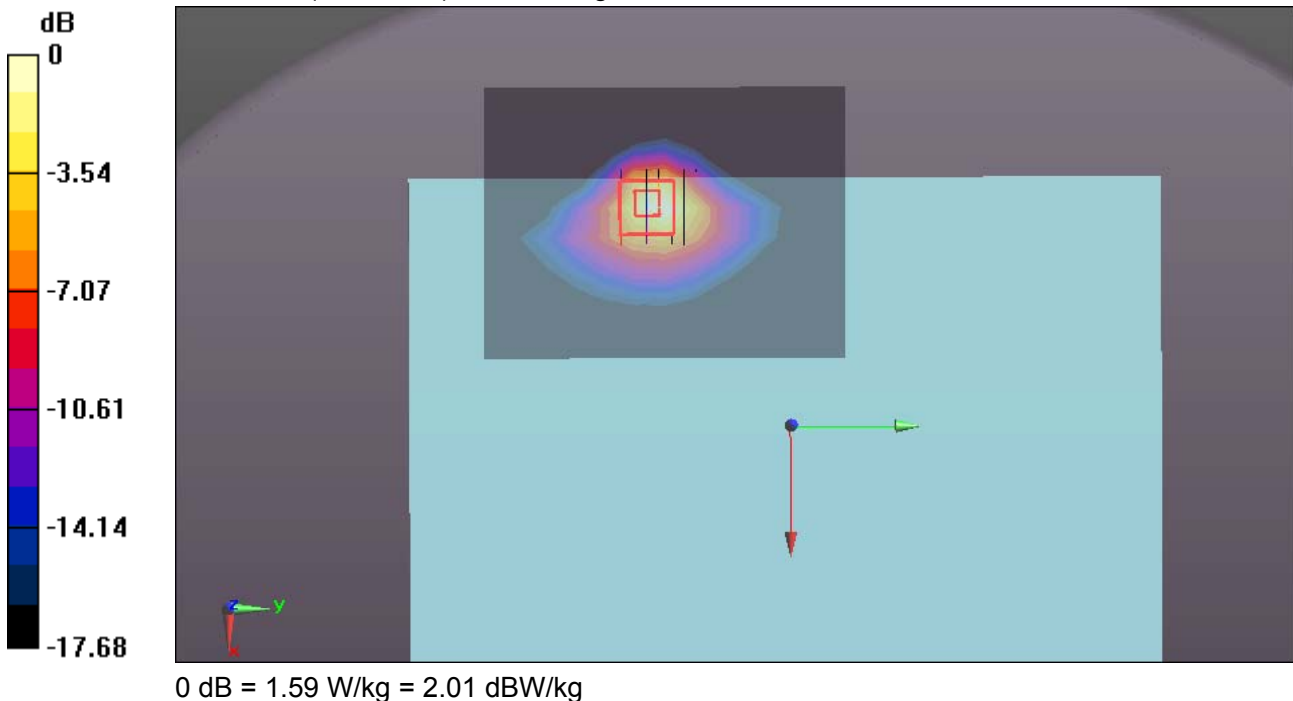

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH40 Chain0 repeat

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band I; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.276$ S/m; $\epsilon_r = 49.123$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.77, 4.77, 4.77); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH40 Chain0 repeat/Area Scan (11x15x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.61 W/kg

WIFI/IEEE802.11a Body Edge 1 CH40 Chain0 repeat/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.861 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.66 W/kg

SAR(1 g) = 0.962 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 2.70 W/kg

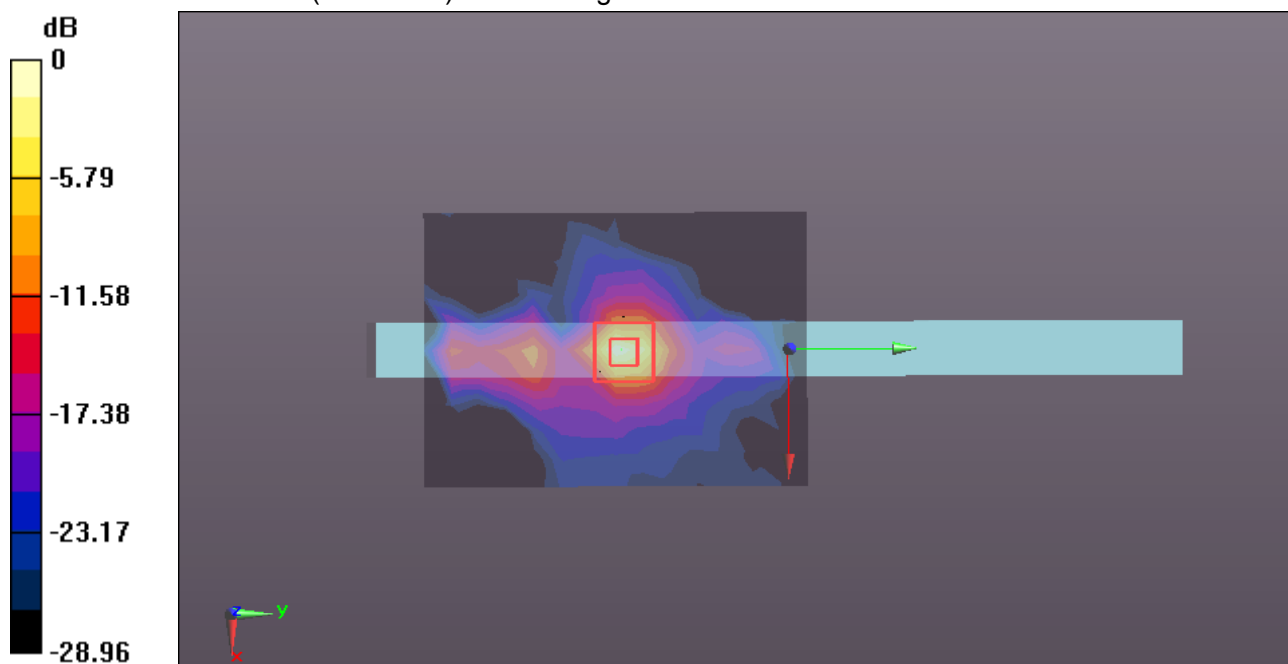

0 dB = 2.70 W/kg = 4.31 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH64 Chain0 repeat

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band II; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.444$ S/m; $\epsilon_r = 48.826$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH64 Chain0 repeat/Area Scan (11x15x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.10 W/kg

WIFI/IEEE802.11a Body Edge 1 CH64 Chain0 repeat/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.544 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 6.58 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 3.75 W/kg

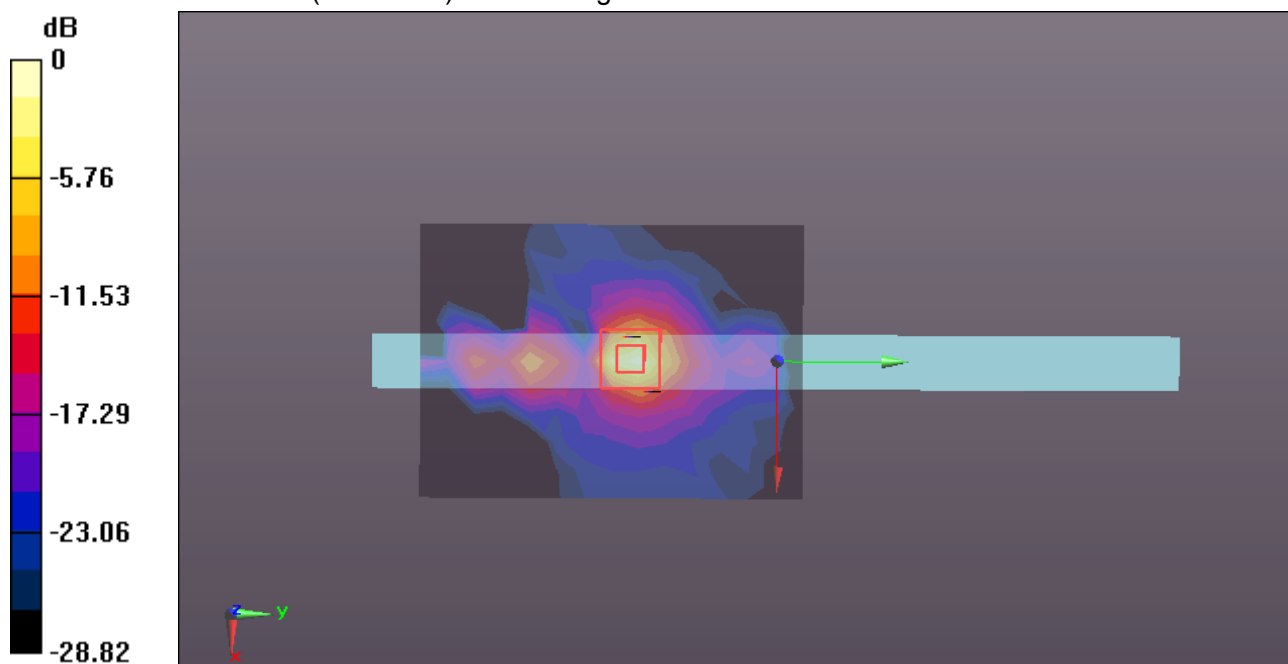

0 dB = 3.75 W/kg = 5.74 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH132 Chain0 repeat

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band III;

Frequency: 5660 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5660$ MHz; $\sigma = 5.959$ S/m; $\epsilon_r = 48.032$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.18, 4.18, 4.18); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH132 Chain0 repeat/Area Scan (11x15x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.29 W/kg

WIFI/IEEE802.11a Body Edge 1 CH132 Chain0 repeat/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.385 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 4.58 W/kg

SAR(1 g) = 0.799 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 2.37 W/kg

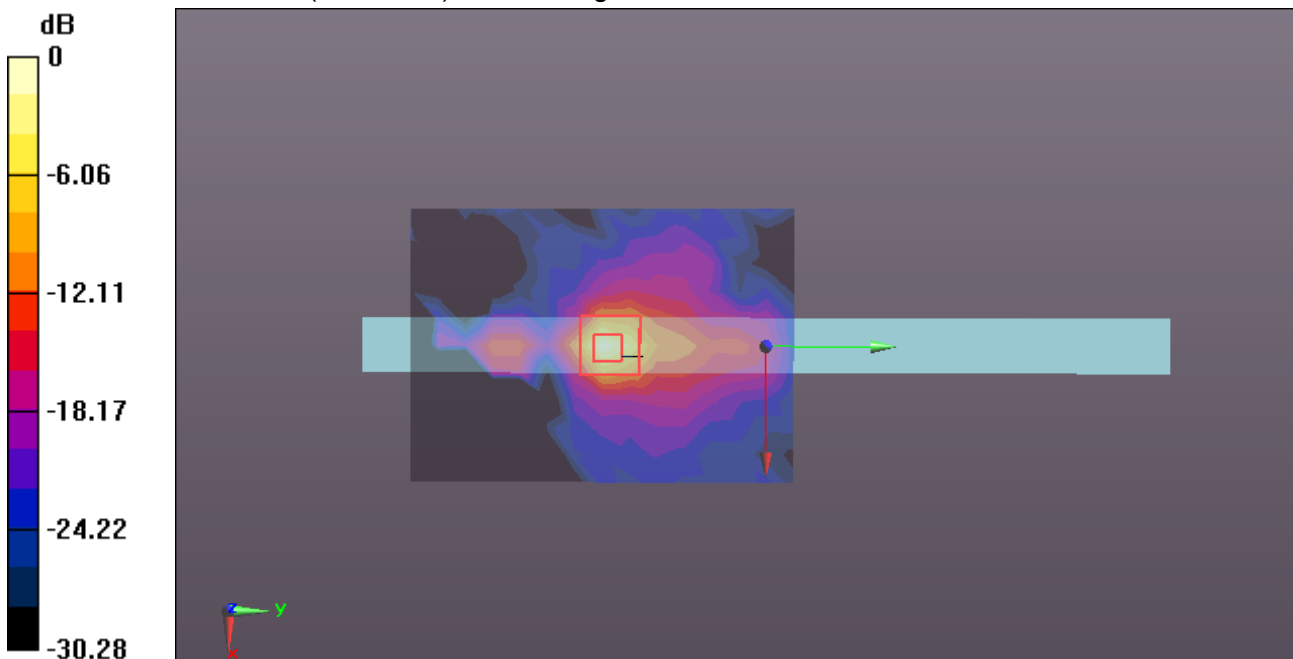

0 dB = 2.37 W/kg = 3.75 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 9/12/2016

WIFI 802.11 a-Body Edge 1 CH157 Chain0 repeat

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band IV;

Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.164$ S/m; $\epsilon_r = 47.787$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.34, 4.34, 4.34); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH157 Chain0 repeat/Area Scan (11x15x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.96 W/kg

WIFI/IEEE802.11a Body Edge 1 CH157 Chain0 repeat/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.878 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 0.887 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

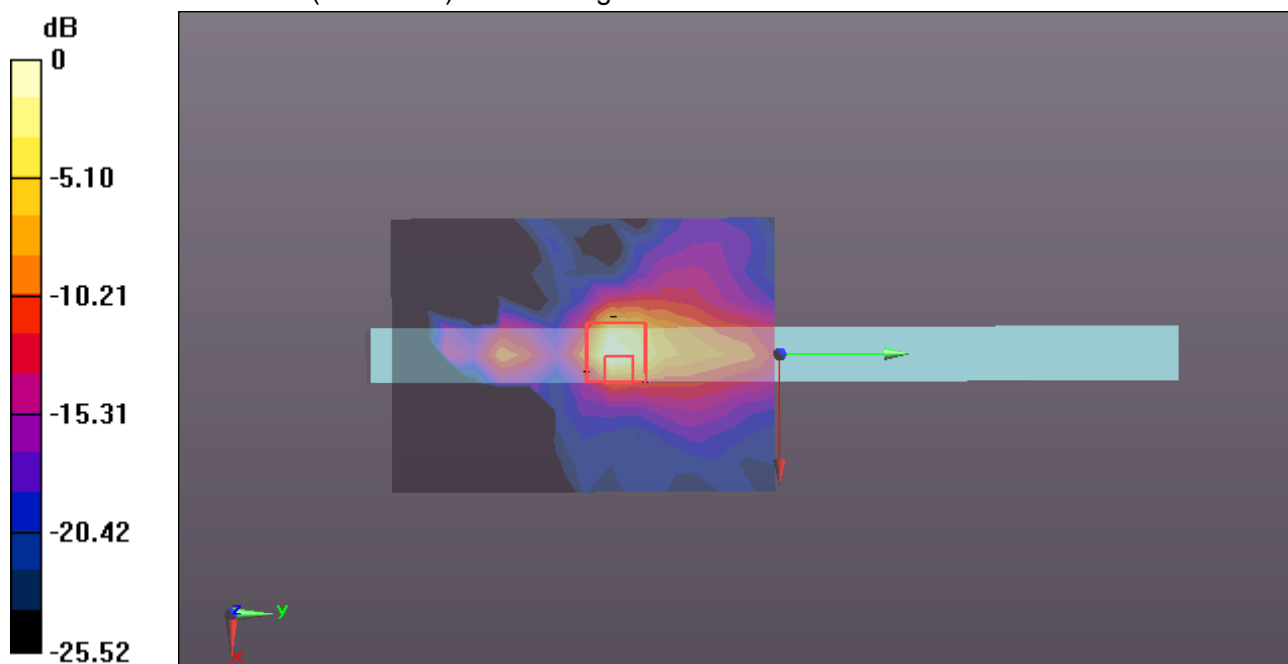

0 dB = 1.43 W/kg = 1.55 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 12/21/2016

WiFi 802.11 b-Body Bottom CH1 Chain0

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.887$ S/m; $\epsilon_r = 51.888$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi 2.4GHz/IEEE802.11b Body Bottom CH1 Chain0/Area Scan (10x13x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.39 W/kg

WiFi 2.4GHz/IEEE802.11b Body Bottom CH1 Chain0/Zoom Scan (7x7x5)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.654 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.458 W/kg

Maximum value of SAR (measured) = 1.63 W/kg

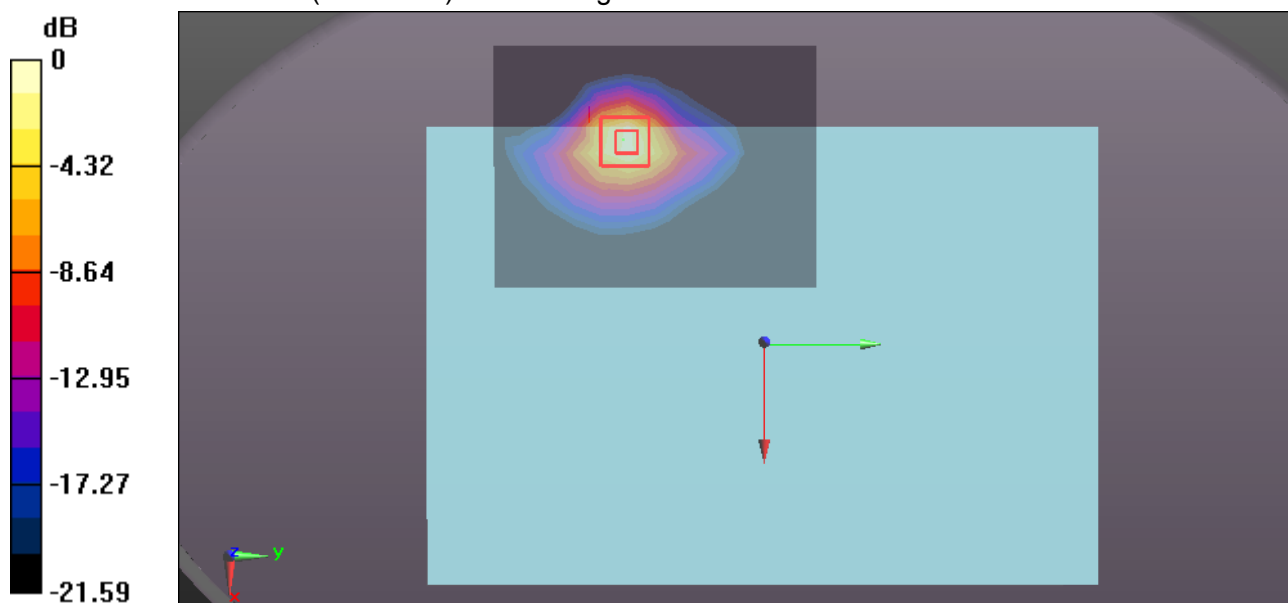

Test Laboratory: Compliance Certification Services Inc.

Date: 12/21/2016

2.4GHz-Body Rear CH78 Chain0

Communication System: UID 0, Bluetooth (0); Communication System Band: ISM 2.4Ghz Band;

Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 2480$ MHz; $\sigma = 2.045$ S/m; $\epsilon_r = 51.862$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi 2.4GHz/2.4GHz Body Rear CH78 Chain0/Area Scan (10x13x1): Measurement grid: dx=12mm, dy=12mm[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0587 W/kg

WiFi 2.4GHz/2.4GHz Body Rear CH78 Chain0/Zoom Scan (7x7x5)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.114 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0921 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.021 W/kg[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0612 W/kg

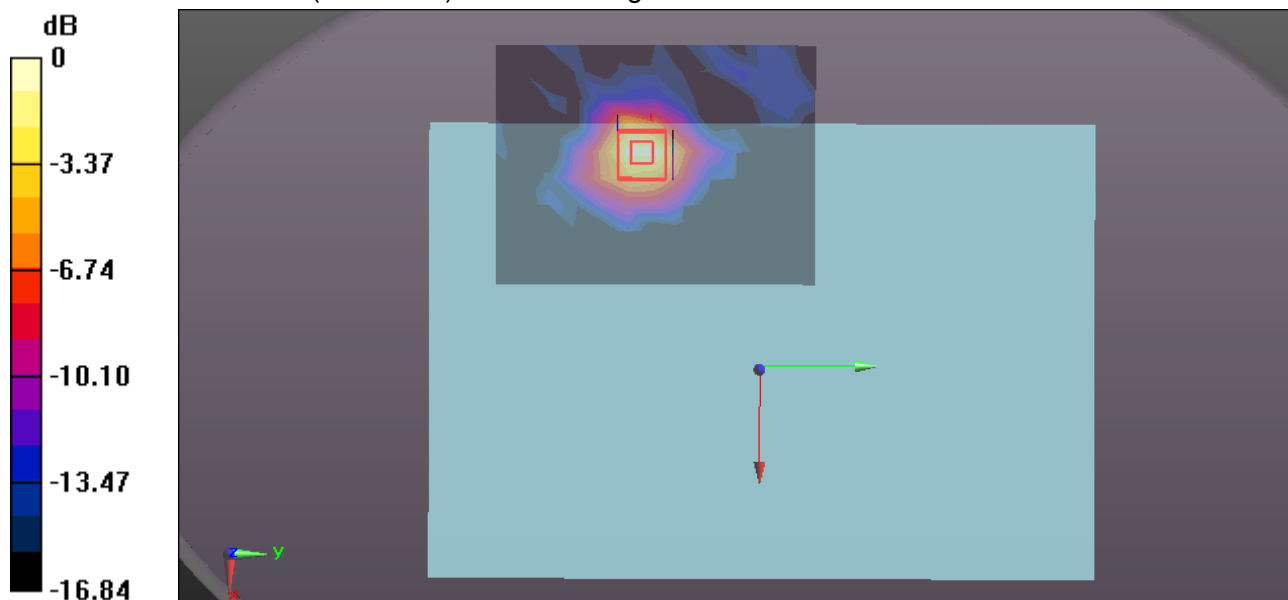

0 dB = 0.0612 W/kg = -12.13 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 12/21/2016

WIFI 802.11 a-Body Edge 1 CH40 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band I; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.159$ S/m; $\epsilon_r = 49.723$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.77, 4.77, 4.77); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH40 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.16 W/kg

WIFI/IEEE802.11a Body Edge 1 CH40 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.606 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.95 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 2.45 W/kg

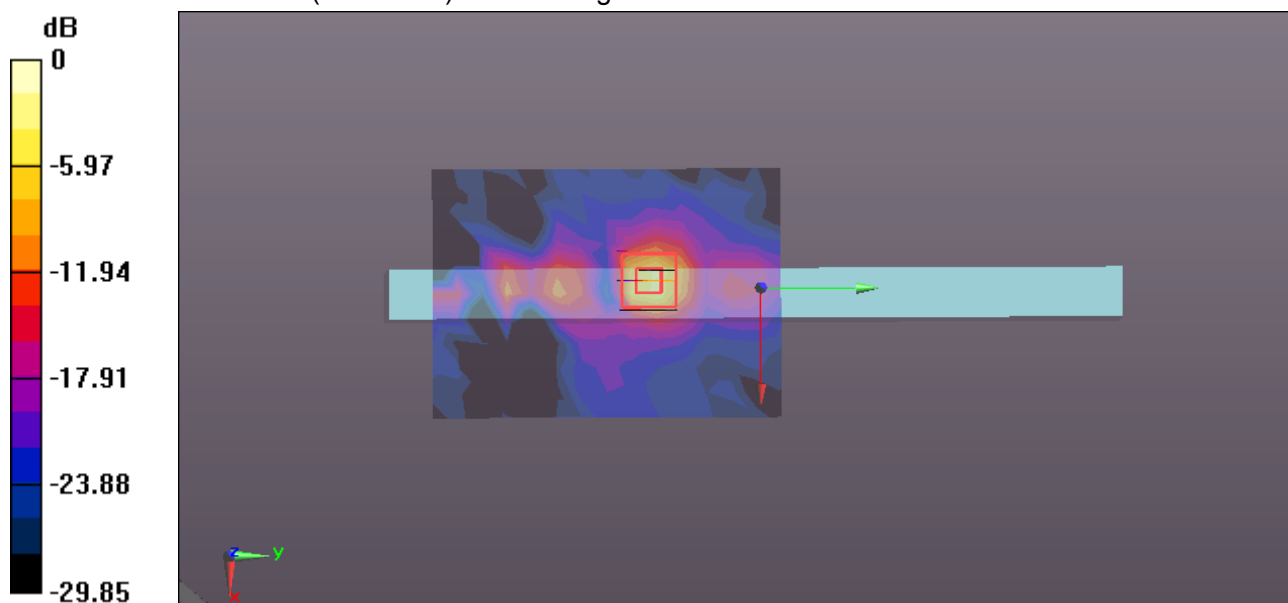

0 dB = 2.45 W/kg = 3.89 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 12/21/2016

WIFI 802.11 a-Body Edge 1 CH64 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band II; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.323$ S/m; $\epsilon_r = 49.477$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH64 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.63 W/kg

WIFI/IEEE802.11a Body Edge 1 CH64 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.942 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 5.53 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 3.38 W/kg

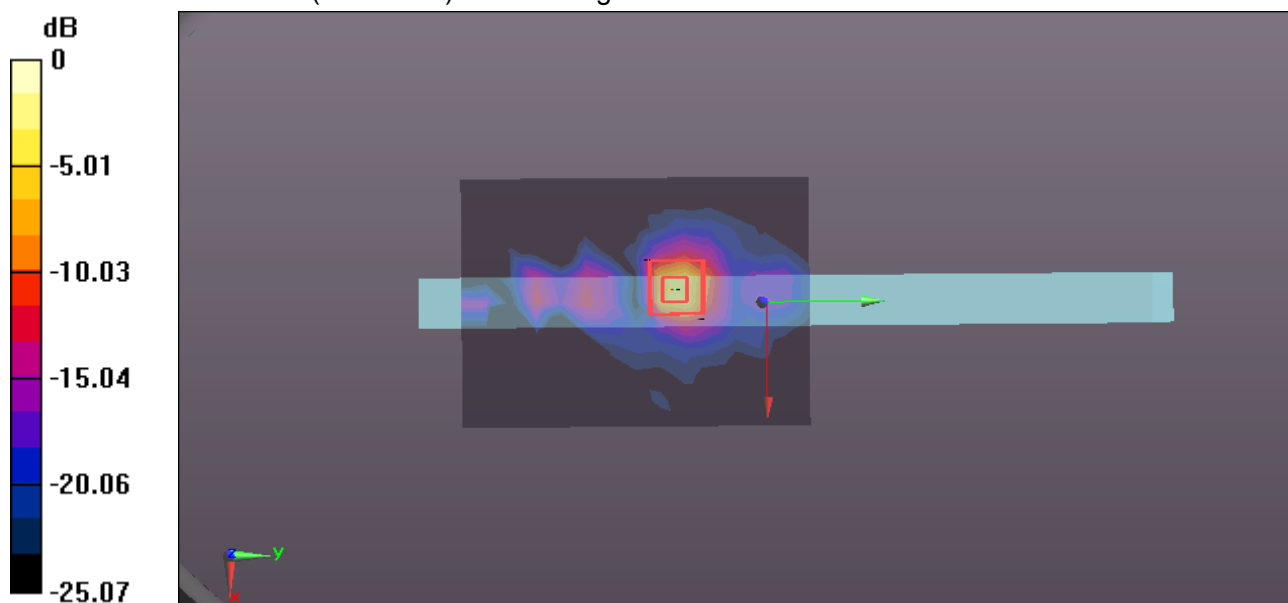

Test Laboratory: Compliance Certification Services Inc.

Date: 12/21/2016

WIFI 802.11 a-Body Edge 1 CH132 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band III;

Frequency: 5660 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5660$ MHz; $\sigma = 5.716$ S/m; $\epsilon_r = 48.922$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.18, 4.18, 4.18); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH132 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.20 W/kg

WIFI/IEEE802.11a Body Edge 1 CH132 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.671 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 4.78 W/kg

SAR(1 g) = 0.901 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 2.73 W/kg

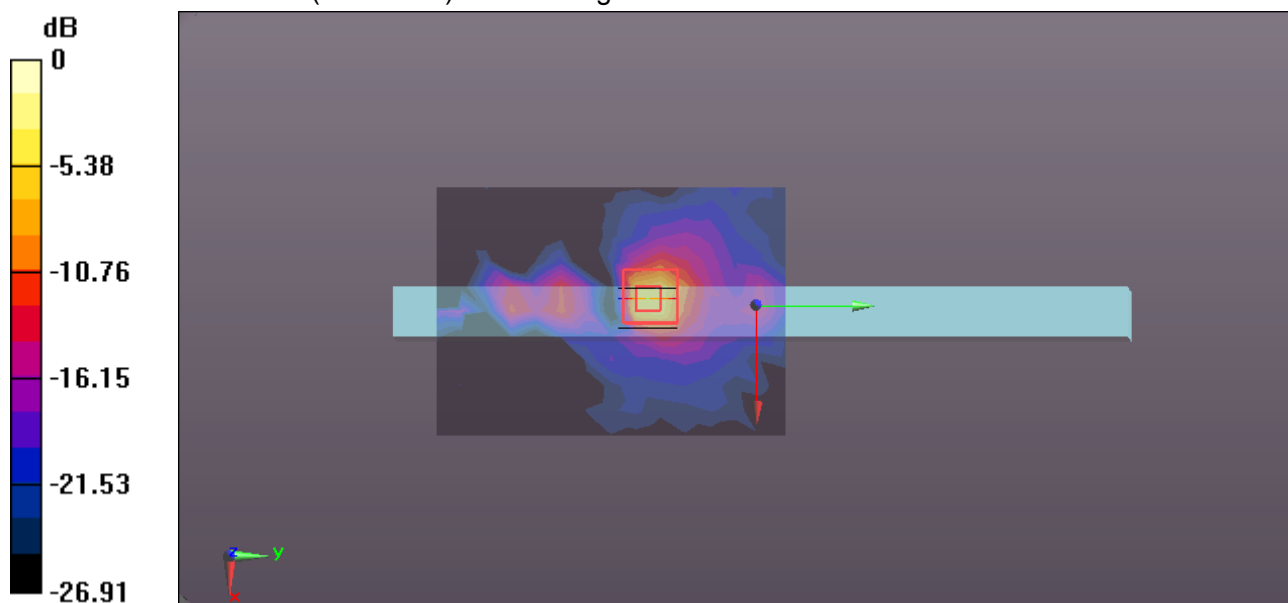

0 dB = 2.73 W/kg = 4.36 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 12/21/2016

WIFI 802.11 a-Body Edge 1 CH157 Chain0

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band IV;

Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.903$ S/m; $\epsilon_r = 48.738$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.34, 4.34, 4.34); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11a Body Edge 1 CH157 Chain0/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.12 W/kg

WIFI/IEEE802.11a Body Edge 1 CH157 Chain0/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.724 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 4.20 W/kg

SAR(1 g) = 0.785 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 2.35 W/kg

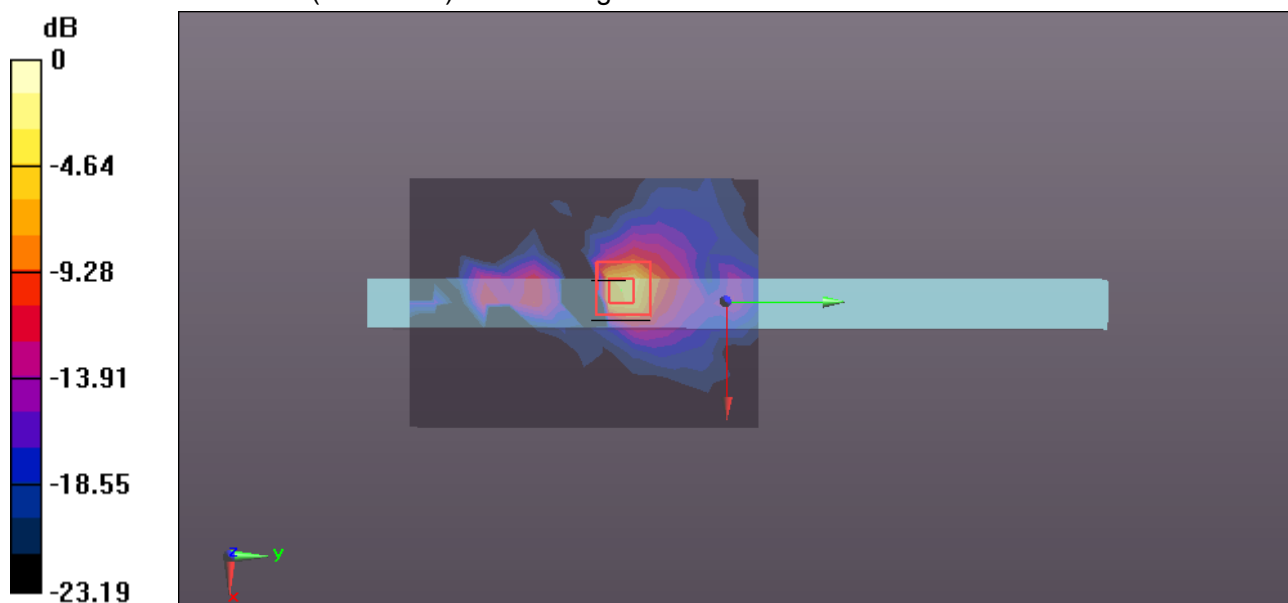

0 dB = 2.35 W/kg = 3.71 dBW/kg