



FCC/ IC TEST REPORT

According to

CFR47 §15.247/ RSS-247 Issue 1

Applicant : Qualcomm Atheros, Inc.
Address : 1700 Technology Drive, San Jose, CA 95110
Manufacturer : Qualcomm Atheros, Inc.
Address : 1700 Technology Drive, San Jose, CA 95110
Equipment : Single Stream 802.11a/b/g/n/ac + BT 4.1 M.2 Type Card
Brand : Qualcomm Atheros
Model No. : QCNFA435
FCC ID : PPD-QCNFA435
IC ID : 4104A-QCNFA435

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **Cerpass Technology Corp.** the test report shall not be reproduced except in full.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.10 – 2013** and the energy emitted by this equipment was **passed**.

CISPR PUB. 22 and FCC Part 15 in both radiated and conducted emission class B limits. Testing was carried out on Mar.06,2017~ Mar.13,2017 at **Cerpass Technology Corp.**

Prepared By:

Kerry Zhou

Approved by:

Miro Chueh (EMC/RF Manager)

Laboratory Accreditation:



Cerpass Technology Corporation Test Laboratory

NVLAP LAB Code:	200954-0
------------------------	-----------------

TAF LAB Code:	1439
----------------------	-------------



Cerpass Technology (SuZhou) Co., Ltd.

NVLAP LAB Code:	200814-0
------------------------	-----------------

CNAS LAB Code:	L5515
-----------------------	--------------



Release History

Attachment No.	Version	Date	Description
SEDJ1701087	Rev 01	2017-03-16	Initial release



Table of Contents

1. Report of Measurements and Examinations.....	4
1.1 List of Measurements and Examinations	4
2. Test Configuration of Equipment under Test.....	5
2.1 Feature of Equipment under Test.....	5
2.2 Duty Cycle	6
2.3 Carrier Frequency of Channels	7
2.4 Test Manner.....	7
2.5 General Information of Test	8
2.6 Measurement Uncertainty	8
3. Antenna Requirements	9
3.1 Standard Applicable	9
3.2 Antenna Construction and Directional Gain	9
4. Maximum Output Power	10
4.1 Test Limit	10
4.2 Test Procedure	10
4.3 Test Setup Layout.....	10
4.4 Measurement Equipment	11
4.5 Test Result and Data	11



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

Performed Test Item	Normative References	Test Performed	Deviation	Result
Output Power	FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(b)(3) RSS-247 Issue 1 May 2015 Section 5.1(2)	Yes	No	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

BT Specification	BT 4.0
BT Frequency	2402~2480MHz
BT Channel Number	40
BT Channel Separation	2MHz
BT Type of Modulation	GFSK
BT Data Rate	1Mbps(GFSK)
Channel Control	Auto
Antenna Type	See antenna requirement


Host Details,

Host Manufacture	Host Type	Host Model
Lenovo	Notebook Computer	Lenovo ideapad 520-15IKB



2.2 Duty Cycle

Test Mode	Frequency (MHz)	Duty Cycle
BLE	2402	64.6%

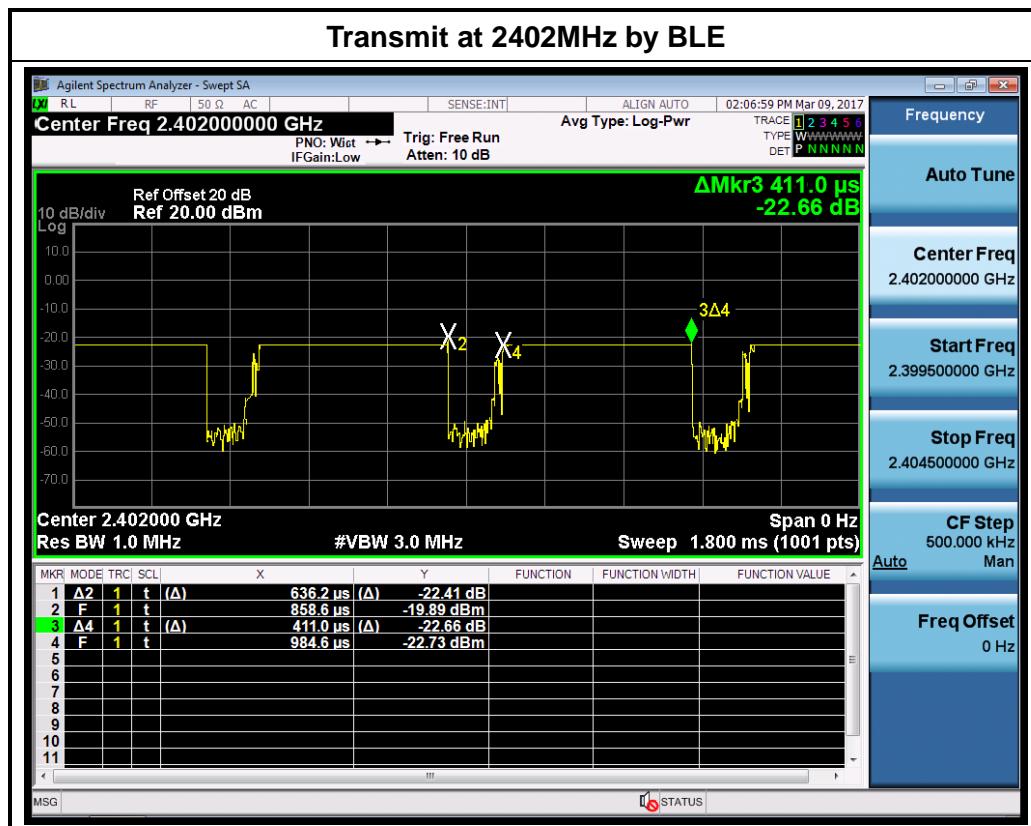



2.3 Carrier Frequency of Channels

Bluetooth Working Frequency of Each Channel: (For BLE)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

2.4 Test Manner

Test Manner	
1	During testing, the interface cables and equipment positions were varied according to RSS-247 Issue 1
2	Adjust the EUT at the test mode and the test channel. Then test.
Test mode	
1	Transmit by 802.11BLE



2.5 General Information of Test

Test Site:	Cerpass Technology Corp.
Performand Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2

2.6 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Radiated Emission	30 MHz ~ 40GHz	Vertical	±4.11 dB
		Horizontal	±4.10 dB
Maximum Peak Output Power	---	---	±1.4 dB



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna	Manufacturer	Ant Type	Ant Part number	Peak Gain
Main(chain 0)	Amphenol	PIFA	DC33001GX00	-1.00dBi for 2.40~2.50GHz band -1.73dBi for 5.15~5.35GHz band -0.68dBi for 5.47~5.725GHz band -1.81dBi for 5.725~5.85GHz band
Aux(chain 1)				-1.63dBi for 2.40~2.50GHz band -3.79dBi for 5.15~5.35GHz band -3.24dBi for 5.47~5.725GHz band -4.66dBi for 5.725~5.85GHz band
Main(chain 0)	SPEED	PIFA	DC33001GV00	0.65dBi for 2.40~2.50GHz band 0.86dBi for 5.15~5.35GHz band -1.29dBi for 5.47~5.725GHz band -3dBi for 5.725~5.85GHz band
Aux(chain 1)				-0.14dBi for 2.40~2.50GHz band -1.73dBi for 5.15~5.35GHz band -1.57dBi for 5.47~5.725GHz band -3.87dBi for 5.725~5.85GHz band

Note: The EUT will collocation two kinds of antenna, we choose one of the high peak gain antenna for all RF testing.



4. Maximum Output Power

4.1 Test Limit

The maximum power shall be less 1Watt (30dBm).

The conducted output power limits specified in §15.247(b) are based on the use of transmit antennae with directional gains that do not exceed 6 dBi. If transmit antennae with an effective directional gain greater than 6 dBi are used, then the conducted output power from the EUT shall be reduced as specified in §15.247(b) and (c).

Per RSS247 Issue 1 Section 5.4(4), for DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum conducted output power shall not exceed 1W.


4.2 Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum conducted AVG output power using KDB 558074 D01v04 - Section 9.2.3.2 AVGPM-G Average Power Method.

The Maximum peak conducted output power using KDB 558074 D01v04 - Section 9.1.1 RBW \geq DTS bandwidth Method.

4.3 Test Setup Layout

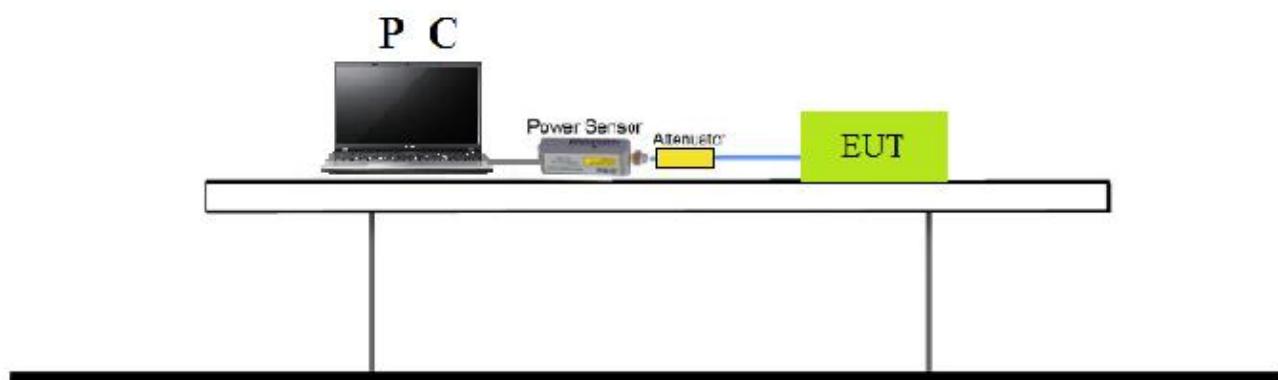



4.4 Measurement Equipment

Instrument	Manufacturer	Type No.	Serial No.	Calibration Date	Valid Date.
PC	Lenovo	E40-70	MP078UQV	N/A	N/A
POWER SENSOR	Agilent	U2021XA	MY53260020	2016/03/27	2017/03/26
Series Power Meter	ANRITSU	ML2495A	1224005	2016/03/27	2017/03/26
Temperature/Humidity Meter	Zhicheng	ZC1-11	CEP-TH-003	2016/03/31	2017/03/30

4.5 Test Result and Data

Test Item	Maximum Output Power
Test Mode	Transmit by BLE
Test Date	2017-03-08

Channel No.	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)	Required Limit (dBm)	Result
01	2402	2.41	2.18	30	Pass
19	2440	2.98	2.65	30	Pass
39	2480	2.98	2.62	30	Pass