



FCC RADIO TEST REPORT

FCC ID : PPD-QCNFA435
Equipment : Single Stream 802.11a/b/g/n/ac + BT 4.1 M.2 Type Card
Brand Name : Qualcomm Atheros
Model Name : QCNFA435
Applicant : Qualcomm Atheros, Inc.
1700 Technology Drive, San Jose, CA 95110
Manufacturer : Qualcomm Atheros, Inc.
1700 Technology Drive, San Jose, CA 95110
Standard : FCC Part 15 Subpart C §15.247

The product was received on Mar. 15, 2018 and testing was started from Mar. 15, 2018 and completed on Mar. 28, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Reviewed by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
3 Test Result.....	10
3.1 Output Power Measurement.....	10
3.2 Radiated Band Edges and Spurious Emission Measurement	11
3.3 Antenna Requirements	15
4 List of Measuring Equipment	16
5 Uncertainty of Evaluation.....	17
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR773112-04A	01	Initial issue of report	May 23, 2018
FR773112-04A	02	1. Revise connection diagram of test system. 2. Add the remark description in summary. 3. Add measuring equipment. 4. Revise test information in appendix c.	May 31, 2018
FR773112-04A	03	Remove the remark description in summary	Jun. 05, 2018



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(b)(1)	Peak Output Power	Pass	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 5.57 dB at 332.900 MHz
3.3	15.203 & 15.247(b)	Antenna Requirement	Pass	-
Remark: The reported TX power in EMC report is per actual shipping power setting and measured in this unit. This has considered the actual shipping power during the measurement.				

Reviewed by: Joseph Lin

Report Producer: Yuping Lin

1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, and Wi-Fi 5GHz 802.11a/n/ac

Product Specification subjective to this standard	
Sample 1	EUT with Portable Computer (HONGBO Antenna)
Sample 2	EUT with Portable Computer (ACON Antenna)

Remark: All the tests were performed with Sample 1.

The product was installed into Portable Computer (Brand Name: DELL, Model Name: P87G, P87G001) during test, and the host information was recorded in the following table.

Antenna Information					
Manufacturer	HONGBO		Manufacturer	ACON	
Model Name	260-26160		Model Name	ANF6Y-200018	
Ant. Type	PIFA		Ant. Type	PIFA	
Peak Gain (dBi)	2.4GHz WLAN	Main: -0.59 Aux: -1.18	Peak Gain (dBi)	2.4GHz WLAN	Main:-1.38 Aux:-2.70
	5GHz WLAN	Main: -1.07 Aux: -1.64		5GHz WLAN	Main:-1.14 Aux:-1.73

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-


2.2 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Radiated Test Cases	Bluetooth BR 1Mbps GFSK
	Mode 1: CH00_2402 MHz
	Mode 2: CH39_2441 MHz
	Mode 3: CH78_2480 MHz
Remark: - For radiated test cases, the worst mode data rate 1Mbps was reported only since the highest RF output power in the preliminary tests. - The Radiated Spurious Emission test has only performed the test cases which chosen from module supplier.	

2.3 Connection Diagram of Test System

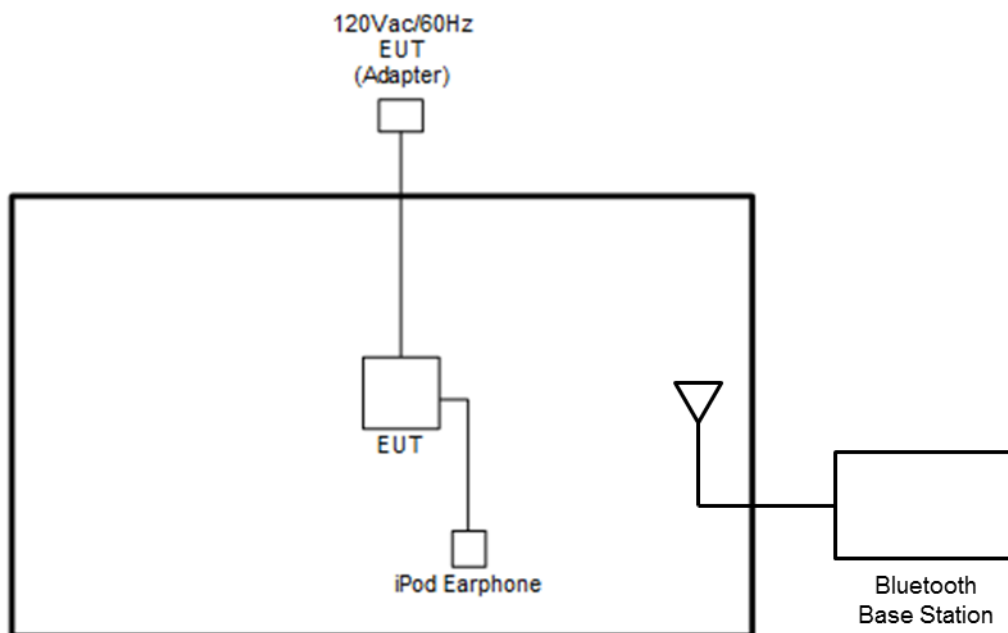



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT.exe” was installed in Portable Computer which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

3.1.4 Test Setup

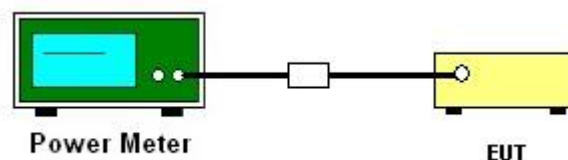

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.



3.2.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.2.4 Test Setup


For radiated emissions below 30MHz

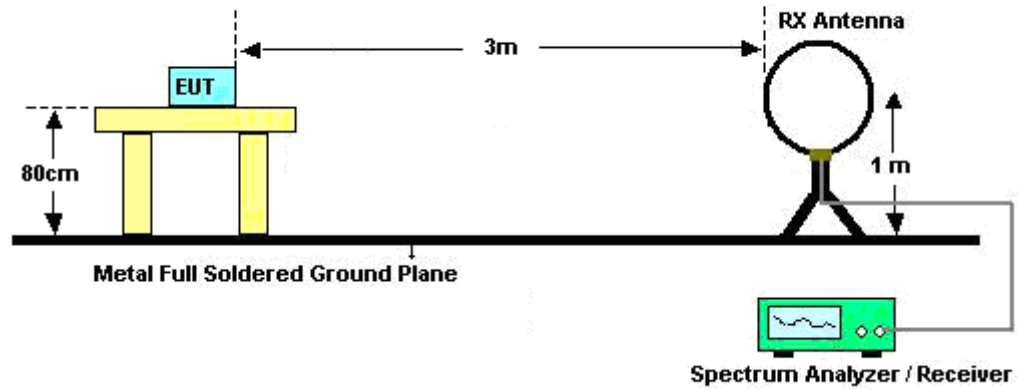

For radiated emissions from 30MHz to 1GHz

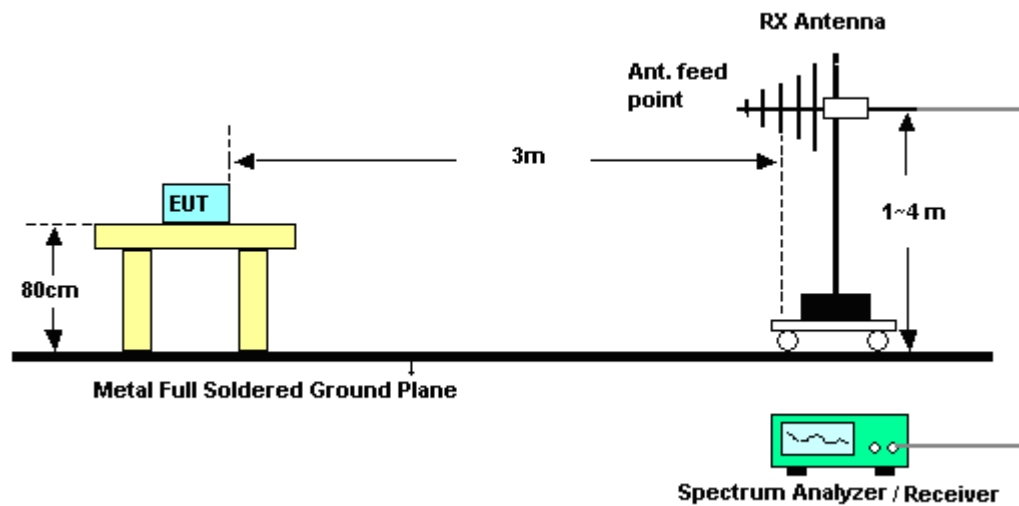

For radiated emissions above 1GHz

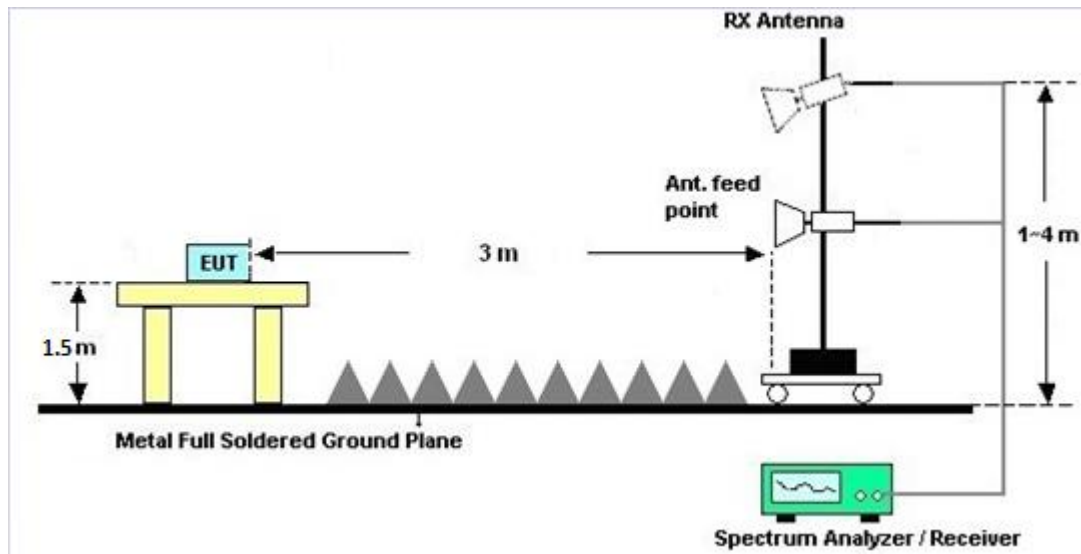

3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.2.7 Duty Cycle

Please refer to Appendix D.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	N/A	Dec. 20, 2017	Mar. 15, 2018~ Mar. 26, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 20, 2017	Mar. 15, 2018~ Mar. 26, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	Mar. 15, 2018~ Mar. 26, 2018	Jun. 19, 2018	Conducted (TH05-HY)
BT Base Station (Measure)	Rohde & Schwarz	CBT	101136	BT 3.0	Sep. 20, 2017	Mar. 15, 2018~ Mar. 26, 2018	Sep. 19, 2018	Conducted (TH05-HY)
Preamplifier	Jet-Power	JAP00101800-30-10P	160118550004	1GHz~18GHz	Apr. 13, 2017	Mar. 22, 2018~ Mar. 28, 2018	Apr. 12, 2018	Radiation (03CH16-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Mar. 22, 2018~ Mar. 28, 2018	Nov. 22, 2018	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-1080-1200-15000-60ST	SN1	1.2 GHz Highpas	Jul. 17, 2017	Mar. 22, 2018~ Mar. 28, 2018	Jul. 16, 2018	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Oct. 17, 2017	Mar. 22, 2018~ Mar. 28, 2018	Oct. 16, 2018	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Oct. 17, 2017	Mar. 22, 2018~ Mar. 28, 2018	Oct. 16, 2018	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	MY1082/26EA	30M~18GHz	Oct. 17, 2017	Mar. 22, 2018~ Mar. 28, 2018	Oct. 16, 2018	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz ~ 26.5GHz	Dec. 05, 2017	Mar. 22, 2018~ Mar. 28, 2018	Dec. 04, 2018	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 05, 2017	Mar. 22, 2018~ Mar. 28, 2018	Dec. 04, 2018	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN3	3 GHz Highpass	Jul. 06, 2017	Mar. 22, 2018~ Mar. 28, 2018	Jul. 05, 2018	Radiation (03CH16-HY)
Horn Antenna	ESCO	3117	00211469	1GHz~18GHz	Jul. 31, 2017	Mar. 22, 2018~ Mar. 28, 2018	Jul. 30, 2018	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY57290111	3Hz~26.5GHz	Nov. 02, 2017	Mar. 22, 2018~ Mar. 28, 2018	Nov. 01, 2018	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1000MHz	Sep. 27, 2017	Mar. 22, 2018~ Mar. 28, 2018	Sep. 26, 2018	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL6111D&00802N1D01N-06	47020&06	30MHz to 1GHz	Nov. 20, 2017	Mar. 22, 2018~ Mar. 28, 2018	Nov. 19, 2018	Radiation (03CH16-HY)
Software	AUDIX	E3 6.2009-8-24	RK001136	N/A	N/A	Mar. 22, 2018~ Mar. 28, 2018	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 22, 2018~ Mar. 28, 2018	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 22, 2018~ Mar. 28, 2018	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 22, 2018~ Apr. 29, 2018	N/A	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Mar. 22, 2018~ Apr. 29, 2018	Nov. 26, 2018	Radiation (03CH16-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8
--	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9
--	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Lena Lo	Temperature:	21~25	°C
Test Date:	2018/03/15 ~ 2018/03/26	Relative Humidity:	51~54	%

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)
DH1	0	1	6.03	20.97
	39	1	6.27	20.97
	78	1	6.42	20.97
2DH1	0	1	4.99	20.97
	39	1	5.24	20.97
	78	1	5.38	20.97
3DH1	0	1	5.38	20.97
	39	1	5.62	20.97
	78	1	5.74	20.97

TEST RESULTS DATA**Average Power Table
(Reporting Only)**

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	5.76	5.17
	39	1	5.98	5.17
	78	1	5.99	5.17
2DH1	0	1	2.53	5.09
	39	1	2.81	5.09
	78	1	2.90	5.09
3DH1	0	1	2.53	5.06
	39	1	2.79	5.06
	78	1	2.90	5.06



Appendix B. Radiated Spurious Emission

Test Engineer :	Peter Liao and Bill Chang	Temperature :	23~25°C
		Relative Humidity :	57~62%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2316.195	49.14	-24.86	74	40.54	32.07	6.54	30.01	339	114	P	H
		2316.195	24.35	-29.65	54	-	-	-	-	-	-	A	H
	*	2402	100.58	-	-	91.72	32.18	6.67	29.99	339	114	P	H
	*	2402	75.79	-	-	-	-	-	-	-	-	A	H
													H
													H
		2326.065	52.82	-21.18	74	44.18	32.09	6.56	30.01	334	182	P	V
		2326.065	28.03	-25.97	54	-	-	-	-	-	-	A	V
	*	2402	103.23	-	-	94.37	32.18	6.67	29.99	334	182	P	V
	*	2402	78.44	-	-	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		2359.42	49.01	-24.99	74	40.27	32.13	6.61	30	376	114	P	H
		2359.42	24.22	-29.78	54	-	-	-	-	-	-	A	H
	*	2441	101.66	-	-	92.67	32.24	6.73	29.98	376	114	P	H
	*	2441	76.87	-	-	-	-	-	-	-	-	A	H
		2497.9	50.25	-23.75	74	41.1	32.3	6.81	29.96	376	114	P	H
		2497.9	25.46	-28.54	54	-	-	-	-	-	-	A	H
		2325.54	51.06	-22.94	74	42.42	32.09	6.56	30.01	356	179	P	V
		2325.54	26.27	-27.73	54	-	-	-	-	-	-	A	V
	*	2441	104.74	-	-	95.74	32.24	6.73	29.97	356	179	P	V
	*	2441	79.95	-	-	-	-	-	-	-	-	A	V
		2494.96	51.33	-22.67	74	42.18	32.3	6.81	29.96	356	179	P	V
		2494.96	26.54	-27.46	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	99.88	-	-	90.78	32.28	6.79	29.97	320	115	P	H
	*	2480	75.09	-	-	-	-	-	-	-	-	A	H
		2483.96	53.28	-20.72	74	44.18	32.28	6.79	29.97	320	115	P	H
		2483.96	28.49	-25.51	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	104.7	-	-	95.6	32.28	6.79	29.97	400	196	P	V
	*	2480	79.91	-	-	-	-	-	-	-	-	A	V
		2483.88	58.06	-15.94	74	48.96	32.28	6.79	29.97	400	196	P	V
		2483.88	33.27	-20.73	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	44.97	-29.03	74	64.6	34	10.72	64.35	100	0	P	H
		4804	20.18	-33.82	54	-	-	-	-	-	-	A	H
													H
													H
		4804	48.93	-25.07	74	68.56	34	10.72	64.35	100	0	P	V
		4804	24.14	-29.86	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	44.38	-29.62	74	63.97	34	10.81	64.4	100	0	P	H
		4882	19.59	-34.41	54	-	-	-	-	-	-	A	H
		7323	43.44	-30.56	74	60.08	35.77	13.15	65.56	100	0	P	H
		7323	18.65	-35.35	54	-	-	-	-	-	-	A	H
		4882	50.74	-23.26	74	70.33	34	10.81	64.4	100	0	P	V
		4882	25.95	-28.05	54	-	-	-	-	-	-	A	V
		7323	43.81	-30.19	74	60.45	35.77	13.15	65.56	100	0	P	V
		7323	19.02	-34.98	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	44.98	-29.02	74	64.55	34	10.9	64.47	100	0	P	H
		4960	20.19	-33.81	54	-	-	-	-	-	-	A	H
		7440	44.16	-29.84	74	60.85	35.79	13.18	65.66	100	0	P	H
		7440	19.37	-34.63	54	-	-	-	-	-	-	A	H
		4960	50.59	-23.41	74	70.16	34	10.9	64.47	100	0	P	V
		4960	25.8	-28.2	54	-	-	-	-	-	-	A	V
		7440	43	-31	74	59.69	35.79	13.18	65.66	100	0	P	V
		7440	18.21	-35.79	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		166.89	30.04	-13.46	43.5	44.19	16.4	1.87	32.42	-	-	P	H
		211.98	34.38	-9.12	43.5	48.45	16.3	2.05	32.42	-	-	P	H
		256.8	36.64	-9.36	46	47.32	19.5	2.26	32.44	-	-	P	H
		332.9	40.43	-5.57	46	49.67	20.68	2.56	32.48	100	0	P	H
		482.7	33.86	-12.14	46	39.4	24.02	3.04	32.6	-	-	P	H
		814.5	34.02	-11.98	46	34.04	28.28	4.04	32.34	-	-	P	H
													H
													H
													H
													H
													H
													H
		30.27	24.62	-15.38	40	30.11	26.2	0.77	32.46	-	-	P	V
		206.58	30.8	-12.7	43.5	44.95	16.23	2.03	32.41	-	-	P	V
		256.26	33.9	-12.1	46	44.68	19.4	2.26	32.44	100	0	P	V
		332.2	32.88	-13.12	46	42.12	20.68	2.56	32.48	-	-	P	V
		470.1	30.72	-15.28	46	36.58	23.74	2.99	32.59	-	-	P	V
		999.3	39.02	-14.98	54	35.59	29.9	4.49	30.96	-	-	P	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots



Test Engineer :	Peter Liao and Bill Chang	Temperature :	23~25°C
		Relative Humidity :	57~62%

2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)




BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	Site : 03CH16-HY Condition : PEAK_BE_74 3m HORN_3117_00211469 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak	Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak

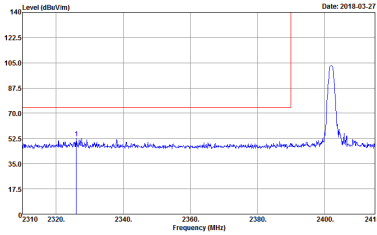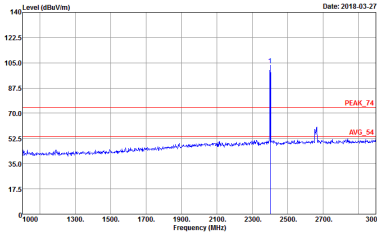



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BC_74 3m HORN_3117_00211469 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak

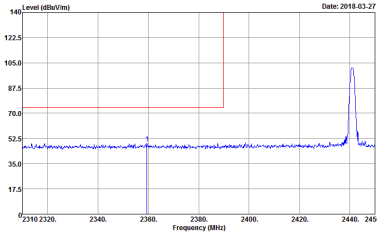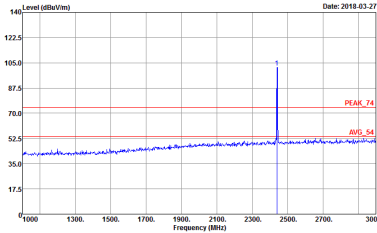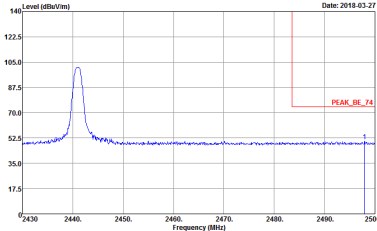



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m HORN_3117_00211469 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
	 Site : 03CH16-HY Condition : PEAK_BE_74 3m HORN_3117_00211469 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Left blank

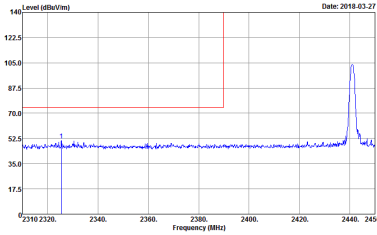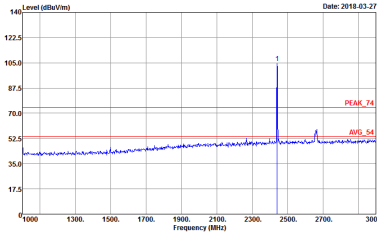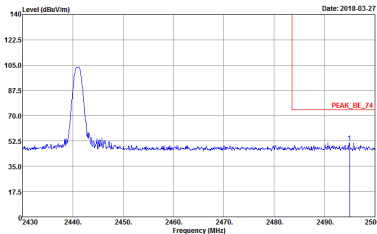BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m HORN_3117_00211469 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto : Peak	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto : Peak
	 Site : 03CH16-HY Condition : PEAK_BE_74 3m HORN_3117_00211469 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto : Peak	Left blank

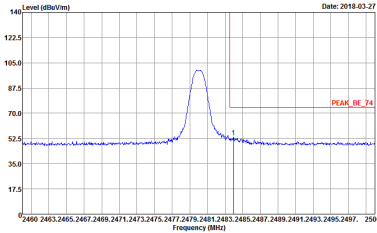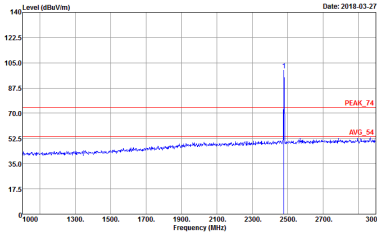

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m HORN_3117_00211469 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak

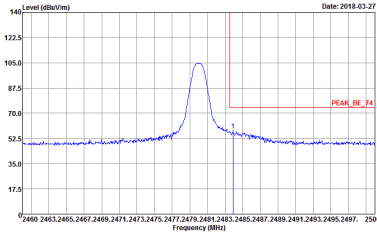
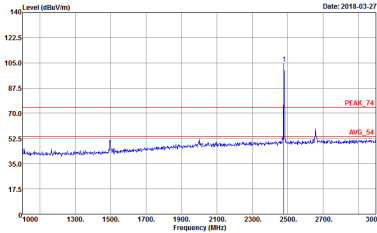


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m HORN_3117_00211469 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak





2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

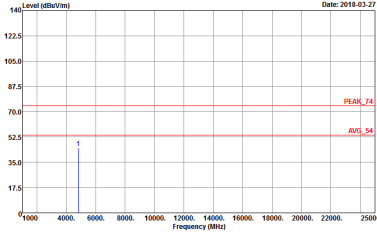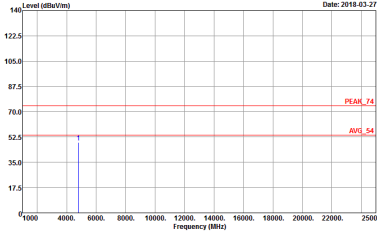BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 HORIZONTAL Detector : Peak Project : 773112-02	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 VERTICAL Detector : Peak Project : 773112-02

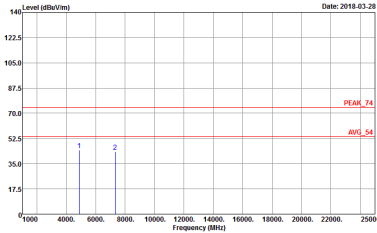
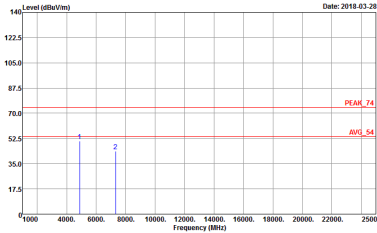


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 HORIZONTAL Detector : Peak Project : 773112-02	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 VERTICAL Detector : Peak Project : 773112-02

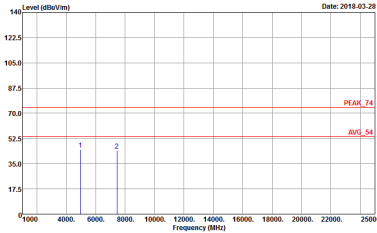
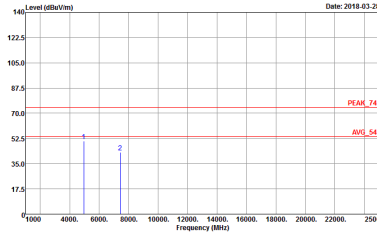


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 HORIZONTAL Detector : Peak Project : 773112-02	 Site : 03CH16-HY Condition : PEAK_74 3m HORN_3117_00211469 VERTICAL Detector : Peak Project : 773112-02

Emission below 1GHz
2.4GHz BT (LF)

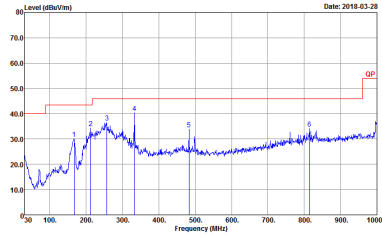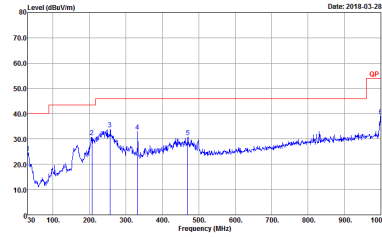BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH16-HY Condition : QP 3m BILOG_47020406 HORIZONTAL Detector : Peak Project : 773112-02	 Site : 03CH16-HY Condition : QP 3m BILOG_47020406 VERTICAL Detector : Peak Project : 773112-02

Appendix D. Duty Cycle Plots

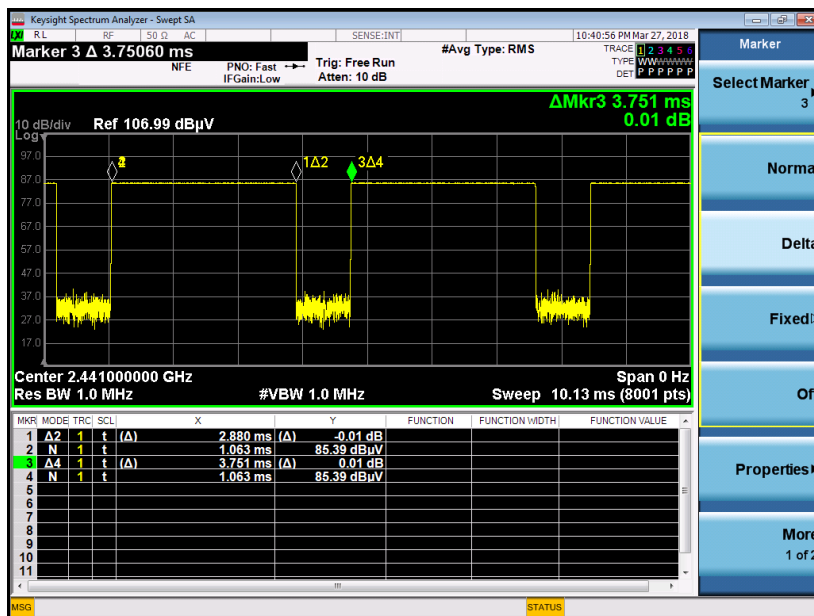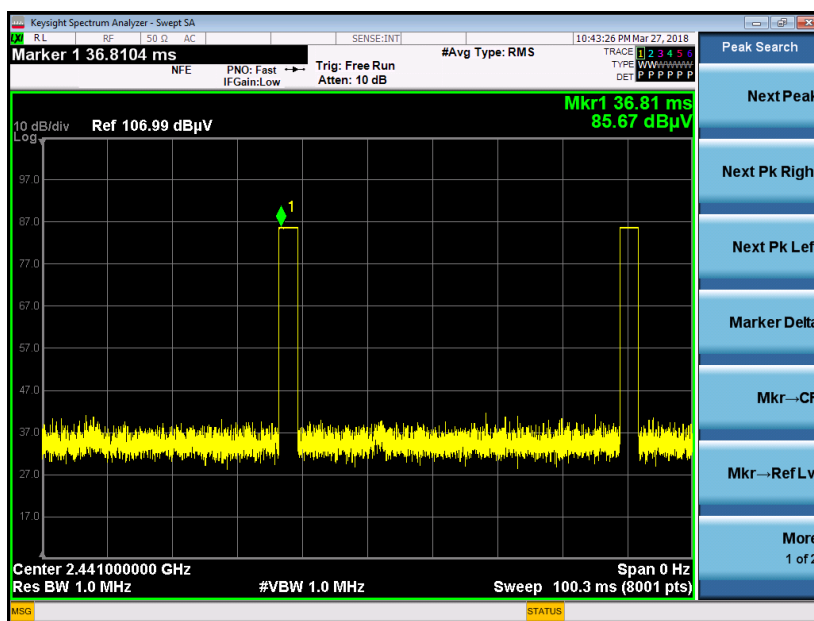DH5 on time (One Pulse) Plot on Channel 39

on time (Count Pulses) Plot on Channel 39

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$