

Report No.: FR773112-04B



# FCC RADIO TEST REPORT

FCC ID : PPD-QCNFA435

Equipment : Single Stream 802.11a/b/g/n/ac + BT 4.1 M.2 Type Card

**Brand Name** : Qualcomm Atheros

**Model Name** : QCNFA435

**Applicant** : Qualcomm Atheros, Inc.

1700 Technology Drive, San Jose, CA 95110

Manufacturer: Qualcomm Atheros, Inc.

1700 Technology Drive, San Jose, CA 95110

**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Mar. 15, 2018 and testing was started from Mar. 15, 2018 and completed on Mar. 28, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

TEL: 886-3-327-3456

SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory

Page Number

: 1 of 17

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

: Jun. 05, 2018 FAX: 886-3-328-4978 Issued Date : 03

# **Table of Contents**

Report No. : FR773112-04B

His	tory c	of this test report	3
Sui	nmar	y of Test Result	4
1	Gene	eral Description	5
	1.1	Product Feature of Equipment Under Test	5
	1.2	Modification of EUT	5
	1.3	Testing Location	6
	1.4	Applicable Standards	6
2	Test	Configuration of Equipment Under Test	7
	2.1	Carrier Frequency Channel	
	2.2	Test Mode	8
	2.3	Connection Diagram of Test System	8
	2.4	Support Unit used in test configuration and system	g
	2.5	EUT Operation Test Setup	g
3	Test	Result	10
	3.1	Output Power Measurement	10
	3.2	Radiated Band Edges and Spurious Emission Measurement	11
	3.3	Antenna Requirements	15
4	List	of Measuring Equipment	16
5	Unce	ertainty of Evaluation	17
Ap	pendi	x A. Conducted Test Results	
Ap	pendi	x B. Radiated Spurious Emission	
Ap	pendi	x C. Radiated Spurious Emission Plots	
Ap	pendi	x D. Duty Cycle Plots	
Ap	pendi	x E. Setup Photographs	

TEL: 886-3-327-3456 Page Number : 2 of 17 FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018 Report Version : 03

Report Template No.: BU5-FR15CBT4.0 Version 2.1

# History of this test report

Report No. : FR773112-04B

Report No.	Version	Description	Issued Date
FR773112-04B	01	Initial issue of report	May 23, 2018
FR773112-04B	02	<ol> <li>Revise connection diagram of test system.</li> <li>Add the remark description in summary.</li> <li>Add measuring equipment.</li> <li>Revise test information in appendix c.</li> <li>Add test procedures for output power.</li> </ol>	May 31, 2018
FR773112-04B	03	Remove the remark description in summary	Jun. 05, 2018

TEL: 886-3-327-3456 Page Number : 3 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

# **Summary of Test Result**

Report No.: FR773112-04B

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(b)(3)	Peak Output Power	Pass	-
3.2	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	Under limit 4.27 dB at 2491.880 MHz
3.3	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Remark: The reported TX power in EMC report is per actual shipping power setting and measured in this unit. This has considered the actual shipping power during the measurement.

Reviewed by: Joseph Lin

**Report Producer: Maggie Chiang** 

TEL: 886-3-327-3456 Page Number : 4 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

# 1 General Description

#### 1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, and Wi-Fi 5GHz 802.11a/n/ac

Product Specification subjective to this standard					
Sample 1	EUT with Portable Computer (HONGBO Antenna)				
Sample 2	EUT with Portable Computer (ACON Antenna)				

Report No.: FR773112-04B

Remark: All the tests were performed with Sample 1.

The product was installed into Portable Computer (Brand Name: DELL, Model Name: P87G, P87G001) during test, and the host information was recorded in the following table.

daming toot, and the meaning toother and too too and an and too and an angle too.							
Antenna Information							
Manufacturer	HON	GBO	Manufacturer	AC	ON		
Model Name 260-2		26160 Model Name		ANF6Y-200018			
Ant. Type	Type PIFA		Ant. Type	PIFA			
Peak Gain	2.4GHz WLAN	Main: -0.59 Aux: -1.18	Peak Gain	2.4GHz WLAN	Main:-1.38 Aux:-2.70		
(dBi)	5GHz WLAN	Main: -1.07 Aux: -1.64	(dBi)	5GHz WLAN	Main:-1.14 Aux:-1.73		

#### 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

TEL: 886-3-327-3456 Page Number : 5 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

#### 1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Report No.: FR773112-04B

Test Site	SPORTON INTERNATIONAL INC.				
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978				
Test Site No.	Sporton Site No.				
Test one NO.	TH05-HY				

**Note:** The test site complies with ANSI C63.4 2014 requirement.

Note: The test site complies with ANSI C63.4 2014 requirement.

## 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation

TEL: 886-3-327-3456 Page Number : 6 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

# 2 Test Configuration of Equipment Under Test

# 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
2400-2483.5 MHz	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

Report No.: FR773112-04B

: 03

Report Version

TEL: 886-3-327-3456 Page Number : 7 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

Report Template No.: BU5-FR15CBT4.0 Version 2.1

#### 2.2 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Report No.: FR773112-04B

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases					
Test Item	Data Rate / Modulation				
rest item	Bluetooth – LE / GFSK				
Radiated	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps				
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps				
Test Cases	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps				

**Remark:** The Radiated Spurious Emission test has only performed the test cases which chosen from module supplier.

# 2.3 Connection Diagram of Test System

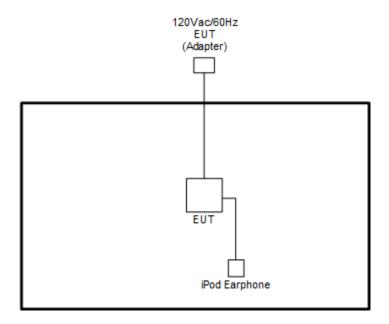

TEL: 886-3-327-3456 Page Number : 8 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

# 2.4 Support Unit used in test configuration and system

Iten	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

Report No.: FR773112-04B

# 2.5 EUT Operation Test Setup

The RF test items, utility "QRCT" was installed in Portable Computer which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

TEL: 886-3-327-3456 Page Number : 9 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

#### 3 Test Result

#### 3.1 Output Power Measurement

#### 3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Report No.: FR773112-04B


#### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.1.3 Test Procedures

- For Peak Output Power, the testing follows the Measurement Procedure of FCC KDB No.
   558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
- 2. For Average Output Power, the testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.2.3.2 Method AVGPM-G.
- 3. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. Set to the maximum power setting and enable the EUT transmit continuously.
- 5. Measure the conducted output power and record the results in the test report.

#### 3.1.4 Test Setup



#### 3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

#### 3.1.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 10 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

### 3.2 Radiated Band Edges and Spurious Emission Measurement

#### 3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Report No.: FR773112-04B

Frequency	Field Strength	Measurement Distance		
(MHz)	(microvolts/meter)	(meters)		
0.009 - 0.490	2400/F(kHz)	300		
0.490 – 1.705	24000/F(kHz)	30		
1.705 – 30.0	30	30		
30 – 88	100	3		
88 – 216	150	3		
216 - 960	200	3		
Above 960	500	3		

#### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

TEL: 886-3-327-3456 Page Number : 11 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

#### 3.2.3 Test Procedures

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04

1. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.


Report No.: FR773112-04B

- 2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor = Level
- 5. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
- 6. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \ge 1$  GHz for peak measurement. For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

TEL: 886-3-327-3456 Page Number : 12 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018


#### 3.2.4 Test Setup

#### For radiated emissions below 30MHz

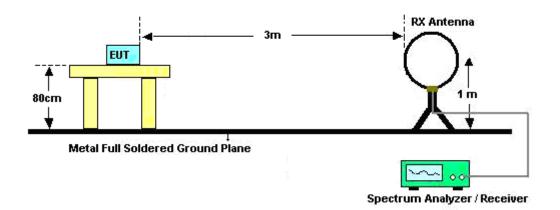


Report No.: FR773112-04B

#### For radiated emissions from 30MHz to 1GHz

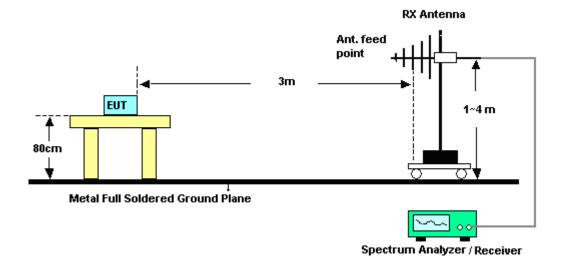

TEL: 886-3-327-3456 Page Number : 13 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

#### For radiated emissions above 1GHz

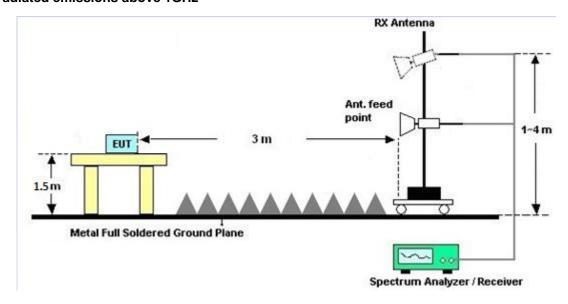

Report No.: FR773112-04B

#### 3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

#### 3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

#### 3.2.7 Duty Cycle

Please refer to Appendix D.

#### 3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

TEL: 886-3-327-3456 Page Number : 14 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

#### 3.3 Antenna Requirements

#### 3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

Report No.: FR773112-04B

#### 3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

TEL: 886-3-327-3456 Page Number : 15 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

# 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	N/A	Dec. 20, 2017	Mar. 15, 2018 ~ Mar. 16, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 20, 2017	Mar. 15, 2018 ~ Mar. 16, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	Mar. 15, 2018 ~ Mar. 16, 2018	Jun. 19, 2018	Conducted (TH05-HY)
Preamplifier	Jet-Power	JAP00101800 -30-10P	160118550004	1GHz~18GHz	Apr. 13, 2017	Mar. 22, 2018~ Mar. 28, 2018	Apr. 12, 2018	Radiation (03CH16-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Mar. 22, 2018~ Mar. 28, 2018	Nov. 22, 2018	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-108 0-1200-15000 -60ST	SN1	1.2 GHz Highpas	Jul. 17, 2017	Mar. 22, 2018~ Mar. 28, 2018	Jul. 16, 2018	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Oct. 17, 2017	Mar. 22, 2018~ Mar. 28, 2018	Oct. 16, 2018	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Oct. 17, 2017	Mar. 22, 2018~ Mar. 28, 2018	Oct. 16, 2018	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	MY1082/26EA	30M~18GHz	Oct. 17, 2017	Mar. 22, 2018~ Mar. 28, 2018	Oct. 16, 2018	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz ~ 26.5GHz	Dec. 05, 2017	Mar. 22, 2018~ Mar. 28, 2018	Dec. 04, 2018	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 05, 2017	Mar. 22, 2018~ Mar. 28, 2018	Dec. 04, 2018	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60ST	SN3	3 GHz Highpass	Jul. 06, 2017	Mar. 22, 2018~ Mar. 28, 2018	Jul. 05, 2018	Radiation (03CH16-HY)
Horn Antenna	ESCO	3117	00211469	1GHz~18GHz	Jul. 31, 2017	Mar. 22, 2018~ Mar. 28, 2018	Jul. 30, 2018	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY57290111	3Hz~26.5GHz	Nov. 02, 2017	Mar. 22, 2018~ Mar. 28, 2018	Nov. 01, 2018	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1000MHz	Sep. 27, 2017	Mar. 22, 2018~ Mar. 28, 2018	Sep. 26, 2018	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL6111D&0 0802N1D01N -06	47020&06	30MHz to 1GHz	Nov. 20, 2017	Mar. 22, 2018~ Mar. 28, 2018	Nov. 19, 2018	Radiation (03CH16-HY)
Software	AUDIX	E3 6.2009-8-24	RK001136	N/A	N/A	Mar. 22, 2018~ Mar. 28, 2018	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 22, 2018~ Mar. 28, 2018	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 22, 2018~ Mar. 28, 2018	N/A	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Mar. 22, 2018~ Mar. 28, 2018	Nov. 26, 2018	Radiation (03CH16-HY)

Report No. : FR773112-04B

TEL: 886-3-327-3456 Page Number : 16 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

# 5 Uncertainty of Evaluation

#### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	4.0
of 95% (U = 2Uc(y))	4.9

Report No.: FR773112-04B

#### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence	E 0
of 95% (U = 2Uc(y))	5.8

#### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence	2.0
of 95% (U = 2Uc(y))	3.9

TEL: 886-3-327-3456 Page Number : 17 of 17
FAX: 886-3-328-4978 Issued Date : Jun. 05, 2018

Report Number : FR773112-04B

#### Appendix A. Test Result of Conducted Test Items

Test Engineer:	Lena Lo	Temperature:	21~25	°C
Test Date:	2018/03/15 ~ 2018/03/16	Relative Humidity:	51~54	%

# TEST RESULTS DATA Peak Power Table

	Mod.	Data Rate	N⊤x	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
ĺ	BLE	1Mbps	1	0	2402	2.94	30.00
ĺ	BLE	1Mbps	1	19	2440	2.97	30.00
	BLE	1Mbps	1	39	2480	2.96	30.00

# TEST RESULTS DATA Average Power Table (Reporting Only)

	Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
ĺ	BLE	1Mbps	1	0	2402	1.91	2.41
ĺ	BLE	1Mbps	1	19	2440	1.91	2.45
ĺ	BLE	1Mbps	1	39	2480	1.91	2.43

# Appendix B. Radiated Spurious Emission

Test Engineer :	Peter Liao and Bill Chang	Temperature :	23~25°C
rest Engineer :		Relative Humidity :	57~62%

Report No. : FR773112-04B

#### 2.4GHz 2400~2483.5MHz

#### BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	( dBµV/m )	( dB )	( dBµV/m )	(dB <sub>µ</sub> V)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
		2361.03	59.24	-14.76	74	40.58	32.13	16.53	30	335	113	Р	Н
		2386.545	49.03	-4.97	54	30.27	32.18	16.57	29.99	335	113	Α	Н
	*	2402	97.56	-	-	78.78	32.18	16.59	29.99	335	113	Р	Н
	*	2402	96.9	-	-	78.12	32.18	16.59	29.99	335	113	Α	Н
BLE													Н
CH 00													Н
2402MHz		2369.22	58.55	-15.45	74	39.84	32.16	16.54	29.99	382	178	Р	V
2402WII 12		2376.99	49.09	-4.91	54	30.36	32.16	16.56	29.99	382	178	Α	V
	*	2402	100.31	1	-	81.53	32.18	16.59	29.99	382	178	Р	V
	*	2402	99.72	-	-	80.94	32.18	16.59	29.99	382	178	Α	V
													V
													V
		2352.98	59.96	-14.04	74	41.31	32.13	16.52	30	332	115	Р	Н
		2384.9	49	-5	54	30.26	32.16	16.57	29.99	332	115	Α	Н
	*	2440	98.33	-	-	79.42	32.24	16.65	29.98	332	115	Р	Н
	*	2440	97.71	-	-	78.8	32.24	16.65	29.98	332	115	Α	Н
DI E		2489.22	58.97	-15.03	74	39.92	32.3	16.72	29.97	332	115	Р	Н
BLE CH 19		2497.83	49.31	-4.69	54	30.24	32.3	16.73	29.96	332	115	Α	Н
2440MHz		2315.74	59.29	-14.71	74	40.77	32.07	16.46	30.01	400	208	Р	٧
277VIVII IZ		2362.92	48.93	-5.07	54	30.27	32.13	16.53	30	400	208	Α	٧
	*	2440	100.09	-	-	81.18	32.24	16.65	29.98	400	208	Р	V
	*	2440	99.55	1	-	80.64	32.24	16.65	29.98	400	208	Α	V
		2497.83	59.36	-14.64	74	40.29	32.3	16.73	29.96	400	208	Р	V
		2488.94	49.72	-4.28	54	30.67	32.3	16.72	29.97	400	208	Α	V

TEL: 886-3-327-3456 Page Number: B1 of B6



# FCC RADIO TEST REPORT

	*	2480	96	-	-	76.98	32.28	16.71	29.97	323	113	Р	Н
	*	2480	95.35	-	-	76.33	32.28	16.71	29.97	323	113	Α	Н
		2497.2	59.78	-14.22	74	40.71	32.3	16.73	29.96	323	113	Р	Н
		2498.76	49.42	-4.58	54	30.35	32.3	16.73	29.96	323	113	Α	Н
D. F.													Н
BLE CH 39 2480MHz													Н
	*	2480	100.98	-	-	81.96	32.28	16.71	29.97	400	199	Р	V
2400WI112	*	2480	100.39	-	-	81.37	32.28	16.71	29.97	400	199	Α	V
		2494.16	59.69	-14.31	74	40.62	32.3	16.73	29.96	400	199	Р	V
		2491.88	49.73	-4.27	54	30.67	32.3	16.72	29.96	400	199	Α	V
													V
													V
	1. No	o other spurious	s found.										
Remark		·		Dook on d	Averege !:-	vit lina							
	2. Al	I results are PA	SS against	reak and	Average III	iit iine.							

Report No. : FR773112-04B

TEL: 886-3-327-3456 Page Number : B2 of B6

#### 2.4GHz 2400~2483.5MHz

Report No. : FR773112-04B

#### BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBµV/m )	Limit (dB)	Line ( dBµV/m )	Level ( dBµV )	Factor ( dB/m )	Loss (dB)	Factor (dB)	Pos ( cm )	Pos ( deg )	Avg. (P/A)	(H/V
		4800	42.01	-31.99	74	61.65	34	10.71	64.35	100	0	Р	Н
													Н
													Н
BLE													Н
CH 00		4804	46.49	-27.51	74	66.12	34	10.72	64.35	100	0	Р	V
2402MHz													V
													V
													V
		4880	41.8	-32.2	74	61.39	34	10.81	64.4	100	0	Р	Н
		7320	43.33	-30.67	74	59.98	35.77	13.14	65.56	100	0	Р	Н
D. E													Н
BLE													Н
CH 19 2440MHz		4880	45.26	-28.74	74	64.85	34	10.81	64.4	100	0	Р	V
2440WII IZ		7320	43.38	-30.62	74	60.03	35.77	13.14	65.56	100	0	Р	V
													V
													V
		4960	41.05	-32.95	74	60.62	34	10.9	64.47	100	0	Р	Н
		7440	43.84	-30.16	74	60.53	35.79	13.18	65.66	100	0	Р	Н
BLE													Н
CH 39													Н
2480MHz		4960	46.07	-27.93	74	65.64	34	10.9	64.47	100	0	Р	V
		7440	43.44	-30.56	74	60.13	35.79	13.18	65.66	100	0	Р	V
													V
													V

TEL: 886-3-327-3456 Page Number : B3 of B6

# Emission below 1GHz 2.4GHz BLE (LF)

Report No. : FR773112-04B

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	( dBµV/m )	(dB)	( dBµV/m )	(dBµV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
		30.54	23.68	-16.32	40	29.75	25.62	0.77	32.46	-	-	Р	Н
		215.49	33.91	-9.59	43.5	47.96	16.3	2.07	32.42	-	-	Р	Н
		248.43	35	-11	46	46.57	18.64	2.22	32.43	-	-	Р	Н
		332.9	34.98	-11.02	46	44.22	20.68	2.56	32.48	-	-	Р	Н
		831.3	37.69	-8.31	46	37.39	28.48	4.07	32.25	100	0	Р	Н
		996.5	38.52	-15.48	54	35.11	29.92	4.48	30.99	-	-	Р	Н
													Н
													Н
													Н
													Н
2.4GHz													Н
BLE													Н
LF		30	26.94	-13.06	40	32.43	26.2	0.77	32.46	-	-	Р	V
		216.03	29.6	-16.4	46	43.65	16.3	2.07	32.42	-	-	Р	V
		253.56	34.98	-11.02	46	46.08	19.1	2.24	32.44	100	0	Р	V
		498.1	32.6	-13.4	46	37.77	24.36	3.09	32.62	-	-	Р	V
		830.6	31.89	-14.11	46	31.61	28.46	4.07	32.25	-	-	Р	V
		1000	38.28	-15.72	54	34.84	29.9	4.49	30.95	-	-	Р	V
													V
													V
													V
													V
													V
													V
	1. No	o other spurious	s found.										
Remark		results are PA		mit line.									

TEL: 886-3-327-3456 Page Number : B4 of B6

#### Note symbol

Report No. : FR773112-04B

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not
	exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	Peak or Average
H/V	Horizontal or Vertical

TEL: 886-3-327-3456 Page Number : B5 of B6

#### A calculation example for radiated spurious emission is shown as below:

Report No.: FR773112-04B

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	( dBµV/m )	(dB)	( dBµV/m )	(dBµV)	( dB/m )	( dB )	( dB )	( cm )	(deg)	(P/A)	(H/V)
BLE		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	Р	Н
CH 00													
2402MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	Α	Н

- 1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
- 2. Level( $dB\mu V/m$ ) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

#### For Peak Limit @ 2390MHz:

- Level(dBµV/m)
- = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 54.51(dB\mu V) 35.86 (dB)$
- $= 55.45 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level(dBµV/m) Limit Line(dBµV/m)
- $= 55.45(dB\mu V/m) 74(dB\mu V/m)$
- = -18.55(dB)

#### For Average Limit @ 2390MHz:

- Level(dBµV/m)
- = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 42.6(dB\mu V) 35.86 (dB)$
- $= 43.54 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level( $dB\mu V/m$ ) Limit Line( $dB\mu V/m$ )
- $= 43.54(dB\mu V/m) 54(dB\mu V/m)$
- = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

TEL: 886-3-327-3456 Page Number : B6 of B6

# Appendix C. Radiated Spurious Emission Plots

Toot Engineer	Peter Liao and Bill Chang	Temperature :	23~25°C	
Test Engineer :		Relative Humidity :	57~62%	

Report No. : FR773112-04B

#### Note symbol


-L	Low channel location
-R	High channel location

TEL: 886-3-327-3456 Page Number : C1 of C13

#### 2.4GHz 2400~2483.5MHz


Report No.: FR773112-04B

#### BLE (Band Edge @ 3m)

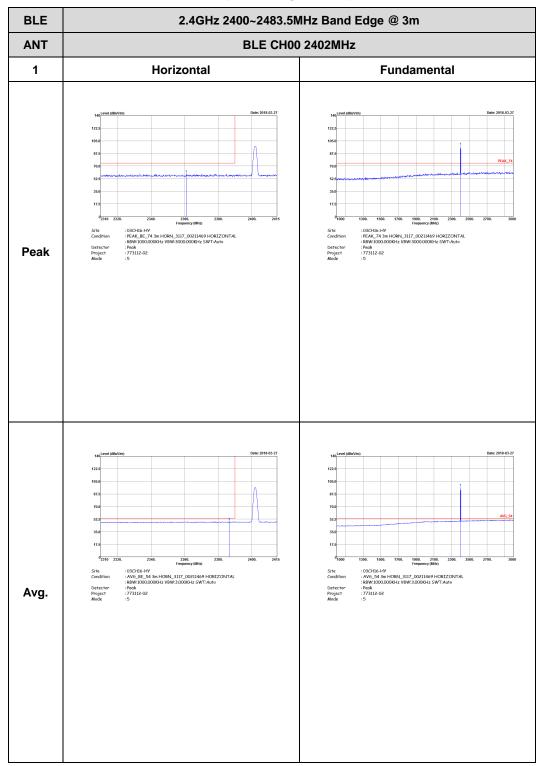


TEL: 886-3-327-3456 Page Number : C2 of C13

Report No. : FR773112-04B

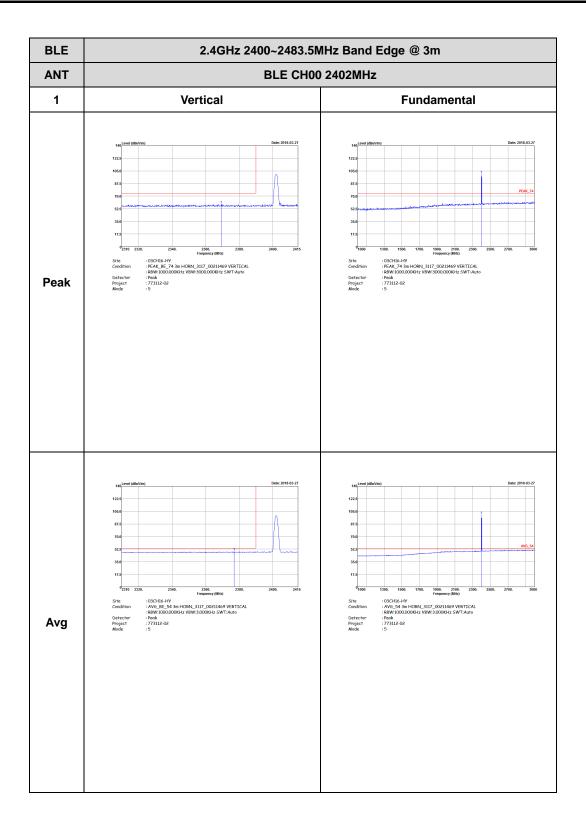


TEL: 886-3-327-3456 Page Number : C3 of C13

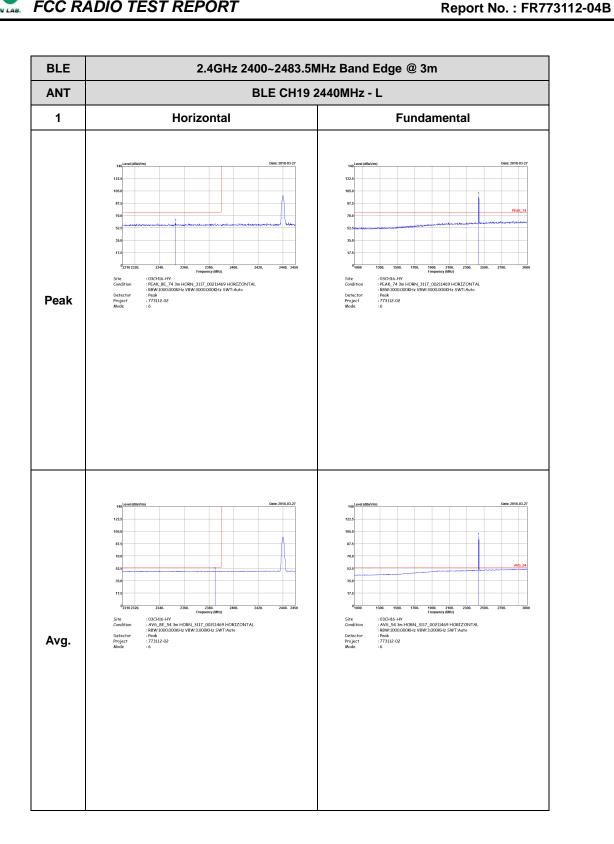

TEL: 886-3-327-3456 Page Number : C4 of C13




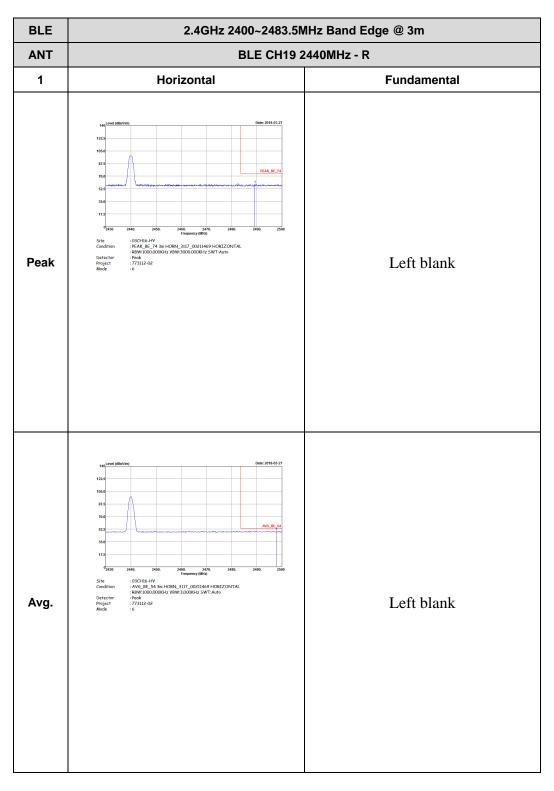

Report No. : FR773112-04B

TEL: 886-3-327-3456 Page Number: C5 of C13

Report No. : FR773112-04B

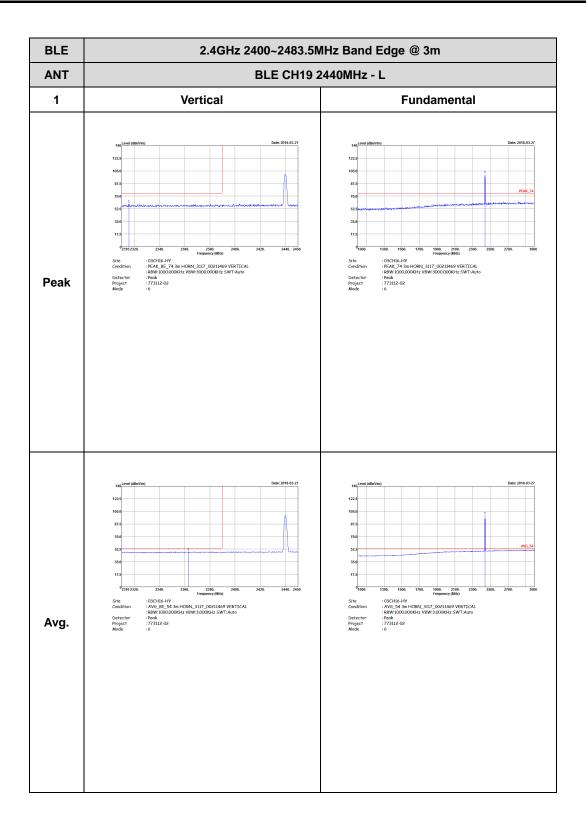


TEL: 886-3-327-3456 Page Number : C6 of C13

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m ANT BLE CH19 2440MHz - R 1 Vertical **Fundamental** Frequency (IIIItz) : 03CH16-HY : PEAK\_BE\_74 3m HORN\_31I7\_00211469 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto : Peak : 7731I2-02 : 6 Left blank Peak : 03CH16-HY : AV6\_BE\_54 3m HORN\_3117\_00211469 VERTICAL : R8W:1000.000KHz VBW:3.000KHz SWT:Auto : Peak : 773112-02 : 6 Left blank Avg.

Report No. : FR773112-04B


TEL: 886-3-327-3456 Page Number: C7 of C13

Report No. : FR773112-04B

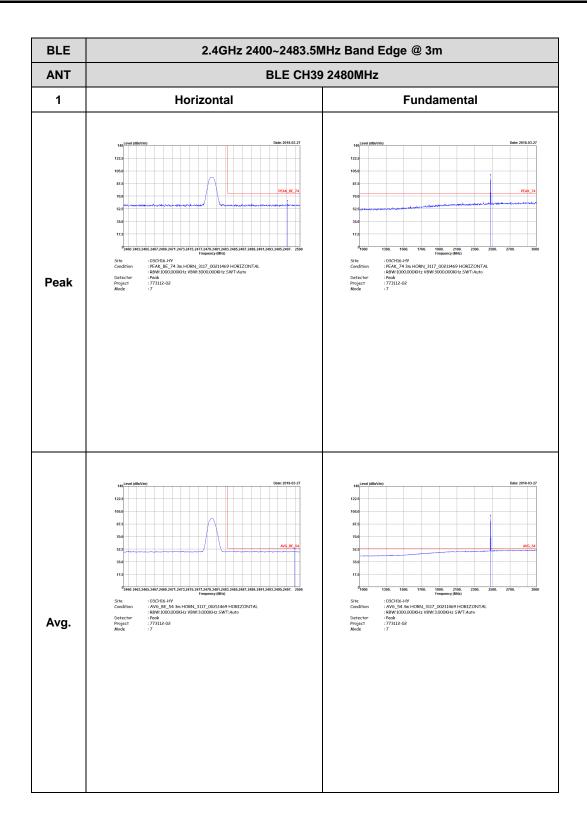

TEL: 886-3-327-3456 Page Number : C8 of C13

Report No. : FR773112-04B

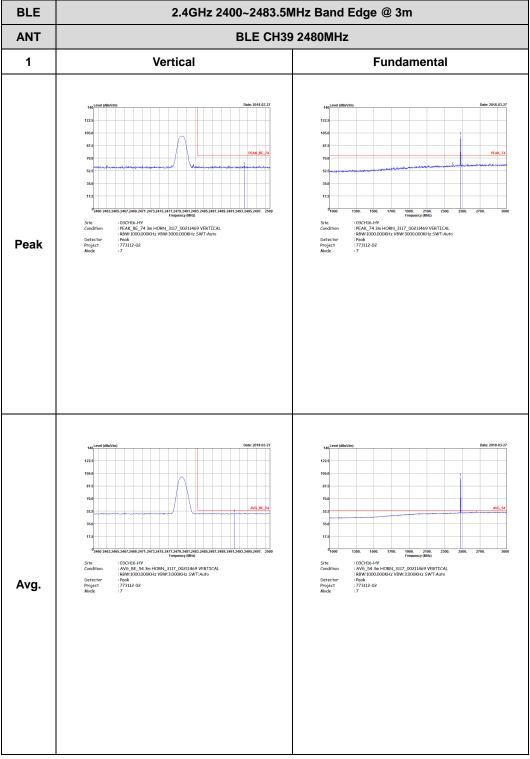


TEL: 886-3-327-3456 Page Number : C9 of C13


#### 2.4GHz 2400~2483.5MHz

Report No. : FR773112-04B

#### BLE (Harmonic @ 3m)

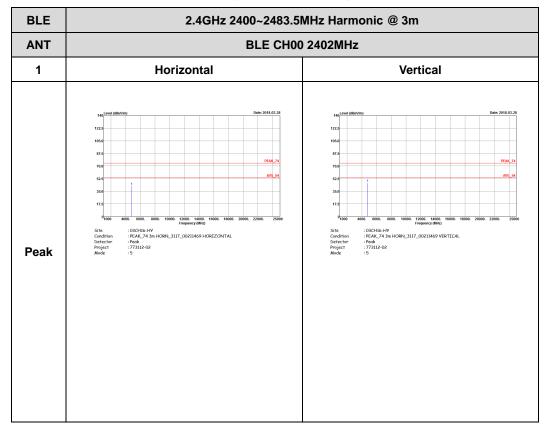

TEL: 886-3-327-3456 Page Number : C10 of C13

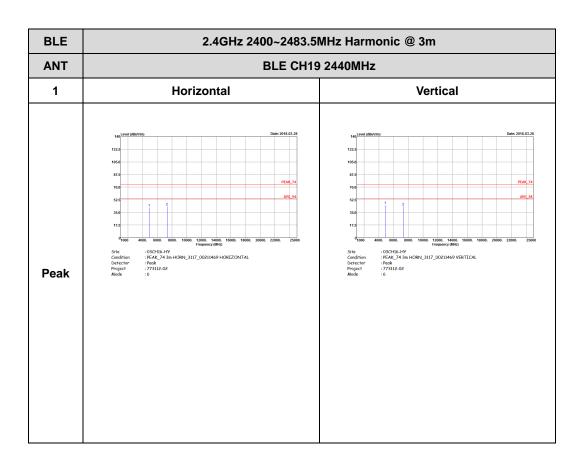

Report No. : FR773112-04B

TEL: 886-3-327-3456 Page Number : C11 of C13

Report No. : FR773112-04B

TEL: 886-3-327-3456 Page Number : C12 of C13

# Emission below 1GHz 2.4GHz BLE (LF)

Report No. : FR773112-04B

# BLE LF 1 Horizontal Vertical Size (OLOGISH) (Constitution of the BILOS, TYXXXXXX HORIZONT AL. Peak 2.4GHz 2400~2483.5MHz Vertical Vertical Out-2914.0.30 Fig. (OLOGISH) (Constitution of the BILOS, TYXXXXXX HORIZONT AL. Project (773112.02) Mode (8 9110.02) Reserved (Constitution of the BILOS, TYXXXXXX HORIZONT AL. Reserved (Constitution of the BILOS, TYXXXXX HORIZONT AL. Reserved (Constitution of the BILOS, TYXXXXX HORIZONT AL. Reserved (Constitution of the BILOS, TYXXXX HORIZONT AL. Reserved (Constitution of the BILOS, TYXXX HORIZONT AL. Reserved (Constitution of the BILOS, TYXX HORIZONT AL. Reserved (Const

TEL: 886-3-327-3456 Page Number : C13 of C13




# Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor (dB)	
Bluetooth -LE	64.42	402.00	2.49	3kHz	1.91	

Report No.: FR773112-04B

#### Bluetooth - LE

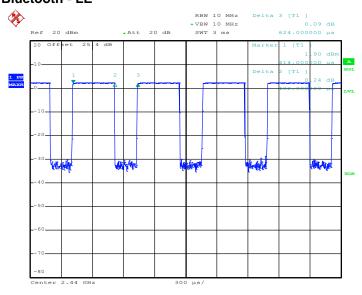

Date: 16.MAR.2018 05:03:08

TEL: 886-3-327-3456 Page Number : D1 of D1