



FCC RADIO TEST REPORT

FCC ID : PPD-QCNFA435
Equipment : Single Stream 802.11a/b/g/n/ac + BT 4.1 M.2 Type Card
Brand Name : Qualcomm Atheros
Model name : QCNFA435
Applicant : Qualcomm Atheros, Inc.
1700 Technology Drive, San Jose, CA 95110
Manufacturer : Qualcomm Atheros, Inc.
1700 Technology Drive, San Jose, CA 95110
Standard : FCC Part 15 Subpart E §15.407

The product was received on Mar. 15, 2018 and testing was started from Mar. 15, 2018 and completed on Apr. 26, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
3 Test Result	9
3.1 Maximum Conducted Output Power Measurement	9
3.2 Unwanted Emissions Measurement	10
3.3 Antenna Requirements.....	15
4 List of Measuring Equipment.....	16
5 Uncertainty of Evaluation.....	18
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR773112-04E	01	Initial issue of report	May 23, 2018
FR773112-04E	02	1. Add the remark description in summary. 2. Revising connection diagram of test system.	May 31, 2018



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407 (a)	Maximum Conducted Output Power	Pass	-
3.2	15.407(b)	Unwanted Emissions	Pass	Under limit 4.11 dB at 196.320 MHz
3.3	15.203 & 15.407 (a)	Antenna Requirement	Pass	-
Remark: The reported TX power in EMC report is per actual shipping power setting and measured in this unit. This has considered the actual shipping power during the measurement.				

Reviewed by: Joseph Lin

Report Producer: Nancy Yang

1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, and Wi-Fi 5GHz 802.11a/n/ac

Product Specification subjective to this standard	
Sample 1	EUT with Portable Computer (HONGBO Antenna)
Sample 2	EUT with Portable Computer (ACON Antenna)

Remark: All the tests were performed with Sample 1.

The product was installed into Portable Computer (Brand Name: DELL, Model Name: P87G, P87G001) during test, and the host information was recorded in the following table.

Antenna Information					
Manufacturer	HONGBO		Manufacturer	ACON	
Model Name	260-26160		Model Name	ANF6Y-200018	
Ant. Type	PIFA		Ant. Type	PIFA	
Peak Gain (dBi)	2.4GHz WLAN	Main:-0.59 Aux:-1.18	Peak Gain (dBi)	2.4GHz WLAN	Main:-1.38 Aux:-2.70
	5GHz WLAN	Main:-1.07 Aux:-1.64		5GHz WLAN	Main:-1.14 Aux:-1.73

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. 03CH10-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Ch. #		Band IV : 5725-5850 MHz					
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	149	151	149	151	-
M	Middle	157	157	-	157	-	155
H	High	165	165	159	165	159	-

Remark: The Radiated Spurious Emission test has only performed the test cases which chosen from module supplier.

2.3 Connection Diagram of Test System

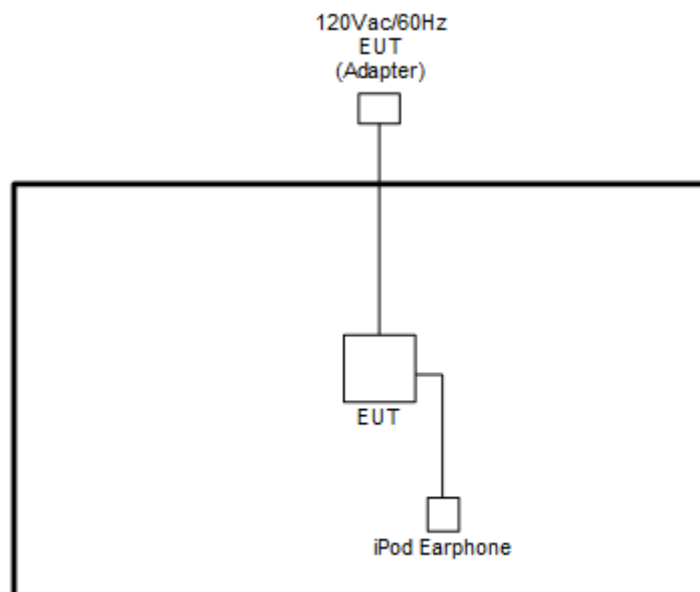

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "QRCT" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Maximum Conducted Output Power Measurement

3.1.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.


3.1.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.1.4 Test Setup

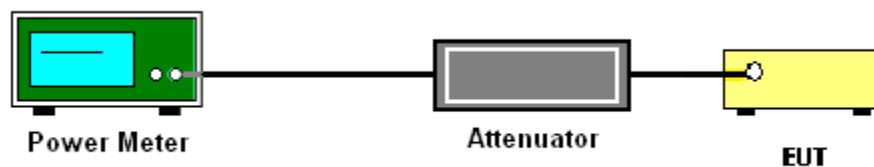

3.1.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.2 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.2.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(1) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.4 Test Setup


For radiated emissions below 30MHz

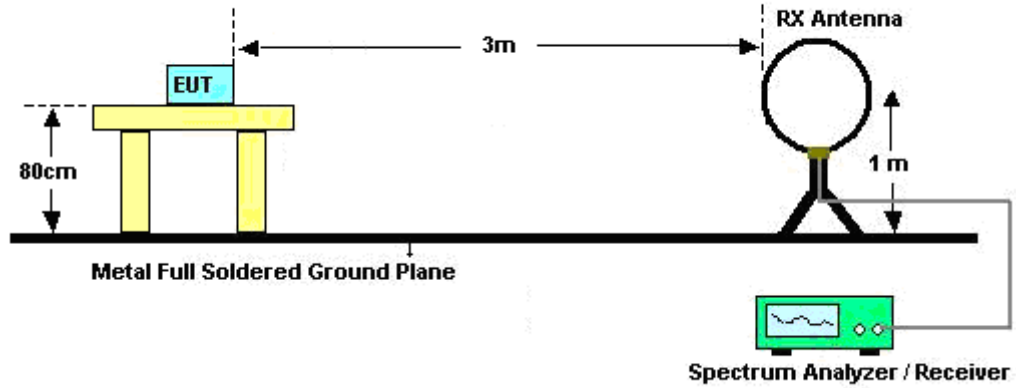

For radiated emissions from 30MHz to 1GHz

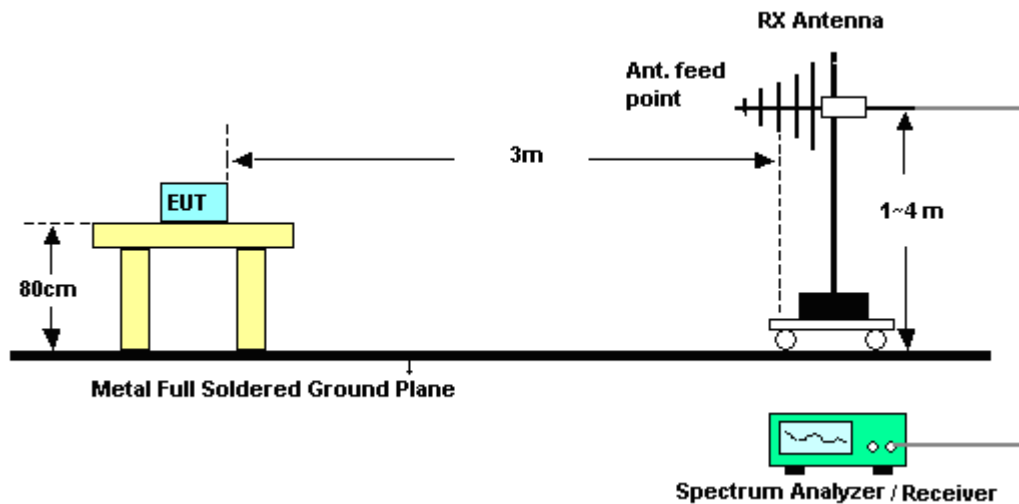

For radiated emissions above 1GHz

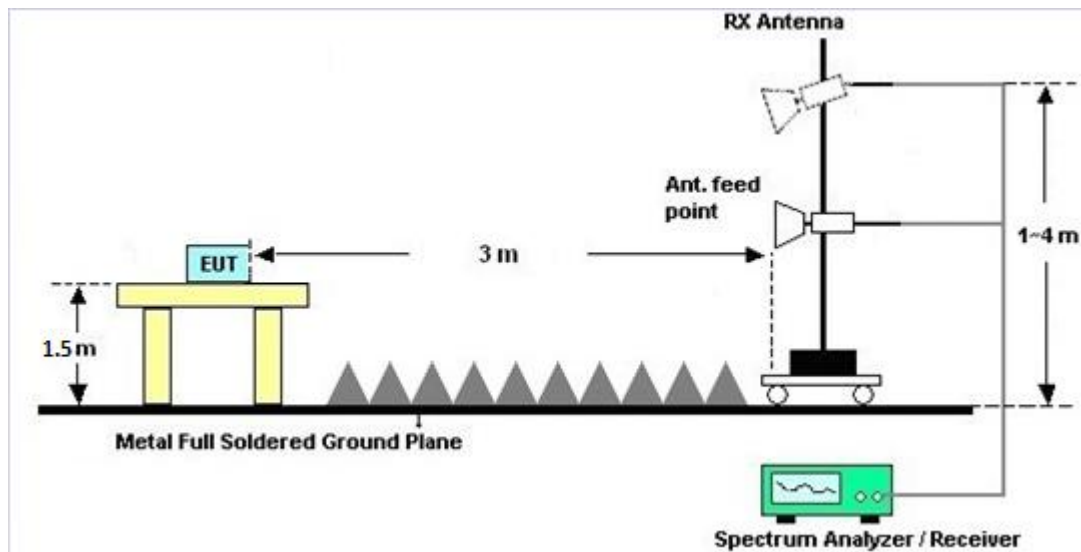

3.2.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.2.6 Test Result of Radiated Band Edges

Please refer to Appendix B and C.

3.2.7 Duty Cycle

Please refer to Appendix D.

3.2.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 19, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Oct. 18, 2018	Radiation (03CH10-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Jul. 17, 2018	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D&0080 0N1D01N-06	35413&02	30MHz~1GHz	Dec. 18, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Dec. 17, 2018	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 27, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Sep. 26, 2018	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Oct. 25, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Oct. 24, 2018	Radiation (03CH10-HY)
Preamplifier	Jet-Power	JAP0010180 0-30-10P	160118550004	1GHz~18GHz	Apr. 13, 2017	Mar. 29, 2018 ~ Apr. 11, 2018	Apr. 12, 2018	Radiation (03CH10-HY)
Preamplifier	Jet-Power	JAP0010180 0-30-10P	160118550004	1GHz~18GHz	Apr. 17, 2018	Apr. 17, 2018 ~ Apr. 26, 2018	Apr. 16, 2019	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHz	Oct. 31, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Oct. 30, 2018	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500 -B	N/A	1~4m	N/A	Mar. 29, 2018 ~ Apr. 26, 2018	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Mar. 29, 2018 ~ Apr. 26, 2018	N/A	Radiation (03CH10-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Mar. 29, 2018 ~ Apr. 26, 2018	N/A	Radiation (03CH10-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Nov. 22, 2018	Radiation (03CH10-HY)
Filter	Woken	WHKX8-587 2.5-6750-18 000-40ST	SN3	6.75G High Pass	Sep. 18, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Sep. 17, 2018	Radiation (03CH10-HY)
Filter	Wainwright	WLKS1200- 12SS	SN2	1.2G Low Pass	Jul. 17, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Jul. 16, 2018	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4,M Y28655/4	9K-30M	Jan. 02, 2018	Mar. 29, 2018 ~ Apr. 26, 2018	Jan. 01, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/4PE, MY11693/4PE, MY2855/2	30M-1G	Nov. 14, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Nov. 13, 2018	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/4PE, MY11693/4PE, MY2855/2	1G-18G	Nov. 14, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Nov. 13, 2018	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40G	Oct. 17, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Oct. 16, 2018	Radiation (03CH10-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY53290053	20Hz to 26.5GHz	Jan. 16, 2018	Mar. 29, 2018 ~ Apr. 26, 2018	Jan. 15, 2019	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Mar. 29, 2018 ~ Apr. 26, 2018	Nov. 26, 2018	Radiation (03CH10-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1240001	N/A	Sep. 07, 2017	Mar. 15, 2018~ Apr. 02, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1207349	300MHz~40GHz	Sep. 07, 2017	Mar. 15, 2018~ Apr. 02, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	Mar. 15, 2018~ Apr. 02, 2018	Jun. 19, 2018	Conducted (TH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.9
--	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
--	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Lena Lo	Temperature:	21~25	°C
Test Date:	2018/3/15~2018/4/2	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

Band IV								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	
11a	6M bps	1	149	5745	0.24	14.87	30.00	
11a	6Mbps	1	157	5785	0.24	14.72	30.00	
11a	6Mbps	1	165	5825	0.24	14.78	30.00	
HT20	MCS 0	1	149	5745	0.24	14.67	30.00	
HT20	MCS 0	1	157	5785	0.24	14.79	30.00	
HT20	MCS 0	1	165	5825	0.24	14.75	30.00	
HT40	MCS 0	1	151	5755	0.47	12.79	30.00	
HT40	MCS 0	1	159	5795	0.47	13.89	30.00	
VHT20	MCS 0	1	149	5745	0.24	14.68	30.00	
VHT20	MCS 0	1	157	5785	0.24	14.86	30.00	
VHT20	MCS 0	1	165	5825	0.24	14.81	30.00	
VHT40	MCS 0	1	151	5755	0.48	12.99	30.00	
VHT40	MCS 0	1	159	5795	0.48	13.98	30.00	
VHT80	MCS 0	1	155	5775	0.97	12.49	30.00	



Appendix B. Radiated Spurious Emission

Test Engineer :	Lewis Ho, JC Liang, and Daniel Lee	Temperature :	23~25°C
		Relative Humidity :	57~62%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5649.8	51.85	-16.35	68.2	43.37	32.26	8.77	32.55	398	163	P	H
		5699.8	52.92	-52.13	105.05	44.25	32.29	8.95	32.57	398	163	P	H
		5709.4	64.27	-43.56	107.83	55.59	32.31	8.95	32.58	398	163	P	H
		5724	62.56	-57.36	119.92	53.81	32.32	9.01	32.58	398	163	P	H
	*	5745	110.04	-	-	101.22	32.34	9.07	32.59	398	163	P	H
	*	5745	102.44	-	-	93.62	32.34	9.07	32.59	398	163	A	H
													H
													H
		5646	52.31	-15.89	68.2	43.85	32.24	8.77	32.55	239	196	P	V
		5699.4	53.8	-50.96	104.76	45.19	32.29	8.89	32.57	239	196	P	V
		5717.4	59.64	-50.43	110.07	50.96	32.31	8.95	32.58	239	196	P	V
		5725	60.38	-61.82	122.2	51.63	32.32	9.01	32.58	239	196	P	V
	*	5745	109.64	-	-	100.82	32.34	9.07	32.59	239	196	P	V
	*	5745	101.97	-	-	93.15	32.34	9.07	32.59	239	196	A	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5639.8	49.25	-18.95	68.2	40.86	32.24	8.7	32.55	306	176	P	H
		5695.4	51.63	-50.18	101.81	43.02	32.29	8.89	32.57	306	176	P	H
		5711.2	49.01	-59.33	108.34	40.33	32.31	8.95	32.58	306	176	P	H
		5721.4	48.37	-65.62	113.99	39.62	32.32	9.01	32.58	306	176	P	H
	*	5785	107.67	-	-	98.7	32.38	9.2	32.61	306	176	P	H
	*	5785	100.17	-	-	91.2	32.38	9.2	32.61	306	176	A	H
		5854.6	49.07	-62.64	111.71	40.08	32.46	9.16	32.63	306	176	P	H
		5874.4	50.4	-54.97	105.37	41.43	32.48	9.13	32.64	306	176	P	H
		5883	51.25	-48.01	99.26	42.31	32.48	9.1	32.64	306	176	P	H
		5936.2	49.01	-19.19	68.2	40.13	32.53	9.01	32.66	306	176	P	H
													H
													H
		5637	49	-19.2	68.2	40.61	32.24	8.7	32.55	281	140	P	V
		5689.6	52.22	-45.31	97.53	43.61	32.29	8.89	32.57	281	140	P	V
		5720	48.81	-61.99	110.8	40.06	32.32	9.01	32.58	281	140	P	V
		5720	48.81	-61.99	110.8	40.06	32.32	9.01	32.58	281	140	P	V
	*	5785	105.77	-	-	96.8	32.38	9.2	32.61	281	140	P	V
	*	5785	98.37	-	-	89.4	32.38	9.2	32.61	281	140	A	V
		5852	48	-69.64	117.64	39.03	32.44	9.16	32.63	281	140	P	V
		5874.8	48.81	-56.45	105.26	39.84	32.48	9.13	32.64	281	140	P	V
		5886.2	51.2	-45.68	96.88	42.26	32.48	9.1	32.64	281	140	P	V
		5940.8	48	-20.2	68.2	39.1	32.55	9.01	32.66	281	140	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	107.11	-	-	98.07	32.43	9.23	32.62	350	174	P	H
	*	5825	98.81	-	-	89.77	32.43	9.23	32.62	350	174	A	H
		5852.2	60.53	-56.65	117.18	51.56	32.44	9.16	32.63	350	174	P	H
		5868.8	60.42	-46.51	106.93	51.47	32.46	9.13	32.64	350	174	P	H
		5907.8	49.49	-31.4	80.89	40.55	32.51	9.07	32.64	350	174	P	H
		5928.4	50.36	-17.84	68.2	41.44	32.53	9.04	32.65	350	174	P	H
													H
													H
	*	5825	106.25	-	-	97.21	32.43	9.23	32.62	249	140	P	V
	*	5825	98.27	-	-	89.23	32.43	9.23	32.62	249	140	A	V
		5850	64.31	-57.89	122.2	55.34	32.44	9.16	32.63	249	140	P	V
		5855	60.55	-50.25	110.8	51.56	32.46	9.16	32.63	249	140	P	V
		5922.2	51.42	-18.84	70.26	42.5	32.53	9.04	32.65	249	140	P	V
		5925.6	51.23	-16.97	68.2	42.31	32.53	9.04	32.65	249	140	P	V
													V
													V
													V
Remark - No other spurious found. - All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	53.43	-20.57	74	64.5	39.81	13.02	63.9	308	173	P	H
		11490	45.23	-8.77	54	56.3	39.81	13.02	63.9	308	173	A	H
		17235	48.69	-19.51	68.2	53.37	41.02	17.12	62.82	100	0	P	H
													H
		11490	54.73	-19.27	74	65.8	39.81	13.02	63.9	100	304	P	V
		11490	46.73	-7.27	54	57.8	39.81	13.02	63.9	100	304	A	V
		17235	47.82	-20.38	68.2	52.5	41.02	17.12	62.82	100	0	P	V
													V
802.11a CH 157 5785MHz		11570	54.08	-19.92	74	67.78	39.69	12.8	66.19	400	168	P	H
		11570	44.48	-9.52	54	58.18	39.69	12.8	66.19	400	168	A	H
		17355	44.55	-23.65	68.2	51.99	41.58	16.86	65.88	100	0	P	H
													H
		11570	55.55	-18.45	74	69.25	39.69	12.8	66.19	320	284	P	V
		11570	45.34	-8.66	54	59.04	39.69	12.8	66.19	320	284	A	V
		17355	45.84	-22.36	68.2	53.28	41.58	16.86	65.88	100	0	P	V
													V
802.11a CH 165 5825MHz		11650	53.21	-20.79	74	64.5	39.58	13.15	64.02	307	172	P	H
		11650	43.91	-10.09	54	55.2	39.58	13.15	64.02	307	172	A	H
		17475	47.52	-20.68	68.2	50.57	42.14	17.34	62.53	100	0	P	H
													H
		11650	54.11	-19.89	74	65.4	39.58	13.15	64.02	391	253	P	V
		11650	44.41	-9.59	54	55.7	39.58	13.15	64.02	391	253	A	V
		17475	47.99	-20.21	68.2	51.04	42.14	17.34	62.53	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5645	51.41	-16.79	68.2	43.02	32.24	8.7	32.55	398	163	P	H
		5696	55.26	-46.99	102.25	46.65	32.29	8.89	32.57	398	163	P	H
		5713.2	63.22	-45.68	108.9	54.54	32.31	8.95	32.58	398	163	P	H
		5723.4	59.48	-59.07	118.55	50.73	32.32	9.01	32.58	398	163	P	H
	*	5745	109.44	-	-	100.62	32.34	9.07	32.59	398	163	P	H
	*	5745	101.76	-	-	92.94	32.34	9.07	32.59	398	163	A	H
													H
													H
		5647.4	52.22	-15.98	68.2	43.76	32.24	8.77	32.55	238	193	P	V
		5693.6	58.09	-42.39	100.48	49.48	32.29	8.89	32.57	238	193	P	V
		5710.2	68.51	-39.55	108.06	59.83	32.31	8.95	32.58	238	193	P	V
		5722	57.88	-57.48	115.36	49.13	32.32	9.01	32.58	238	193	P	V
	*	5745	109.07	-	-	100.25	32.34	9.07	32.59	238	193	P	V
	*	5745	101.39	-	-	92.57	32.34	9.07	32.59	238	193	A	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5610.8	48.27	-19.93	68.2	39.97	32.2	8.64	32.54	394	161	P	H
		5690.4	51.31	-46.81	98.12	42.7	32.29	8.89	32.57	394	161	P	H
		5710	49.07	-58.93	108	40.39	32.31	8.95	32.58	394	161	P	H
		5722.8	50.2	-66.98	117.18	41.45	32.32	9.01	32.58	394	161	P	H
	*	5785	106.34	-	-	97.37	32.38	9.2	32.61	394	161	P	H
	*	5785	96.08	-	-	87.11	32.38	9.2	32.61	394	161	A	H
		5852.2	48.47	-68.71	117.18	39.5	32.44	9.16	32.63	394	161	P	H
		5874.2	48.44	-56.98	105.42	39.47	32.48	9.13	32.64	394	161	P	H
		5889	49.34	-45.47	94.81	40.38	32.5	9.1	32.64	394	161	P	H
		5933.2	48.94	-19.26	68.2	40.05	32.53	9.01	32.65	394	161	P	H
													H
													H
		5640.4	48.23	-19.97	68.2	39.84	32.24	8.7	32.55	282	161	P	V
		5688	48.63	-47.72	96.35	40.02	32.29	8.89	32.57	282	161	P	V
		5707	47.63	-59.53	107.16	38.95	32.31	8.95	32.58	282	161	P	V
		5720.2	46.47	-64.79	111.26	37.72	32.32	9.01	32.58	282	161	P	V
	*	5785	105.7	-	-	96.73	32.38	9.2	32.61	282	161	P	V
	*	5785	94.89	-	-	85.92	32.38	9.2	32.61	282	161	A	V
		5852	49.05	-68.59	117.64	40.08	32.44	9.16	32.63	282	161	P	V
		5872.2	49.4	-56.58	105.98	40.43	32.48	9.13	32.64	282	161	P	V
		5877.2	51.62	-51.95	103.57	42.65	32.48	9.13	32.64	282	161	P	V
		5938	47.86	-20.34	68.2	38.98	32.53	9.01	32.66	282	161	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	106.58	-	-	97.54	32.43	9.23	32.62	400	170	P	H
	*	5825	98.25	-	-	89.21	32.43	9.23	32.62	400	170	A	H
		5850.2	64.27	-57.47	121.74	55.3	32.44	9.16	32.63	400	170	P	H
		5856.6	57.6	-52.75	110.35	48.61	32.46	9.16	32.63	400	170	P	H
		5916.4	50.77	-23.77	74.54	41.87	32.51	9.04	32.65	400	170	P	H
		5945.2	49.5	-18.7	68.2	40.6	32.55	9.01	32.66	400	170	P	H
													H
													H
	*	5825	106.44	-	-	97.4	32.43	9.23	32.62	251	138	P	V
	*	5825	97.5	-	-	88.46	32.43	9.23	32.62	251	138	A	V
		5853.4	60.9	-53.55	114.45	51.93	32.44	9.16	32.63	251	138	P	V
		5855	59.54	-51.26	110.8	50.55	32.46	9.16	32.63	251	138	P	V
		5922.2	51.58	-18.68	70.26	42.66	32.53	9.04	32.65	251	138	P	V
		5927.4	51.22	-16.98	68.2	42.3	32.53	9.04	32.65	251	138	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	55.33	-18.67	74	66.4	39.81	13.02	63.9	300	173	P	H
		11490	45.53	-8.47	54	56.6	39.81	13.02	63.9	300	173	A	H
		17235	48.85	-19.35	68.2	53.53	41.02	17.12	62.82	100	0	P	H
													H
		11490	55.73	-18.27	74	66.8	39.81	13.02	63.9	100	304	P	V
		11490	46.43	-7.57	54	57.5	39.81	13.02	63.9	100	304	A	V
		17235	47.77	-20.43	68.2	52.45	41.02	17.12	62.82	100	0	P	V
													V
802.11n HT20 CH 157 5785MHz		11570	55.41	-18.59	74	66.6	39.69	13.08	63.96	303	175	P	H
		11570	45.61	-8.39	54	56.8	39.69	13.08	63.96	303	175	A	H
		17355	47.75	-20.45	68.2	51.61	41.58	17.23	62.67	100	0	P	H
													H
		11570	55.61	-18.39	74	66.8	39.69	13.08	63.96	100	254	P	V
		11570	45.51	-8.49	54	56.7	39.69	13.08	63.96	100	254	A	V
		17355	46.66	-21.54	68.2	50.52	41.58	17.23	62.67	100	0	P	V
													V
802.11n HT20 CH 165 5825MHz		11650	49.8	-24.2	74	61.09	39.58	13.15	64.02	100	0	P	H
		17475	47.59	-20.61	68.2	50.64	42.14	17.34	62.53	100	0	P	H
													H
													H
		11650	52.18	-21.82	74	63.47	39.58	13.15	64.02	100	251	P	V
		11650	43.48	-10.52	54	54.77	39.58	13.15	64.02	100	251	A	V
		17475	47.9	-20.3	68.2	50.95	42.14	17.34	62.53	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5647.4	51.69	-16.51	68.2	43.23	32.24	8.77	32.55	324	160	P	H
		5691.8	61.51	-37.64	99.15	52.9	32.29	8.89	32.57	324	160	P	H
		5719.6	66.72	-43.97	110.69	57.97	32.32	9.01	32.58	324	160	P	H
		5724.4	61.27	-59.56	120.83	52.52	32.32	9.01	32.58	324	160	P	H
	*	5755	103.74	-	-	94.83	32.36	9.14	32.59	324	160	P	H
	*	5755	95.66	-	-	86.75	32.36	9.14	32.59	324	160	A	H
		5850.2	49.9	-71.84	121.74	40.93	32.44	9.16	32.63	324	160	P	H
		5875	50.1	-55.1	105.2	41.13	32.48	9.13	32.64	324	160	P	H
		5901.4	50.3	-35.32	85.62	41.37	32.5	9.07	32.64	324	160	P	H
		5928.8	50.67	-17.53	68.2	41.75	32.53	9.04	32.65	324	160	P	H
													H
													H
		5645.2	52.65	-15.55	68.2	44.26	32.24	8.7	32.55	238	195	P	V
		5665.2	51.7	-27.78	79.48	43.17	32.26	8.83	32.56	238	195	P	V
		5719.4	60.73	-49.9	110.63	51.98	32.32	9.01	32.58	238	195	P	V
		5722.4	68.95	-47.32	116.27	60.2	32.32	9.01	32.58	238	195	P	V
	*	5755	103.32	-	-	94.41	32.36	9.14	32.59	238	195	P	V
	*	5755	95.12	-	-	86.21	32.36	9.14	32.59	238	195	A	V
		5854.8	47.85	-63.41	111.26	38.86	32.46	9.16	32.63	238	195	P	V
		5869.6	49.24	-57.47	106.71	40.29	32.46	9.13	32.64	238	195	P	V
		5907.8	48.65	-32.24	80.89	39.71	32.51	9.07	32.64	238	195	P	V
		5928	49.15	-19.05	68.2	40.23	32.53	9.04	32.65	238	195	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5628.4	54.22	-13.98	68.2	45.85	32.22	8.7	32.55	395	170	P	H
		5653	53.69	-16.74	70.43	45.21	32.26	8.77	32.55	395	170	P	H
		5718.6	55.92	-54.49	110.41	47.17	32.32	9.01	32.58	395	170	P	H
		5722.4	54.56	-61.71	116.27	45.81	32.32	9.01	32.58	395	170	P	H
	*	5795	104.25	-	-	95.21	32.39	9.26	32.61	395	170	P	H
	*	5795	95.83	-	-	86.79	32.39	9.26	32.61	395	170	A	H
		5853.2	53.82	-61.08	114.9	44.85	32.44	9.16	32.63	395	170	P	H
		5855.6	52.19	-58.44	110.63	43.2	32.46	9.16	32.63	395	170	P	H
		5884.6	51.68	-46.39	98.07	42.74	32.48	9.1	32.64	395	170	P	H
		5939.6	47.96	-20.24	68.2	39.06	32.55	9.01	32.66	395	170	P	H
													H
													H
		5613.6	57.81	-10.39	68.2	49.51	32.2	8.64	32.54	236	194	P	V
		5684	50.38	-43.02	93.4	41.77	32.29	8.89	32.57	236	194	P	V
		5712	58.85	-49.71	108.56	50.17	32.31	8.95	32.58	236	194	P	V
		5722.2	60.35	-55.47	115.82	51.6	32.32	9.01	32.58	236	194	P	V
	*	5795	103.22	-	-	94.18	32.39	9.26	32.61	236	194	P	V
	*	5795	95.02	-	-	85.98	32.39	9.26	32.61	236	194	A	V
		5850.4	52.27	-69.02	121.29	43.3	32.44	9.16	32.63	236	194	P	V
		5857.2	51.45	-58.73	110.18	42.46	32.46	9.16	32.63	236	194	P	V
		5901.4	49.58	-36.04	85.62	40.65	32.5	9.07	32.64	236	194	P	V
		5939	48.43	-19.77	68.2	39.53	32.55	9.01	32.66	236	194	P	V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	47.3	-26.7	74	58.38	39.8	13.03	63.91	100	0	P	H
		17265	46.81	-21.39	68.2	51.26	41.18	17.15	62.78	100	0	P	H
													H
													H
		11510	47.44	-26.56	74	58.52	39.8	13.03	63.91	100	0	P	V
		17265	46.8	-21.4	68.2	51.25	41.18	17.15	62.78	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11590	49.64	-24.36	74	60.86	39.66	13.09	63.97	100	0	P	H
		17385	46.82	-21.38	68.2	50.46	41.74	17.26	62.64	100	0	P	H
													H
													H
		11590	48.44	-25.56	74	59.66	39.66	13.09	63.97	100	0	P	V
		17385	46.97	-21.23	68.2	50.61	41.74	17.26	62.64	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 149 5745MHz		5646	52.14	-16.06	68.2	43.68	32.24	8.77	32.55	398	161	P	H
		5694	56.51	-44.27	100.78	47.9	32.29	8.89	32.57	398	161	P	H
		5718.4	62.79	-47.56	110.35	54.04	32.32	9.01	32.58	398	161	P	H
		5724.2	68.53	-51.85	120.38	59.78	32.32	9.01	32.58	398	161	P	H
	*	5745	108.92	-	-	100.1	32.34	9.07	32.59	398	161	P	H
	*	5745	101.49	-	-	92.67	32.34	9.07	32.59	398	161	A	H
													H
													H
		5648.4	52.27	-15.93	68.2	43.81	32.24	8.77	32.55	237	193	P	V
		5654	51.47	-19.7	71.17	43	32.26	8.77	32.56	237	193	P	V
		5719.4	59.4	-51.23	110.63	50.65	32.32	9.01	32.58	237	193	P	V
		5720.4	64.72	-46.99	111.71	55.97	32.32	9.01	32.58	237	193	P	V
	*	5745	108.36	-	-	99.54	32.34	9.07	32.59	237	193	P	V
	*	5745	100.83	-	-	92.01	32.34	9.07	32.59	237	193	A	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 157 5785MHz		5640	49.17	-19.03	68.2	40.78	32.24	8.7	32.55	392	169	P	H
		5682.4	51.93	-40.28	92.21	43.34	32.27	8.89	32.57	392	169	P	H
		5703.6	48.19	-58.02	106.21	39.5	32.31	8.95	32.57	392	169	P	H
		5723.8	48.02	-71.44	119.46	39.27	32.32	9.01	32.58	392	169	P	H
	*	5785	108.95	-	-	99.98	32.38	9.2	32.61	392	169	P	H
	*	5785	98.43	-	-	89.46	32.38	9.2	32.61	392	169	A	H
		5855	49.15	-61.65	110.8	40.16	32.46	9.16	32.63	392	169	P	H
		5874.6	49.98	-55.33	105.31	41.01	32.48	9.13	32.64	392	169	P	H
		5881.8	51.52	-48.63	100.15	42.58	32.48	9.1	32.64	392	169	P	H
		5932.6	49.93	-18.27	68.2	41.01	32.53	9.04	32.65	392	169	P	H
													H
													H
		5637.8	48.96	-19.24	68.2	40.57	32.24	8.7	32.55	279	196	P	V
		5685.6	51.93	-42.65	94.58	43.32	32.29	8.89	32.57	279	196	P	V
		5708.6	48.15	-59.46	107.61	39.47	32.31	8.95	32.58	279	196	P	V
		5721.8	47.47	-67.43	114.9	38.72	32.32	9.01	32.58	279	196	P	V
	*	5785	106.17	-	-	97.2	32.38	9.2	32.61	279	196	P	V
	*	5785	96.41	-	-	87.44	32.38	9.2	32.61	279	196	A	V
		5850.2	49.31	-72.43	121.74	40.34	32.44	9.16	32.63	279	196	P	V
		5872.2	48.15	-57.83	105.98	39.18	32.48	9.13	32.64	279	196	P	V
		5887.2	49.54	-46.6	96.14	40.6	32.48	9.1	32.64	279	196	P	V
		5937.2	48.44	-19.76	68.2	39.56	32.53	9.01	32.66	279	196	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 165 5825MHz	*	5825	106.38	-	-	97.34	32.43	9.23	32.62	400	170	P	H
	*	5825	98.25	-	-	89.21	32.43	9.23	32.62	400	170	A	H
		5850.8	63.1	-57.28	120.38	54.13	32.44	9.16	32.63	400	170	P	H
		5855.8	61.64	-48.94	110.58	52.65	32.46	9.16	32.63	400	170	P	H
		5913	49.76	-27.29	77.05	40.83	32.51	9.07	32.65	400	170	P	H
		5925.6	50.34	-17.86	68.2	41.42	32.53	9.04	32.65	400	170	P	H
													H
													H
	*	5825	105.76	-	-	96.72	32.43	9.23	32.62	250	139	P	V
	*	5825	97.33	-	-	88.29	32.43	9.23	32.62	250	139	A	V
		5850.2	58.87	-62.87	121.74	49.9	32.44	9.16	32.63	250	139	P	V
		5856.2	58.71	-51.75	110.46	49.72	32.46	9.16	32.63	250	139	P	V
		5914.6	51.37	-24.5	75.87	42.44	32.51	9.07	32.65	250	139	P	V
		5927.2	50.84	-17.36	68.2	41.92	32.53	9.04	32.65	250	139	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 149 5745MHz		11490	49.84	-24.16	74	60.91	39.81	13.02	63.9	100	0	P	H
		17235	46.94	-21.26	68.2	51.62	41.02	17.12	62.82	100	0	P	H
													H
													H
		11490	53.13	-20.87	74	64.2	39.81	13.02	63.9	100	269	P	V
		11490	44.83	-9.17	54	55.9	39.81	13.02	63.9	100	269	A	V
		17235	46.73	-21.47	68.2	51.41	41.02	17.12	62.82	100	0	P	V
													V
802.11ac VHT20 CH 157 5785MHz		11570	53.31	-20.69	74	64.5	39.69	13.08	63.96	304	177	P	H
		11570	45.21	-8.79	54	56.4	39.69	13.08	63.96	304	177	A	H
		17355	47.11	-21.09	68.2	50.97	41.58	17.23	62.67	100	0	P	H
													H
		11570	52.31	-21.69	74	63.5	39.69	13.08	63.96	100	255	P	V
		11570	43.11	-10.89	54	54.3	39.69	13.08	63.96	100	255	A	V
		17355	46.85	-21.35	68.2	50.71	41.58	17.23	62.67	100	0	P	V
													V
802.11ac VHT20 CH 165 5825MHz		11650	49.62	-24.38	74	60.91	39.58	13.15	64.02	100	0	P	H
		17475	47.5	-20.7	68.2	50.55	42.14	17.34	62.53	100	0	P	H
													H
													H
		11650	52.11	-21.89	74	63.4	39.58	13.15	64.02	100	238	P	V
		11650	43.21	-10.79	54	54.5	39.58	13.15	64.02	100	238	A	V
		17475	47.22	-20.98	68.2	50.27	42.14	17.34	62.53	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 151 5755MHz		5644.2	55.67	-12.53	68.2	47.28	32.24	8.7	32.55	378	163	P	H
		5655.2	55.91	-16.15	72.06	47.44	32.26	8.77	32.56	378	163	P	H
		5706	62.56	-44.32	106.88	53.88	32.31	8.95	32.58	378	163	P	H
		5723.8	60.17	-59.29	119.46	51.42	32.32	9.01	32.58	378	163	P	H
	*	5755	103.66	-	-	94.75	32.36	9.14	32.59	378	163	P	H
	*	5755	95.48	-	-	86.57	32.36	9.14	32.59	378	163	A	H
		5852.8	50.09	-65.73	115.82	41.12	32.44	9.16	32.63	378	163	P	H
		5858	49.66	-60.3	109.96	40.68	32.46	9.16	32.64	378	163	P	H
		5886.2	48.78	-48.1	96.88	39.84	32.48	9.1	32.64	378	163	P	H
		5926.8	48.96	-19.24	68.2	40.04	32.53	9.04	32.65	378	163	P	H
													H
													H
		5645.8	49.81	-18.39	68.2	41.35	32.24	8.77	32.55	239	194	P	V
		5655.2	51.95	-20.11	72.06	43.48	32.26	8.77	32.56	239	194	P	V
		5715	70.26	-39.14	109.4	61.58	32.31	8.95	32.58	239	194	P	V
		5724	63.03	-56.89	119.92	54.28	32.32	9.01	32.58	239	194	P	V
	*	5755	103.71	-	-	94.8	32.36	9.14	32.59	239	194	P	V
	*	5755	95.18	-	-	86.27	32.36	9.14	32.59	239	194	A	V
		5852.6	47.76	-68.51	116.27	38.79	32.44	9.16	32.63	239	194	P	V
		5856.2	51.1	-59.36	110.46	42.11	32.46	9.16	32.63	239	194	P	V
		5924.4	49.15	-19.49	68.64	40.23	32.53	9.04	32.65	239	194	P	V
		5928.6	48.14	-20.06	68.2	39.22	32.53	9.04	32.65	239	194	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 159 5795MHz		5610.4	52.31	-15.89	68.2	44.01	32.2	8.64	32.54	388	171	P	H
		5695.6	50.66	-51.3	101.96	42.05	32.29	8.89	32.57	388	171	P	H
		5714.6	52.69	-56.6	109.29	44.01	32.31	8.95	32.58	388	171	P	H
		5725	49.41	-72.79	122.2	40.66	32.32	9.01	32.58	388	171	P	H
	*	5795	104.43	-	-	95.39	32.39	9.26	32.61	388	171	P	H
	*	5795	95.76	-	-	86.72	32.39	9.26	32.61	388	171	A	H
		5850.4	54.64	-66.65	121.29	45.67	32.44	9.16	32.63	388	171	P	H
		5855	50.66	-60.14	110.8	41.67	32.46	9.16	32.63	388	171	P	H
		5880.6	49.46	-51.58	101.04	40.52	32.48	9.1	32.64	388	171	P	H
		5931.4	48.99	-19.21	68.2	40.07	32.53	9.04	32.65	388	171	P	H
													H
													H
		5615.4	48.85	-19.35	68.2	40.55	32.2	8.64	32.54	236	193	P	V
		5669.4	57.24	-25.35	82.59	48.7	32.27	8.83	32.56	236	193	P	V
		5705	54.01	-52.59	106.6	45.33	32.31	8.95	32.58	236	193	P	V
		5725	49.31	-72.89	122.2	40.56	32.32	9.01	32.58	236	193	P	V
	*	5795	103.17	-	-	94.13	32.39	9.26	32.61	236	193	P	V
	*	5795	94.82	-	-	85.78	32.39	9.26	32.61	236	193	A	V
		5850.8	50.53	-69.85	120.38	41.56	32.44	9.16	32.63	236	193	P	V
		5857	49.95	-60.29	110.24	40.96	32.46	9.16	32.63	236	193	P	V
		5900	51.29	-35.37	86.66	42.36	32.5	9.07	32.64	236	193	P	V
		5929.2	48.73	-19.47	68.2	39.81	32.53	9.04	32.65	236	193	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 151 5755MHz		11510	47.85	-26.15	74	58.93	39.8	13.03	63.91	100	0	P	H
		17265	46.58	-21.62	68.2	51.03	41.18	17.15	62.78	100	0	P	H
													H
													H
		11510	47.93	-26.07	74	59.01	39.8	13.03	63.91	100	0	P	V
		17265	46.82	-21.38	68.2	51.27	41.18	17.15	62.78	100	0	P	V
													V
													V
802.11ac VHT40 CH 159 5795MHz		11590	49.63	-24.37	74	60.85	39.66	13.09	63.97	100	0	P	H
		17385	47.21	-20.99	68.2	50.85	41.74	17.26	62.64	100	0	P	H
													H
													H
		11590	48.06	-25.94	74	59.28	39.66	13.09	63.97	100	0	P	V
		17385	47.24	-20.96	68.2	50.88	41.74	17.26	62.64	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5639	54.27	-13.93	68.2	45.88	32.24	8.7	32.55	375	164	P	H
		5692	61.94	-37.36	99.3	53.33	32.29	8.89	32.57	375	164	P	H
		5705.4	63.7	-43.01	106.71	55.02	32.31	8.95	32.58	375	164	P	H
		5725	63.31	-58.89	122.2	54.56	32.32	9.01	32.58	375	164	P	H
	*	5775	100.29	-	-	91.31	32.38	9.2	32.6	375	164	P	H
	*	5775	91.97	-	-	82.99	32.38	9.2	32.6	375	164	A	H
		5852.2	54.34	-62.84	117.18	45.37	32.44	9.16	32.63	375	164	P	H
		5861.8	53.79	-55.1	108.89	44.84	32.46	9.13	32.64	375	164	P	H
		5875.8	51.2	-53.41	104.61	42.23	32.48	9.13	32.64	375	164	P	H
		5939.2	49.16	-19.04	68.2	40.26	32.55	9.01	32.66	375	164	P	H
													H
													H
		5642.2	57.98	-10.22	68.2	49.59	32.24	8.7	32.55	239	194	P	V
		5698	61.83	-41.9	103.73	53.22	32.29	8.89	32.57	239	194	P	V
		5706	63.72	-43.16	106.88	55.04	32.31	8.95	32.58	239	194	P	V
		5723.6	64.15	-54.86	119.01	55.4	32.32	9.01	32.58	239	194	P	V
	*	5775	99.69	-	-	90.71	32.38	9.2	32.6	239	194	P	V
	*	5775	91.62	-	-	82.64	32.38	9.2	32.6	239	194	A	V
		5852	53.75	-63.89	117.64	44.78	32.44	9.16	32.63	239	194	P	V
		5857.8	53.4	-56.61	110.01	44.42	32.46	9.16	32.64	239	194	P	V
		5889	51.06	-43.75	94.81	42.1	32.5	9.1	32.64	239	194	P	V
		5929	50.33	-17.87	68.2	41.41	32.53	9.04	32.65	239	194	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	45.29	-28.71	74	56.45	39.72	13.06	63.94	100	0	P	H
		17325	47.15	-21.05	68.2	51.24	41.42	17.2	62.71	100	0	P	H
													H
													H
		11550	46.55	-27.45	74	57.71	39.72	13.06	63.94	100	0	P	V
		17325	47.38	-20.82	68.2	51.47	41.42	17.2	62.71	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

[illegible]



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Lewis Ho, JC Liang, and Daniel Lee	Temperature :	23~25°C
		Relative Humidity :	57~62%

Note symbol



-L	Low channel location
-R	High channel location

Band 4 - 5725~5850MHz




WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
Peak	Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto


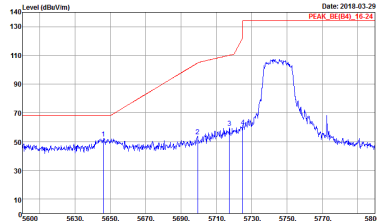
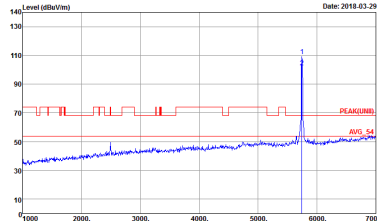


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

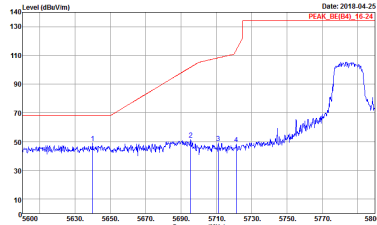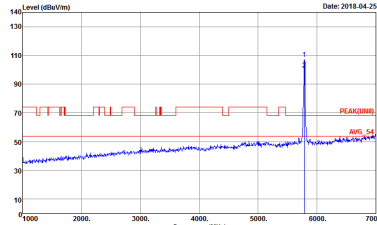
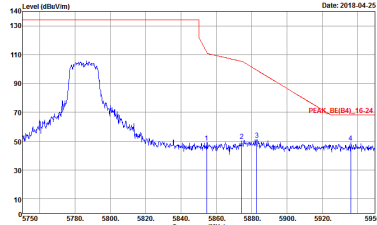


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

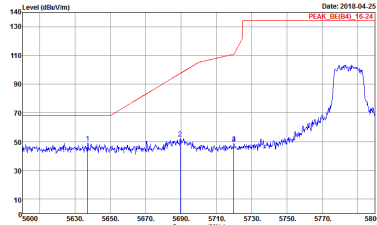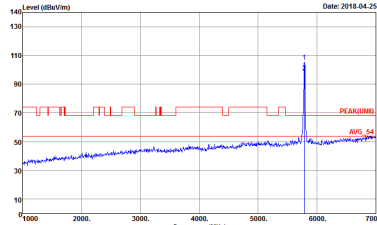
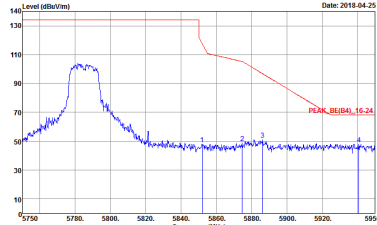


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

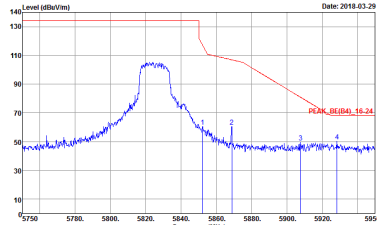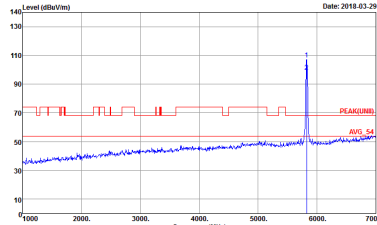



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(164)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

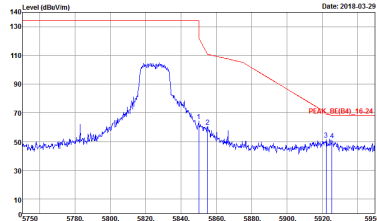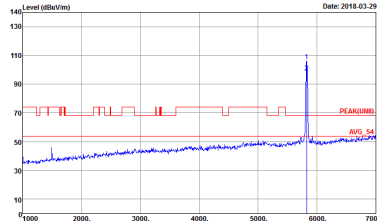



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto






Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

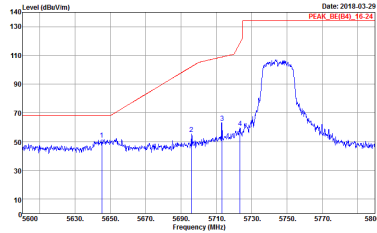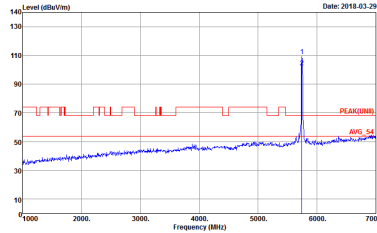WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-14Y Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-14Y Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto


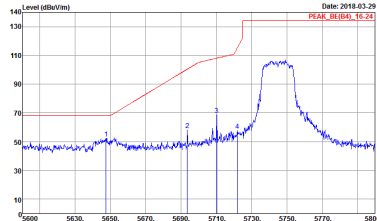
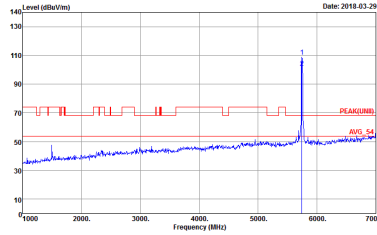


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

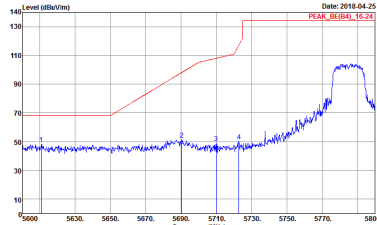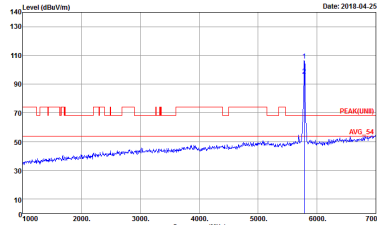
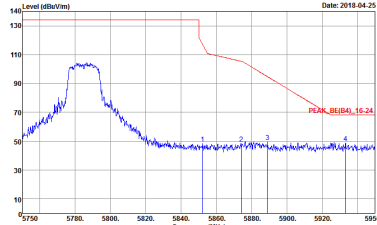


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

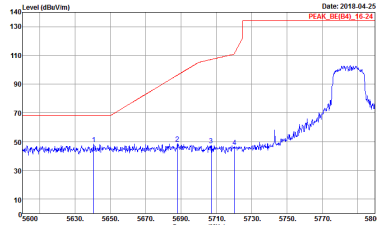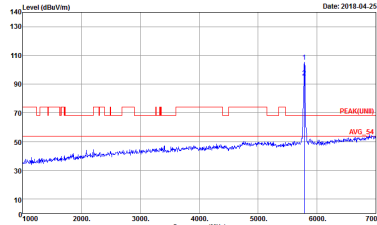
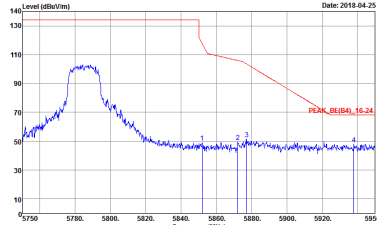


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

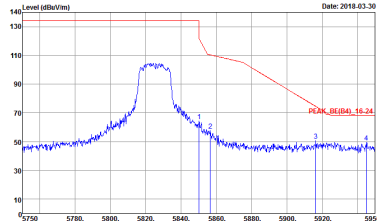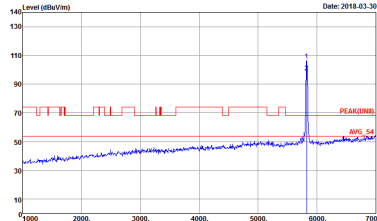




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

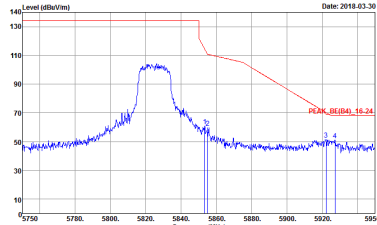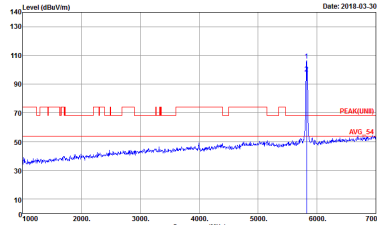




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto






Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

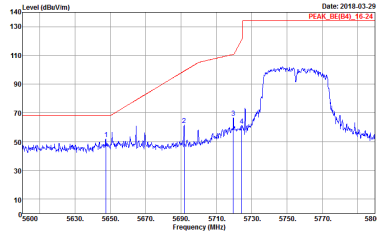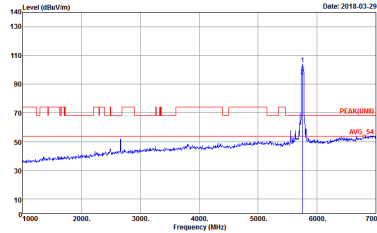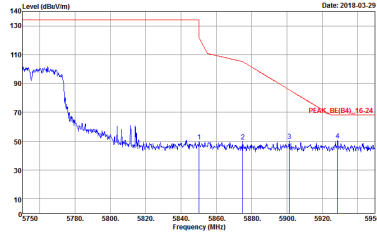WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

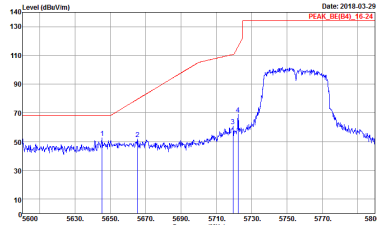
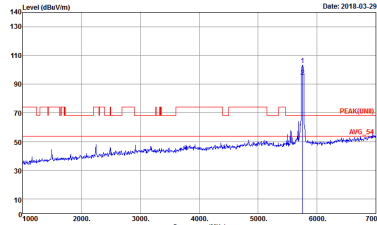
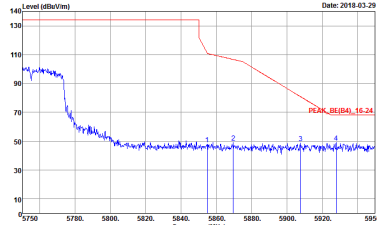


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	 Site Condition : 03CH10-HY : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site Condition : 03CH10-HY : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

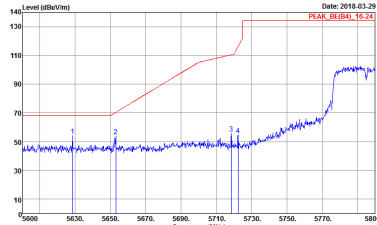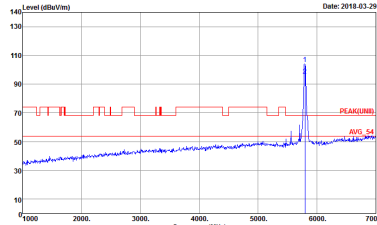
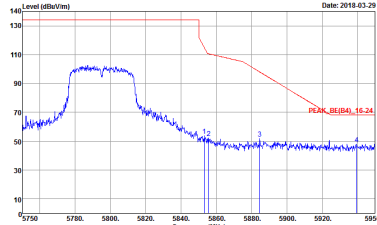


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

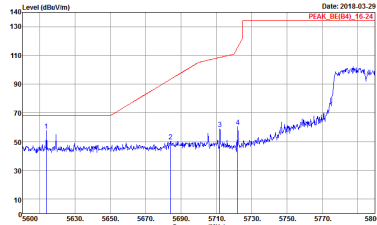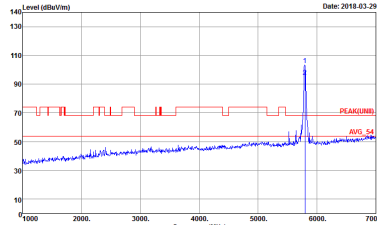
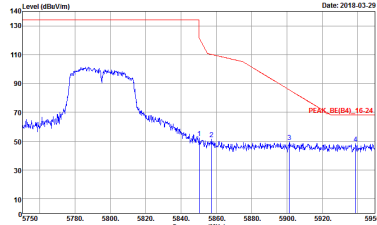


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank




Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

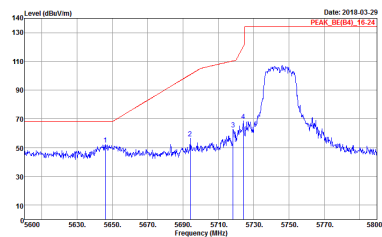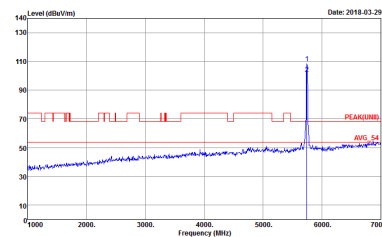WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH0-14Y Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH0-14Y Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto


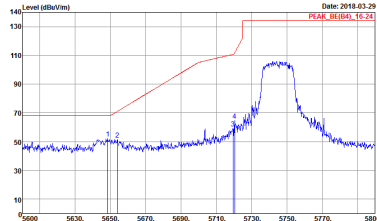
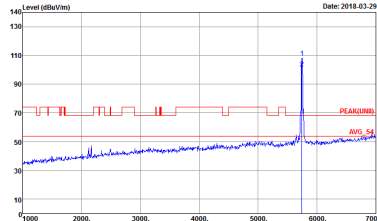


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak Avg.	 Site Condition : 03CH10-HY : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

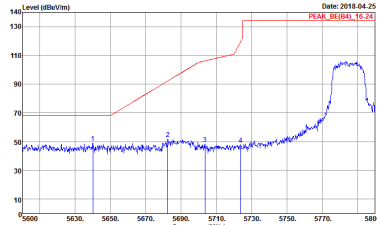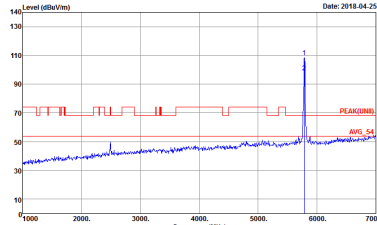
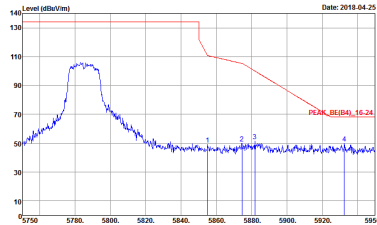


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

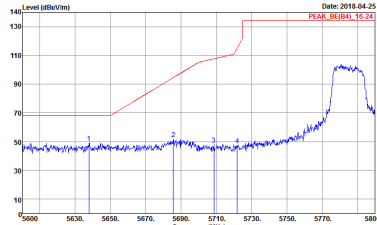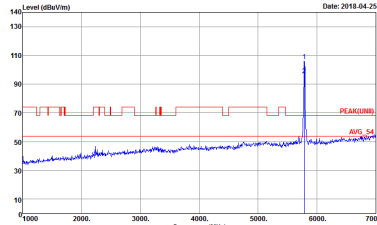
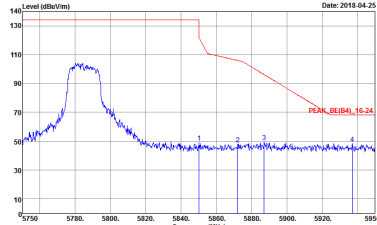


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

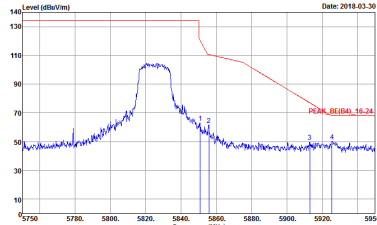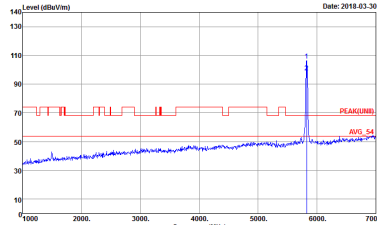

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

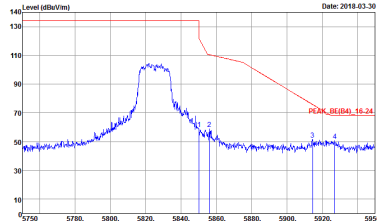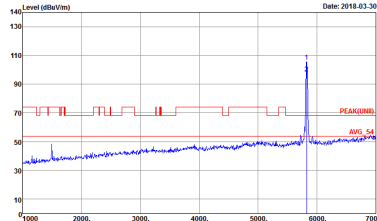




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak Avg.	 Site Condition : 03CH10-HY : PEAK_BE(164)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNII) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto






Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1	Horizontal	Fundamental
Peak	Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto
Peak	Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank

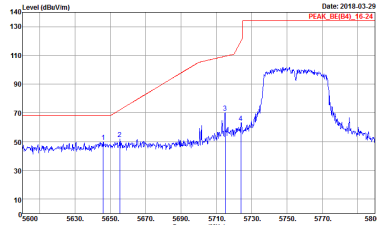
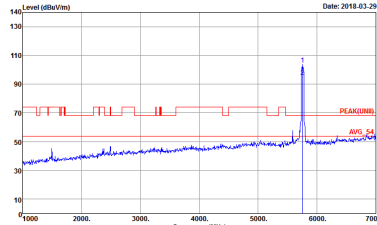
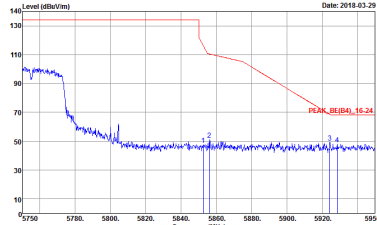


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

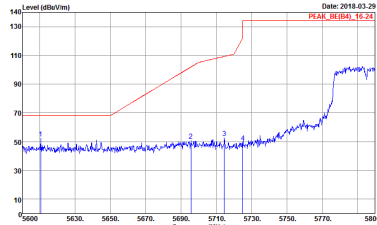
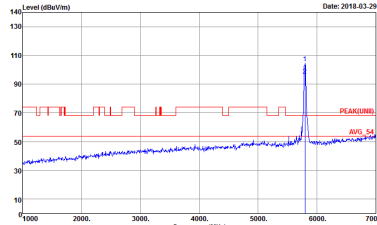
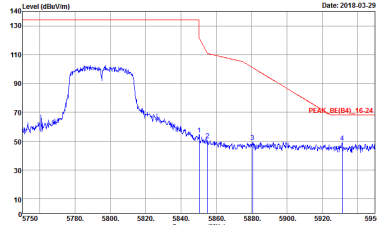


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

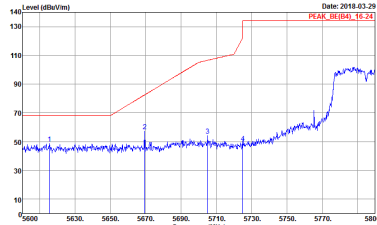
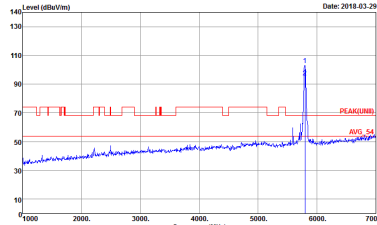
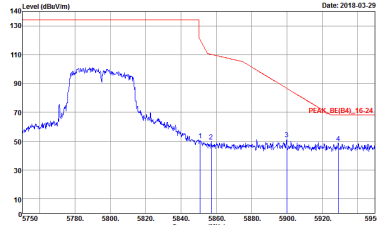


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

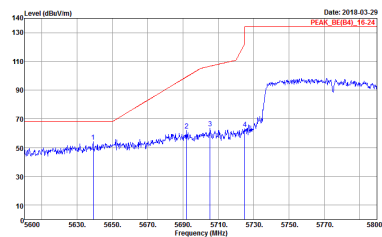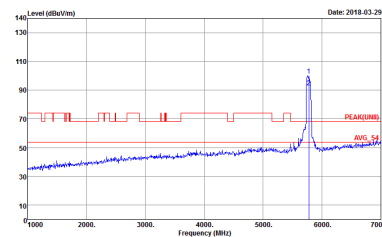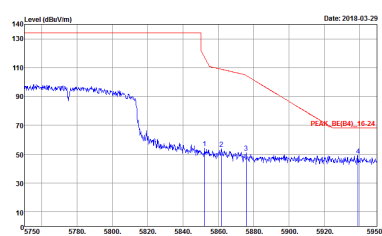WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH10-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

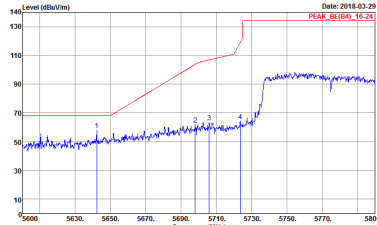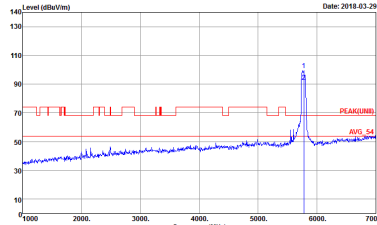
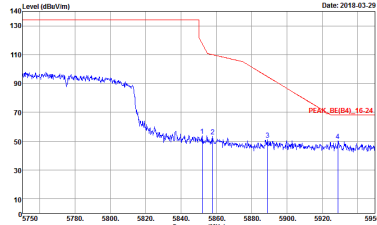


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Vertical	Fundamental
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH10-HY : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site Condition : 03CH10-HY : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank





Band 4 - 5725~5850MHz



WIFI 802.11a (Harmonic @ 3m)

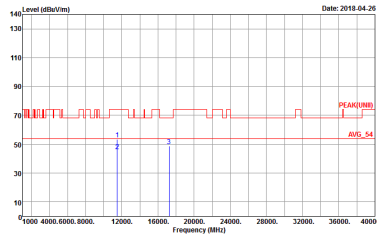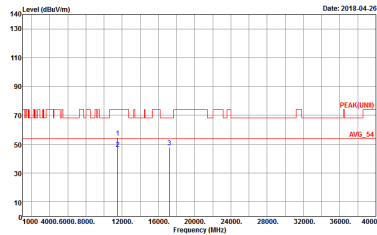WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak

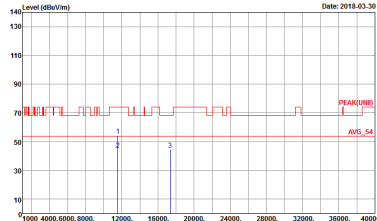
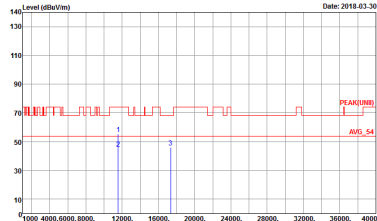


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak

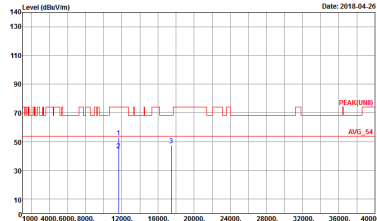
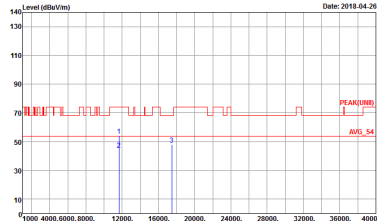


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak

Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

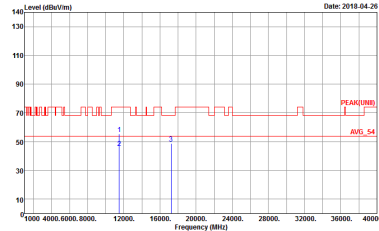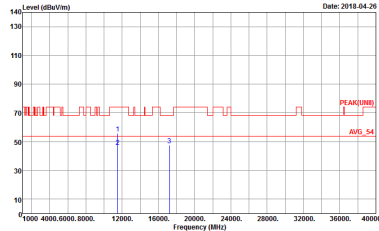WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-HY Condition : PEAK(UWB) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-HY Condition : PEAK(UWB) 3m HORN 9120D-HF VERTICAL Detector : Peak

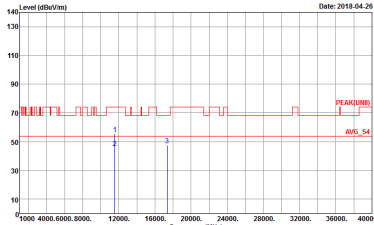
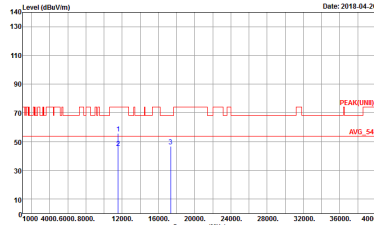


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
Peak	Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

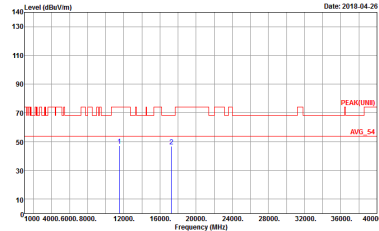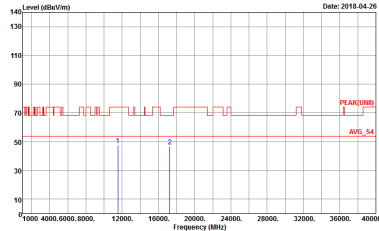WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-HY Condition : PEAK(UWB) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-HY Condition : PEAK(UWB) 3m HORN 9120D-HF VERTICAL Detector : Peak

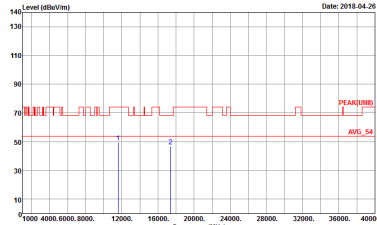
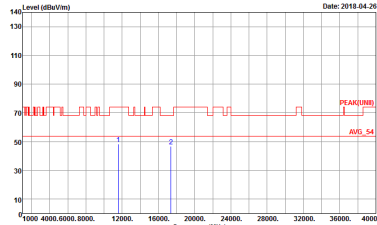


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak



Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

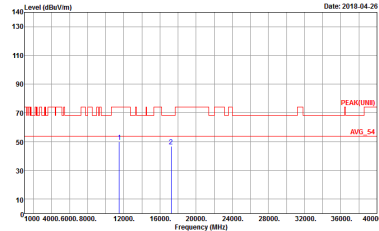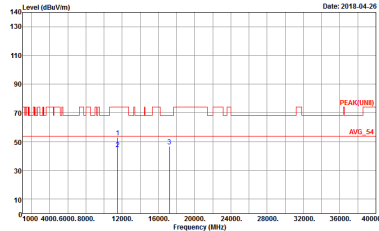WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-4Y Condition : PEAK(UWB) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-4Y Condition : PEAK(UWB) 3m HORN 9120D-HF VERTICAL Detector : Peak

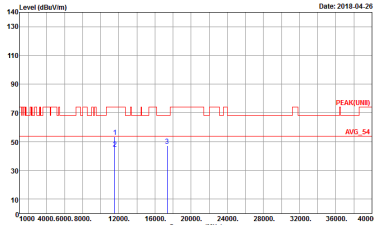
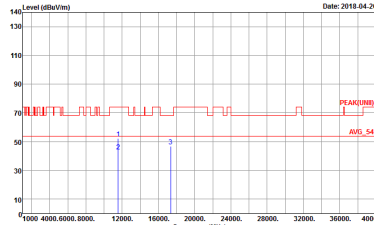


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak

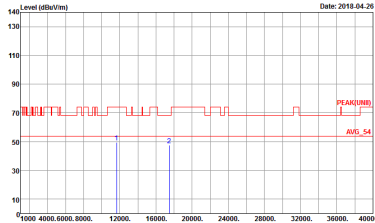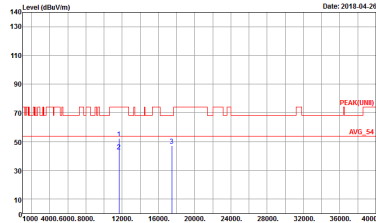

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak



Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-14Y Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-14Y Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1	Horizontal	Vertical
Peak	Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	Site : 03CH10-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak

Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-14Y Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH10-14Y Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak




Emission below 1GHz
5GHz WIFI 802.11a (LF)

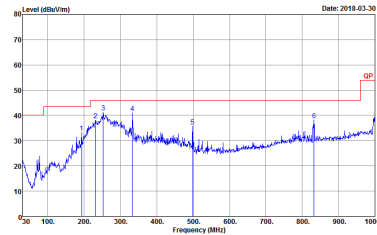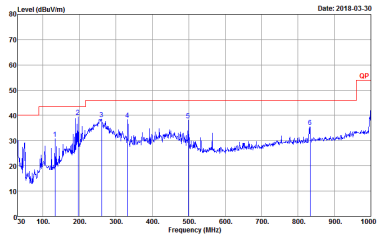WIFI	5GHz 5725~5850MHz	
ANT	802.11a LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH10-HY Condition : QP 3m BE-LOG 6111D-LF HORIZONTAL Detector : Peak	 Site : 03CH10-HY Condition : QP 3m BE-LOG 6111D-LF VERTICAL Detector : Peak


Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor (dB)
802.11a	94.52	2070.00	0.48	1kHz	0.24
5GHz 802.11n HT20	94.61	1930.00	0.52	1kHz	0.24
5GHz 802.11n HT40	89.67	955.00	1.05	3kHz	0.47
5GHz 802.11ac VHT20	94.63	1940.00	0.52	1kHz	0.24
5GHz 802.11ac VHT40	89.62	950.00	1.05	3kHz	0.48
5GHz 802.11ac VHT80	80.00	456.00	2.19	3kHz	0.97


802.11a

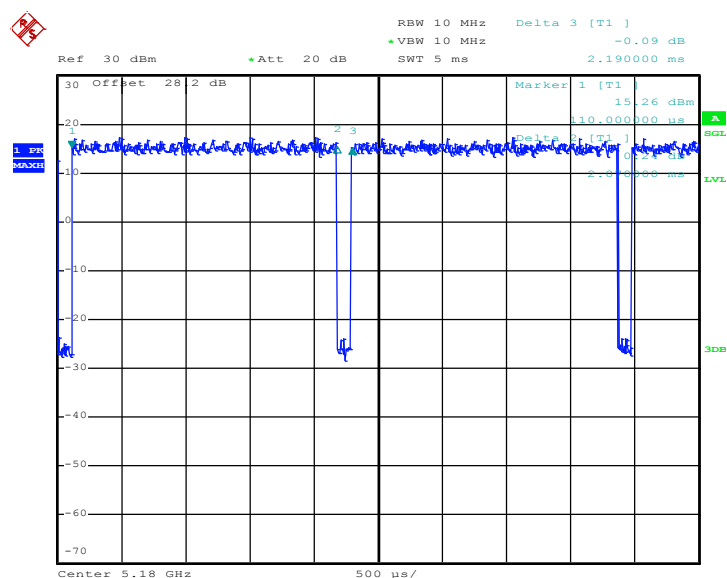


Date: 16.MAR.2018 02:45:25

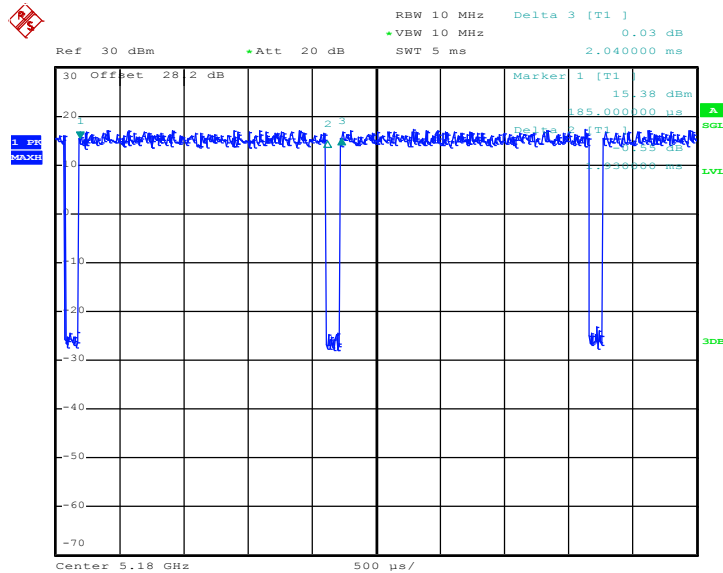802.11n HT20


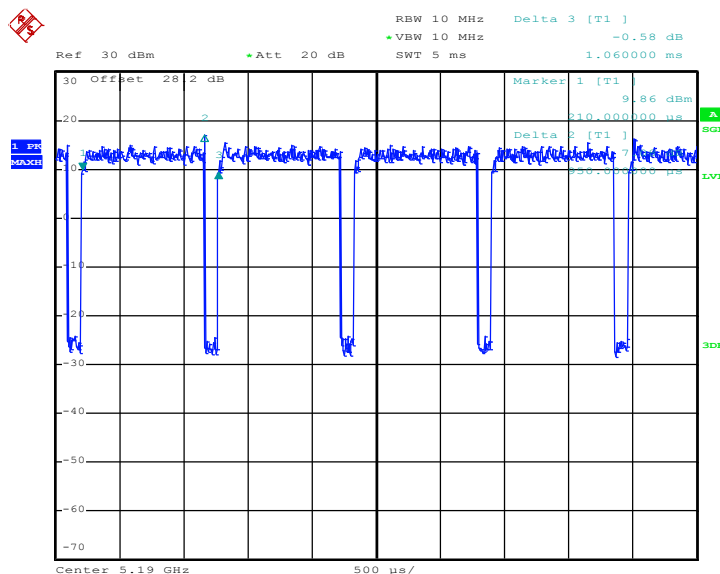
Date: 16.MAR.2018 02:54:24

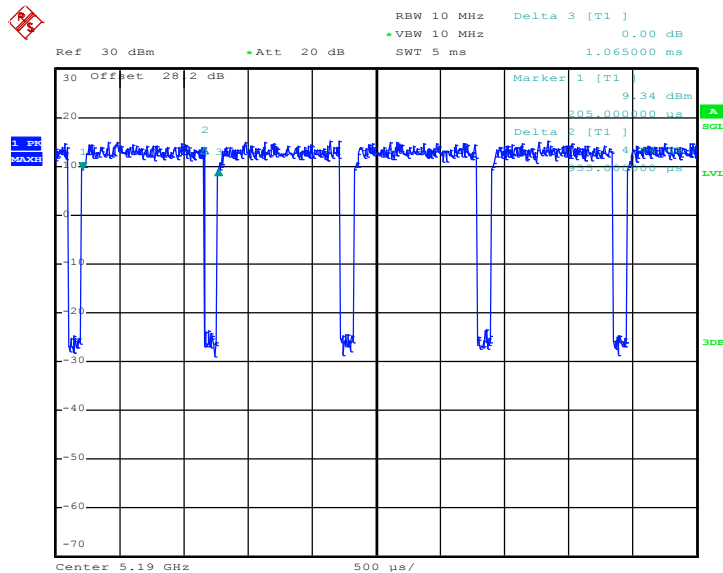802.11n HT40


Date: 16.MAR.2018 03:05:12

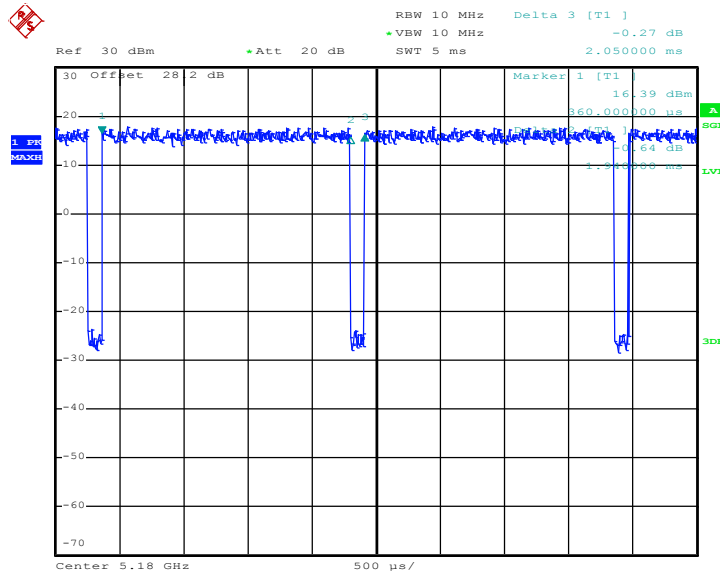802.11ac VHT20


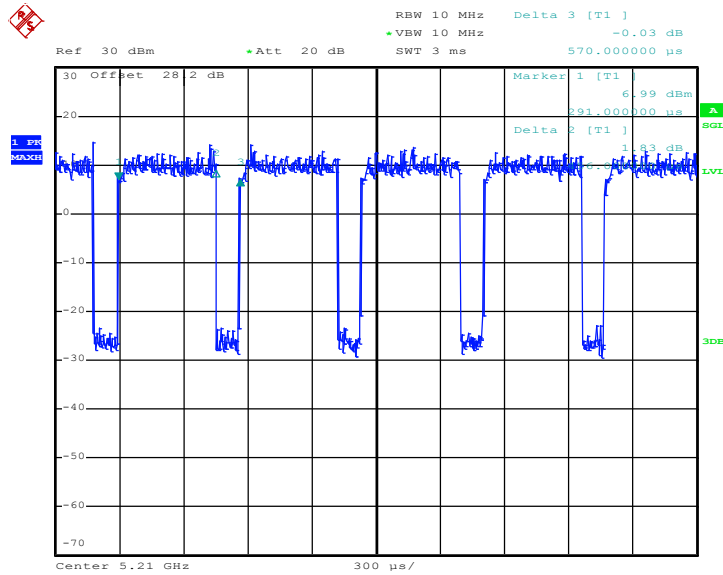
Date: 16.MAR.2018 03:15:35

802.11ac VHT40


Date: 16.MAR.2018 03:28:57



802.11ac VHT80



Date: 16.MAR.2018 03:42:51