



## SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093  
IEEE Std. 1528-2013**

For  
**Single Stream 802.11a/b/g/n/ac + BT 4.1 M.2 Type Card**

**FCC ID: PPD-QCNFA435  
Model Name: QCNFA435**

**Report Number: 4788502267-2**

**Issue Date: June 11, 2018**

Prepared for  
**Qualcomm Atheros, Inc.**  
**1700 Technology Drive, San Jose, CA 95110**

Prepared by  
**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech  
Development Zone Dongguan, People's Republic of China**

**Tel: +86 769 22038881  
Fax: +86 769 33244054  
Website: [www.ul.com](http://www.ul.com)**

**Revision History**

Rev.	Date	Revisions	Revised By
V1.0	June 11, 2018	Initial Issue	\

## Table of Contents

<b>1. Attestation of Test Results .....</b>	<b>5</b>
<b>2. Test Specification, Methods and Procedures.....</b>	<b>6</b>
<b>3. Facilities and Accreditation.....</b>	<b>7</b>
<b>4. SAR Measurement System &amp; Test Equipment .....</b>	<b>8</b>
4.1. <i>SAR Measurement System.....</i>	8
4.2. <i>SAR Scan Procedures.....</i>	9
4.3. <i>Test Equipment.....</i>	11
<b>5. Measurement Uncertainty.....</b>	<b>12</b>
<b>6. Device Under Test (DUT) Information .....</b>	<b>13</b>
6.1. <i>DUT Description .....</i>	13
6.2. <i>Wireless Technology.....</i>	13
<b>7. SAR Test Configuration .....</b>	<b>14</b>
<b>8. Conducted Output Power Measurement and tune-up tolerance.....</b>	<b>15</b>
8.1. <i>Power measurement result of 2.4GHz Wi-Fi for Main ANT. ....</i>	15
8.2. <i>Power measurement result of 2.4GHz Wi-Fi for Aux ANT.....</i>	15
8.3. <i>Power measurement result of 5GHz Wi-Fi (U-NII-1) for Main ANT.....</i>	16
8.4. <i>Power measurement result of 5GHz Wi-Fi (U-NII-2A) for Main ANT. ....</i>	16
8.5. <i>Power measurement result of 5GHz Wi-Fi (U-NII-2C) for Main ANT.....</i>	17
8.6. <i>Power measurement result of 5GHz Wi-Fi (U-NII-3) for Main ANT.....</i>	18
8.7. <i>Power measurement result of 5GHz Wi-Fi (U-NII-1) for Aux ANT. ....</i>	19
8.8. <i>Power measurement result of 5GHz Wi-Fi (U-NII-2A) for Aux ANT.....</i>	19
8.9. <i>Power measurement result of 5GHz Wi-Fi (U-NII-2C) for Aux ANT.....</i>	20
8.10. <i>Power measurement result of 5GHz Wi-Fi (U-NII-3) for Aux ANT.....</i>	21
8.11. <i>Power measurement result BT .....</i>	22
<b>9. RF Exposure Conditions.....</b>	<b>23</b>
<b>10. Dielectric Property Measurements &amp; System Check .....</b>	<b>24</b>
10.1. <i>Dielectric Property Measurements.....</i>	24
10.2. <i>System Check .....</i>	26
<b>11. Measured and Reported (Scaled) SAR Results.....</b>	<b>28</b>
11.1. <i>SAR Test Results of 2.4G Wi-Fi with ICT antenna platform.....</i>	30

11.2. <i>SAR Test Results of 2.4G Wi-Fi with SPD antenna platform</i> .....	31
11.3. <i>SAR Test Results of 5G Wi-Fi with ICT antenna platform</i> .....	32
11.4. <i>SAR Test Results of 5G Wi-Fi with SPD antenna platform</i> .....	36
<b>12. Simultaneous Transmission SAR Analysis</b> .....	<b>40</b>
12.1. <i>Estimated SAR</i> .....	40
12.2. <i>Simultaneous Transmission calculation for ICT antenna platform</i> .....	41
12.3. <i>Simultaneous Transmission calculation for ICT antenna platform</i> .....	41
12.4. <i>Simultaneous Transmission calculation for SPD antenna platform</i> .....	41
12.5. <i>Simultaneous Transmission calculation for SPD antenna platform</i> .....	42
<b>Appendices</b> .....	<b>43</b>
4788502267-2_App A Photo .....	43
4788502267-2_App B System Check Plots .....	43
4788502267-2_App C Highest Test Plots .....	43
4788502267-2_App D Cal. Certificates .....	43

## 1. Attestation of Test Results

Applicant Name	Qualcomm Atheros, Inc.
Address	1700 Technology Drive, San Jose, CA 95110
Manufacturer	Qualcomm Atheros, Inc.
Address	1700 Technology Drive, San Jose, CA 95110
EUT Name	Single Stream 802.11a/b/g/n/ac + BT 4.1 M.2 Type Card
Model Name	QCNFA435
Sample Status	Normal
Brand	Qualcomm Atheros
Host Equipment	Notebook Computer
Band Name	Lenovo
Host Model	Lenovo Legion Y7000P
Series Host Model	Lenovo Legion Y7000P-1060
Difference	Lenovo Legion Y7000P, Lenovo Legion Y7000P-1060 have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction. The difference lies only in the Marketing use.
Sample Received Date	May 28, 2018
Date of Tested	June 7, 2018 to June 9, 2018
Applicable Standards	FCC 47 CFR § 2.1093 IEEE Std. 1528-2013 KDB publication

### SAR Limits (W/Kg)

Exposure Category	Peak spatial-average(1g of tissue)	Extremities (hands, wrists, ankles, etc.) (10g of tissue)
General population / Uncontrolled exposure	1.6	4

### The Highest Reported SAR (W/kg)

RF Exposure Conditions	Equipment Class		
	DTS	U-NII	DSS
Body (1-g)	1.084	1.128	\
Simultaneous Transmission (1-g)	1.143		
Test Results	Pass		
Tested By:  James Qin Engineer Project Associate	Reviewed By:  Shawn Wen Laboratory Leader	Approved By:  Stephen Guo Laboratory Manager	

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with IEEE Std. 1528-2013, the following FCC Published RF exposure KDB procedures:

- 248227 D01 802.11 Wi-Fi SAR
- 447498 D01 General RF Exposure Guidance
- 690783 D01 SAR Listings on Grants
- 865664 D01 SAR measurement 100 MHz to 6 GHz
- 865664 D02 RF Exposure Reporting
- 616217 D04 SAR for laptop and tablets


### 3. Facilities and Accreditation

Test Location	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
Address	Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Recognized No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>IC(Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
Description	All measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

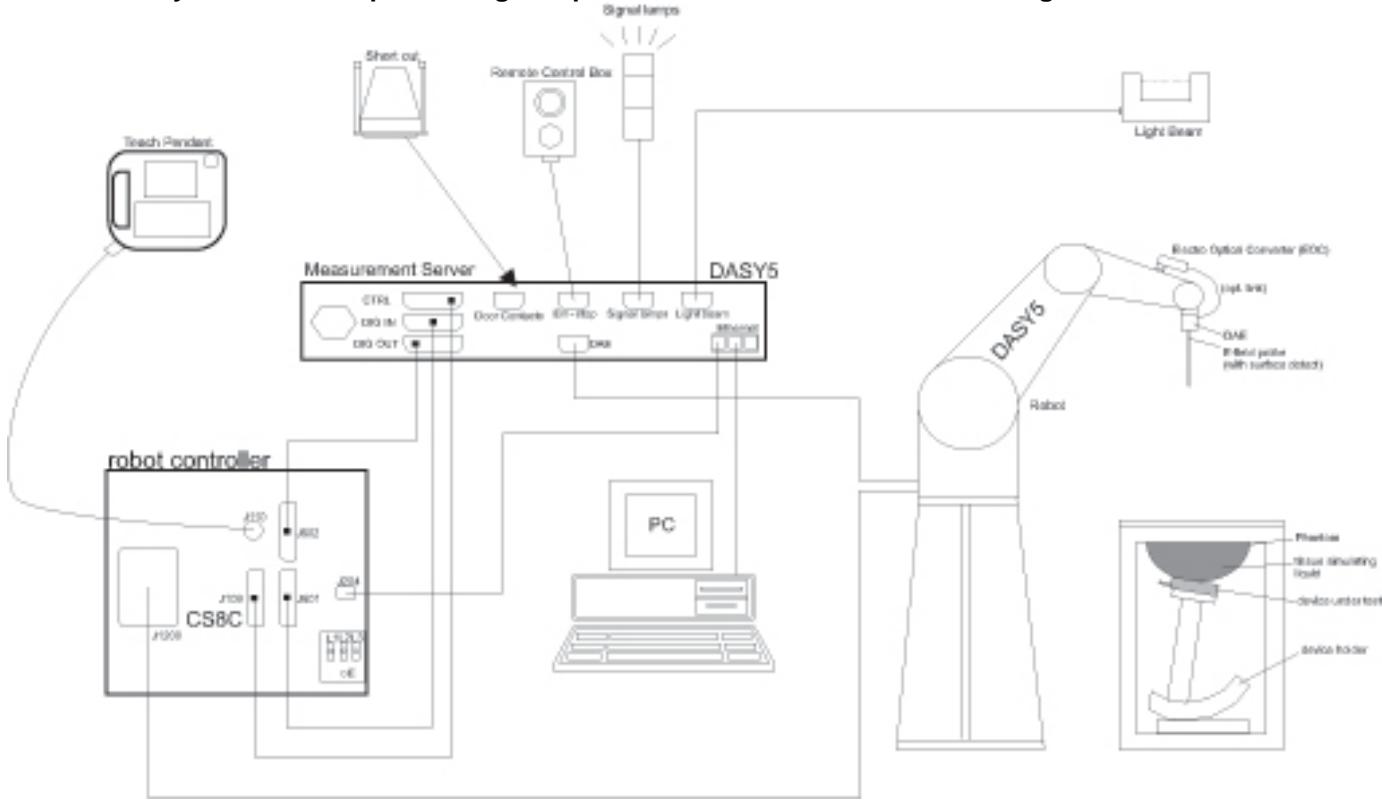

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}$ , $\Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

### Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

		$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$  graded grid	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface  $\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 4$ mm  $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm
<p>Note: <math>\delta</math> is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is <math>\leq 1.4</math> W/kg, <math>\leq 8</math> mm, <math>\leq 7</math> mm and <math>\leq 5</math> mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>			

### Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

### Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be greater than the step size in Z-direction.

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Name of equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
ENA Network Analyzer	Keysight	E5080A	MY55100583	December 11, 2018
Dielectric Probe kit	SPEAG	SM DAK 040 SA	1155	NCR
DC power supply	Keysight	E36103A	MY55350020	December 11, 2018
Signal Generator	Rohde & Schwarz	SME06	837633\001	March 23, 2019
BI-Directional Coupler	WERLATONE	C8060-102	3423	December 11, 2018
Peak and Average Power Sensor	Keysight	E9323A	MY55440013	December 11, 2018
Peak and Average Power Sensor	Keysight	E9323A	MY55420006	December 11, 2018
Dual Channel PK Power Meter	Keysight	N1912A	MY55416024	December 11, 2018
Amplifier	CORAD TECHNOLOGY LTD	AMF-4D-00400600-50-30P	1983561	NCR
Dosimetric E-Field Probe	SPEAG	EX3DV4	7383	December 13, 2018
Data Acquisition Electronic	SPEAG	DAE3	427	December 3, 2018
Dipole Kit 2450 MHz	SPEAG	D2450V2	977	January 13, 2019
Dipole Kit 5 GHz	SPEAG	D5GHzV2	1231	January 12, 2019
Software	SPEAG	DASY52	N/A	NCR
Twin Phantom	SPEAG	SAM V5.0	1805	NCR
ELI Phantom	SPEAG	ELI V5.0	1235	NCR
Thermometer	Control Company	4242	150709653	December 11, 2018
Thermometer	VICTOR	VC230	/	December 11, 2018

**Note:**

1) Per KDB865664D01 v01r04 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within  $5\Omega$  from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

## 5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std. 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

The DUT is a wireless module with IEEE 802.11a/b/g/n/ac, and BT radio.	
DUT Dimension	Overall (Length x Width x Height): 30 mm x 12 mm x 3 mm
Host Dimension	Overall (Length x Width x Height): 360 mm x 268 mm x 28 mm

### 6.2. Wireless Technology

Wireless technology	Frequency band
Wi-Fi	2.4 GHz
Wi-Fi	5 GHz
BT	2.4 GHz

## 7. SAR Test Configuration

As per KDB 616217 D04, when antennas are incorporated in the keyboard section of a laptop computer, SAR is required for the bottom surface of the keyboard. Provided tablet use conditions are not supported by the laptop computer, SAR tests for bystander exposure from the edges of the keyboard and display screen of laptop computers are generally not required.

## 8. Conducted Output Power Measurement and tune-up tolerance

### 8.1. Power measurement result of 2.4GHz Wi-Fi for Main ANT.

Mode	Channel	Frequency (MHz)	Data Rate	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test	Duty Cycle %
802.11b	1	2412	1Mbps	19.04	20.5	Required	100.00
	6	2437		19.12	20.5		
	11	2462		18.86	20.5		
802.11g	1	2412	6Mbps	16.15	17.5	Excluded	\
	6	2437		18.06	19.5		
	11	2462		16.42	18.0		
802.11n-HT20	1	2412	MCS0	15.94	17.5	Excluded	\
	6	2437		17.77	19.5		
	11	2462		15.63	17.0		
802.11n-HT40	3	2422	MCS0	14.82	16.5	Excluded	\
	6	2437		17.13	18.5		
	9	2452		13.46	15.0		

### 8.2. Power measurement result of 2.4GHz Wi-Fi for Aux ANT.

Mode	Channel	Frequency (MHz)	Data Rate	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test	Duty Cycle %
802.11b	1	2412	1Mbps	18.84	20.5	Required	100.00
	6	2437		19.35	20.5		
	11	2462		19.04	20.5		
802.11g	1	2412	6Mbps	15.81	17.5	Excluded	\
	6	2437		18.02	19.5		
	11	2462		16.91	18.0		
802.11n-HT20	1	2412	MCS0	15.74	17.5	Excluded	\
	6	2437		17.78	19.5		
	11	2462		15.53	17.0		
802.11n-HT40	3	2422	MCS0	15.08	16.5	Excluded	\
	6	2437		17.52	18.5		
	9	2452		13.51	15.0		

### 8.3. Power measurement result of 5GHz Wi-Fi (U-NII-1) for Main ANT.

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-up Limit	SAR Test	Duty Cycle %
802.11a	36	5180	6Mbps	14.81	15.5	Excluded	99.4
	40	5200		15.24	17.0		
	44	5220		15.62	17.0		
	48	5240		15.57	17.0		
802.11n-HT20	36	5180	MCS0	14.51	15.5	Excluded	\
	40	5200		15.26	17.0		
	44	5220		15.54	17.0		
	48	5240		15.48	17.0		
802.11n-HT40	38	5190	MCS0	11.15	12.0	Excluded	\
	46	5230		14.95	16.0		
802.11ac-VHT20	36	5180	MCS0	14.51	15.5	Excluded	\
	40	5200		15.26	17.0		
	44	5220		15.54	17.0		
	48	5240		15.48	17.0		
802.11ac-VHT40	38	5190	MCS0	11.16	12.0	Excluded	\
	46	5230		15.32	16.0		
802.11ac-VHT80	42	5210	MCS0	12.63	14.0	Excluded	\

### 8.4. Power measurement result of 5GHz Wi-Fi (U-NII-2A) for Main ANT.

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-up Limit	SAR Test	Duty Cycle %
802.11a	52	5260	6Mbps	15.51	17.0	Required	99.4
	56	5280		15.54	17.0		
	60	5300		15.39	17.0		
	64	5320		14.55	16.0		
802.11n-HT20	52	5260	MCS0	15.26	17.0	Excluded	\
	56	5280		15.47	16.0		
	60	5300		15.59	17.0		
	64	5320		14.15	15.0		
802.11n-HT40	54	5270	MCS0	14.86	16.0	Excluded	\
	62	5310		11.53	13.0		
802.11ac-VHT20	52	5260	MCS0	15.26	17.0	Excluded	\
	56	5280		15.47	16.0		
	60	5300		15.59	17.0		
	64	5320		14.15	15.0		
802.11ac-VHT40	54	5270	MCS0	15.23	16.0	Excluded	\
	62	5310		11.11	13.0		
802.11ac-VHT80	58	5290	MCS0	10.91	12.0	Excluded	\

## 8.5. Power measurement result of 5GHz Wi-Fi (U-NII-2C) for Main ANT.

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-up Limit	SAR Test	Duty Cycle %
802.11a	100	5500	6Mbps	13.62	15.0	Required	99.4
	104	5520		15.44	17.0		
	108	5540		15.43	17.0		
	112	5560		15.31	17.0		
	116	5580		15.51	17.0		
	120	5600		15.39	17.0		
	124	5620		15.56	17.0		
	128	5640		15.84	17.0		
	132	5660		15.77	17.0		
	136	5680		15.91	17.0		
	140	5700		14.01	14.5		
	144	5720		15.89	17.0		
802.11n-HT20	100	5500	MCS0	13.45	15.0	Excluded	\
	104	5520		15.26	17.0		
	108	5540		15.38	17.0		
	112	5560		15.24	17.0		
	116	5580		15.16	17.0		
	120	5600		15.41	17.0		
	124	5620		15.23	17.0		
	128	5640		15.68	17.0		
	132	5660		15.84	17.0		
	136	5680		15.89	17.0		
	140	5700		14.18	15.0		
	144	5720		15.88	17.0		
802.11n-HT40	102	5510	MCS0	12.41	13.0	Excluded	\
	110	5550		14.64	16.0		
	118	5590		14.61	16.0		
	126	5630		14.83	16.0		
	134	5670		14.22	15.5		
	142	5710		15.07	16.0		
802.11ac-VHT20	100	5500	MCS0	13.45	15.0	Excluded	\
	104	5520		15.26	17.0		
	108	5540		15.38	17.0		
	112	5560		15.24	17.0		
	116	5580		15.16	17.0		
	120	5600		15.41	17.0		
	124	5620		15.23	17.0		
	128	5640		15.68	17.0		
	132	5660		15.84	17.0		
	136	5680		15.89	17.0		
	140	5700		14.18	15.0		
	144	5720		15.88	17.0		
802.11ac-	102	5510	MCS0	11.36	13.0	Excluded	\

VHT40	110	5550		14.71	16.0		
	118	5590		14.54	16.0		
	126	5630		15.14	16.0		
	134	5670		13.98	15.5		
	142	5710		14.93	16.0		
802.11ac-VHT80	106	5530	MCS0	10.12	12.0	Excluded	\
	122	5610		14.84	16.0		
	138	5690		14.63	16.0		

## 8.6. Power measurement result of 5GHz Wi-Fi (U-NII-3) for Main ANT.

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-up Limit	SAR Test	Duty Cycle %
802.11a	149	5745	6Mbps	15.68	17.0	Required	99.4
	153	5765		15.91	17.0		
	157	5785		15.63	17.0		
	161	5805		15.26	17.0		
	165	5825		15.19	17.0		
802.11n-HT20	149	5745	MCS0	15.31	17.0	Excluded	\
	153	5765		15.52	17.0		
	157	5785		15.26	17.0		
	161	5805		15.19	17.0		
	165	5825		15.11	17.0		
802.11n-HT40	151	5755	MCS0	13.61	15.0	Excluded	\
	159	5795		14.73	16.0		
802.11ac-VHT20	149	5745	MCS0	15.31	17.0	Excluded	\
	153	5765		15.52	17.0		
	157	5785		15.26	17.0		
	161	5805		15.19	17.0		
	165	5825		15.11	17.0		
802.11ac-VHT40	151	5755	MCS0	13.52	15.0	Excluded	\
	159	5795		14.59	16.0		
802.11ac-VHT80	155	5775	MCS0	13.26	14.5	Excluded	\

## 8.7. Power measurement result of 5GHz Wi-Fi (U-NII-1) for Aux ANT.

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-up Limit	SAR Test	Duty Cycle %
802.11a	36	5180	6Mbps	13.82	15.5	Excluded	99.4
	40	5200		15.61	17.0		
	44	5220		15.68	17.0		
	48	5240		15.67	17.0		
802.11n-HT20	36	5180	MCS0	13.68	15.5	Excluded	\
	40	5200		15.46	17.0		
	44	5220		15.31	17.0		
	48	5240		15.59	17.0		
802.11n-HT40	38	5190	MCS0	10.95	12.0	Excluded	\
	46	5230		15.21	16.0		
802.11ac-VHT20	36	5180	MCS0	13.68	15.5	Excluded	\
	40	5200		15.47	17.0		
	44	5220		15.39	17.0		
	48	5240		15.57	17.0		
802.11ac-VHT40	38	5190	MCS0	10.83	12.0	Excluded	\
	46	5230		14.45	16.0		
802.11ac-VHT80	42	5210	MCS0	12.56	14.0	Excluded	\

## 8.8. Power measurement result of 5GHz Wi-Fi (U-NII-2A) for Aux ANT.

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-up Limit	SAR Test	Duty Cycle %
802.11a	52	5260	6Mbps	15.68	17.0	Required	99.4
	56	5280		15.76	17.0		
	60	5300		16.22	17.0		
	64	5320		14.32	16.0		
802.11n-HT20	52	5260	MCS0	15.68	17.0	Excluded	\
	56	5280		15.63	16.0		
	60	5300		16.09	17.0		
	64	5320		13.55	15.0		
802.11n-HT40	54	5270	MCS0	14.35	16.0	Excluded	\
	62	5310		12.75	13.0		
802.11ac-VHT20	52	5260	MCS0	15.82	17.0	Excluded	\
	56	5280		15.64	16.0		
	60	5300		16.09	17.0		
	64	5320		13.65	15.0		
802.11ac-VHT40	54	5270	MCS0	15.63	16.0	Excluded	\
	62	5310		11.68	13.0		
802.11ac-VHT80	58	5290	MCS0	11.81	12.0	Excluded	\

## 8.9. Power measurement result of 5GHz Wi-Fi (U-NII-2C) for Aux ANT.

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-up Limit	SAR Test	Duty Cycle %
802.11a	100	5500	6Mbps	14.13	15.0	Required	99.4
	104	5520		15.68	17.0		
	108	5540		16.09	17.0		
	112	5560		16.12	17.0		
	116	5580		16.65	17.0		
	120	5600		16.63	17.0		
	124	5620		16.51	17.0		
	128	5640		16.91	17.0		
	132	5660		16.45	17.0		
	136	5680		16.53	17.0		
	140	5700		14.41	14.5		
	144	5720		16.71	17.0		
802.11n-HT20	100	5500	MCS0	13.15	15.0	Excluded	\
	104	5520		15.65	17.0		
	108	5540		16.15	17.0		
	112	5560		16.17	17.0		
	116	5580		16.75	17.0		
	120	5600		16.78	17.0		
	124	5620		16.45	17.0		
	128	5640		16.88	17.0		
	132	5660		16.77	17.0		
	136	5680		16.51	17.0		
	140	5700		14.17	15.0		
	144	5720		16.23	17.0		
802.11n-HT40	102	5510	MCS0	11.71	13.0	Excluded	\
	110	5550		14.91	16.0		
	118	5590		15.55	16.0		
	126	5630		15.71	16.0		
	134	5670		14.66	15.5		
	142	5710		15.05	16.0		
802.11ac-VHT20	100	5500	MCS0	14.21	15.0	Excluded	\
	104	5520		15.75	17.0		
	108	5540		16.13	17.0		
	112	5560		16.07	17.0		
	116	5580		16.81	17.0		
	120	5600		16.56	17.0		
	124	5620		16.51	17.0		
	128	5640		16.88	17.0		
	132	5660		16.71	17.0		
	136	5680		16.65	17.0		
	140	5700		14.36	15.0		
	144	5720		16.16	17.0		
802.11ac-	102	5510	MCS0	11.45	13.0	Excluded	\

VHT40	110	5550		14.93	16.0		
	118	5590		15.67	16.0		
	126	5630		15.95	16.0		
	134	5670		14.78	15.5		
	142	5710		15.66	16.0		
802.11ac-VHT80	106	5530	MCS0	10.75	12.0	Excluded	\
	122	5610		15.15	16.0		
	138	5690		14.82	16.0		

## 8.10. Power measurement result of 5GHz Wi-Fi (U-NII-3) for Aux ANT.

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-up Limit	SAR Test	Duty Cycle %
802.11a	149	5745	6Mbps	15.62	17.0	Required	99.4
	153	5765		15.45	17.0		
	157	5785		15.46	17.0		
	161	5805		15.68	17.0		
	165	5825		15.32	17.0		
802.11n-HT20	149	5745	MCS0	15.65	17.0	Excluded	\
	153	5765		15.25	17.0		
	157	5785		15.05	17.0		
	161	5805		15.57	17.0		
	165	5825		15.16	17.0		
802.11n-HT40	151	5755	MCS0	13.51	15.0	Excluded	\
	159	5795		14.56	16.0		
802.11ac-VHT20	149	5745	MCS0	15.58	17.0	Excluded	\
	153	5765		15.23	17.0		
	157	5785		15.11	17.0		
	161	5805		15.65	17.0		
	165	5825		15.17	17.0		
802.11ac-VHT40	151	5755	MCS0	13.62	15.0	Excluded	\
	159	5795		14.45	16.0		
802.11ac-VHT80	155	5775	MCS0	12.74	14.5	Excluded	\

## 8.11. Power measurement result BT

Band	Mode	Antenna	Average Conducted Power (dBm)			Tune-up
			0CH	39CH	78CH	
2.4G	DH5	Main	2.35	2.86	3.21	6.0
		Aux	2.23	2.85	3.06	6.0
	3DH5	Main	-0.04	0.55	0.84	6.0
		Aux	-1.28	-0.65	-0.44	6.0

Band	Mode	Antenna	Average Conducted Power (dBm)			Tune-up
			0CH	19CH	39CH	
2.4G	BLE	Main	-4.45	-3.95	-3.76	6.0
		Aux	-1.92	-1.64	-1.66	6.0

Note:

As per KDB 447498 sec.4.1.d) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

## 9. RF Exposure Conditions

The antenna location diagram inside the device can be found in App A, the distance of antenna to bottom surface can be found on it.

Per FCC KDB 447498D01:

1. The 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for product specific 10-g SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

2. The SAR exclusion threshold for distances  $> 50$  mm is defined by the following equation, as illustrated in KDB 447498 D01 Appendix B:

a) at 100 MHz to 1500 MHz

[Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW

b) at  $> 1500$  MHz and  $\leq 6$  GHz

[Power allowed at numeric Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW

3. The test separation distances required for a device to demonstrate SAR or MPE compliance must be sufficiently conservative to support the operational separation distances required by the device and its antennas and radiating structures. For devices such as tablets and transmitters embedded in keyboard sections of laptop computers that are typically used in close proximity to users, the test separation distance is determined by the smallest distance between the outer surface of the device and the user. For larger devices, as the antenna operational separation distance increases to where the SAR characteristics of the device and its antennas are not directly influenced by the user, such as antennas along the top and upper side edges of laptop computer displays or opposite and adjacent edges of tablets, the test separation distance is normally determined by the closest separation between the antenna and the user.

For BT 1-g SAR

Mode	Frequency	Power (dBm)	Power (mW)	Separation Distance (mm)	Calculated Result	Threshold	SAR Test
2.4G	2480	6.0	3.98	5.00	1.3	3.0	Excluded

Note:

Because the calculated result is less than the threshold, so SAR evaluation for BT 1-g SAR is not required.

## 10. Dielectric Property Measurements & System Check

### 10.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

## Dielectric Property Measurements Results:

Liquid	Freq.	Liquid Parameters				Delta(%)		Limit (%)	Temp. (°C)	Test Date			
		Measured		Target									
		ε <sub>r</sub>	σ	ε <sub>r</sub>	σ	ε <sub>r</sub>	σ						
Body 2450	2360	52.27	1.91	52.82	1.86	-1.04	2.63	±5	23.5	June 7, 2018			
	2450	51.94	2.02	52.70	1.95	-1.44	3.64	±5					
	2540	51.75	2.12	52.59	2.08	-1.60	1.97	±5					
Body 5250	5160	48.36	5.28	49.07	5.25	-1.45	0.53	±5	23.1	June 9, 2018			
	5250	48.34	5.42	48.95	5.36	-1.25	1.19	±5					
	5340	48.07	5.59	48.96	5.46	-1.82	2.36	±5					
Body 5600	5500	47.75	5.78	48.59	5.66	-1.73	2.19	±5	22.9	June 9, 2018			
	5600	47.57	5.94	48.47	5.77	-1.86	2.95	±5					
	5700	47.34	6.06	48.35	5.87	-2.09	3.19	±5					
Body 5750	5660	47.41	5.86	48.39	5.84	-2.03	0.39	±5	23.0	June 9, 2018			
	5750	47.30	6.00	48.27	5.94	-2.01	1.04	±5					
	5840	47.08	6.18	48.16	6.03	-2.24	2.50	±5					

## 10.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0  $\pm 0.2$  mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0$  cm for SAR measurements  $\leq 3$  GHz and  $\geq 10.0$  cm for measurements  $> 3$  GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm (above 1GHz) and 15mm (below 1GHz) from dipole center to the simulating liquid surface.
- For area scan, standard grid spacing for head measurements is 15 mm in x- and y- dimension( $\leq 2$ GHz), 12 mm in x- and y-dimension(2-4 GHz) and 10mm in x- and y- dimension(4-6GHz).
- For zoom scan,  $\Delta x_{zoom}$ ,  $\Delta y_{zoom} \leq 2$ GHz -  $\leq 8$ mm, 2-4GHz -  $\leq 5$  mm and 4-6 GHz- $\leq 4$ mm;  $\Delta z_{zoom} \leq 3$ GHz -  $\leq 5$  mm, 3-4 GHz-  $\leq 4$ mm and 4-6GHz- $\leq 2$ mm.
- Distance between probe sensors and phantom surface was set to 3 mm except for 5 GHz band. For 5GHz band, Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was set to 100 mW or 250 mW depend on the certificate of the dipoles.
- The results are normalized to 1 W input power.

### System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

T.S. Liquid		Measured Results		Target (Ref. value)	Delta (%)	Limit (%)	Temp. (°C)	Test Date
		Zoom Scan (W/Kg)	Normalize to 1W (W/Kg)					
Body 2450	1g	12.500	50.00	51.70	-3.29	±10	23.5	June 7, 2018
	10g	5.930	23.72	24.30	-2.39			
Body 5250	1g	7.290	72.90	76.10	-4.20	±10	23.1	June 9, 2018
	10g	2.070	20.70	21.40	-3.27			
Body 5600	1g	7.750	77.50	80.40	-3.61	±10	22.9	June 9, 2018
	10g	2.190	21.90	22.50	-2.67			
Body 5750	1g	7.520	75.20	77.00	-2.34	±10	23.0	June 9, 2018
	10g	2.120	21.20	21.50	-1.40			

## 11. Measured and Reported (Scaled) SAR Results

As per KDB 447498 sec.4.1.e), When SAR or MPE is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported.

### Scaled SAR calculation formula:

Scaled SAR = Tune-up in mW / Conducted power in mW \* Duty cycle (if available) \* SAR value

### SAR Test Reduction criteria are as follows:

#### KDB 447498 D01 General RF Exposure Guidance:

A) Per KDB447498 D01 v06, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.

B) Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$ .
- $\leq 0.6 \text{ W/kg}$  or  $1.5 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between  $100 \text{ MHz}$  and  $200 \text{ MHz}$ .
- $\leq 0.4 \text{ W/kg}$  or  $1.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200 \text{ MHz}$ .

#### Per KDB865664 D01 v01r04:

For each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8 \text{ W/kg}$ ; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45 \text{ W/kg}$ , only one repeated measurement is required.

#### Per KDB 248227 D01 v02r02:

For Wi-Fi SAR testing, a communication link is set up with the testing software for Wi-Fi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227 D01 v02r02 are applied. (Refer to KDB 248227D01 v02r02 for more details)

### Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4 \text{ W/kg}$ , no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8 \text{ W/kg}$  or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8 \text{ W/kg}$ , SAR is measured for these test positions /configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2 \text{ W/kg}$  or all required channels are tested.

### Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01

v02r02). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the reported SAR of the initial test configuration is  $> 0.8 \text{ W/kg}$ , SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is  $\leq 1.2 \text{ W/kg}$  or all required channels are tested.

### **Sub Test Configuration Procedure**

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ , SAR is not required for that subsequent test configuration.

Note:

The same procedure is applied to extremity SAR evaluation, and the corresponding limitation is 2.5 times of 1-g SAR.

## 11.1. SAR Test Results of 2.4G Wi-Fi with ICT antenna platform

Test Position (Body 0mm)	Test Mode	Channel/ Frequency	Power (dBm)		SAR Value 1-g (Zoom Scan)	Power Drift	Duty Factor (%)	Scaled (W/Kg)
			Tune-up	Meas.				
Main ANT.								
Bottom surface	802.11 b	6/2437	20.50	19.12	0.684	-0.07	100.0	0.940
Bottom surface	802.11 b	1/2412	20.50	19.04	0.524	0.14	100.0	0.733
Aux ANT.								
Bottom surface	802.11 b	6/2437	20.50	19.35	0.482	0.13	100.0	0.628

OFDM mode SAR evaluation exclusion analysis for 1-g SAR for main ANT

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11b	20.5	112.20	0.940	\	\
802.11g	19.5	89.13	\	0.747	Excluded
802.11n (20M)	19.5	89.13	\	0.747	Excluded
802.11n (40M)	18.5	70.79	\	0.593	Excluded

Note:

- 1) The highest reported SAR for DSSS adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, so SAR evaluation for 802.11g/n is not required.

OFDM mode SAR evaluation exclusion analysis for 1-g SAR for aux ANT

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11b	20.5	112.20	0.628	\	\
802.11g	19.5	89.13	\	0.499	Excluded
802.11n (20M)	19.5	89.13	\	0.499	Excluded
802.11n (40M)	18.5	70.79	\	0.396	Excluded

Note:

- 1) The highest reported SAR for DSSS adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, so SAR evaluation for 802.11g/n is not required.

## 11.2. SAR Test Results of 2.4G Wi-Fi with SPD antenna platform

Test Position (Body 0mm)	Test Mode	Channel/ Frequency	Power (dBm)		SAR Value 1-g (Zoom Scan)	Power Drift	Duty Factor (%)	Scaled (W/Kg)
			Tune-up	Meas.				
Main ANT.								
Bottom surface	802.11 b	6/2437	20.50	19.12	0.751	0.03	100.0	1.032
Bottom surface	802.11 b	1/2412	20.50	19.04	0.674	-0.11	100.0	0.943
Bottom surface	802.11 b	11/2462	20.50	18.86	0.743	-0.08	100.0	1.084
Aux ANT.								
Bottom surface	802.11 b	6/2437	20.50	19.35	0.603	0.18	100.0	0.786

OFDM mode SAR evaluation exclusion analysis for 1-g SAR for main ANT

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11b	20.5	112.20	1.084	\	\
802.11g	19.5	89.13	\	0.861	Excluded
802.11n (20M)	19.5	89.13	\	0.861	Excluded
802.11n (40M)	18.5	70.79	\	0.684	Excluded

Note:

- 1) The highest reported SAR for DSSS adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, so SAR evaluation for 802.11g/n is not required.

OFDM mode SAR evaluation exclusion analysis for 1-g SAR for aux ANT

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11b	20.5	112.20	0.786	\	\
802.11g	19.5	89.13	\	0.624	Excluded
802.11n (20M)	19.5	89.13	\	0.624	Excluded
802.11n (40M)	18.5	70.79	\	0.496	Excluded

Note:

- 1) The highest reported SAR for DSSS adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, so SAR evaluation for 802.11g/n is not required.

### 11.3. SAR Test Results of 5G Wi-Fi with ICT antenna platform

Test Position (Body 0mm)	Test Mode	Channel/ Frequency	Power (dBm)		SAR Value	Power Drift	Duty Factor (%)	Scaled (W/Kg)						
			Tune-up	Meas.										
Main ANT.														
UNII-2A														
Bottom surface	802.11 a	56/5280	17.00	15.54	0.806	0.14	99.4	1.128						
Bottom surface	802.11 a	52/5260	17.00	15.51	0.655	0.19	99.4	0.923						
Bottom surface-repeated	802.11 a	56/5280	17.00	15.54	0.740	0.05	99.4	1.036						
UNII-2C														
Bottom surface	802.11 a	136/5680	17.00	15.91	0.780	0.13	99.4	1.003						
Bottom surface	802.11 a	144/5720	17.00	15.89	0.641	0.11	99.4	0.828						
UNII-3														
Bottom surface	802.11 a	153/5765	17.00	15.91	0.578	0.18	99.4	0.743						
Aux ANT.														
UNII-2A														
Bottom surface	802.11 a	60/5300	17.00	16.22	0.583	0.09	99.4	0.698						
UNII-2C														
Bottom surface	802.11 a	128/5640	17.00	16.91	0.966	0.05	99.4	0.986						
Bottom surface	802.11 a	144/5720	17.00	16.71	0.560	0.02	99.4	0.599						
Bottom surface-repeated	802.11 a	128/5640	17.00	16.91	0.906	-0.01	99.4	0.925						
UNII-3														
Bottom surface	802.11 a	161/5805	17.00	15.68	0.572	0.15	99.4	0.775						

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for main ANT (U-NII-2A)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	1.128	\	\
802.11n 20M	17	50.12	\	1.128	Excluded
802.11n 40M	16	39.81	\	0.896	Excluded
802.11ac 20M	17	50.12	\	1.128	Excluded
802.11ac 40M	16	39.81	\	0.896	Excluded
802.11ac 80M	12	15.85	\	0.357	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for main ANT (U-NII-2C)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	1.003	\	\
802.11n 20M	17	50.12	\	1.003	Excluded
802.11n 40M	16	39.81	\	0.797	Excluded
802.11ac 20M	17	50.12	\	1.003	Excluded
802.11ac 40M	16	39.81	\	0.797	Excluded
802.11ac 80M	16	39.81	\	0.797	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for main ANT (U-NII-3)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	0.743	\	\
802.11n 20M	17	50.12	\	0.743	Excluded
802.11n 40M	16	39.81	\	0.590	Excluded
802.11ac 20M	17	50.12	\	0.743	Excluded
802.11ac 40M	16	39.81	\	0.590	Excluded
802.11ac 80M	14.5	28.18	\	0.418	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for aux ANT (U-NII-2A)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	0.698	\	\
802.11n 20M	17	50.12	\	0.698	Excluded
802.11n 40M	16	39.81	\	0.554	Excluded
802.11ac 20M	17	50.12	\	0.698	Excluded
802.11ac 40M	16	39.81	\	0.554	Excluded
802.11ac 80M	12	15.85	\	0.221	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for aux ANT (U-NII-2C)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	0.986	\	\
802.11n 20M	17	50.12	\	0.986	Excluded
802.11n 40M	16	39.81	\	0.783	Excluded
802.11ac 20M	17	50.12	\	0.986	Excluded
802.11ac 40M	16	39.81	\	0.783	Excluded
802.11ac 80M	16	39.81	\	0.783	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for aux ANT (U-NII-3)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	0.775	\	\
802.11n 20M	17	50.12	\	0.775	Excluded
802.11n 40M	16	39.81	\	0.616	Excluded
802.11ac 20M	17	50.12	\	0.775	Excluded
802.11ac 40M	16	39.81	\	0.616	Excluded
802.11ac 80M	14.5	28.18	\	0.436	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## 11.4. SAR Test Results of 5G Wi-Fi with SPD antenna platform

Test Position (Body 0mm)	Test Mode	Channel/ Frequency	Power (dBm)		SAR Value	Power Drift	Duty Factor (%)	Scaled (W/Kg)					
			Tune-up	Meas.	1-g (Zoom Scan)								
Main ANT.													
UNII-2A													
Bottom surface	802.11 a	56/5280	17.00	15.54	0.616	0.17	99.4	0.862					
Bottom surface	802.11 a	52/5260	17.00	15.51	0.563	0.15	99.4	0.793					
UNII-2C													
Bottom surface	802.11 a	136/5680	17.00	15.91	0.535	0.04	99.4	0.688					
UNII-3													
Bottom surface	802.11 a	153/5765	17.00	15.91	0.495	0.10	99.4	0.636					
Aux ANT.													
UNII-2A													
Bottom surface	802.11 a	60/5300	17.00	16.22	0.334	-0.10	99.4	0.400					
UNII-2C													
Bottom surface	802.11 a	128/5640	17.00	16.91	0.373	-0.03	99.4	0.381					
UNII-3													
Bottom surface	802.11 a	161/5805	17.00	15.68	0.273	-0.18	99.4	0.370					

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for main ANT (U-NII-2A)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	0.862	\	\
802.11n 20M	17	50.12	\	0.862	Excluded
802.11n 40M	16	39.81	\	0.685	Excluded
802.11ac 20M	17	50.12	\	0.862	Excluded
802.11ac 40M	16	39.81	\	0.685	Excluded
802.11ac 80M	12	15.85	\	0.273	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for main ANT (U-NII-2C)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	0.688	\	\
802.11n 20M	17	50.12	\	0.688	Excluded
802.11n 40M	16	39.81	\	0.546	Excluded
802.11ac 20M	17	50.12	\	0.688	Excluded
802.11ac 40M	16	39.81	\	0.546	Excluded
802.11ac 80M	16	39.81	\	0.546	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for main ANT (U-NII-3)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	0.636	\	\
802.11n 20M	17	50.12	\	0.636	Excluded
802.11n 40M	16	39.81	\	0.505	Excluded
802.11ac 20M	17	50.12	\	0.636	Excluded
802.11ac 40M	16	39.81	\	0.505	Excluded
802.11ac 80M	14.5	28.18	\	0.358	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for aux ANT (U-NII-2A)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	0.400	\	\
802.11n 20M	17	50.12	\	0.400	Excluded
802.11n 40M	16	39.81	\	0.318	Excluded
802.11ac 20M	17	50.12	\	0.400	Excluded
802.11ac 40M	16	39.81	\	0.318	Excluded
802.11ac 80M	12	15.85	\	0.126	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for aux ANT (U-NII-2C)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	0.381	\	\
802.11n 20M	17	50.12	\	0.381	Excluded
802.11n 40M	16	39.81	\	0.303	Excluded
802.11ac 20M	17	50.12	\	0.381	Excluded
802.11ac 40M	16	39.81	\	0.303	Excluded
802.11ac 80M	16	39.81	\	0.303	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for 1-g SAR for aux ANT (U-NII-3)

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11a	17	50.12	0.370	\	\
802.11n 20M	17	50.12	\	0.370	Excluded
802.11n 40M	16	39.81	\	0.294	Excluded
802.11ac 20M	17	50.12	\	0.370	Excluded
802.11ac 40M	16	39.81	\	0.294	Excluded
802.11ac 80M	14.5	28.18	\	0.208	Excluded

## Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## 12. Simultaneous Transmission SAR Analysis

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

The main ANT and aux ANT both supports 2.4G Wi-Fi, 5G Wi-Fi and BT, 5G Wi-Fi can transmit concurrent with BT, 2.4G Wi-Fi share the same antenna with BT. So 5G Wi-Fi and BT simultaneous transmission is exit, and 2.4G Wi-Fi and BT simultaneous transmission isn't exit.

Combination NO.	Mode
1	5G Wi-Fi (main ANT) + BT (aux ANT)
2	BT (main ANT) + 5G Wi-Fi (aux ANT)

### 12.1. Estimated SAR

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- 1) (max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)].  
[ $\sqrt{f(\text{GHz})/x}$  W/kg for test separation distances  $\leq$  50 mm, where  $x = 7.5$  for 1-g SAR and  $x = 18.75$  for 10-g SAR.
- 2) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distance is  $>$  50 mm.

When the minimum test separation distance is  $<$  5 mm, a distance of 5 mm is applied.

Estimated 1-g SAR of BT

Position	Frequency (GHz)	Power (dBm)	Power (mW)	Separation Distance (mm)	Estimated 1-g SAR (W/Kg)
Bottom surface	0.248	6.00	3.98	18.0	0.015

## 12.2. Simultaneous Transmission calculation for ICT antenna platform

For Combination NO.1

Test Position	5G Wi-Fi (main ANT) 1-g SAR (W/Kg)	BT (aux ANT) 1-g SAR (W/Kg)	SUM 1-g SAR (W/Kg)	SPLSR
Bottom surface	1.128	0.015	1.143	Excluded

Note:

Because the maximum SUM 1-g SAR  $\leq$  1.6 W/Kg, so the SPLSR analysis is not required.

## 12.3. Simultaneous Transmission calculation for ICT antenna platform

For Combination NO.2

Test Position	BT (main ANT) 1-g SAR (W/Kg)	5G Wi-Fi (aux ANT) 1-g SAR (W/Kg)	SUM 1-g SAR (W/Kg)	SPLSR
Bottom surface	0.015	0.986	1.001	Excluded

Note:

Because the maximum SUM 1-g SAR  $\leq$  1.6 W/Kg, so the SPLSR analysis is not required.

## 12.4. Simultaneous Transmission calculation for SPD antenna platform

For Combination NO.1

Test Position	5G Wi-Fi (main ANT) 1-g SAR (W/Kg)	BT (aux ANT) 1-g SAR (W/Kg)	SUM 1-g SAR (W/Kg)	SPLSR
Bottom surface	0.862	0.015	0.877	Excluded

Note:

Because the maximum SUM 1-g SAR  $\leq$  1.6 W/Kg, so the SPLSR analysis is not required.

## 12.5. Simultaneous Transmission calculation for SPD antenna platform

For Combination NO.2

Test Position	BT (main ANT) 1-g SAR (W/Kg)	5G Wi-Fi (aux ANT) 1-g SAR (W/Kg)	SUM 1-g SAR (W/Kg)	SPLSR
Bottom surface	0.015	0.400	0.415	Excluded

Note:

Because the maximum SUM 1-g SAR  $\leq$  1.6 W/Kg, so the SPLSR analysis is not required.

## Appendices

Refer to separated files for the following appendixes.

**4788502267-2\_App A Photo**

**4788502267-2\_App B System Check Plots**

**4788502267-2\_App C Highest Test Plots**

**4788502267-2\_App D Cal. Certificates**

-----End of Report-----