



Report No.: AGC00610130801FE03

Page 1 of 35

FCC Test Report

Report No.: AGC00610130801FE03

FCC ID : PPFHB025

APPLICATION PURPOSE : Class II Permissive Change

PRODUCT DESIGNATION : Bluetooth keyboard

BRAND NAME : N/A

MODEL NAME : HB028

CLIENT : Shenzhen Haskey Technology Co.,Ltd

DATE OF ISSUE : Aug.07,2013

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug.07,2013	Valid	Original Report

Product Change Record

This is a variant report based on model HB025 (FCC ID: PPFHB025).
Two Models all the same except for the appearance.
The original report can be referred to STR12118167I.
Only Radiated Emission, Band Edges and Conduction Emission were verified for the differences based on the original product.

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION.....	6
2.1 PRODUCT DESCRIPTION	6
2.2 TABLE OF CARRIER FREQUENCYS	6
2.3 RECEIVER INPUT BANDWIDTH.....	7
2.4 EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE.....	8
2.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	8
2.6 RELATED SUBMITTAL(S) / GRANT (S)	8
2.7 TEST METHODOLOGY.....	8
2.8 MEASUREMENT UNCERTAINTY	8
2.9 TEST FACILITY.....	9
2.10 SPECIAL ACCESSORIES	9
2.11 EQUIPMENT MODIFICATIONS.....	9
3. SYSTEM TEST CONFIGURATION	10
3.1 CONFIGURATION OF TESTED SYSTEM.....	10
3.2 EQUIPMENT USED IN EUT SYSTEM.....	10
4. SUMMARY OF TEST RESULTS	11
5. DESCRIPTION OF TEST MODES.....	11
6. RADIATED EMISSION	12
6.1 MEASUREMENT PROCEDURE.....	12
6.2 TEST SETUP	13
6.3 TEST EQUIPMENT LIST	14
6.4 TEST RESULT	15
7. BAND EDGES EMISSION.....	19
7.1 MEASUREMENT PROCEDURE.....	19
7.2 TEST SET-UP	19
7.3 TEST RESULT	19
8. FCC LINE CONDUCTED EMISSION TEST	24
8.1 LIMITS OF LINE CONDUCTED EMISSION TEST	24
8.2 TEST EQUIPMENT LIST	24
8.3 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	24
8.4 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	25
8.5 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	25
8.6 TEST RESULT OF LINE CONDUCTED EMISSION TEST	26
APPENDIX A	28
PHOTOGRAPHS OF THE TEST SETUP	28
APPENDIX B	30
PHOTOGRAPHS OF THE EUT	30


1. VERIFICATION OF COMPLIANCE

Applicant	Shenzhen Haskey Technology Co., Ltd
Address	G-A1 BLDG, Democracy West Industry Park, Shajing town, Bao'an District, Shenzhen, China
Manufacturer	Shenzhen Haskey Technology Co., Ltd
Address	G-A1 BLDG, Democracy West Industry Park, Shajing town, Bao'an District, Shenzhen, China
Product Designation	Bluetooth keyboard
Brand Name	N/A
Test Model	HB028
Date of test	Aug.01~ Aug.05,2013
Deviation	None
Condition of Test Sample	Normal

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By



Wall Huang Aug.07,2013

Checked By



Forrest Lei Aug.07,2013

Authorized By



Solger Zhang Aug.07,2013

2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

The EUT is “Bluetooth Earphone” designed as a “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following:

Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V 3.0
Modulation	GFSK
Number of channels	79
Antenna Designation	Integrated Antenna
Antenna Gain	0dBi
Hardware Version	3.0+HS
Software Version	V3.2
Power Supply	DC 3.7V by Built-in Li-ion Battery

Note:

1. BT is active when charging. The USB port only used for charging and can't be used to transfer data with PC.
2. The EUT is equipped with the Bluetooth Chip AB1107 which complies with Bluetooth V 3.0, but for this device the functionality is limited to GFSK (1MBit/s) by the firmware. End-user is not able to change the settings and enable any additional functionality by himself.
3. All the tests blow were performed base on the modulation used.

2.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

2.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3 MHz. In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multisport (packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4 EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06
01, 51,03,55,05,04

2.5 EQUIALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:
1 LAP/UAP of the master of the connection

2 Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations)are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter)than the minimum resolution of the clock(312.5us).The hopping sequence will always Differ from the first one.

2.6 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: PPFHB025**, filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.8 MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

- Uncertainty of Conducted Emission, $U_c = \pm 2.75\text{dB}$
- Uncertainty of Radiated Emission, $U_c = \pm 3.2\text{dB}$

2.9 TEST FACILITY

All measurement facilities used to collect the measurement data are located at
Attestation of Global Compliance(Shenzhen) Co., Ltd.
2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen,
Guangdong, China
The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.
FCC register No.: 259865

2.10 SPECIAL ACCESSORIES

Refer to section 2.2.


2.11 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.


3. SYSTEM TEST CONFIGURATION

3.1 CONFIGURATION OF TESTED SYSTEM

Configuration 1: (Normal Hopping)

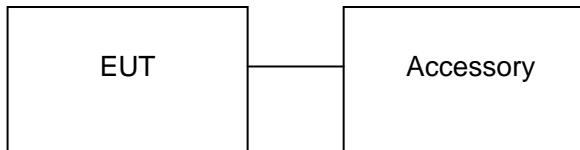

Configuration 2: (Control continuous TX)

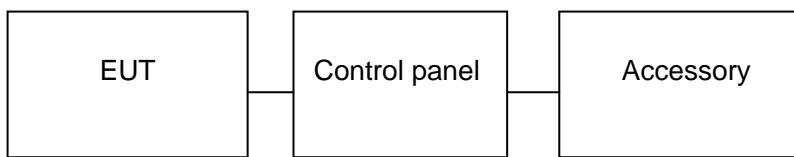

3.2 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth keyboard	N/A	HB028	EUT
2	Battery	N/A	382035p	Accessory
3	PC	Dell	INSPIRON	A.E
4	Control Board	N/A	N/A	A.E
5	Tablet PC	N/A	N/A	A.E

4. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Conduction Emission	Compliant

5. DESCRIPTION OF TEST MODES

TEST MODE DESCRIPTION		
NO.	TEST MODE DESCRIPTION	WORST
1	Low channel TX	
2	Middle channel TX	
3	High channel TX	
4	Normal Hopping	V

Note:

1. V means EMI worst mode.
2. All the test modes can be supply by Built-in Li-ion battery and adapter, only the result of the worst case was recorded in the report, if no other cases.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

6. RADIATED EMISSION

6.1 MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.'

Spectrum Parameter	Setting
Start Frequency	1GHz
Stop Frequency	26.5GHz
RB/VB(Emission in restricted band)	1MHz/1MHz for Peak, 1MHz/10Hz for Average
RB/VB(Emission in non-restricted band)	1MHz/1MHz for Peak


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

6.2 TEST SETUP


RADIATED EMISSION TEST SETUP BELOW 30MHz

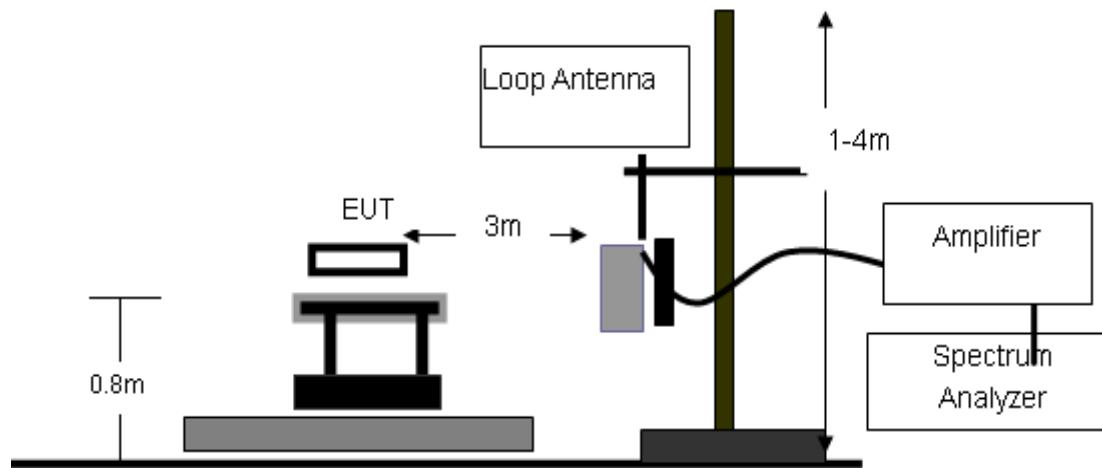

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

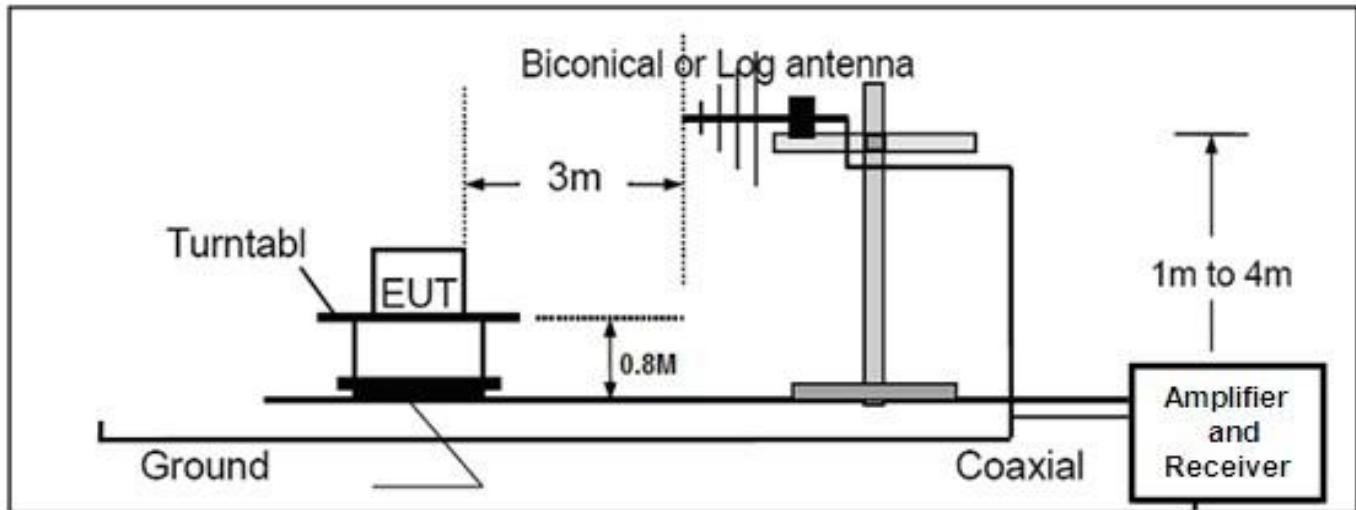

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

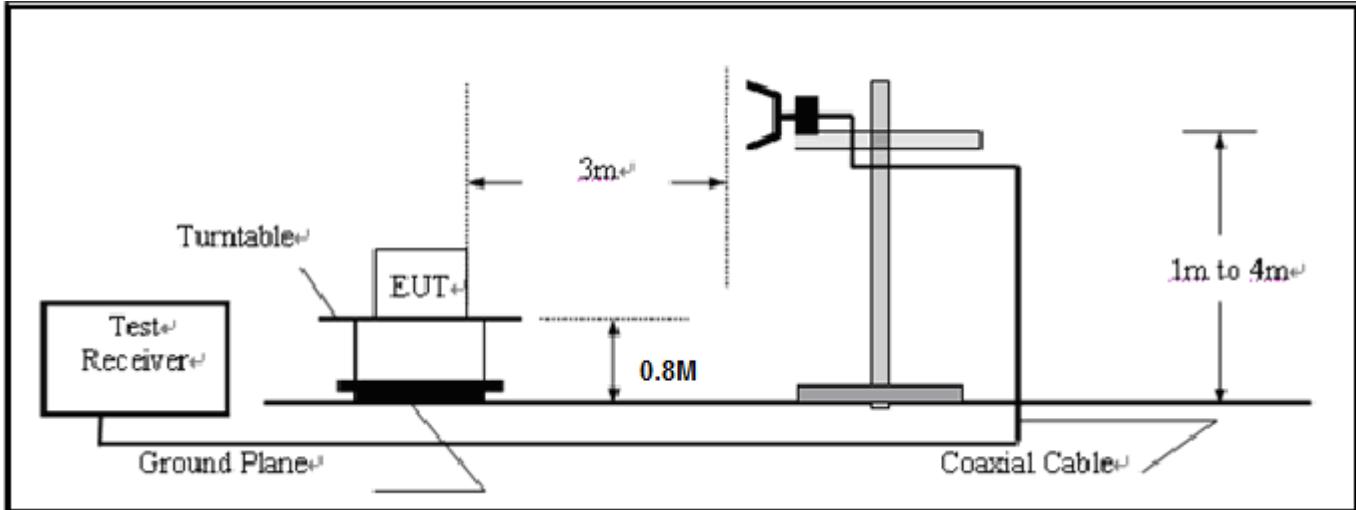

6.3 TEST EQUIPMENT LIST

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	US41421290	07/18/2012	07/17/2013
Amplifier	EM	EM30180	0607030	02/28/2013	02/27/2014
Horn Antenna	EM	EM-AH-10180	67	04/21/2012	04/20/2014
Horn Antenna	A.H. Systems Inc.	SAS-574	--	07/18/2012	07/17/2013
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/18/2012	07/17/2013
Biological Antenna	A.H. Systems Inc.	SAS-521-4	28	06/08/2012	06/07/2013


6.4 TEST RESULT

THE WORST CASE IS NORMAL HOPPING MODE.

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.


RADIATED EMISSION BELOW 1GHZ

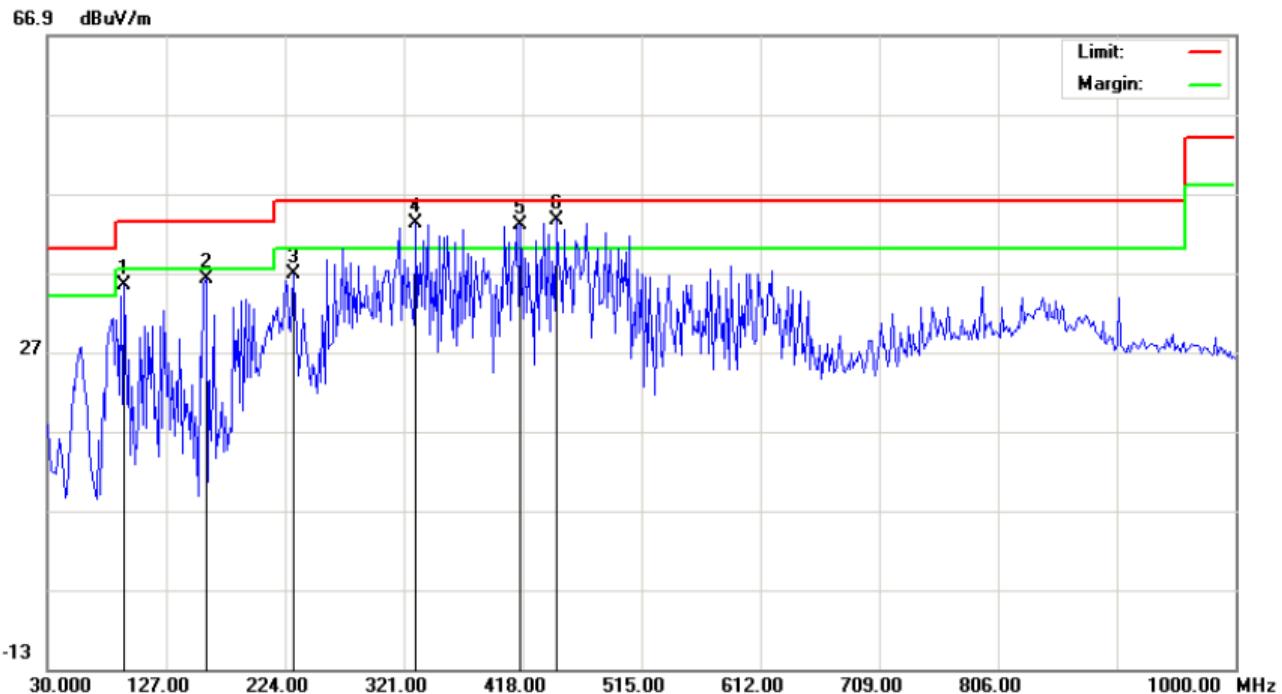

Site: site #1	Polarization: Horizontal	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Bluetooth keyboard	Distance: 3m	
M/N: HB028		
Mode: Normal Hopping		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		93.0500	23.04	12.29	35.33	43.50	-8.17	peak			
2		159.3333	28.57	7.72	36.29	43.50	-7.21	peak			
3		230.4667	24.38	12.39	36.77	46.00	-9.23	peak			
4	!	330.7000	23.34	19.78	43.12	46.00	-2.88	peak			
5	!	416.3833	23.59	19.40	42.99	46.00	-3.01	peak			
6	*	445.4833	21.94	21.59	43.53	46.00	-2.47	peak			

66.9 dBuV/m

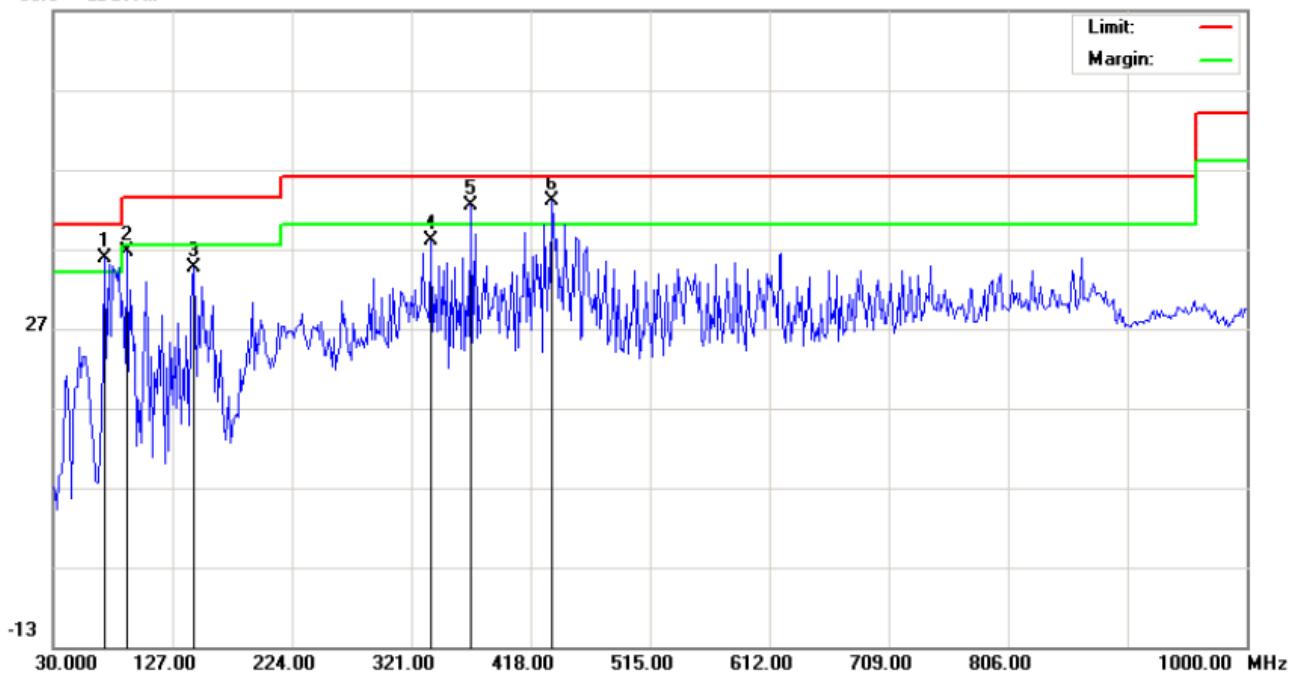

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth keyboard

Distance: 3m


M/N: HB028

Mode: Normal Hopping

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	72.0333	30.73	5.00	35.73	40.00	-4.27	peak			
2		89.8167	31.53	5.02	36.55	43.50	-6.95	peak			
3		144.7833	29.21	5.47	34.68	43.50	-8.82	peak			
4		337.1666	17.96	20.13	38.09	46.00	-7.91	peak			
5	!	369.5000	22.40	20.04	42.44	46.00	-3.56	peak			
6	*	435.7833	21.69	21.28	42.97	46.00	-3.03	peak			

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)

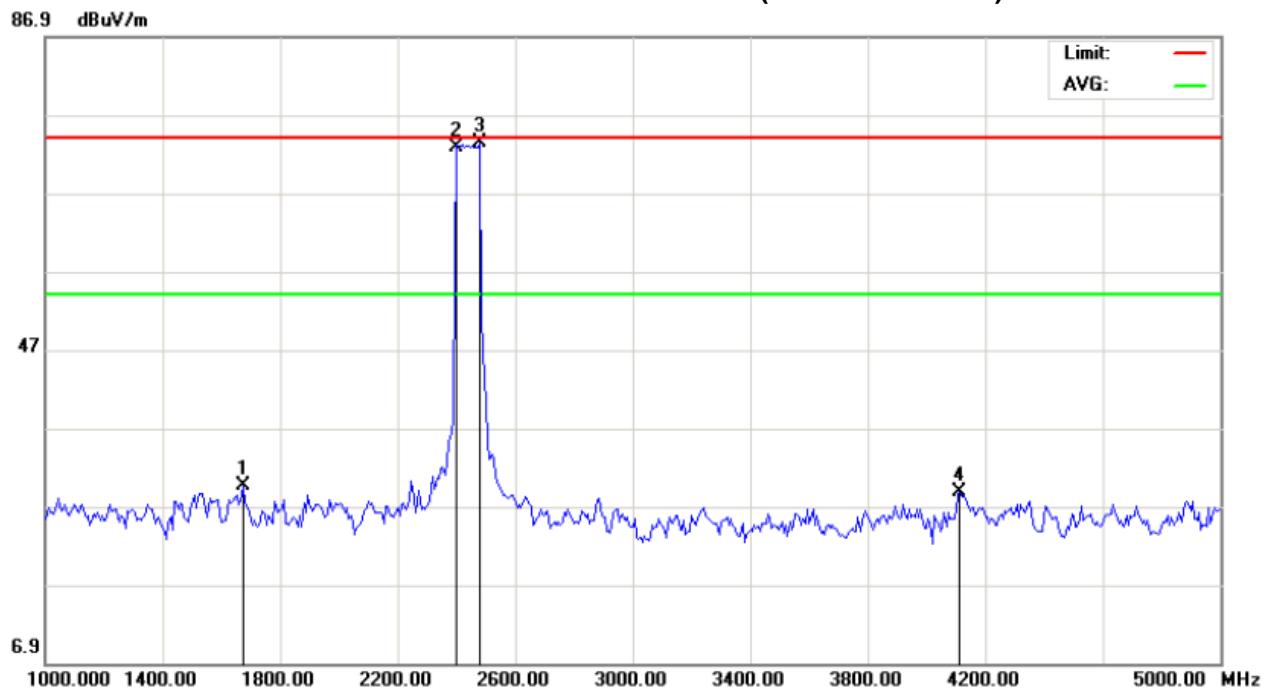

Site: site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth keyboard Distance: 3m
 M/N: HB028
 Mode: Normal Hopping
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		1673.333	39.85	-10.32	29.53	74.00	-44.47	peak			
2		2402.000	81.21	-8.39	72.82	74.00	-1.18	peak			
3	*	2480.000	81.39	-8.08	73.31	74.00	-0.69	peak			
4		4113.333	35.27	-6.51	28.76	74.00	-45.24	peak			

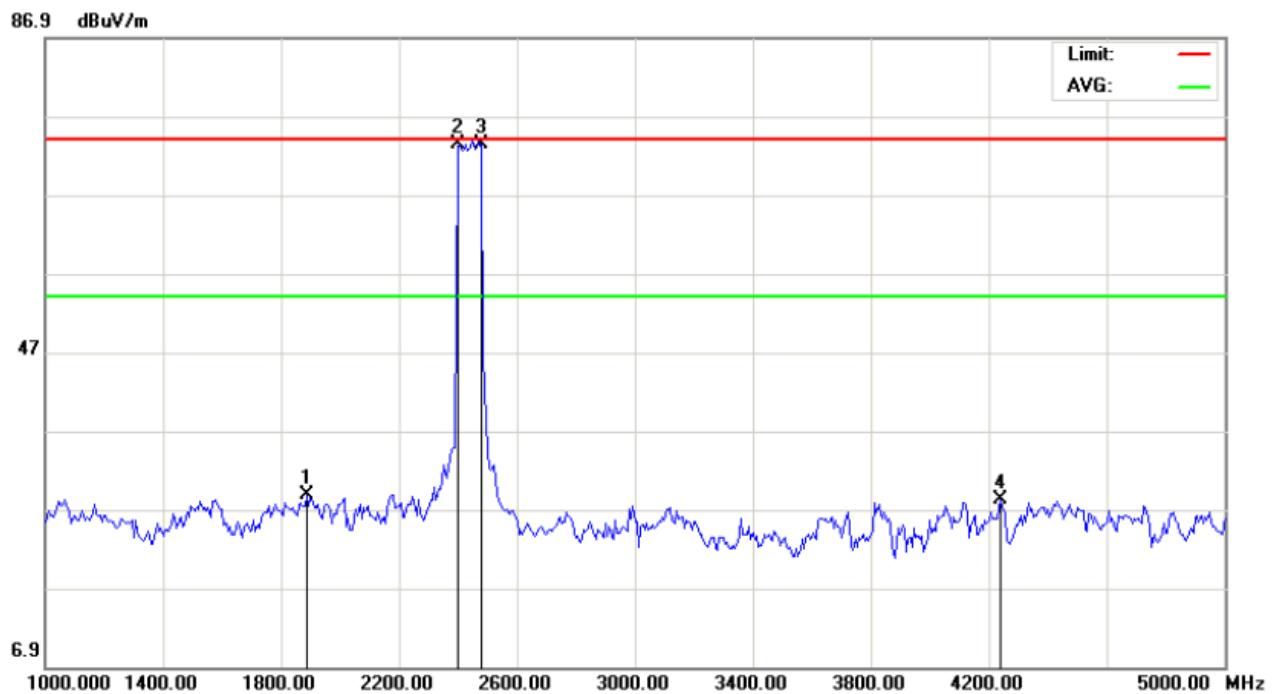

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth keyboard Distance: 3m
M/N: HB028
Mode: Normal Hopping
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1886.667	38.84	-10.11	28.73	74.00	-45.27	peak			
2	*	2402.000	81.71	-8.39	73.32	74.00	-0.68	peak			
3		2480.000	81.39	-8.08	73.31	74.00	-0.69	peak			
4		4240.000	34.02	-5.84	28.18	74.00	-45.82	peak			

****Note:** 5~25GHz at least have 20dB margin. No recording in the test report.
Factor=Antenna Factor+ Cable loss-Amplifier gain, Over=Measurement-Limit.

7. BAND EDGES EMISSION

7.1 MEASUREMENT PROCEDURE


- 1, Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency = Operation Frequency, $RBW \geq 1\% \text{span}$, $VBW \geq RBW$
3. The band edges was measured and recorded.

7.2 TEST SET-UP

The same as described in section 5.2

7.3 TEST RESULT


TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)

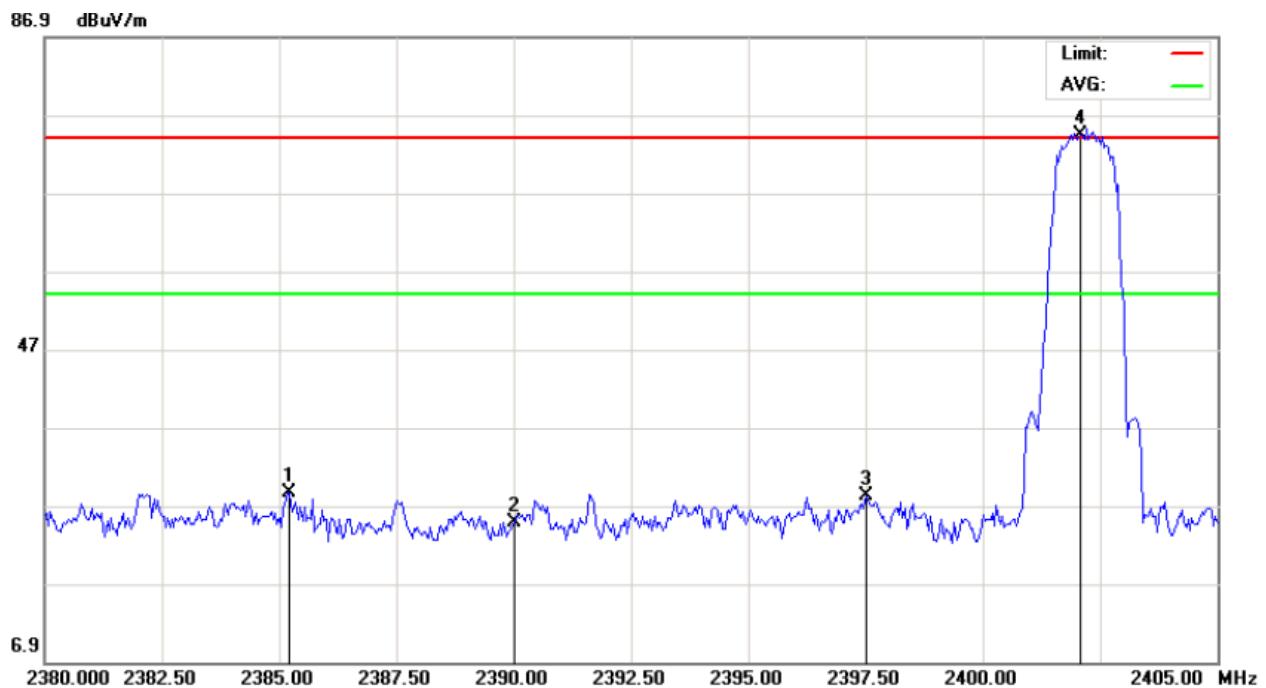

Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth keyboard Distance: 3m
M/N: HB028
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2385.208	37.05	-8.46	28.59	74.00	-45.41	peak			
2		2390.000	33.18	-8.44	24.74	74.00	-49.26	peak			
3		2397.500	36.67	-8.41	28.26	74.00	-45.74	peak			
4	*	2402.094	82.75	-8.39	74.36	74.00	0.36	peak			


86.9 dBuV/m

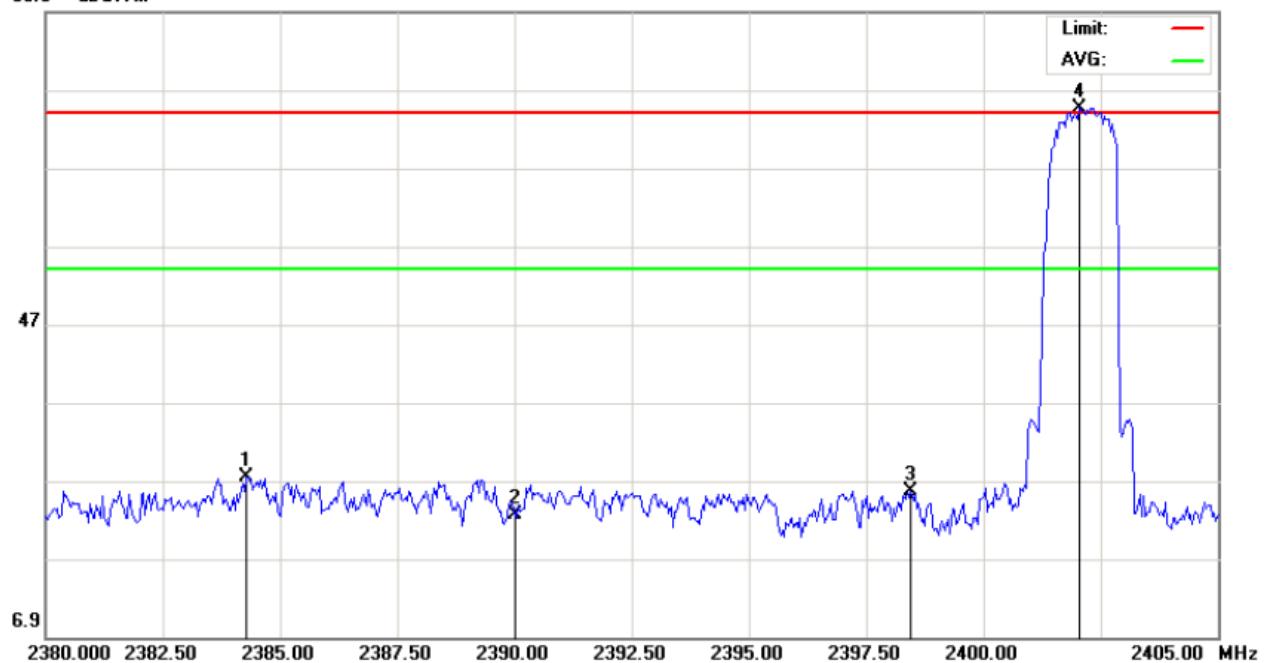

Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth keyboard Distance: 3m
 M/N: HB028
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2384.292	35.91	-8.46	27.45	74.00	-46.55	peak			
2		2390.000	30.99	-8.44	22.55	74.00	-51.45	peak			
3		2398.458	33.99	-8.41	25.58	74.00	-48.42	peak			
4	*	2402.039	82.97	-8.39	74.58	74.00	0.58	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)

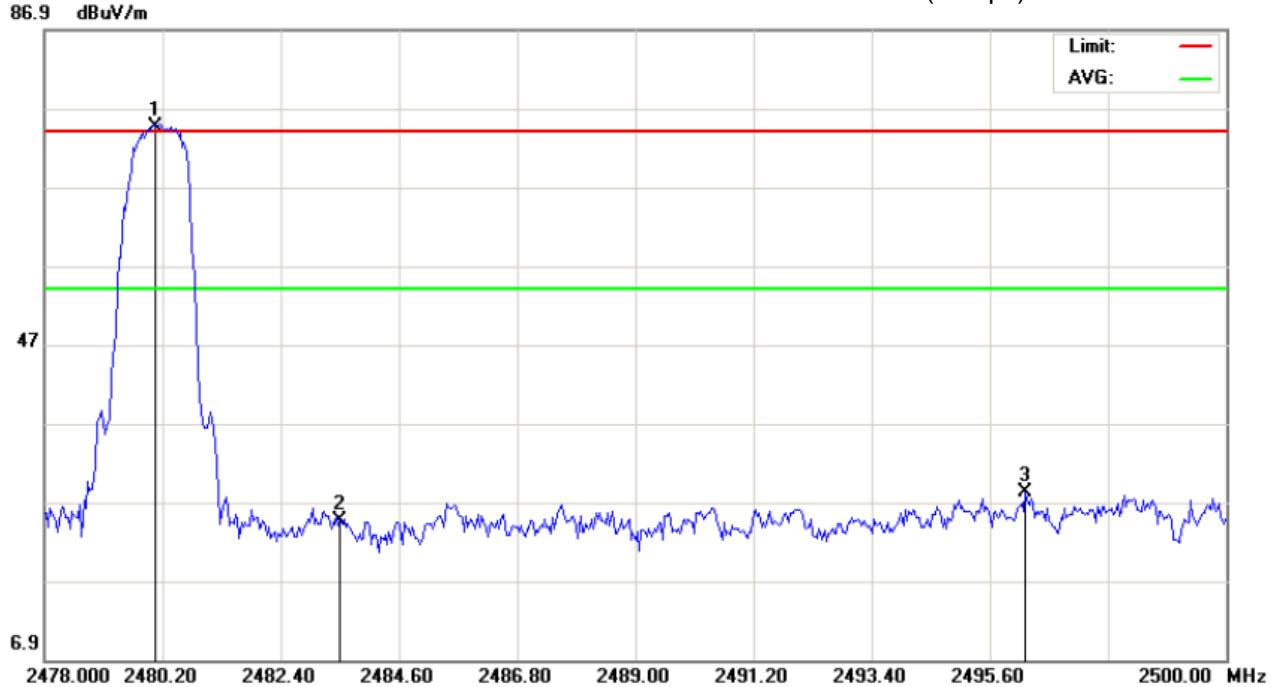

Site: site #1 Polarization: **Horizontal** Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Bluetooth keyboard Distance: 3m

M/N: HB028

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.067	82.73	-8.08	74.65	74.00	0.65	peak			
2		2483.500	32.74	-8.07	24.67	74.00	-49.33	peak			
3		2496.260	36.16	-8.01	28.15	74.00	-45.85	peak			

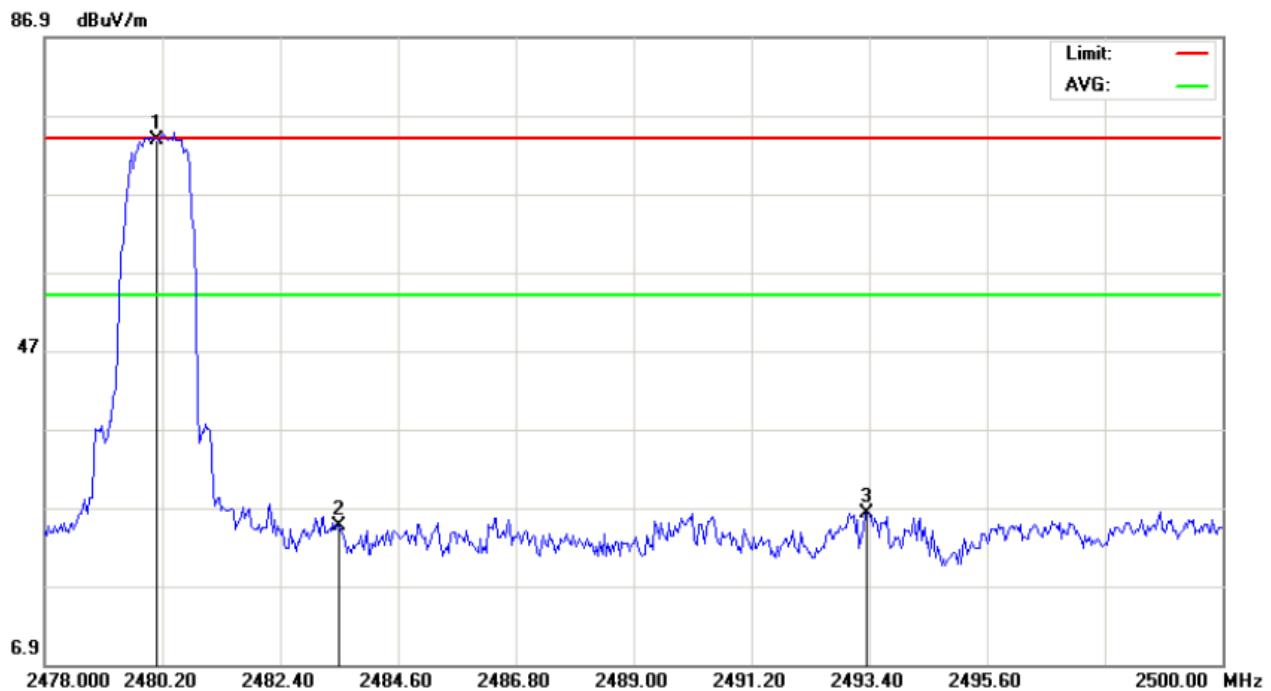

Site: site #1 Polarization: **Vertical** Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth keyboard Distance: 3m

M/N: HB028

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	2480.097	81.92	-8.08	73.84	74.00	-0.16	peak			
2		2483.500	32.61	-8.07	24.54	74.00	-49.46	peak			
3		2493.363	34.21	-8.03	26.18	74.00	-47.82	peak			

8. FCC LINE CONDUCTED EMISSION TEST

8.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2 TEST EQUIPMENT LIST

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/18/2012	07/17/2013
LISN	R&S	ESH3-Z5	N/A	07/18/2012	07/17/2013

8.3 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

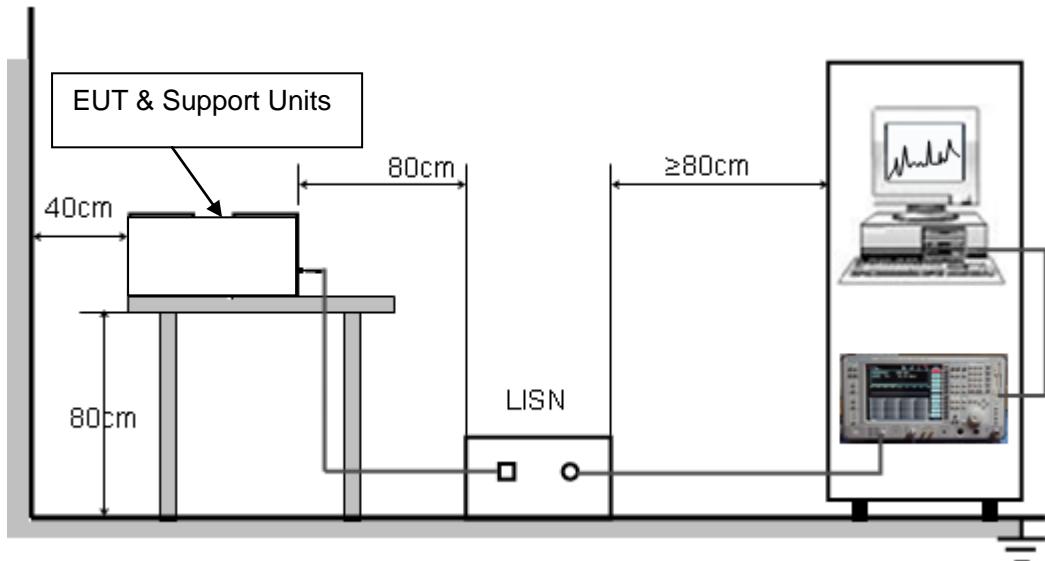

8.4 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC5V charging voltage by PC which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.5 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

8.6 TEST RESULT OF LINE CONDUCTED EMISSION TEST


Line Conducted Emission Test Line 1-L

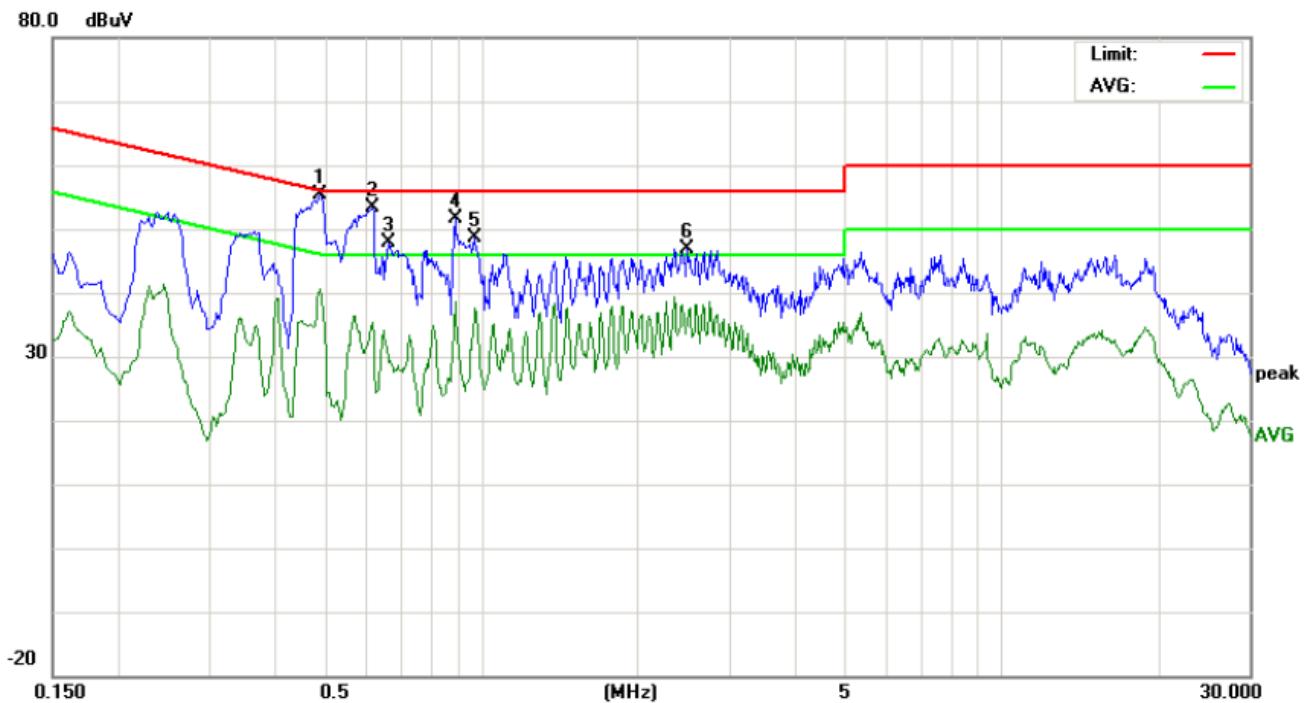

Site: Conduction Phase: L1 Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %
 EUT: Bluetooth keyboard
 M/N: HB028
 Mode: Normal Hopping
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.4900	44.95	42.61	29.30	10.39	55.34	53.00	39.69	56.17	46.17	-3.17	-6.48	P	
2	0.6180	42.95		25.06	10.32	53.27		35.38	56.00	46.00	-2.73	-10.62	P	
3	0.6620	37.58		19.77	10.33	47.91		30.10	56.00	46.00	-8.09	-15.90	P	
4	0.8940	41.12		28.20	10.40	51.52		38.60	56.00	46.00	-4.48	-7.40	P	
5	0.9700	38.20		25.51	10.38	48.58		35.89	56.00	46.00	-7.42	-10.11	P	
6	2.4900	36.37		24.72	10.43	46.80		35.15	56.00	46.00	-9.20	-10.85	P	

Line Conducted Emission Test Line 2-N

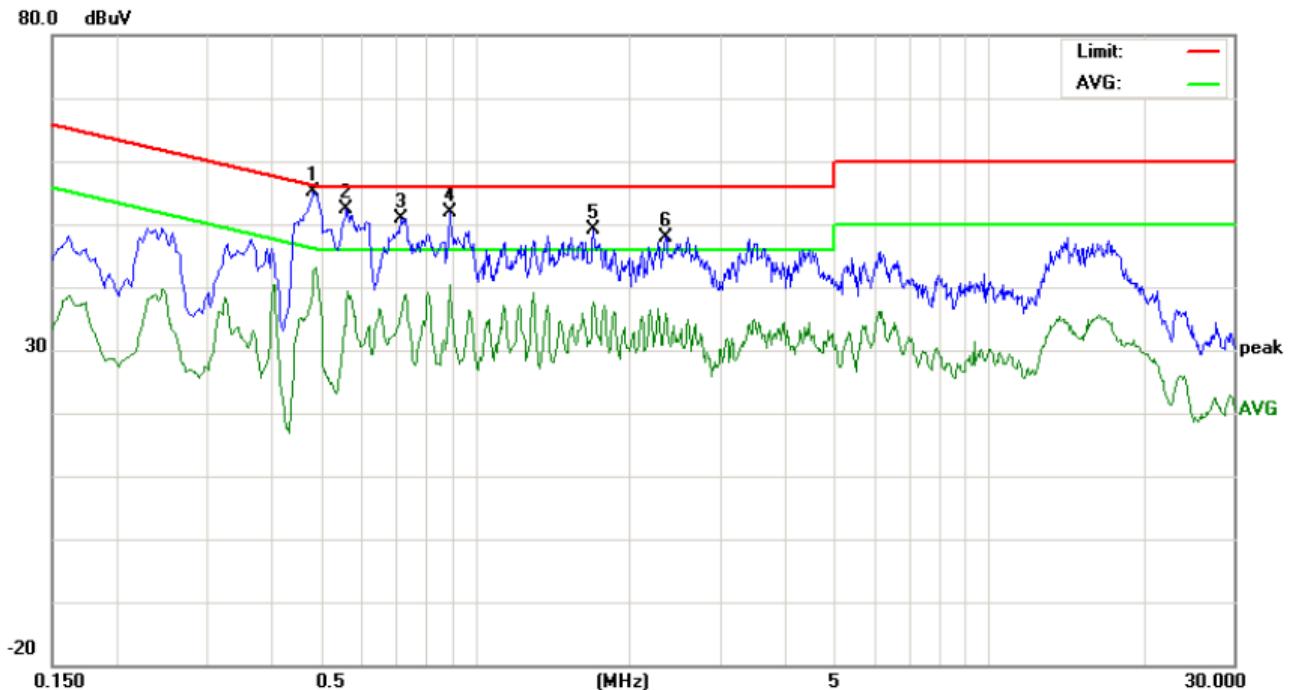


Site: Conduction Phase: **N** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %
 EUT: Bluetooth keyboard
 M/N: HB028
 Mode: Normal Hopping
 Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4860	44.63	42.01	32.67	10.39	55.02	52.40	43.06	56.24	46.24	-3.84	-3.18	P	
2	0.5620	42.01		26.73	10.34	52.35		37.07	56.00	46.00	-3.65	-8.93	P	
3	0.7180	40.53		25.88	10.34	50.87		36.22	56.00	46.00	-5.13	-9.78	P	
4	0.8940	41.55		30.07	10.40	51.95		40.47	56.00	46.00	-4.05	-5.53	P	
5	1.7020	38.81		27.18	10.32	49.13		37.50	56.00	46.00	-6.87	-8.50	P	
6	2.3540	37.58		25.40	10.37	47.95		35.77	56.00	46.00	-8.05	-10.23	P	

APPENDIX A
PHOTOGRAPHS OF THE TEST SETUP
FCC LINE CONDUCTED EMISSION TEST SETUP




RADIATED EMISSION

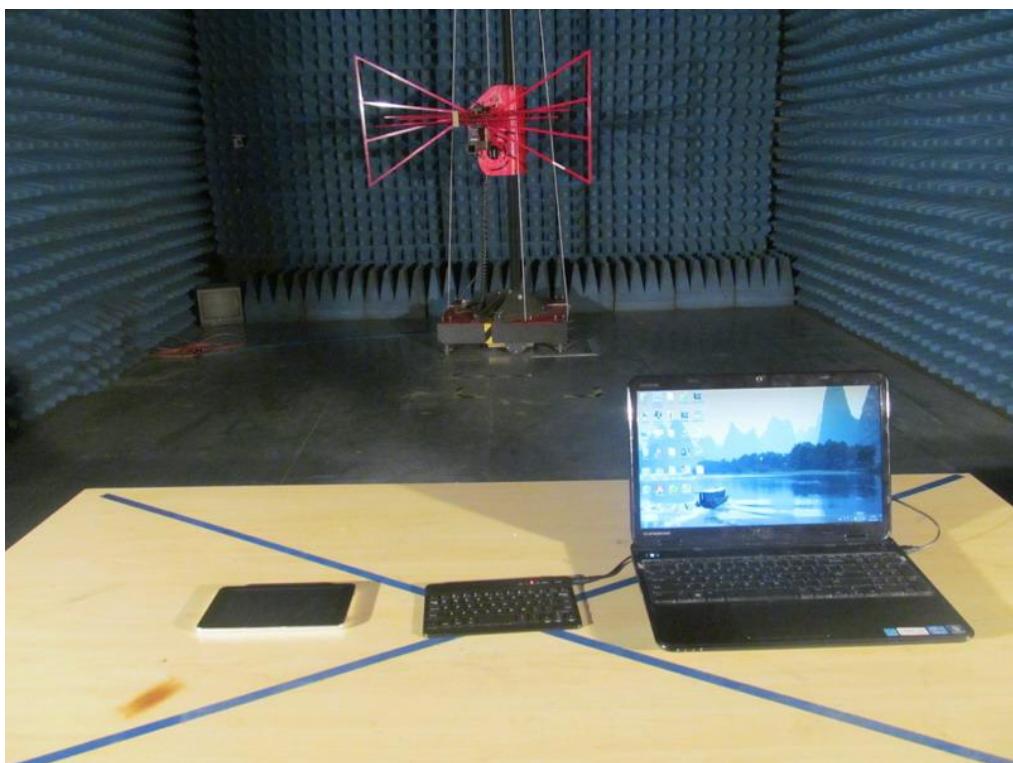

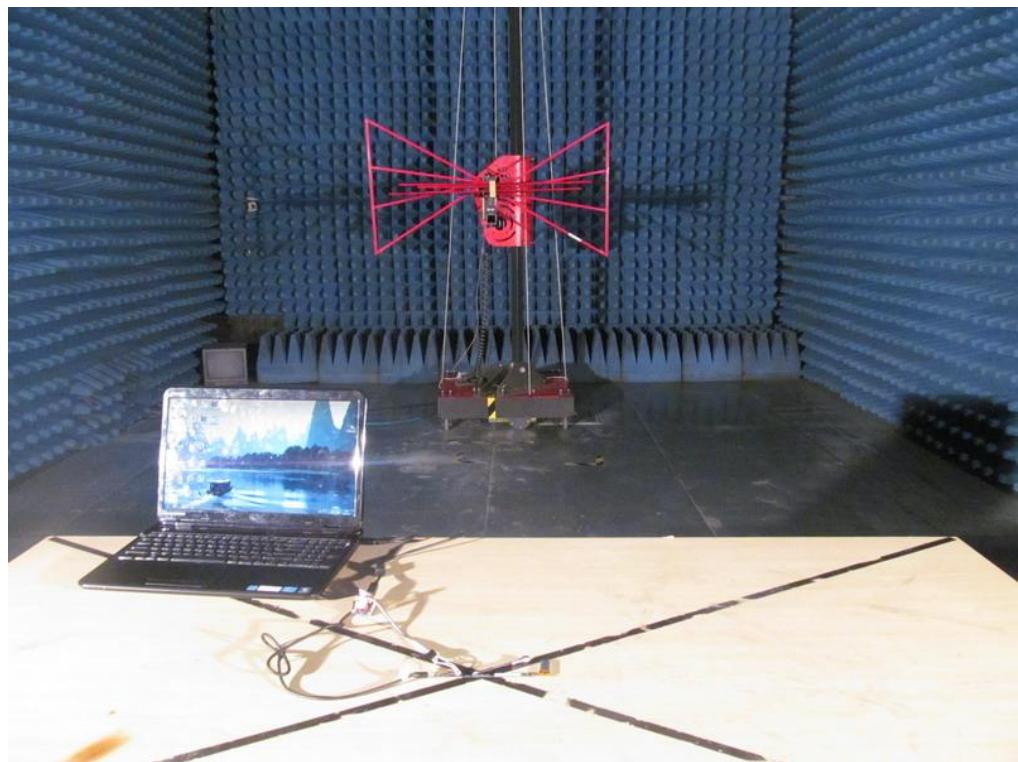

APPENDIX B
PHOTOGRAPHS OF THE EUT
TOP VIEW OF EUT

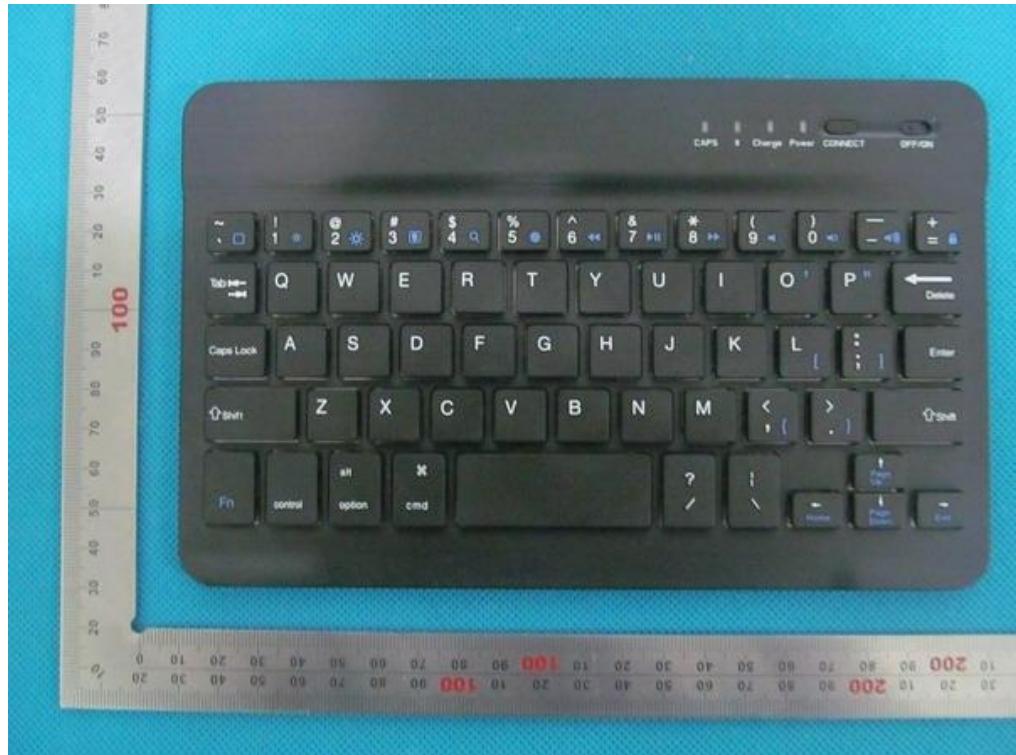

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT




INTERNAL VIEW OF EUT-1




INTERNAL VIEW OF EUT-2




INTERNAL VIEW OF EUT-3

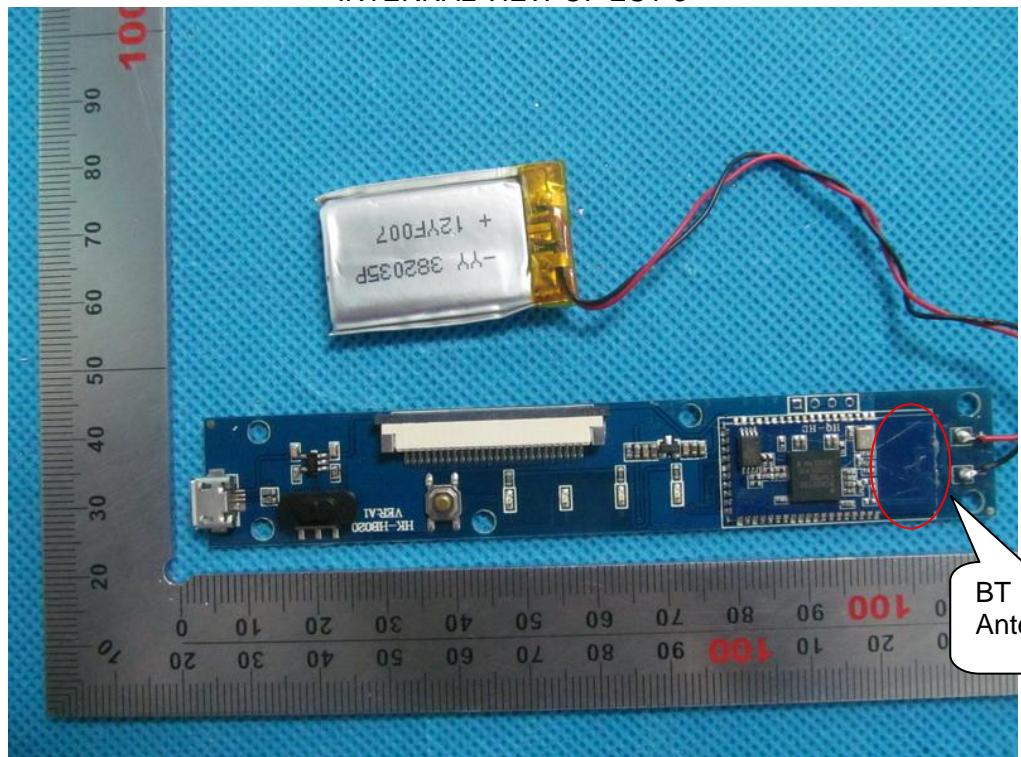

INTERNAL VIEW OF EUT-4

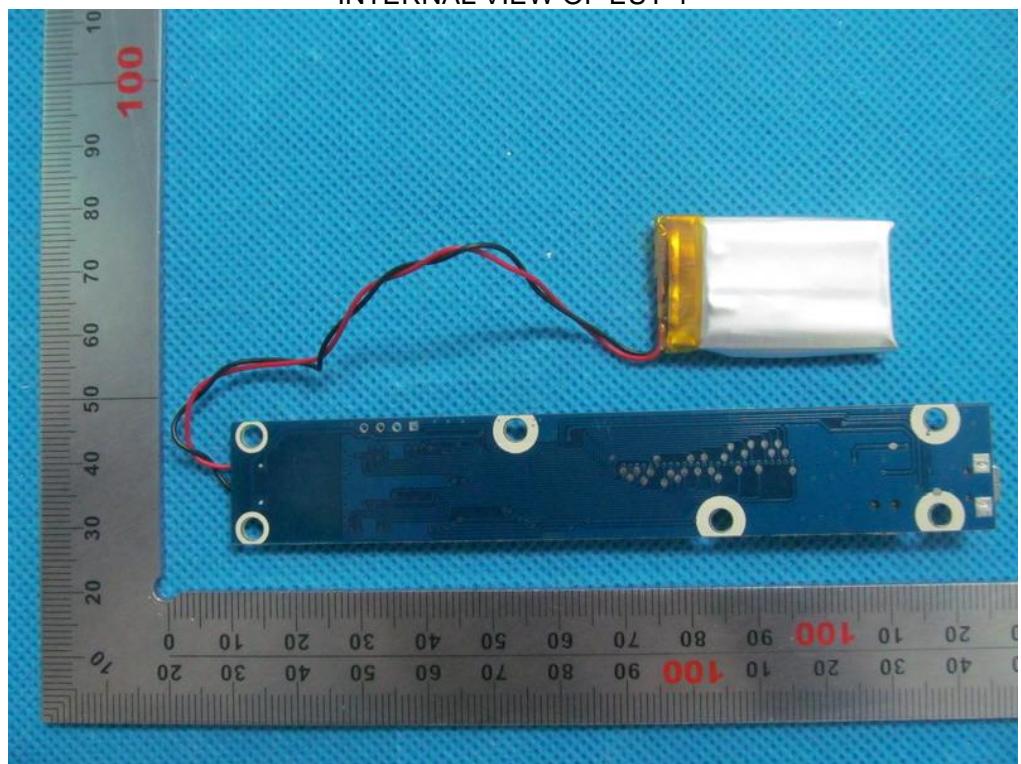

INTERNAL VIEW OF EUT-5

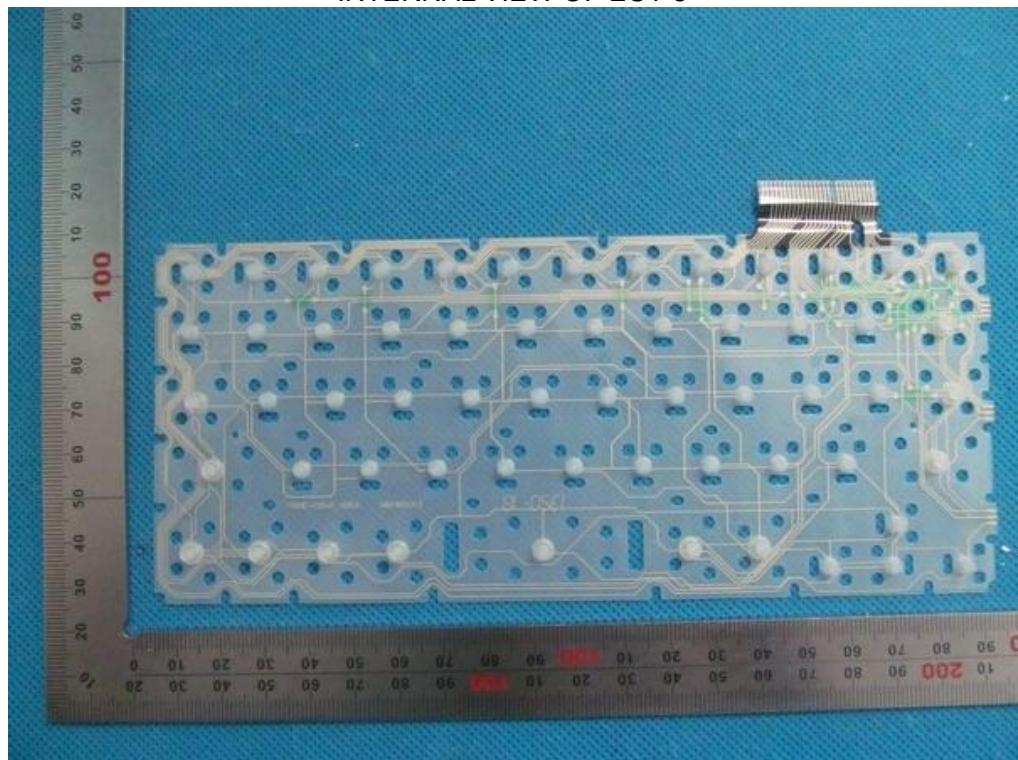

---END OF REPORT---