

FCC Part 15C Compliance Test Report

Test Report no.:	Tre_FCC_0624_02.doc	Date of Report:	20.6.2006
Number of pages:	11	Customer's Contact person:	Jukka Pekkala
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Client:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	GSM phone RM-126 hw 0573 / Battery BL-4C, AC charger AC-3, Headset HS-23		
FCC ID:	PPIRM-126H	IC:	661U-RM126
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), IC standards RSS-GEN and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	9.6.2006
Testing completed	12.6.2006
The customer's contact person	Jukka Pekkala
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	-
Document name	T:\\Projects\\RM-126\\EMC\\Results\\FCC\\Tre_FCC_0624_02.doc

1.1. EUT and Accessory Information

The EUT is a quadri band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
GSM phone	RM-126	004400851723591	0573	-	3.13	40687
Battery	BL-4C	-	-	-	-	40693
AC-Charger	AC-3	-	-	-	-	40690
Headset	HS-23	-	-	-	-	40689

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Peak output power	NP
15.247(c)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(c)	A8.5	Spurious RF conducted emissions	NP
15.247(c), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Tampere Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Spurious radiated emissions test setup	4
3. Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 A8.5)	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. Test Equipment.....	11
4.1. Conducted measurements	11
4.2. Radiated measurements	11

2. Test setups


2.1. Conducted RF test setup

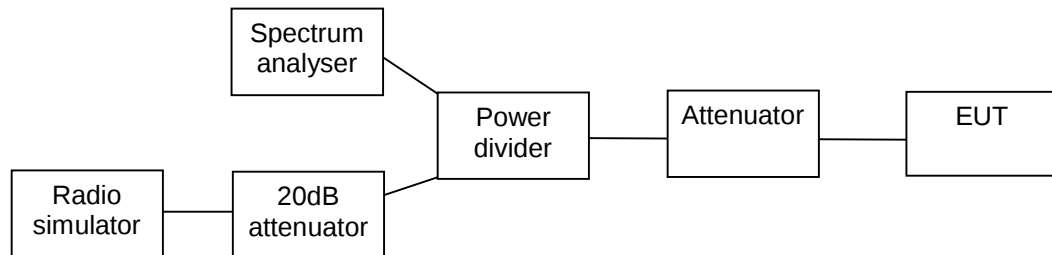

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

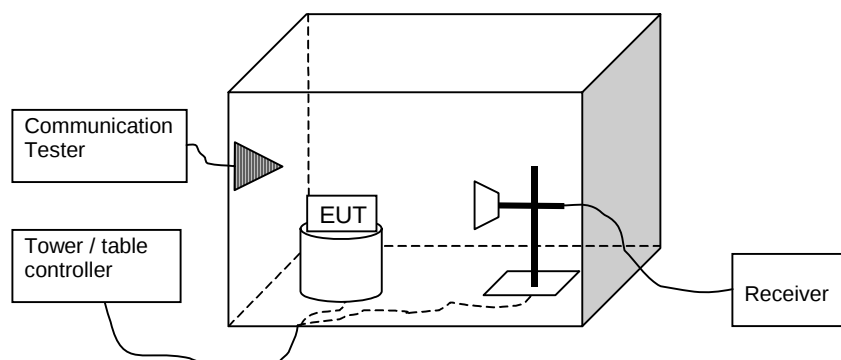

3. Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 A8.5)

EUT with DUT number	RM-126 DUT 40687
Accessories with DUT numbers	BL-4C DUT 40693, AC-3 DUT 40690, HS-23 DUT 40689
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Flip open
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 47 / 102.5
Date of measurements	12.6.2006
Measured by	Jari Jantunen

3.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

3.2. Bluetooth Test results

3.2.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
0 / 2402	29.23	PASSED
78 / 2480	36.73	PASSED
Hopping on, low end	27.95	PASSED
Hopping on, high end	28.50	PASSED


Peak (RBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
0 / 2402	44.18	PASSED
78 / 2480	52.99	PASSED
Hopping on, low end	41.92	PASSED
Hopping on, high end	52.31	PASSED


Channel 0 / 2402 MHz

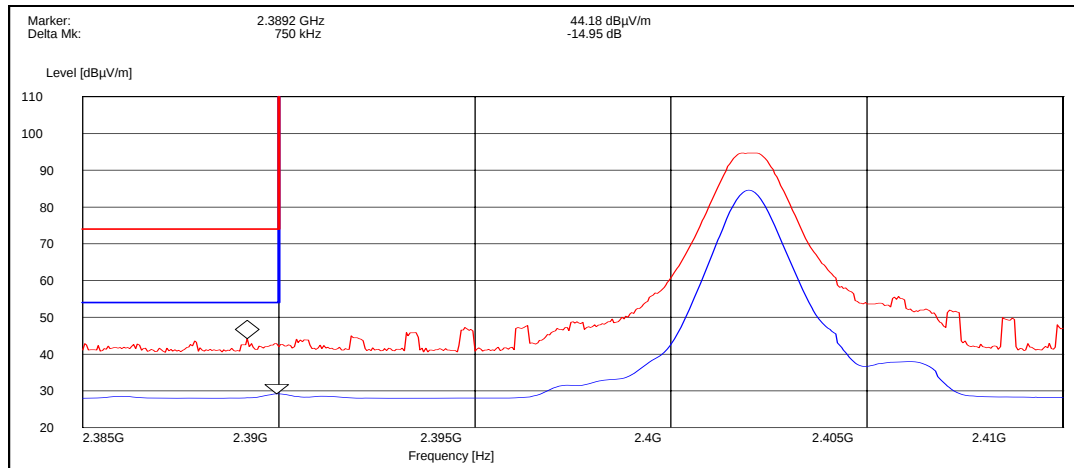


Channel 78 / 2480 MHz

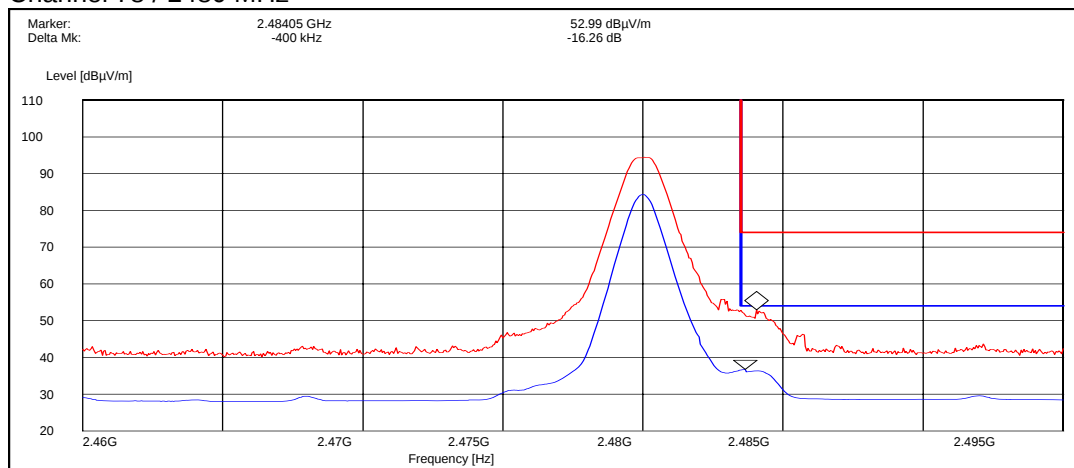

Hopping on, low end

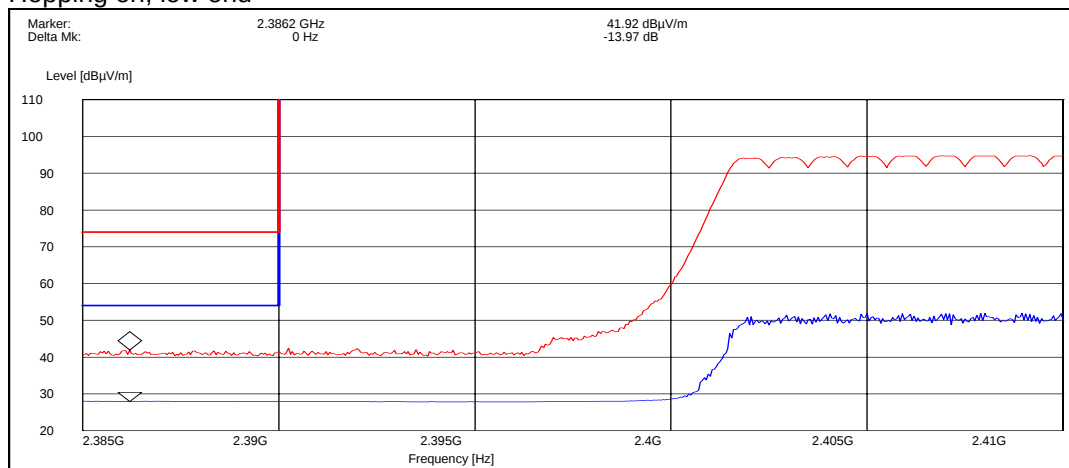

Hopping on, high end

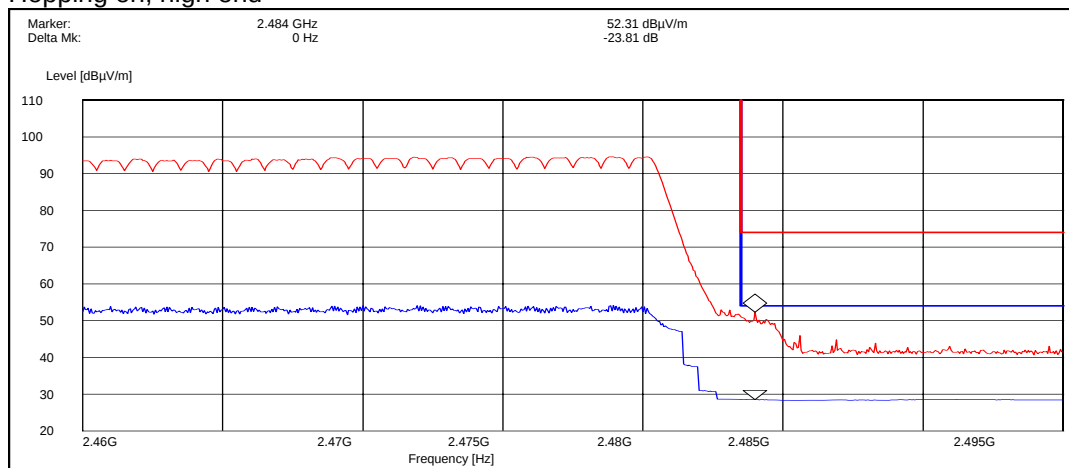

3.2.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz)

Channel / f_c [MHz]	E [dBμV/m]	Result
0 / 2402	33.55	PASSED
78 / 2480	44.13	PASSED
Hopping on, low end	29.10	PASSED
Hopping on, high end	31.46	PASSED


Peak (RBW: 1 MHz)

Channel / f_c [MHz]	E [dBμV/m]	Result
0 / 2402	46.76	PASSED
78 / 2480	56.86	PASSED
Hopping on, low end	45.92	PASSED
Hopping on, high end	57.82	PASSED


Channel 0 / 2402 MHz

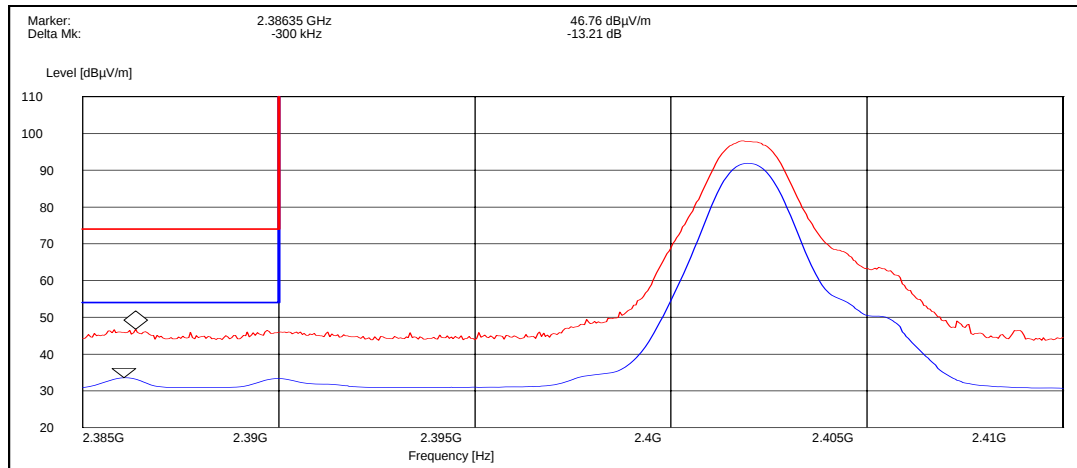


Channel 78 / 2480 MHz

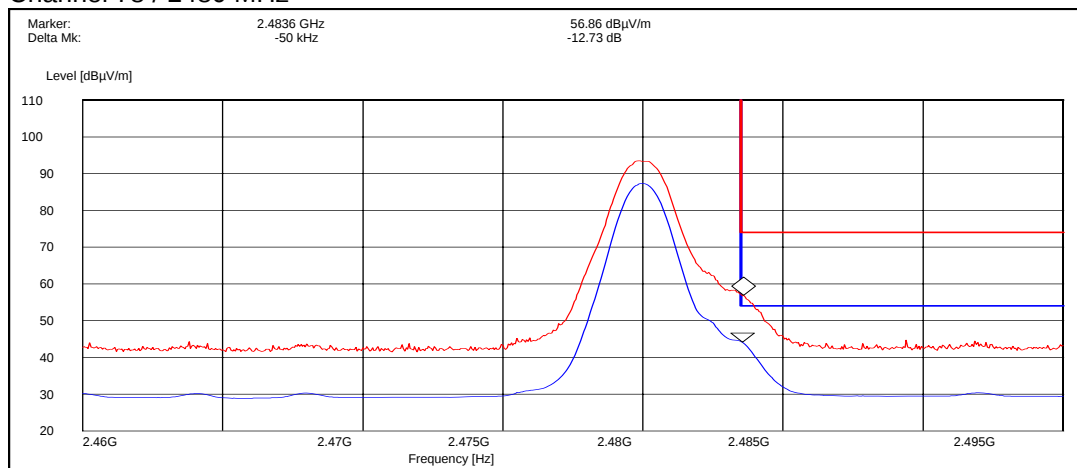

Hopping on, low end

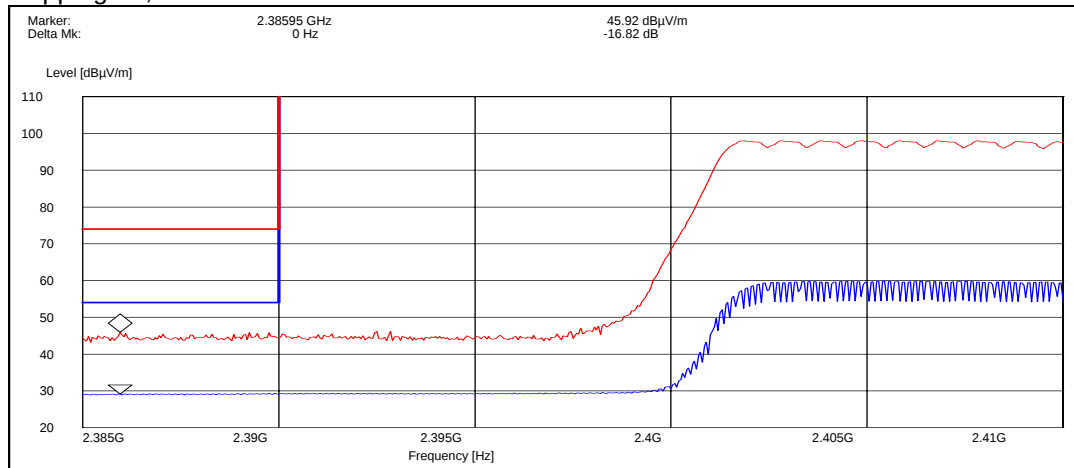

Hopping on, high end

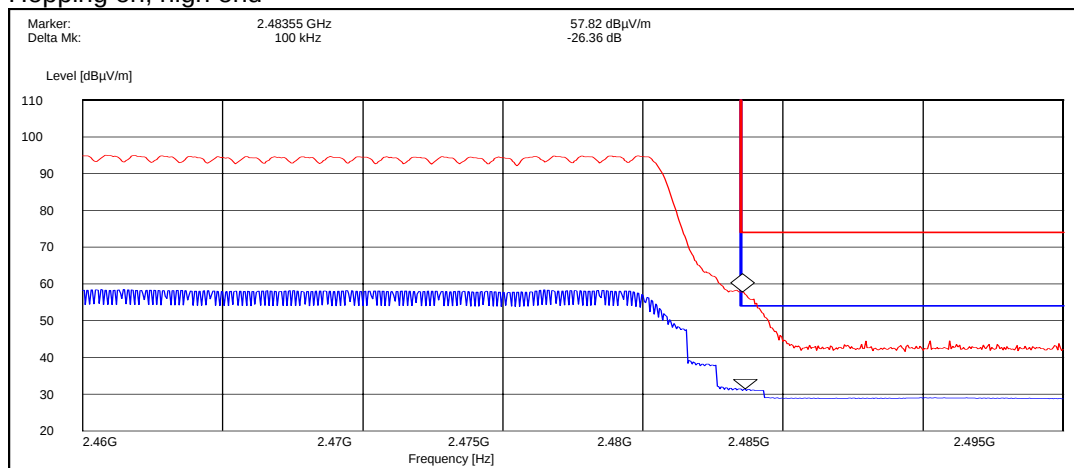

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	15C,22/24
TM37678	Radio communication tester	CMU-200	R&S	15C,22/24
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	15C,22/24
TM22901	Step attenuator 110dB	8496A	Agilent	15C,22/24
TM37499	Power splitter	11667A	Agilent	15C,22/24
	Temperature chamber	VT4002	Vötsch	15C,22/24
TM38112	DC power supply	6632A	Agilent	15C,22/24
TM38111	Multimeter	34401A	Agilent	15C,22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C
TM37773	Radio communication tester	CMU-200	R&S	15B,15C
TM38631	Signal generator	83640L	Agilent	15B,15C
TM38114	DC power supply	6632A	Agilent	15B,15C
TM22835	Multimeter	87	Fluke	15B,15C
TM30600	Pulse Limiter	ESH3-Z2	R&S	15B,15C
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15B,15C
TM30636	LISN 50 µH	L2-16/	PMM	15B,15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	15B,15C, 22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C, 22/24
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	15B,15C, 22/24
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	15B,15C, 22/24
TM37516	Biconilog antenna	HL562	R&S	15B,15C, 22/24
TM26496	Double ridged waveguide antenna	3115	EMCO	15B,15C, 22/24
TM39158	Horn antenna	3116	EMCO	15B,15C, 22/24
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	15B,15C, 22/24
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	15B,15C, 22/24
TM38631	Signal generator	83640L	Agilent	15B,15C, 22/24
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	15B,15C, 22/24
	High pass filter	WHK2010-10SS	Trilithic	15B,15C, 22/24
	Low pass filter	WLK1750-10SS	Trilithic	15B,15C, 22/24
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	15B,15C, 22/24
TM26500	Turntable	DS412	Deisel	15B,15C, 22/24
TM38842	Antenna mast controller	2090	EMCO	15B,15C, 22/24
TM38843	Antenna mast	2075	EMCO	15B,15C, 22/24
TM38114	DC power supply	6632A	Agilent	15B,15C, 22/24
TM22835	Multimeter	87	Fluke	15B,15C, 22/24