

FCC Part 15C Compliance Test Report

Test Report no.:	Tre_FCC_0605_05.doc	Date of Report:	16.2.2006
Number of pages:	35	Customer's Contact person:	Thomas Reitmayer
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Client:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	GSM phone RM-162 (hw 3030) / Battery BL-4C, AC charger AC-3, Headset HS-23, Dummy battery SD-4		
FCC ID:	PPIRM-162X	IC:	661U-RM162
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), IC standards RSS-GEN and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jan-Erik Lilja, System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	27.1.2006
Testing completed	8.2.2006
The customer's contact person	Thomas Reitmayer
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	-
Document name	T:\\Projects\\RM-162\\EMC\\Results\\FCC\\Tre_FCC_0605_05.doc

1.1. EUT and Accessory Information

The EUT is a triple band (GSM850/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
GSM phone	RM-162	004400781700800	3030	-	Vpbl05w07_05w49.1	40530
GSM phone	RM-162	004400781700214	3030	-	Vpbl05w07_05w49.1	40531
GSM phone	RM-162	004400781700719	3030	-	Vpbl05w07_05w49.1	40537
Battery	BL-4C	L425B10217496	-	-	-	40528
Battery	BL-4C	067038610717243511	-	-	-	40529
AC-Charger	AC-3	-	1.1	0.3	-	40486
Headset	HS-23	-	-	-	-	40487
Dummy Battery	SD-4	-	V.1 300	-	-	40490

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Peak output power	PASSED
15.247(c)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(c)	A8.5	Spurious RF conducted emissions	PASSED
15.247(c), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup.....	5
2.3. Spurious radiated emissions test setup	5
3. Peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2)).....	6
3.1. Test method and limit.....	6
3.2. Bluetooth Test results	6
4. Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 A8.5)	9
4.1. Test method and limit.....	9
4.2. Bluetooth Test results	9
5. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5).....	14
5.1. Test method and limit.....	14
5.2. Bluetooth Test results	14
6. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 A8.5).....	18
6.1. Test method and limit.....	18
6.2. Bluetooth Test results	19
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	22
7.1. Test method and limit.....	22
7.2. Bluetooth Test results	23
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))	25
8.1. Test method and limit.....	25
8.2. Bluetooth Test results	25
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))	28
9.1. Test method and limit.....	28
9.2. Bluetooth Test results	28
10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	30
10.1. Test method and limit.....	30
10.2. Bluetooth Test results	30
11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	32


11.1.	Test method and limit	32
11.2.	Bluetooth test results	32
12.	Test Equipment	35
12.1.	Conducted measurements	35
12.2.	Radiated measurements	35

2. Test setups


2.1. Conducted RF test setup

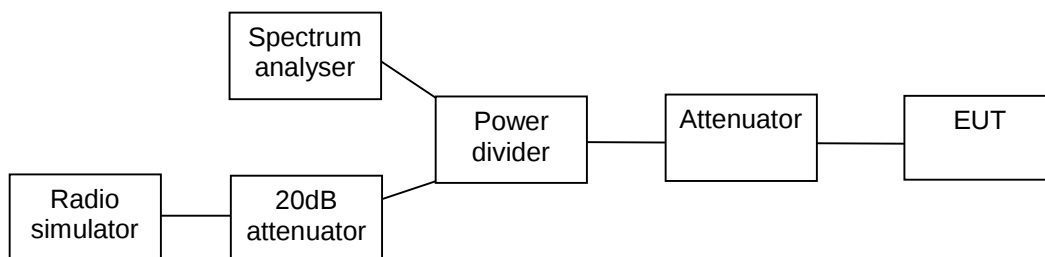

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

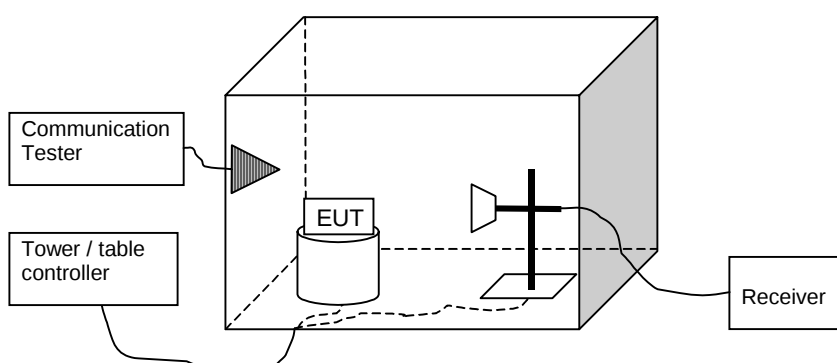

3. Peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	Phone: DUT 40537
Accessories with DUT numbers	Battery: DUT 40529
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23/49/100.8
Date of measurements	7.2.2006
Measured by	Jan-Erik Lilja

3.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GSKF modulation, PRBS packet type

Channel	P [dBm]	P [mW]	Result
0 (2402 MHz)	-0.40	0.912	Passed
40 (2442 MHz)	-0.20	0.955	Passed
78 (2480 MHz)	-0.10	0.977	Passed


Channel 0 (2402 MHz) (Peak detector, RBW: 1 MHz)

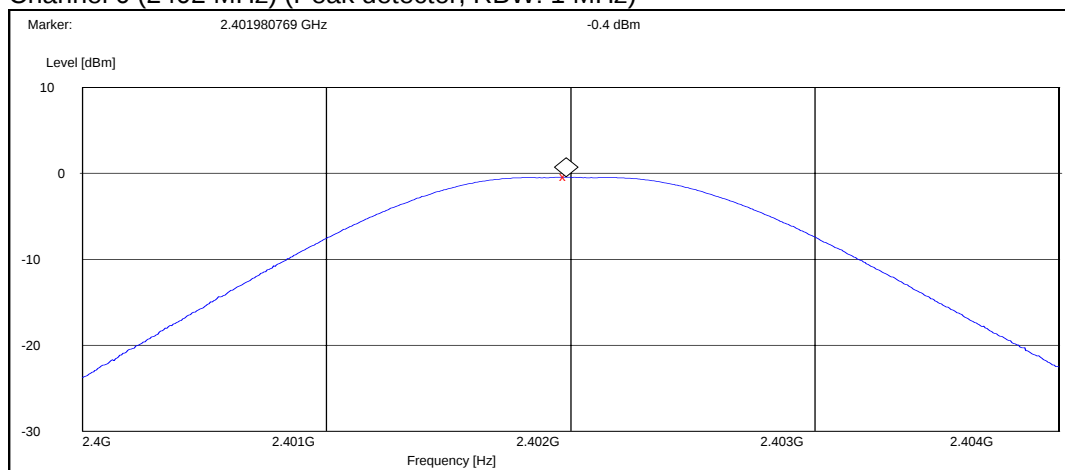

Channel 40 (2442 MHz) (Peak detector, RBW: 1 MHz)

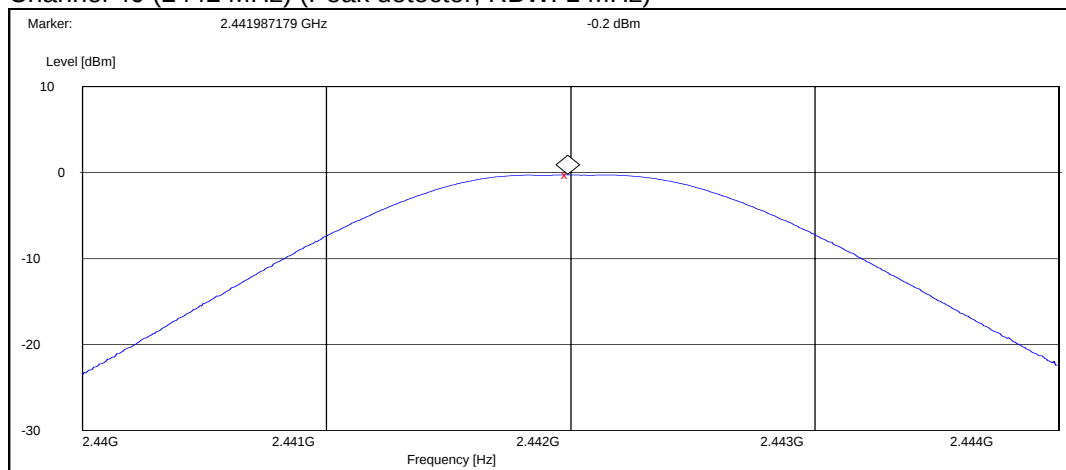


Channel 78 (2480 MHz) (Peak detector, RBW: 1 MHz)

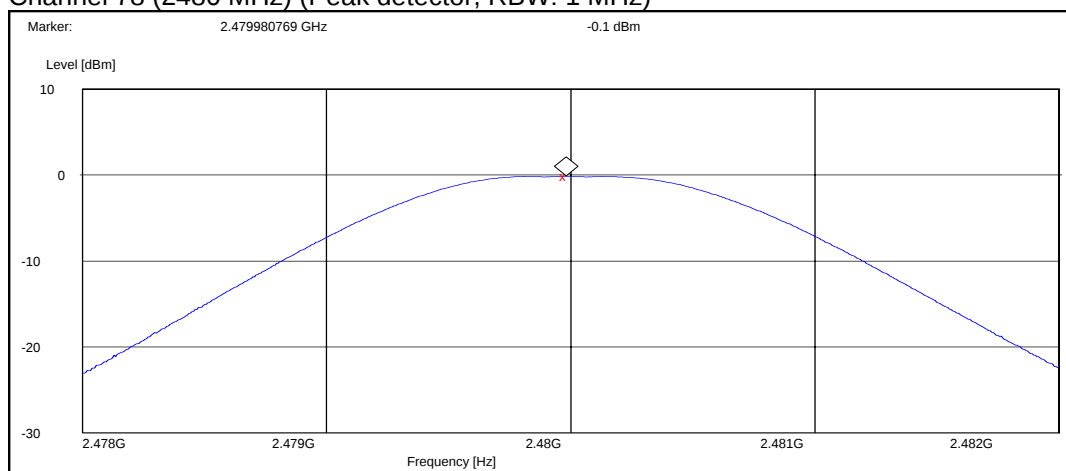


3.2.2 8DPSK modulation, PRBS packet type

Channel	P [dBm]	P [mW]	Result
0 (2402 MHz)	1.10	1.288	Passed
39 (2441 MHz)	0.90	1.230	Passed
78 (2480 MHz)	1.2	1.318	Passed


Channel 0 (2402 MHz) (Peak detector, RBW: 1 MHz)

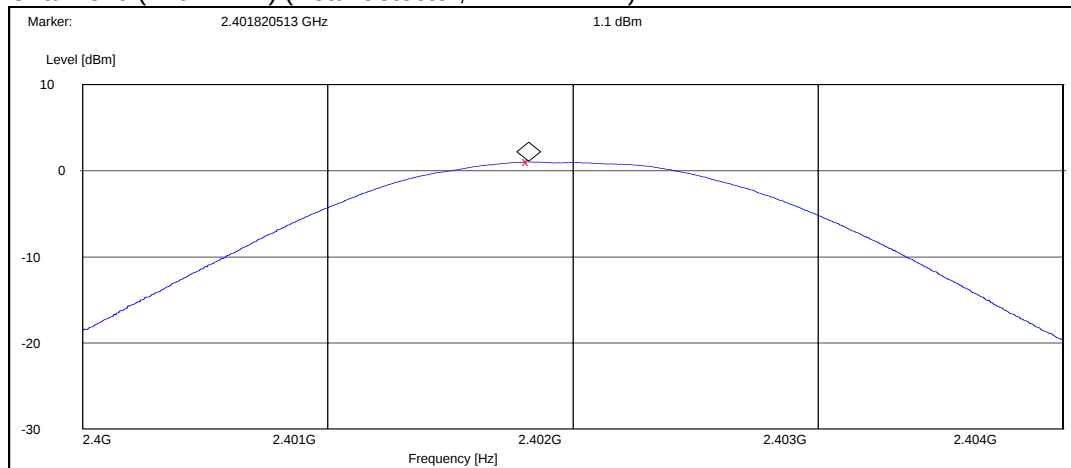

Channel 39 (2441 MHz) (Peak detector, RBW: 1 MHz)

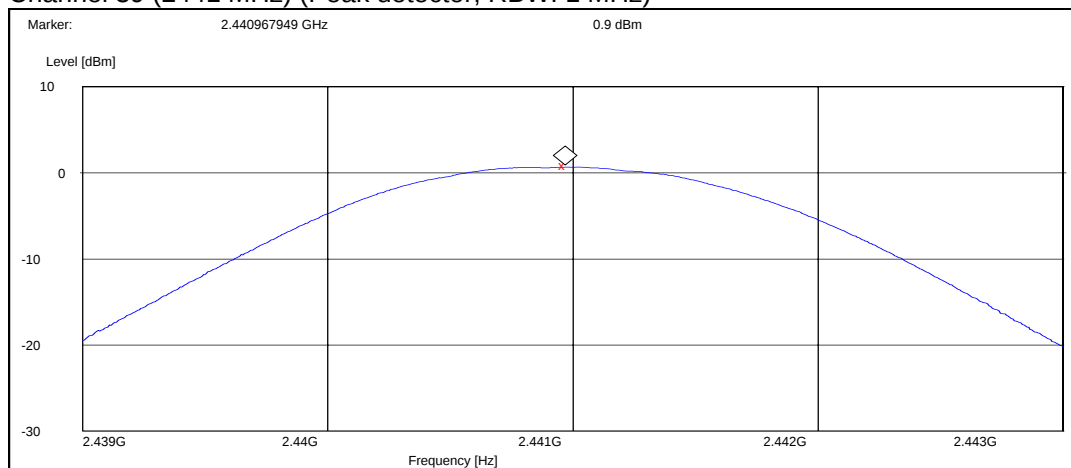

Channel 78 (2480 MHz) (Peak detector, RBW: 1 MHz)

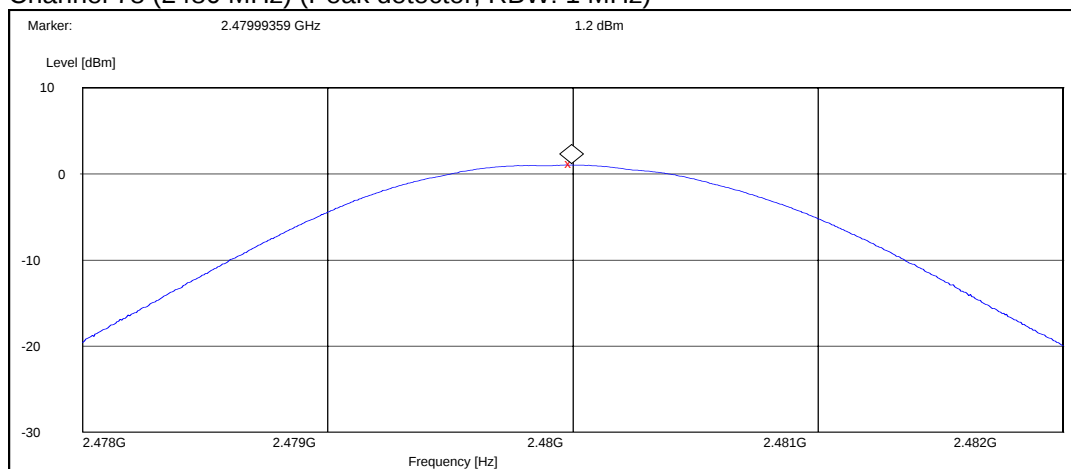

4. Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 A8.5)

EUT with DUT number	RM-162 DUT 40530
Accessories with DUT numbers	BL-4C DUT 40528, AC-3 DUT 40486, HS-23 DUT 40488
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Flip open
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23-25 / 42-45 / 100.7-101.9
Date of measurements	2-3.2.2006
Measured by	Jari Jantunen

4.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results

4.2.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz)

Channel	E [dBμV/m]	Result
0 (2402 MHz)	29.12	PASSED
78 (2480 MHz)	35.90	PASSED
Hopping on, low end	27.79	PASSED
Hopping on, high end	36.95	PASSED


Peak (RBW: 1 MHz)

Channel	E [dBμV/m]	Result
0 (2402 MHz)	43.28	PASSED
78 (2480 MHz)	53.91	PASSED
Hopping on, low end	47.29	PASSED
Hopping on, high end	66.06	PASSED


Channel 0 (2402 MHz)

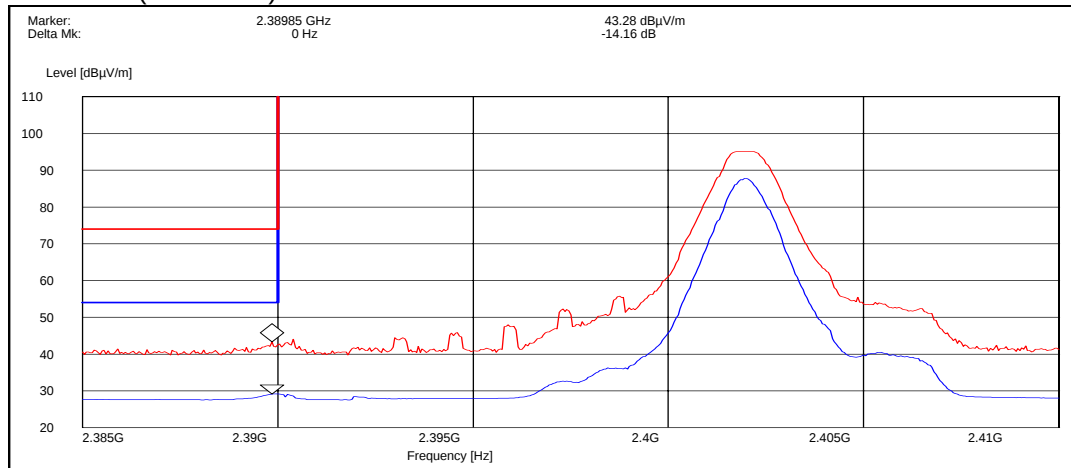


Channel 78 (2480 MHz)

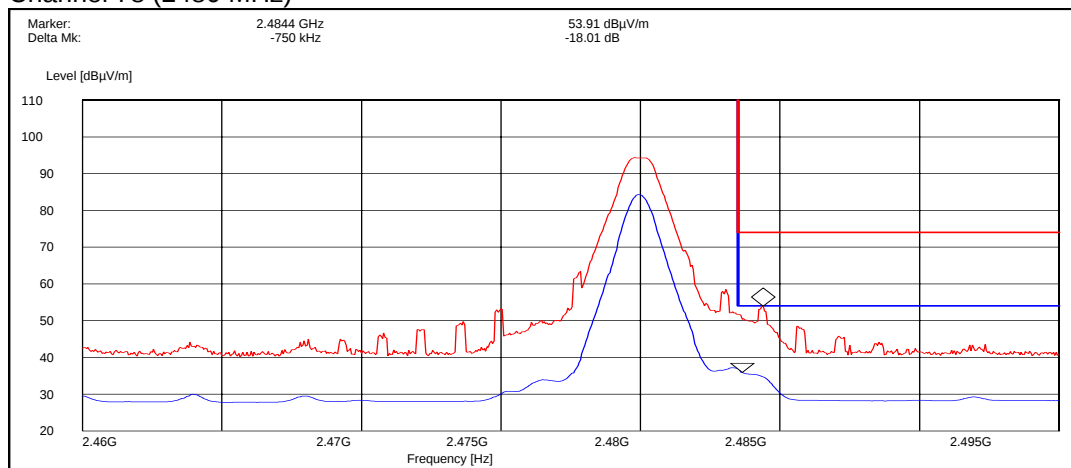

Hopping on, low end

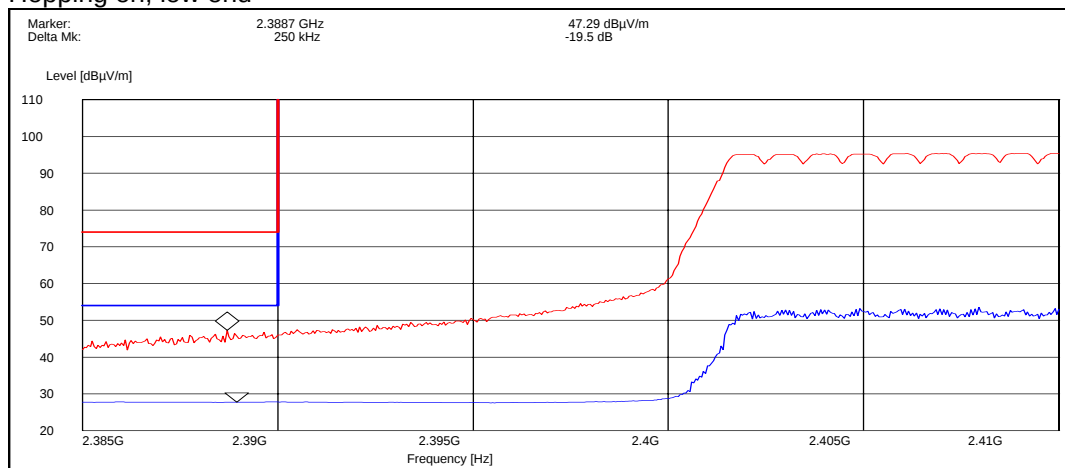

Hopping on, high end

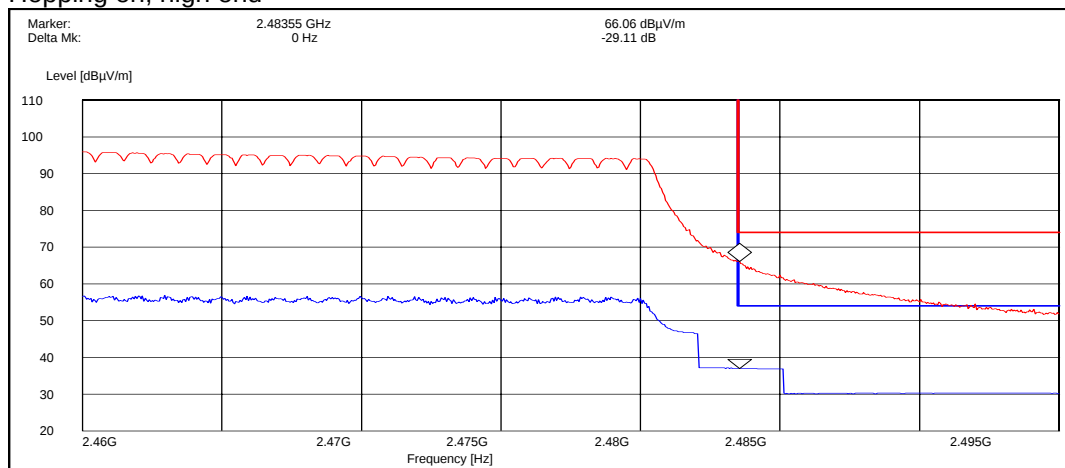

4.2.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz)

Channel	E [dBμV/m]	Result
0 (2402 MHz)	32.21	PASSED
78 (2480 MHz)	44.92	PASSED
Hopping on, low end	28.39	PASSED
Hopping on, high end	31.09	PASSED


Peak (RBW: 1 MHz)

Channel	E [dBμV/m]	Result
0 (2402 MHz)	47.15	PASSED
78 (2480 MHz)	57.93	PASSED
Hopping on, low end	45.08	PASSED
Hopping on, high end	56.60	PASSED


Channel 0 (2402 MHz)

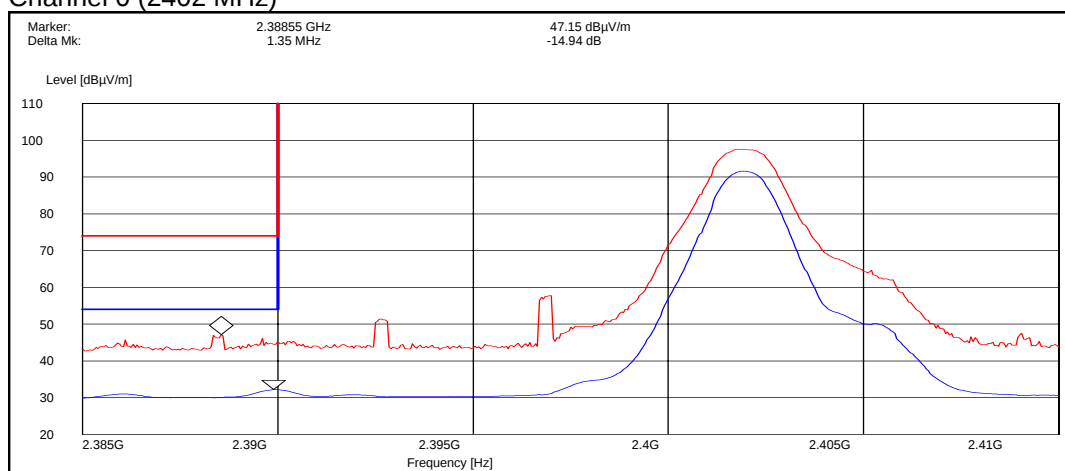


Channel 78 (2480 MHz)

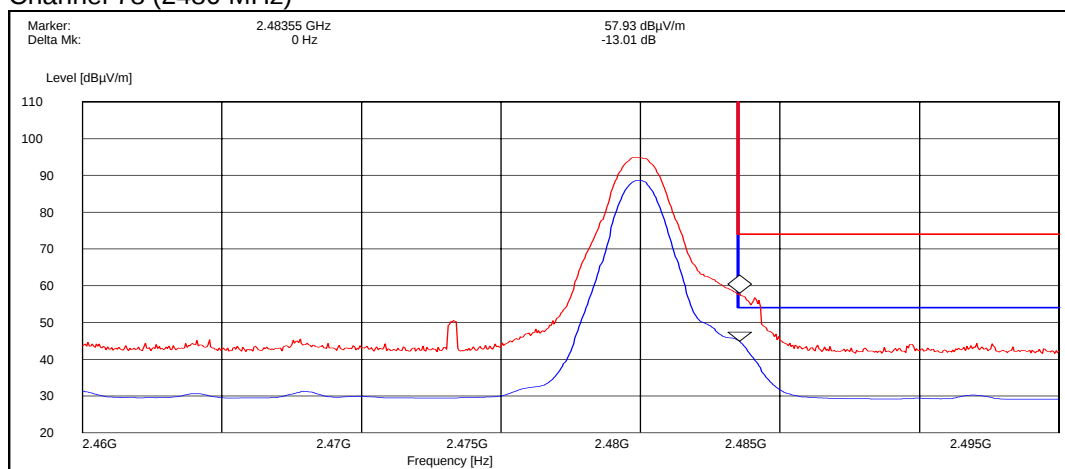

Hopping on, low end

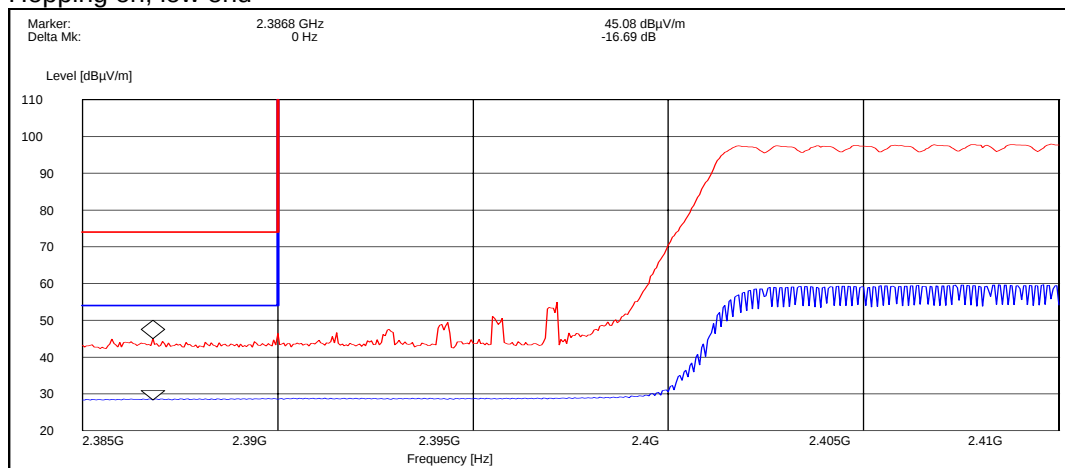

Hopping on, high end

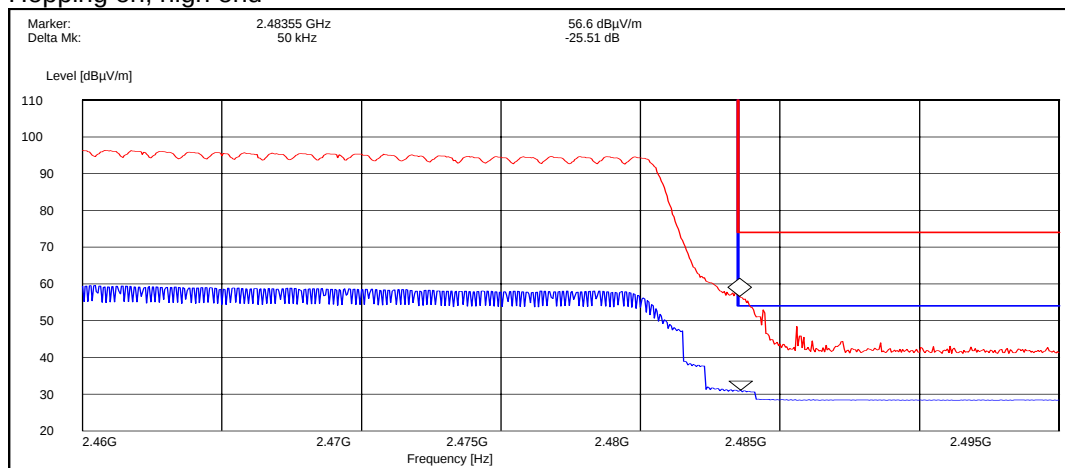

5. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5)

EUT with DUT number	Phone: DUT 40537
Accessories with DUT numbers	Battery: DUT 40529
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23/49/100.8
Date of measurements	7.2.2006
Measured by	Jan-Erik Lilja

5.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results


5.2.1 GFSK modulation, PRBS packet type

Channel 0 (2402 MHz)

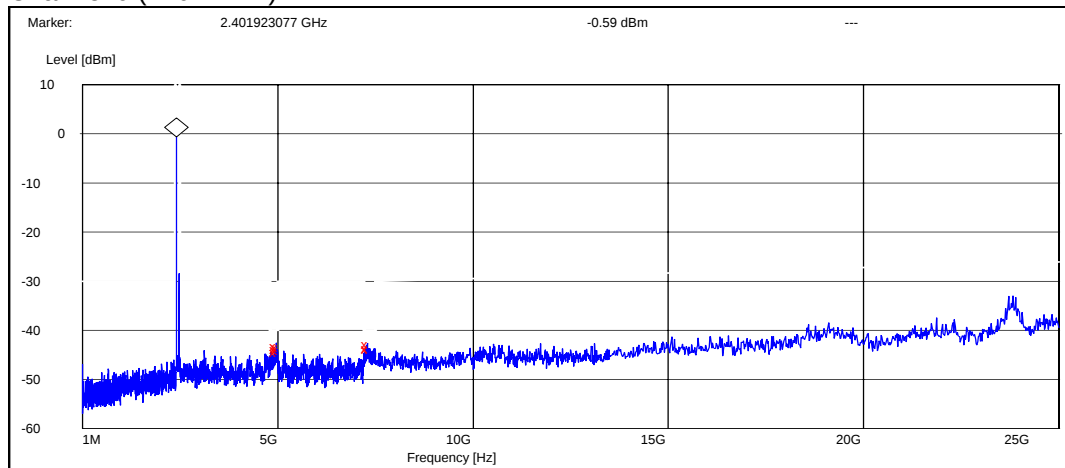


Frequency [MHz]	P [dBc]	Result
4961.388462	-42.708450	Passed
4999.950000	-42.808450	Passed
7299.819231	-42.208450	Passed

Channel 40 (2442 MHz)

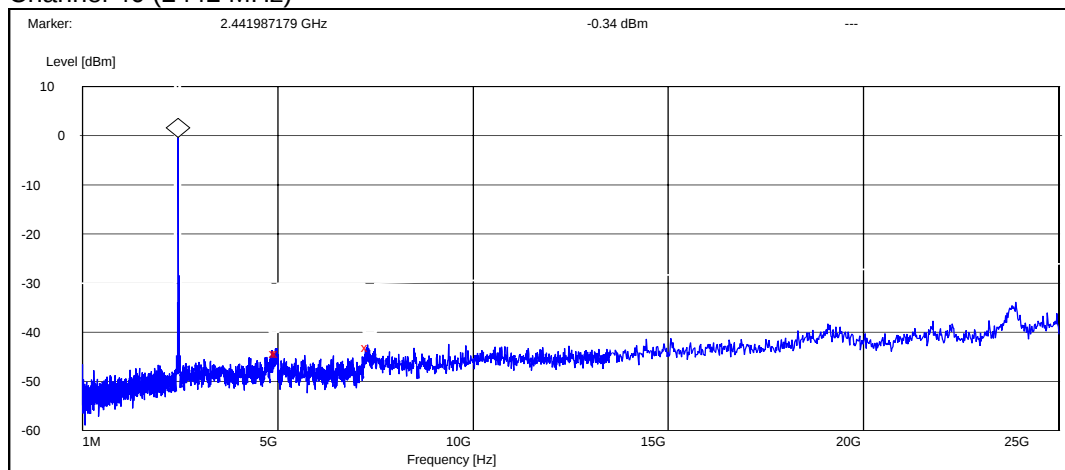

Frequency [MHz]	P [dBc]	Result
4951.282051	-43.961454	Passed
5000.000000	-43.861454	Passed
7304.326923	-42.761454	Passed


Channel 78 (2480 MHz)

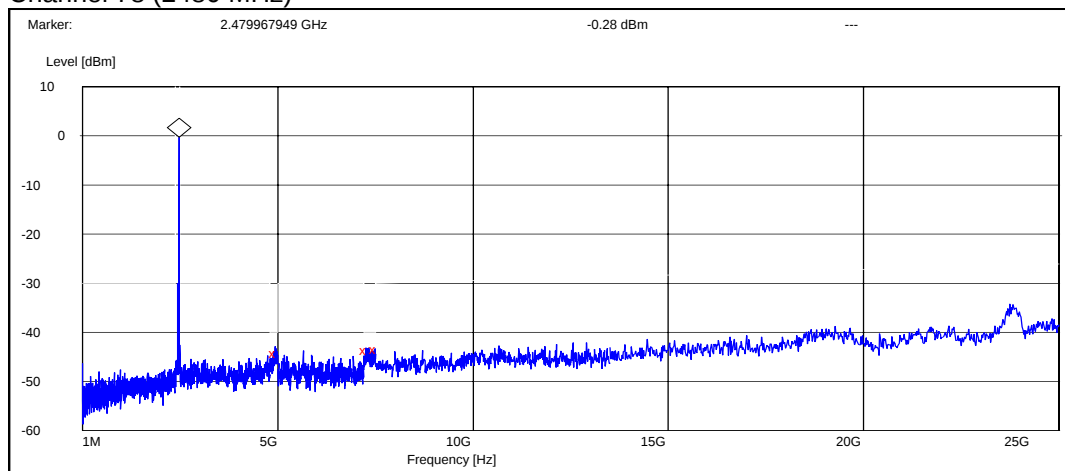

Frequency [MHz]	P [dBc]	Result
4931.730769	-43.921868	Passed
7252.403846	-43.421868	Passed
7500.000000	-43.221868	Passed


5.2.2 8DPSK modulation, PRBS packet type

Channel 0 (2402 MHz)

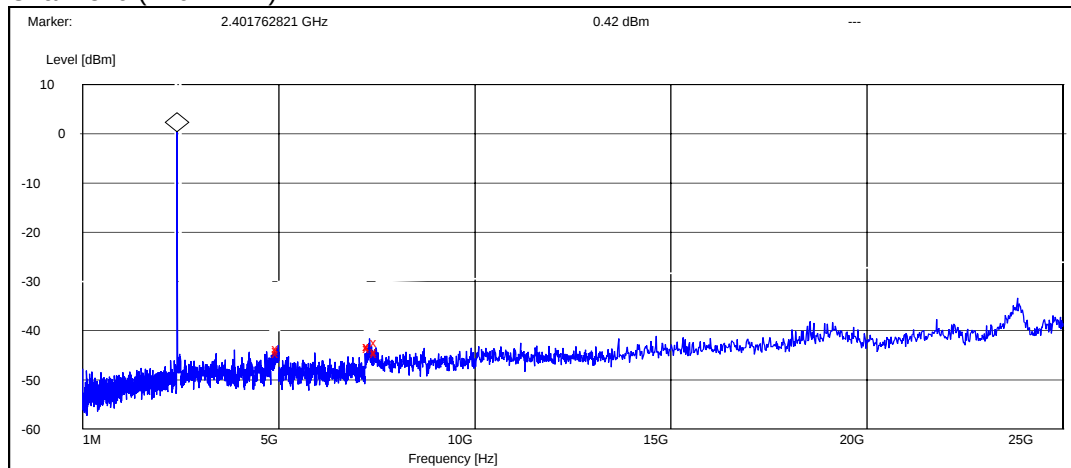


Frequency [MHz]	P [dBc]	Result
4985.926923	-44.016457	Passed
7309.034615	-43.616457	Passed
7499.950000	-42.816457	Passed

Channel 39 (2441 MHz)

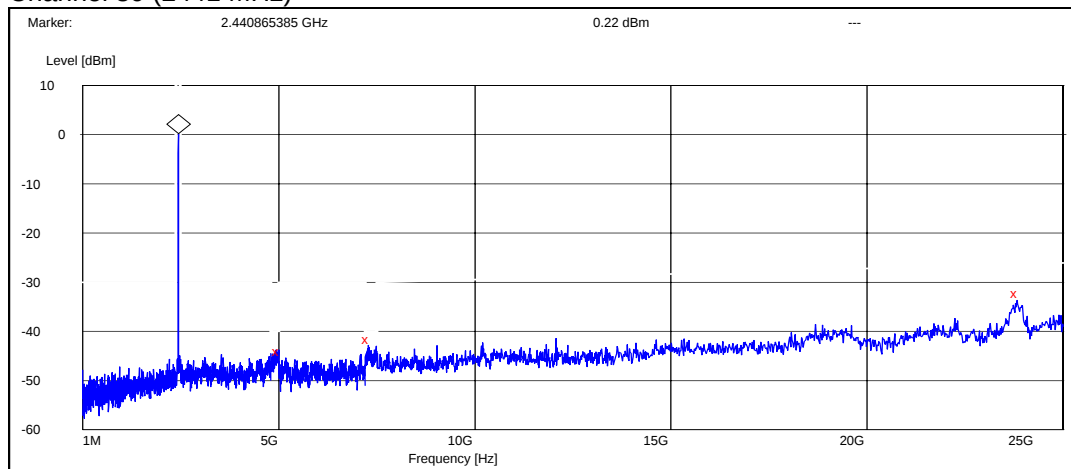

Frequency [MHz]	P [dBc]	Result
4998.397436	-44.215905	Passed
7289.423077	-41.915905	Passed
23820.512821	-32.415905	Passed

Channel 78 (2480 MHz)

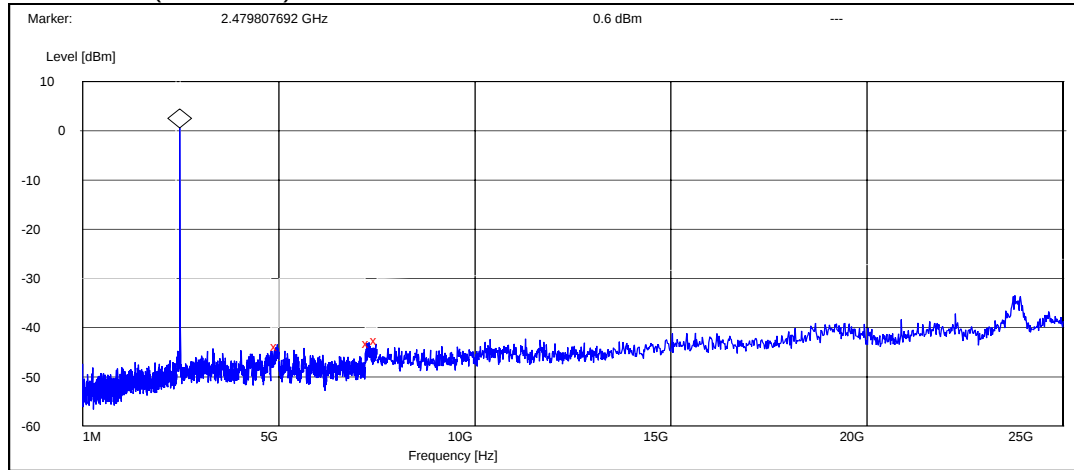

Frequency [MHz]	P [dBc]	Result
4960.256410	-44.395543	Passed
7296.634615	-43.795543	Passed
7500.000000	-43.295543	Passed

6. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-162 DUT 40530
Accessories with DUT numbers	BL-4C DUT 40528, AC-3 DUT 40486, HS-23 DUT 40488
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Flip open
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 42 / 101.9
Date of measurements	3.2.2006
Measured by	Jari Jantunen

6.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Channel 0 (2402 MHz)

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	39.80	97.72	40.10	-0.30	VERTICAL	PASSED
7206.000000	42.80	138.04	39.80	3.00	HORIZONTAL	PASSED
9608.000000	45.80	194.98	36.50	9.30	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	27.10	22.65	27.40	-0.30	VERTICAL	PASSED
7206.000000	29.60	30.20	26.60	3.00	HORIZONTAL	PASSED
9608.000000	32.90	44.16	23.60	9.30	HORIZONTAL	PASSED

Channel 40 (2442 MHz)

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4950.393788	40.20	102.33	40.40	-0.20	VERTICAL	PASSED
7350.693387	43.70	153.11	39.30	4.40	HORIZONTAL	PASSED
7370.247495	43.90	156.68	39.60	4.30	VERTICAL	PASSED
9768.000000	44.70	171.79	36.20	8.50	HORIZONTAL	PASSED
17920.345691	54.70	543.25	33.00	21.70	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4948.393788	27.50	23.71	27.70	-0.20	VERTICAL	PASSED
7350.693387	31.10	35.89	26.70	4.40	HORIZONTAL	PASSED
7370.247495	30.90	35.08	26.60	4.30	VERTICAL	PASSED
9768.000000	32.10	40.27	23.60	8.50	VERTICAL	PASSED
17924.845691	42.30	130.32	20.50	21.80	HORIZONTAL	PASSED

Channel 78 (2480 MHz)

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.40	104.71	40.50	-0.10	VERTICAL	PASSED
7440.000000	43.30	146.22	38.90	4.40	HORIZONTAL	PASSED
9920.000000	46.30	206.54	37.10	9.20	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	27.90	24.83	28.00	-0.10	VERTICAL	PASSED
7440.000000	31.00	35.48	26.60	4.40	HORIZONTAL	PASSED
9920.000000	33.20	45.71	24.00	9.20	HORIZONTAL	PASSED

6.2.2 8DPSK modulation, PRBS packet type

Channel 0 (2402 MHz)

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	39.80	97.72	40.10	-0.30	VERTICAL	PASSED
7206.000000	42.90	139.64	39.90	3.00	HORIZONTAL	PASSED
9608.000000	45.50	188.36	36.20	9.30	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	27.10	22.65	27.40	-0.30	HORIZONTAL	PASSED
7206.000000	29.70	30.55	26.70	3.00	HORIZONTAL	PASSED
9608.000000	33.00	44.67	23.70	9.30	HORIZONTAL	PASSED

Channel 39 (2441 MHz)

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4882.000000	40.50	105.93	41.20	-0.70	VERTICAL	PASSED
7351.695391	43.90	156.68	39.50	4.40	VERTICAL	PASSED
7423.341683	43.80	154.88	39.30	4.50	HORIZONTAL	PASSED
7433.867735	43.70	153.11	39.20	4.50	VERTICAL	PASSED
9764.000000	45.50	188.36	36.90	8.60	VERTICAL	PASSED
17990.987976	55.60	602.56	33.60	22.00	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4882.000000	27.80	24.55	28.50	-0.70	VERTICAL	PASSED
7349.695391	31.00	35.48	26.60	4.40	VERTICAL	PASSED
7419.841683	31.30	36.73	26.80	4.50	HORIZONTAL	PASSED
7430.367735	31.20	36.31	26.70	4.50	VERTICAL	PASSED
9764.000000	32.80	43.65	24.20	8.60	HORIZONTAL	PASSED
17990.987976	42.70	136.46	20.70	22.00	VERTICAL	PASSED

Channel 78 (2480 MHz)

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.70	108.39	40.80	-0.10	HORIZONTAL	PASSED
7440.000000	43.90	156.68	39.50	4.40	VERTICAL	PASSED
9920.000000	45.90	197.24	36.70	9.20	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	27.90	24.83	28.00	-0.10	VERTICAL	PASSED
7440.000000	31.00	35.48	26.60	4.40	HORIZONTAL	PASSED
9920.000000	33.30	46.24	24.10	9.20	HORIZONTAL	PASSED

7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-162 DUT 40530
Accessories with DUT numbers	BL-4C DUT 40528, AC-3 DUT 40486, HS-23 DUT 40488
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 100.7
Date of measurements	8.2.2006
Measured by	Jari Jantunen

7.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Channel 40 (2442 MHz)

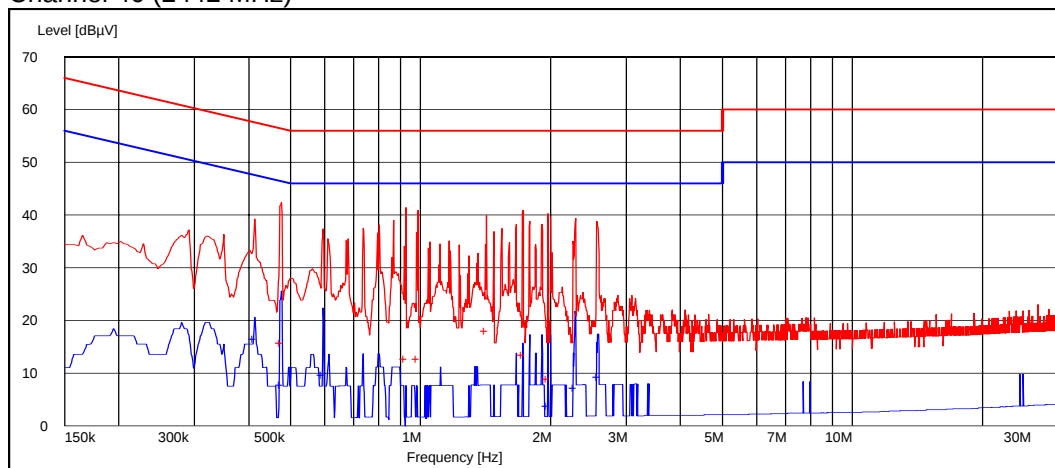

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.476253	15.60	L1	PASSED
0.924850	12.60	L1	PASSED
0.987876	12.60	L1	PASSED
1.421643	18.00	L1	PASSED
1.729359	13.40	N	PASSED
1.974048	8.80	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.413226	16.40	L1	PASSED
0.476253	7.70	L1	PASSED
0.594890	9.60	L1	PASSED
1.974048	3.80	L1	PASSED
2.282565	7.10	L1	PASSED
2.583166	9.30	L1	PASSED

7.2.2 8DPSK modulation, PRBS packet type

Channel 39 (2441 MHz)

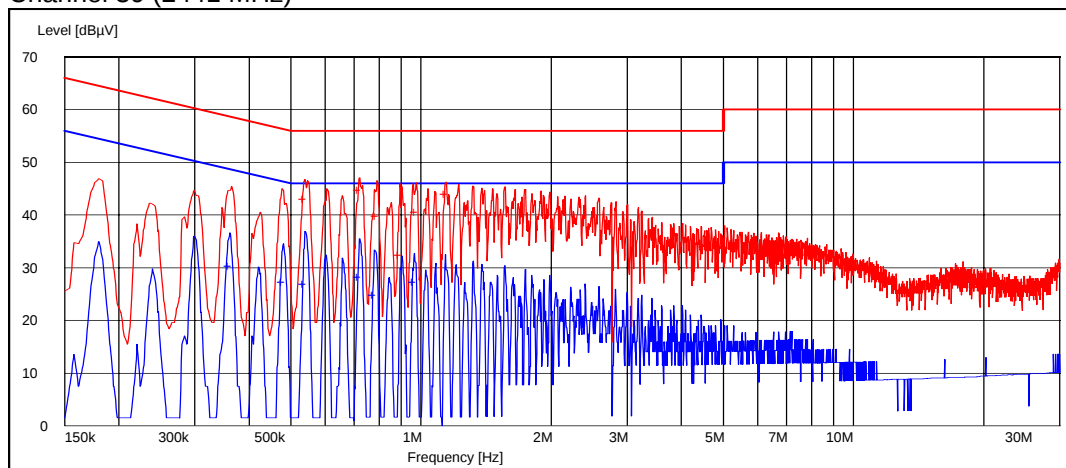

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.539279	43.10	L1	PASSED
0.720942	44.70	L1	PASSED
0.791383	39.70	N	PASSED
0.895190	32.40	L1	PASSED
0.976754	40.50	N	PASSED
1.143587	44.00	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.361323	30.30	L1	PASSED
0.479960	27.20	L1	PASSED
0.539279	26.80	L1	PASSED
0.720942	28.20	L1	PASSED
0.780261	24.80	L1	PASSED
0.965631	27.20	L1	PASSED

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))

EUT with DUT number	Phone: DUT 40537
Accessories with DUT numbers	Battery: DUT 40529
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23/49/100.8
Date of measurements	7.2.2006
Measured by	Jan-Erik Lilja

8.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel	20 dB bandwidth [kHz]
0 (2402 MHz)	875.000
40 (2442 MHz)	868.590
78 (2480 MHz)	871.795


Channel 0 (2402 MHz)

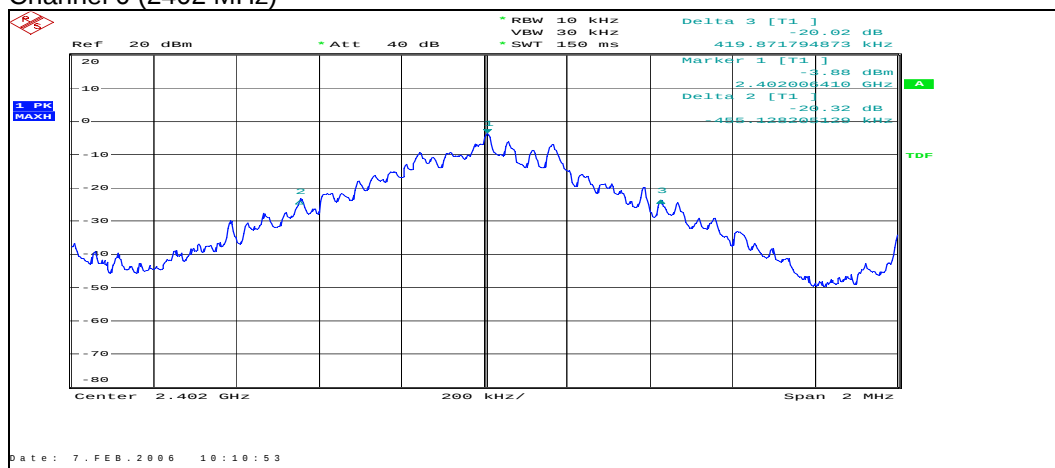

Channel 40 (2442 MHz)

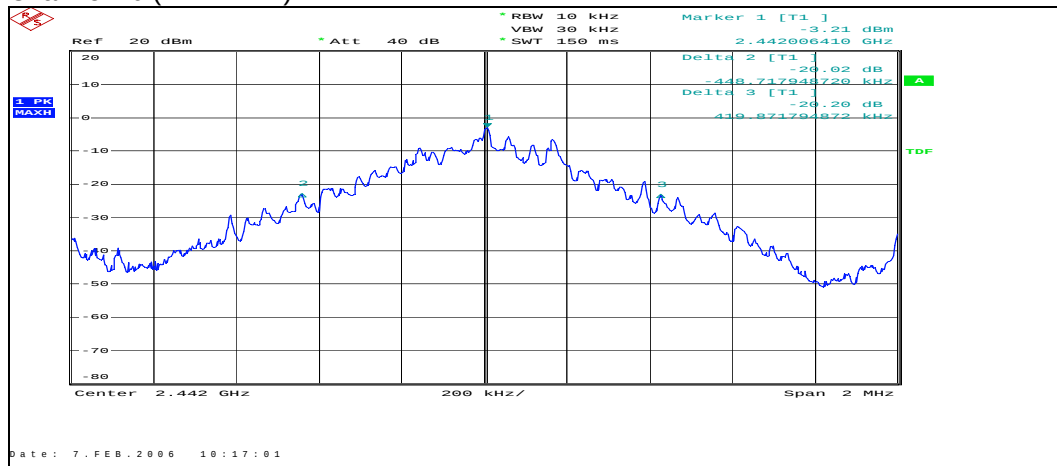


Channel 78 (2480 MHz)

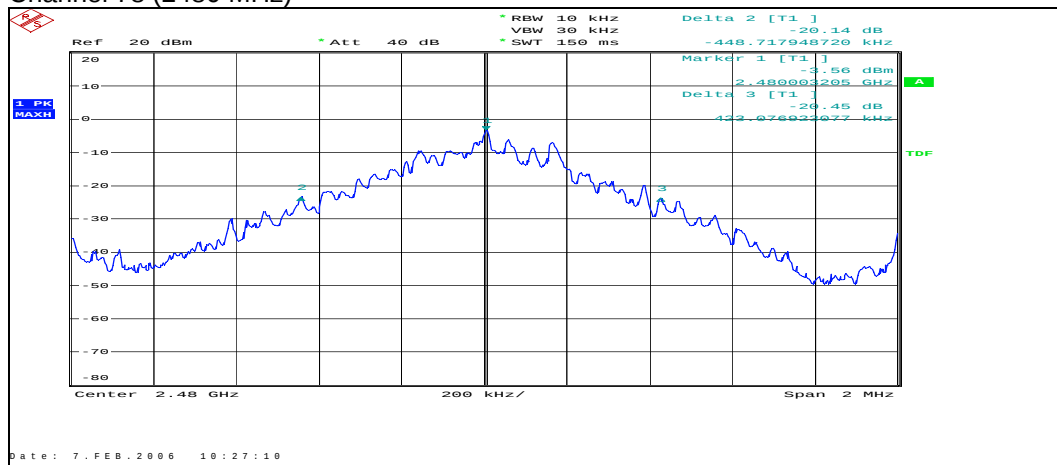


8.2.2 8DPSK modulation, PRBS packet type

Channel	20 dB bandwidth [kHz]
0 (2402 MHz)	1211.538
39 (2441 MHz)	1208.333
78 (2480 MHz)	1221.154


Channel 0 (2402 MHz)

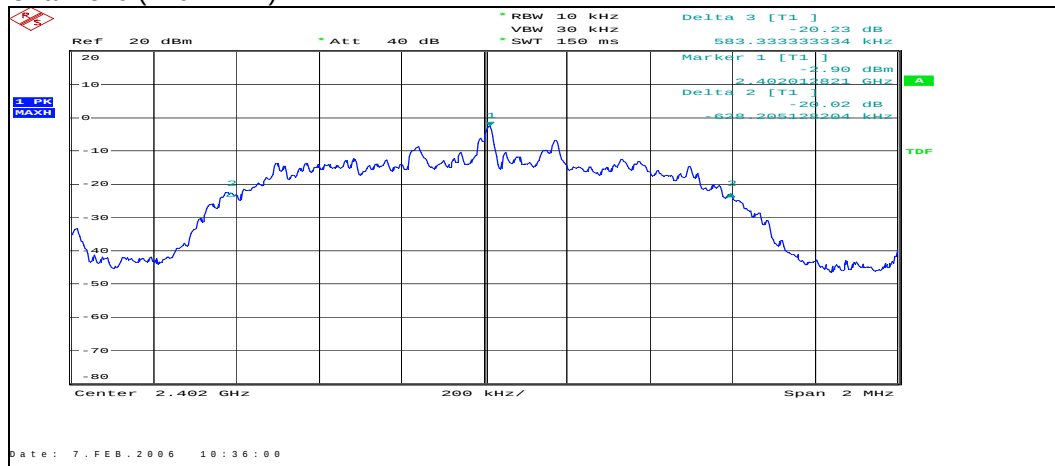

Channel 39 (2441 MHz)

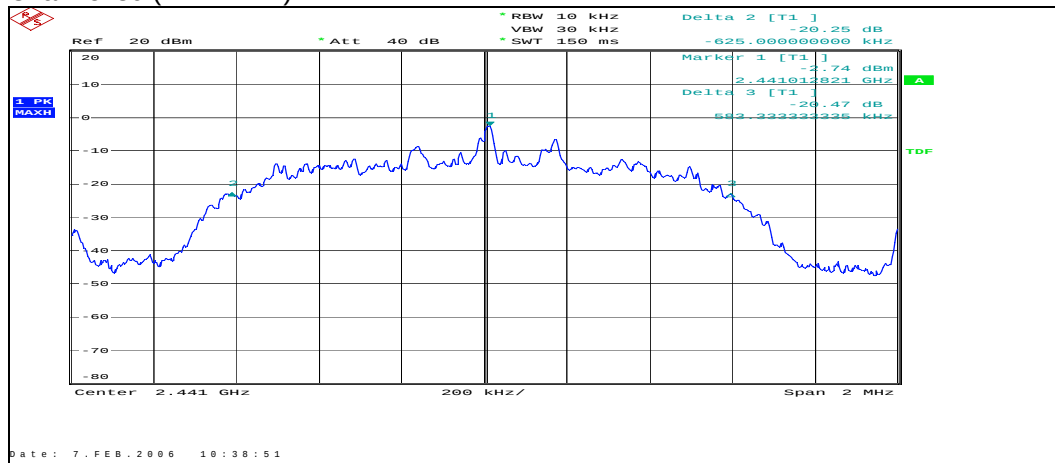

Channel 78 (2480 MHz)

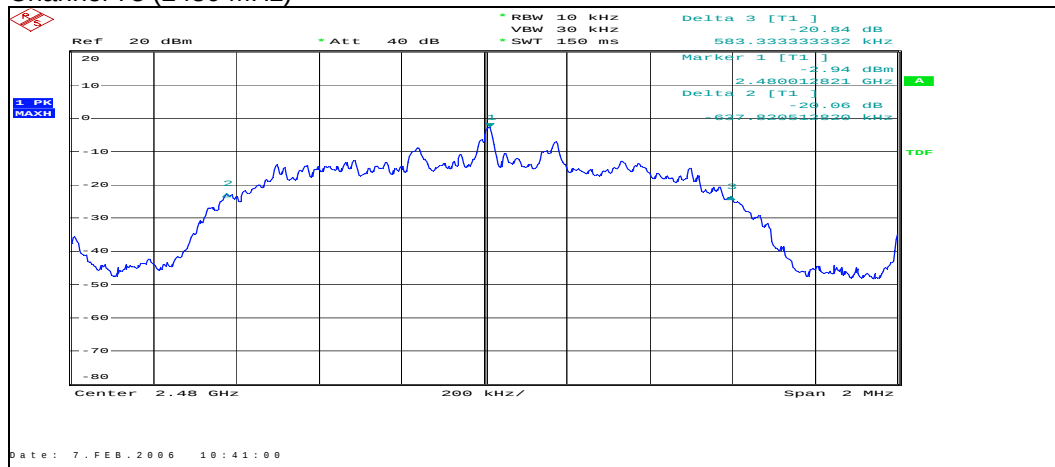

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))

EUT with DUT number	Phone: DUT 40537
Accessories with DUT numbers	Battery: DUT 40529
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23/49/100.8
Date of measurements	7.2.2006
Measured by	Jan-Erik Lilja

9.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
953.526	Passed


Hopping on, carrier frequency separation of channels 39 (2441 MHz) and 40 (2442 MHz)

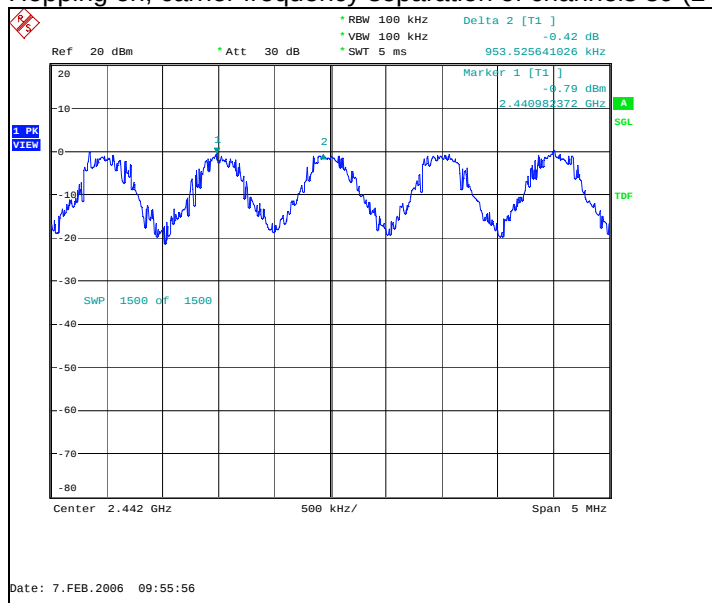

9.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
993590	Passed

Hopping on, carrier frequency separation of channels 39 and 40 (2442 MHz)

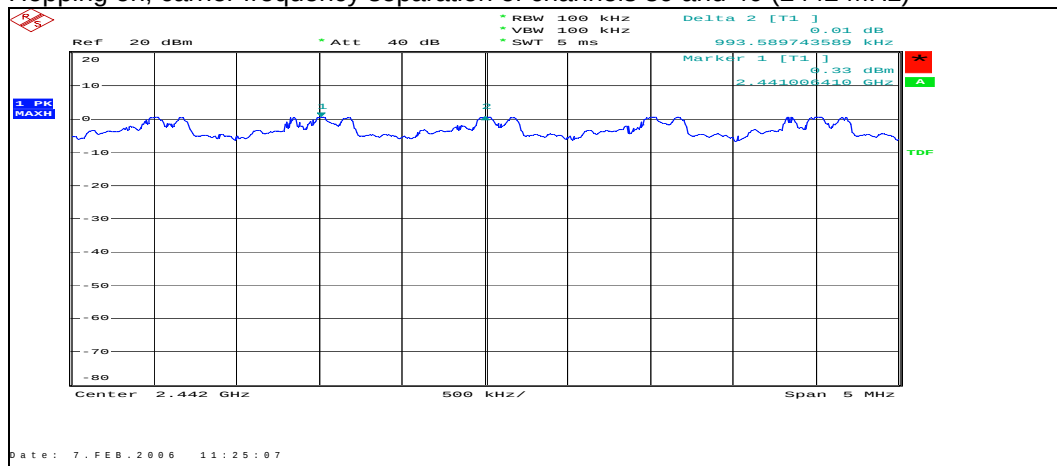

10. Number of hopping frequencies

(FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	Phone: DUT 40537
Accessories with DUT numbers	Battery: DUT 40529
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23/49/100.8
Date of measurements	7.2.2006
Measured by	Jan-Erik Lilja

10.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	Passed


Hopping on, number of hopping frequencies

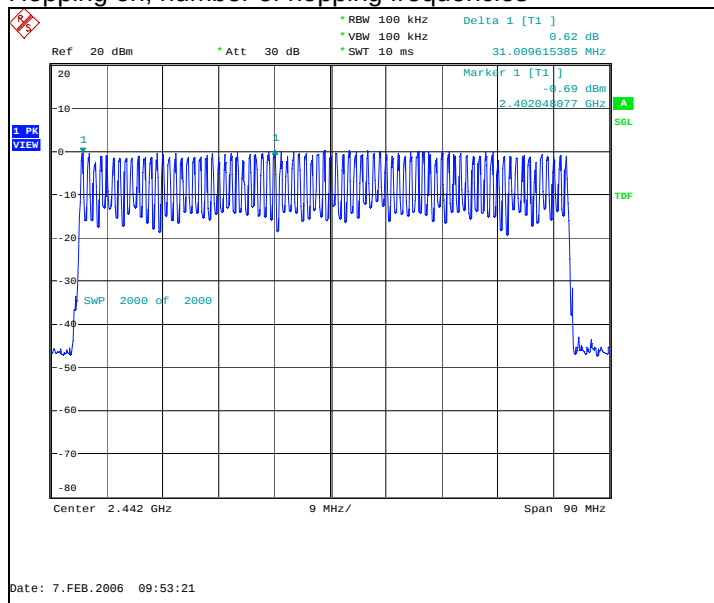

10.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	Passed

Hopping on, number of hopping frequencies

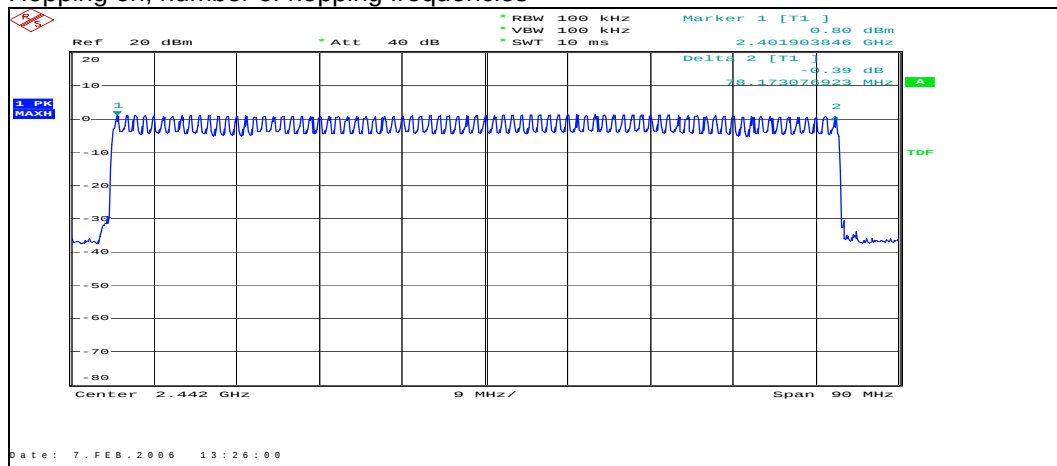

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	Phone: DUT 40537
Accessories with DUT numbers	Battery: DUT 40529
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23/49/100.8
Date of measurements	7.2.2006
Measured by	Jan-Erik Lilja

11.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results


11.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
67	2961.538	0.198423	Passed

Hopping on, number of transmissions, channel 40 (2442 MHz)

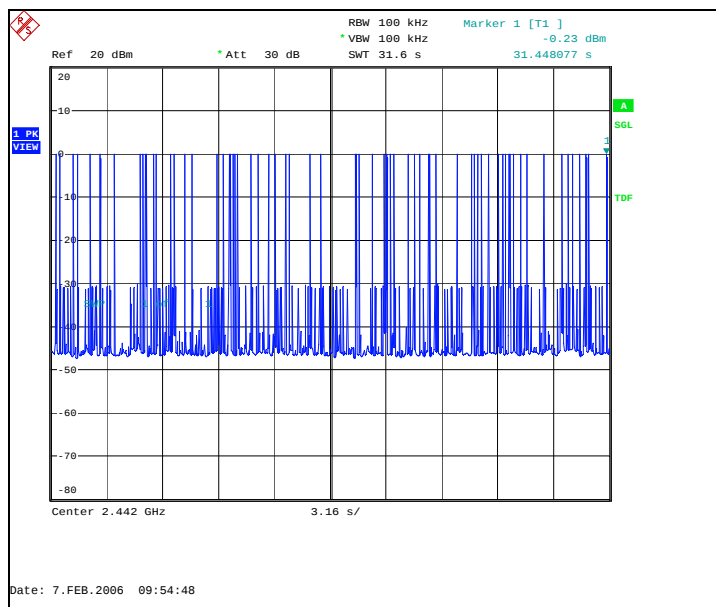


Hopping on, duration of one transmission, channel 40 (2442 MHz)

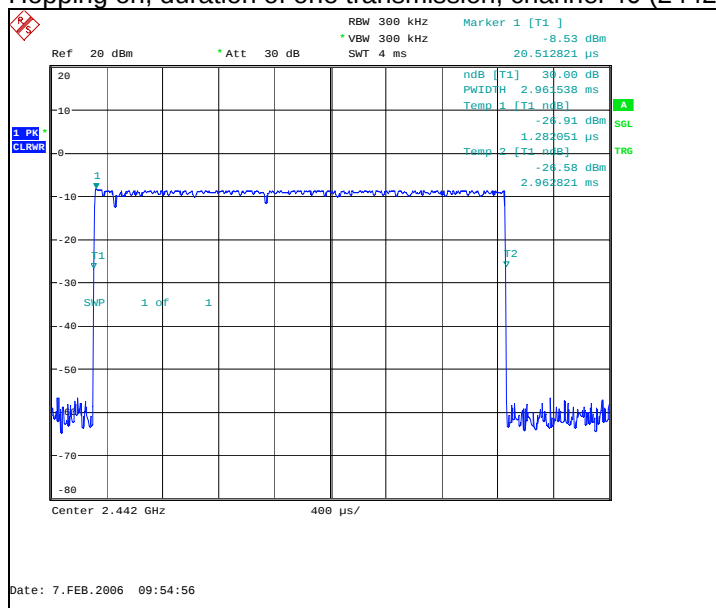


11.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
107	2980.769	0.318942	Passed

Hopping on, number of transmissions, channel 39 (2441 MHz)

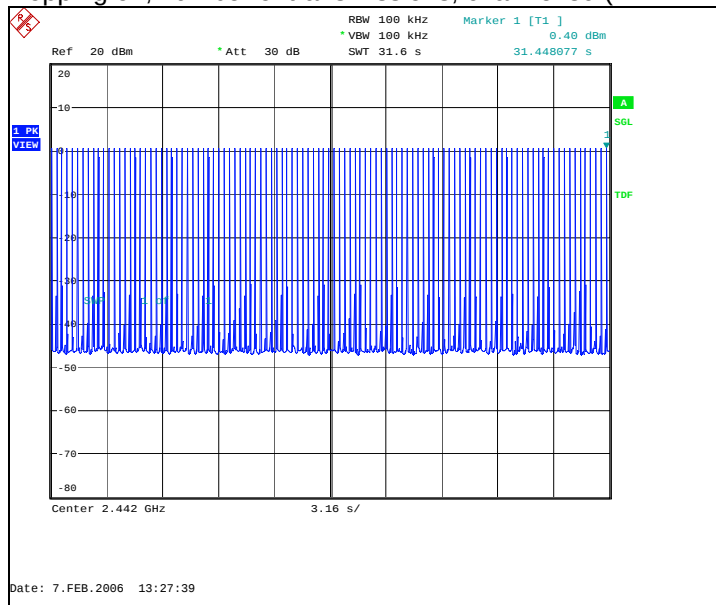

Hopping on, duration of one transmission, channel 39 (2441 MHz)

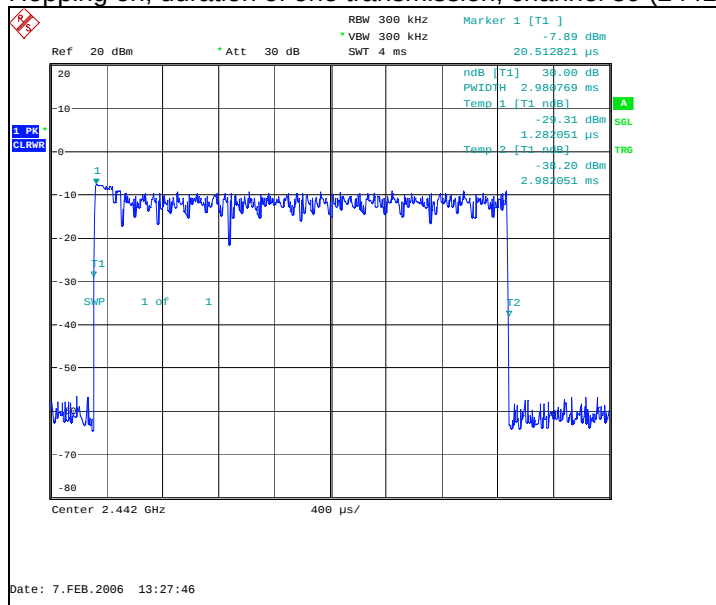

12. Test Equipment

12.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	15C,22/24
TM37678	Radio communication tester	CMU-200	R&S	15C,22/24
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	15C,22/24
TM22901	Step attenuator 110dB	8496A	Agilent	15C,22/24
TM37499	Power splitter	11667A	Agilent	15C,22/24
	Temperature chamber	VT4002	Vötsch	15C,22/24
TM38112	DC power supply	6632A	Agilent	15C,22/24
TM38111	Multimeter	34401A	Agilent	15C,22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C
TM37773	Radio communication tester	CMU-200	R&S	15B,15C
TM38631	Signal generator	83640L	Agilent	15B,15C
TM38114	DC power supply	6632A	Agilent	15B,15C
TM22835	Multimeter	87	Fluke	15B,15C
TM30600	Pulse Limiter	ESH3-Z2	R&S	15B,15C
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15B,15C
TM30636	LISN 50 µH	L2-16/	PMM	15B,15C

12.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	15B,15C, 22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C, 22/24
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	15B,15C, 22/24
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	15B,15C, 22/24
TM37516	Biconilog antenna	HL562	R&S	15B,15C, 22/24
TM26496	Double ridged waveguide antenna	3115	EMCO	15B,15C, 22/24
TM39158	Horn antenna	3116	EMCO	15B,15C, 22/24
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	15B,15C, 22/24
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	15B,15C, 22/24
TM38631	Signal generator	83640L	Agilent	15B,15C, 22/24
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	15B,15C, 22/24
	High pass filter	WHK2010-10SS	Trilithic	15B,15C, 22/24
	Low pass filter	WLK1750-10SS	Trilithic	15B,15C, 22/24
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	15B,15C, 22/24
TM26500	Turntable	DS412	Deisel	15B,15C, 22/24
TM38842	Antenna mast controller	2090	EMCO	15B,15C, 22/24
TM38843	Antenna mast	2075	EMCO	15B,15C, 22/24
TM38114	DC power supply	6632A	Agilent	15B,15C, 22/24
TM22835	Multimeter	87	Fluke	15B,15C, 22/24