

## FCC Part 22/24 Compliance Test Report

|                                                         |                                                                                                                                                                                                                                                      |                                   |                                                                                                                       |
|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Test Report no.:</b>                                 | Cph_FCC_0634_01.doc                                                                                                                                                                                                                                  | <b>Date of Report:</b>            | 21-08-2006                                                                                                            |
| <b>Number of pages:</b>                                 | 8                                                                                                                                                                                                                                                    | <b>Customer's Contact person:</b> | Thomas Reitmayer                                                                                                      |
| <b>Testing laboratory:</b>                              | TCC Nokia Copenhagen Laboratory<br>Frederikskaj<br>1790 COPENHAGEN V<br>DENMARK<br>Tel. +45 33 292929<br>Fax. +45 33 292934                                                                                                                          | <b>Customer:</b>                  | Nokia Corporation<br>Lise Meitner Strasse 10<br>89081 ULM<br>GERMANY<br>Tel. +49 731 1754 0<br>Fax. +49 731 1754 6800 |
| <b>FCC listing no.:</b>                                 | 99059                                                                                                                                                                                                                                                |                                   |                                                                                                                       |
| <b>IC recognition no.:</b>                              | 4820 and 4820-1                                                                                                                                                                                                                                      |                                   |                                                                                                                       |
| <b>Tested devices/ accessories:</b>                     | <b>Phone; RM-209 (HW 0200) &amp; Battery; BL-4B &amp; Memory Card; MU-26 &amp; Headset; HS-31 &amp; AC Charger; AC-3E</b>                                                                                                                            |                                   |                                                                                                                       |
| <b>FCC ID:</b>                                          | PPIRM-209                                                                                                                                                                                                                                            | <b>IC:</b>                        | 661U-RM209                                                                                                            |
| <b>Supplement reports:</b>                              |                                                                                                                                                                                                                                                      |                                   |                                                                                                                       |
| <b>Testing has been carried out in accordance with:</b> | <b>CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".</b> |                                   |                                                                                                                       |
| <b>Documentation:</b>                                   | The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia. |                                   |                                                                                                                       |
| <b>Test Results:</b>                                    | <b>The EUT complies with the requirements in respect of all parameters subject to the test.</b><br>The test results relate only to devices specified in this document.                                                                               |                                   |                                                                                                                       |
| <b>Date and signature for the contents:</b>             |                                                                                                                                                                                                                                                      |                                   |                                                                                                                       |

**Niels Christian Andersen, Engineer**

## 1. Summary for FCC Part 22/24 Compliance Test Report

|                               |                                                              |
|-------------------------------|--------------------------------------------------------------|
| Date of receipt               | 08-08-2006                                                   |
| Testing completed             | 21-08-2006                                                   |
| The customer's contact person | Thomas Reitmayer                                             |
| Test Plan referred to         | \\EMC\\TESTPLAN\\                                            |
| Notes                         | None                                                         |
| Document name                 | T:\\Projects\\RM-209\\EMC\\Results\\FCC\\Cph_FCC_0634_01.doc |

### 1.1. EUT and Accessory Information

The EUT is a triple band (GSM900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

| Product     | Type   | SN                          | HW   | MV | SW     | DUT   |
|-------------|--------|-----------------------------|------|----|--------|-------|
| Phone       | RM-209 | 004400/91/164066/0          | 0200 | -  | 3.11.1 | 27883 |
| Battery     | BL-4B  | 0670491363563N213110701790  | -    | -  | -      | 27875 |
| Memory Card | MU-26  | 0545E10041N C128T           | -    | -  | -      | 29078 |
| Headset     | HS-31  | 402698603301                | -    | -  | -      | 27874 |
| AC Charger  | AC-3E  | 1103336133141301706;0675370 | -    | -  | -      | 29076 |

### 1.2. Summary of Test Results

#### GSM 1900:

| Section in CFR 47   | Section in RSS-133 | Name of the test                           | Result |
|---------------------|--------------------|--------------------------------------------|--------|
| §2.1046(a)          | 6.2                | Conducted RF output power                  | NP     |
| §24.232(b)          | 6.2                | Radiated RF output power                   | NP     |
| §2.1049(h)          | 5.6                | 99 % occupied bandwidth                    | NP     |
| §24.238(a)          | 6.3                | Band edge compliance                       | NP     |
| §24.238(a), §2.1051 | 6.3                | Spurious emissions at antenna terminals    | NP     |
| §24.238(a), §2.1053 | 6.3                | Spurious radiated emissions                | Passed |
| §2.1055(a)          | 7                  | Frequency stability, temperature variation | NP     |
| §2.1055(d)          | 7                  | Frequency stability, voltage variation     | NP     |

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Copenhagen Laboratory.


## CONTENTS

|                                                                                                                              |          |
|------------------------------------------------------------------------------------------------------------------------------|----------|
| <b>1. Summary for FCC Part 22/24 Compliance Test Report .....</b>                                                            | <b>2</b> |
| 1.1. EUT and Accessory Information .....                                                                                     | 2        |
| 1.2. Summary of Test Results .....                                                                                           | 2        |
| <b>2. Spurious radiated emissions<br/>(FCC §22.917(a), §24.238(a), §2.1053, RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3) .....</b> | <b>4</b> |
| 2.1. Test setup .....                                                                                                        | 4        |
| 2.2. Test method and limit .....                                                                                             | 4        |
| 2.3. GSM 1900 Test results .....                                                                                             | 5        |
| <b>3. Test Equipment.....</b>                                                                                                | <b>7</b> |
| 3.1. Conducted measurements .....                                                                                            | 7        |
| 3.2. Radiated measurements .....                                                                                             | 7        |

## 2. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)

|                                                        |                                                                    |
|--------------------------------------------------------|--------------------------------------------------------------------|
| <b>EUT with DUT number</b>                             | RM-209 Dut#27883                                                   |
| <b>Accessories with DUT numbers</b>                    | BL-4B Dut#27875, MU-26 Dut#29078, HS-31 Dut#27874, AC-3E Dut#29076 |
| <b>Operation Voltage [V] / [Hz]</b>                    | 230 / 50                                                           |
| <b>Result</b>                                          | Passed                                                             |
| <b>Remarks</b>                                         | None                                                               |
| <b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b> | 23 / 55 / 1023                                                     |
| <b>Date of measurements</b>                            | 21-08-2006                                                         |
| <b>Measured by</b>                                     | Christian Andersen                                                 |

### 2.1. Test setup

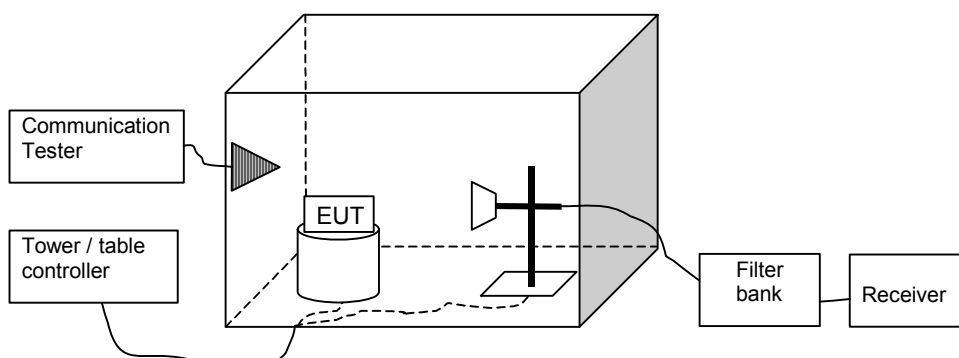

### 2.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.  
The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\_TX} - P_{SUBST\_RX} - L_{SUBST\_CABLES} + G_{SUBST\_TX\_ANT}$$

Where  $A_{SUBST}$  is the final substitution correction including receive antenna gain.  $P_{SUBST\_TX}$  is signal generator level,  $P_{SUBST\_RX}$  is receiver level,  $L_{SUBST\_CABLES}$  is cable losses including both TX and RX cables and  $G_{SUBST\_TX\_ANT}$  is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where  $P_{MEAS}$  is receiver reading in dBm and  $A_{TOT}$  is total correction factor including cable loss, preamplifier gain and substitution correction ( $A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$ ).

Limits for spurious radiated emissions measurements

| Operation band        | Frequency range [MHz] | Limit [dBm] |
|-----------------------|-----------------------|-------------|
| GSM 850 / WCDMA 850   | 30 - 8500             | -13         |
| GSM 1900 / WCDMA 1900 | 30 - 18000            | -13         |

## 2.3. GSM 1900 Test results

### 2.3.1 Phone flip open

GSM mode, channel 661 / 1880.0 MHz

| Frequency [MHz] | P [dBm] | P [μW]  | P <sub>MEAS</sub> [dBm] | A <sub>TOT</sub> [dB] | Polarisation | Result |
|-----------------|---------|---------|-------------------------|-----------------------|--------------|--------|
| 1960.049699     | -28.60  | 1.38038 | -37.40                  | 8.80                  | VERTICAL     | Passed |
| 3760.023046     | -43.20  | 0.04786 | -48.80                  | 5.60                  | HORIZONTAL   | Passed |
| 5640.282565     | -50.60  | 0.00871 | -59.10                  | 8.50                  | HORIZONTAL   | Passed |
| 7520.042084     | -42.10  | 0.06166 | -59.10                  | 17.00                 | VERTICAL     | Passed |

EGPRS mode, channel 661 / 1880.0 MHz

| Frequency [MHz] | P [dBm] | P [μW]  | P <sub>MEAS</sub> [dBm] | A <sub>TOT</sub> [dB] | Polarisation | Result |
|-----------------|---------|---------|-------------------------|-----------------------|--------------|--------|
| 1960.049699     | -23.90  | 4.07380 | -32.70                  | 8.80                  | VERTICAL     | Passed |
| 3760.023046     | -56.20  | 0.00240 | -61.80                  | 5.60                  | HORIZONTAL   | Passed |
| 5639.782565     | -56.00  | 0.00251 | -64.50                  | 8.50                  | HORIZONTAL   | Passed |
| 7520.042084     | -42.50  | 0.05623 | -59.50                  | 17.00                 | VERTICAL     | Passed |

### 2.3.2 Phone flip closed

GSM mode, channel 661 / 1880.0 MHz

| Frequency [MHz] | P [dBm] | P [ $\mu$ W] | P <sub>MEAS</sub> [dBm] | A <sub>TOT</sub> [dB] | Polarisation | Result |
|-----------------|---------|--------------|-------------------------|-----------------------|--------------|--------|
| 1959.864930     | -27.00  | 1.99526      | -35.80                  | 8.80                  | VERTICAL     | Passed |
| 3760.023046     | -45.20  | 0.03020      | -50.80                  | 5.60                  | HORIZONTAL   | Passed |
| 5640.278557     | -49.70  | 0.01072      | -58.00                  | 8.30                  | VERTICAL     | Passed |
| 7520.042084     | -42.90  | 0.05129      | -59.90                  | 17.00                 | VERTICAL     | Passed |

EGPRS mode, channel 661 / 1880.0 MHz

| Frequency [MHz] | P [dBm] | P [ $\mu$ W] | P <sub>MEAS</sub> [dBm] | A <sub>TOT</sub> [dB] | Polarisation | Result |
|-----------------|---------|--------------|-------------------------|-----------------------|--------------|--------|
| 1959.864930     | -24.40  | 3.63078      | -33.20                  | 8.80                  | VERTICAL     | Passed |
| 3759.523046     | -56.30  | 0.00234      | -61.90                  | 5.60                  | HORIZONTAL   | Passed |
| 5640.778557     | -55.80  | 0.00263      | -64.10                  | 8.30                  | VERTICAL     | Passed |
| 7520.042084     | -44.30  | 0.03715      | -61.30                  | 17.00                 | VERTICAL     | Passed |

### 3. Test Equipment

#### 3.1. Conducted measurements

| Eq. No | Equipment                                      | Type      | Manufacturer         | Used in |
|--------|------------------------------------------------|-----------|----------------------|---------|
| 13037  | Power Supply 0-15V 10A                         | EA3012    | LP Instruments       | 15B,15C |
| 13513  | Pulse Limiter 9KHz-30MHz                       | ESH3Z2    | Rohde&Schwarz        | 15B,15C |
| 13666  | EMI Test Reciever 9KHz-2,5GHz                  | ESPC      | Rohde&Schwarz        | 15B,15C |
| 13935  | Two Lines Artificial Mains Network             | ESH3-Z5   | Rohde&Schwarz        | 15B,15C |
| 16995  | Directional Coupler 20dB 0,5-2,0 GHz SMA Conn. | 1538RA-20 | Weinschel            | 15B,15C |
| 18772  | Shielded Chamber                               | RFD-100   | ETS-Lindgren         | 15B,15C |
| 19171  | Universal Radio Communication Tester           | CMU200    | Rohde&Schwarz        | 15B,15C |
| 11386  | System DC Power Supply                         | HP6632A   | Hewlett Packard      | 22.24   |
| 11487  | Network analyzer 300KHz-3,0GHz                 | HP8753A   | Hewlett Packard      | 22.24   |
| 11584  | Spectrum analyzer 50Hz-6,5GHz                  | HP8561B   | Hewlett Packard      | 22.24   |
| 13134  | Tracking generator                             | HP85645A  | Hewlett Packard      | 22.24   |
| 13302  | Spectrum Analyzer 9KHz-12.8GHz                 | HP8596E   | Hewlett Packard      | 22.24   |
| 13371  | Temperature Chamber                            | S-1,2C    | Thermotron           | 22.24   |
| 13524  | Digital Radiocomm. Tester                      | CMD55     | Rohde&Schwarz        | 22.24   |
| 14807  | S - Parameter Test Set 300KHz-6GHz             | HP85047A  | Hewlett Packard      | 22.24   |
| 15859  | Digital Radio Communication Test Set           | 4201S     | Wavetek              | 22.24   |
| 17277  | Multimeter Digital 6 1/2 Digit                 | AT34401A  | Agilent Technologies | 22.24   |
| 17796  | Radio Communication Test Set                   | 4400M     | Wavetek              | 22.24   |
| 19374  | Resonant Dipole Antenna 850MHz SMA m Conn.     | -         | NMP Cph              | 22.24   |
| 19375  | Resonant Dipole Antenna 1900MHz SMA m Conn.    | -         | NMP Cph              | 22.24   |
| 13037  | Power Supply 0-15V 10A                         | EA3012    | LP Instruments       | 15B,15C |

#### 3.2. Radiated measurements

| Eq. No | Equipment                                   | Type           | Manufacturer  | Used in       |
|--------|---------------------------------------------|----------------|---------------|---------------|
| 14020  | Programmable Relay Switching System         | -              | Pickering     | 15B,15C,22,24 |
| 18792  | Multi Device Controller                     | 2090           | ETS-EMCO      | 15B,15C,22,24 |
| 13829  | Turntable Controller                        | 4630-100       | Comtest       | 15B,15C,22,24 |
| 14963  | RF Preamplifier 100MHz-4GHz (Metal Chassis) | AFS3-00100400  | Miteq/NMP Cph | 15B,15C,22,24 |
| 13668  | BiLog Antenna 30-2000MHz                    | BiLog-CBL6112A | Chase         | 15B,15C,22,24 |
| 18861  | EMI Test Receiver 20Hz-26,5GHz              | ESI            | Rohde&Schwarz | 15B,15C,22,24 |
| 12679  | Dual Log Periodic Antenna 1-18 GHz          | HL025          | Rohde&Schwarz | 15B,15C,22,24 |
| 18860  | Ultra Broadband Antenna                     | HL562          | Rohde&Schwarz | 15B,15C,22,24 |

| Eq. No | Equipment                                   | Type                           | Manufacturer           | Used in       |
|--------|---------------------------------------------|--------------------------------|------------------------|---------------|
|        | Ultralog 30-3000MHz                         |                                |                        |               |
| 18773  | Shielded Chamber                            | RFD-100                        | ETS-Lindgren           | 15B,15C,22,24 |
| 18774  | Shielded Chamber                            | RFSD-F/A-100                   | ETS-Lindgren           | 15B,15C,22,24 |
| 18324  | High Pass Filter 3GHz SMA f Conn            | WHJS3000-10SS                  | Wainwright             | 15B,15C,22,24 |
| 14114  | Highpass Filter 1000MHz-4500MHz             | WHK1000-12SS                   | Wainwright             | 15B,15C,22,24 |
| 13918  | Highpass Filter 2000-4000MHz 50OHM SMA Conn | WHKS2000-10SS                  | Wainwright Instruments | 15B,15C,22,24 |
| 13937  | Ultra Stable Notch Filter 902,4MHz          | WRCA902.4-0.2/40-6SS           | Wainwright Instruments | 15B,15C,22,24 |
| 13936  | Ultra Stable Notch Filter 1747,5MHz         | WRCD1747.5-0.2/40-10SS         | Wainwright Instruments | 15B,15C,22,24 |
| 13917  | Highpass Filter 1000-3000MHz 50OHM SMA Conn | WHKS1000-10SS                  | Wainwright Instruments | 15B,15C,22,24 |
| 14188  | Ultra Stable Notch Filter 902,4MHz          | WRCA902.4-0.2/40-6SS           | Wainwright             | 15B,15C,22,24 |
| 14187  | Ultra Stable Notch Filter 1747,5MHz         | WRCD1747.5-0.2/40-10SS         | Wainwright             | 15B,15C,22,24 |
| 16633  | Ultra Stable Notch Filter 1880,0MHz         | WRCD1880.0-0.2/40-10SS         | Wainwright             | 15B,15C,22,24 |
| 18323  | Band reject filter 1947-1953MHz 40dB        | WRCG1947/1953-1940/1960-40/6SS | Wainwright             | 15B,15C,22,24 |
| 15190  | Infra Red Remote Control Unit               | 4630                           | Emco                   | 22,24,15B,15C |
| 14993  | EMI Test Receiver 9KHz-2750MHz              | ESCS30                         | Rohde&Schwarz          | 22,24,15B,15C |
| 15191  | Turntable Contoller Unit                    | G-800SDX                       | YAESU                  | 22,24,15B,15C |
| 14900  | Antenna Controller                          | HD100                          | HD GmbH                | 22,24,15B,15C |