

FCC Part 15C Compliance Test Report

Test Report no.:	Tre_FCC_0726_06.doc	Date of Report:	11.07.2007
Number of pages:	27	Customer's Contact person:	Jukka Pekkala
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	Phone RM-272 / Battery BL-4C, AC-charger AC-4E, Headset HS-47		
FCC ID:	PPIRM-272	IC:	661U-RM272
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Yin Hongpeng, Engineer

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	28.06.2007
Testing completed	29.06.2007
The customer's contact person	Jukka Pekkala
Test Plan referred to	T:\Projects\RM-272\TestPlan_RS\RS_Testplan_RM-272.xls
Notes	-
Document name	T:\Projects\RM-272\EMC\Results\FCC\Tre_FCC_0726_06.doc

1.1. EUT and Accessory Information

The EUT is a 3-band (GSM900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-272	004401013210063	0210	-	kw06w15_07w24	41167
Battery	BL-4C	-	-	-	-	41172
AC-Charger	AC-4E	-	-	-	-	41176
Headset	HS-47	-	-	-	-	41178

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(c)	A8.5	Band edge compliance of RF emissions	NP
15.247(c)	A8.5	Spurious RF conducted emissions	PASSED
15.247(c), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Tampere Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Spurious radiated emissions test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5).....	9
4.1. Test method and limit.....	9
4.2. Bluetooth Test results	10
5. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))	13
5.1. Test method and limit.....	13
5.2. Bluetooth Test results	14
6. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))	18
6.1. Test method and limit.....	18
6.2. Bluetooth Test results	19
7. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	21
7.1. Test method and limit.....	21
7.2. Bluetooth Test results	22
8. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	24
8.1. Test method and limit.....	24
8.2. Bluetooth test results.....	25
9. Test Equipment.....	27
9.1. Conducted measurements	27
9.2. Radiated measurements	27

2. Test setups


2.1. Conducted RF test setup

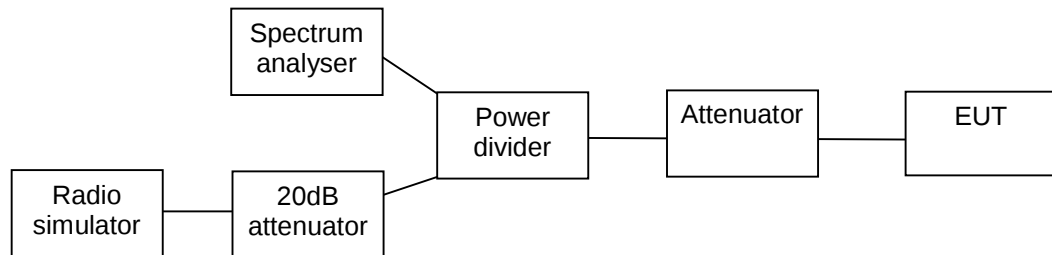

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

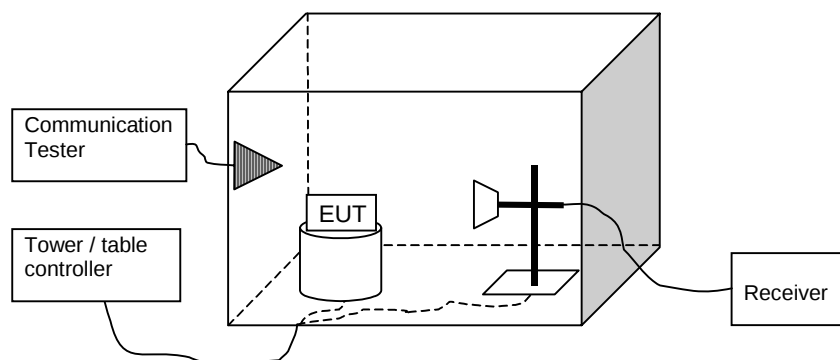

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-272 DUT 41167
Accessories with DUT numbers	BL-4C DUT 41172, AC-4E DUT 41176, HS-47 DUT 41178
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 99.7
Date of measurements	29.06.2007
Measured by	Timo Raiskio

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-0.20	0.955	PASSED
40 / 2442	-0.40	0.912	PASSED
78 / 2480	-0.90	0.813	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

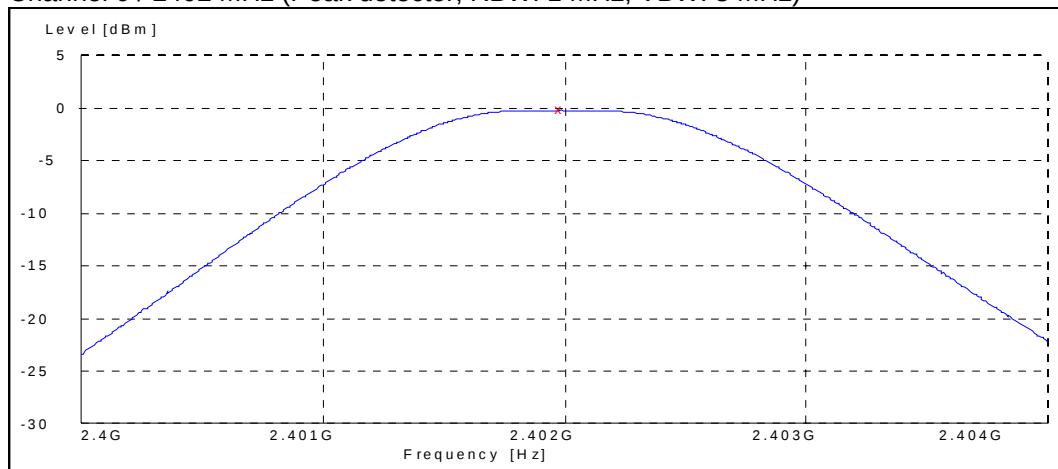

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

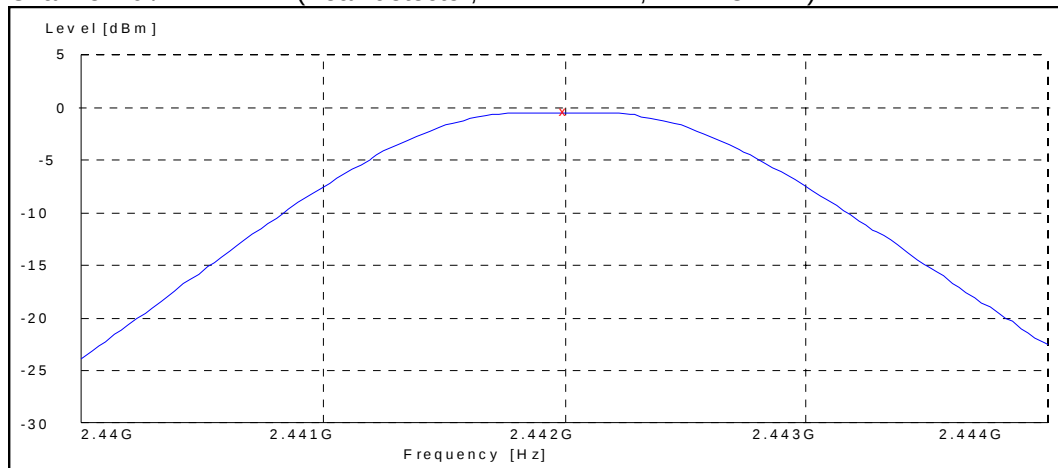


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

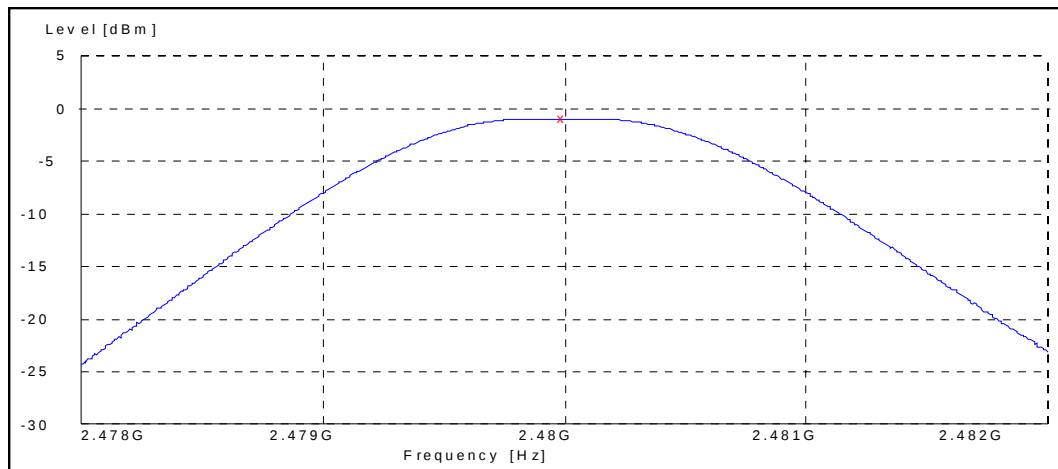


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	1.60	1.445	PASSED
40 / 2442	0.90	1.230	PASSED
78 / 2480	0.30	1.072	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

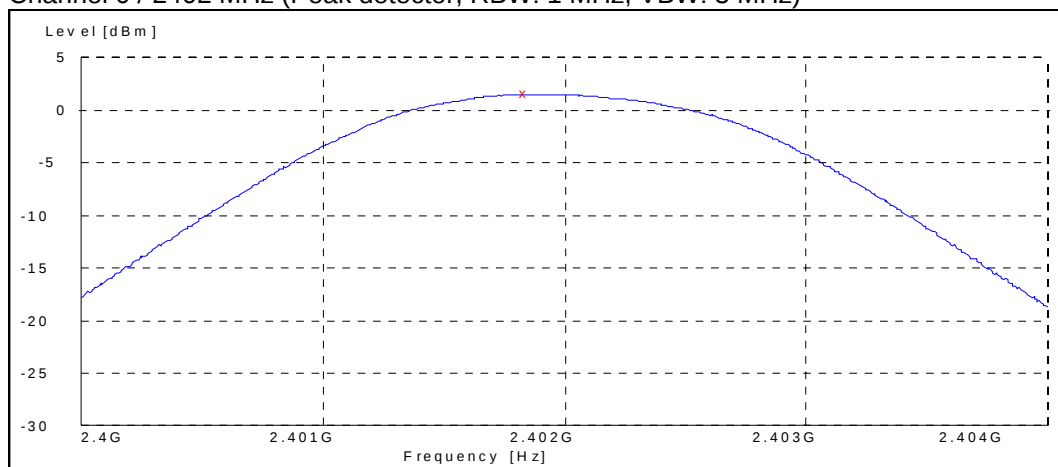

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

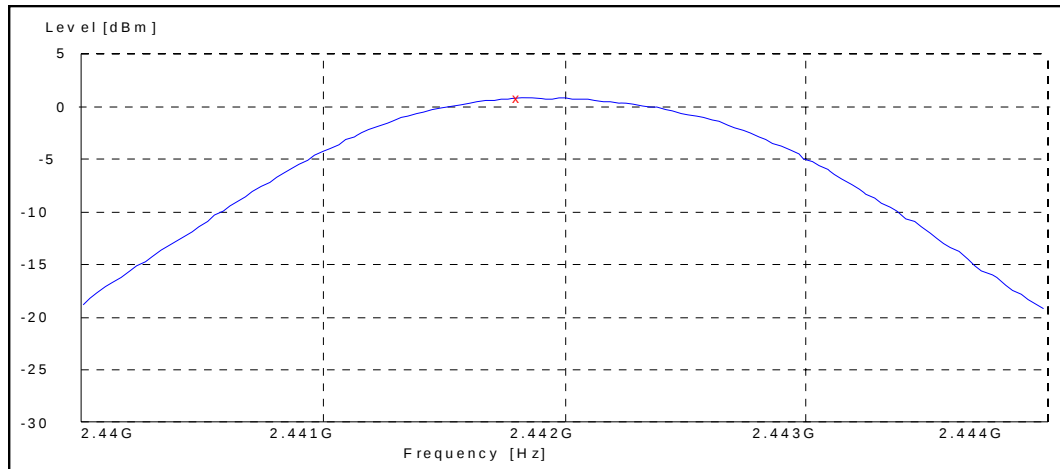

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

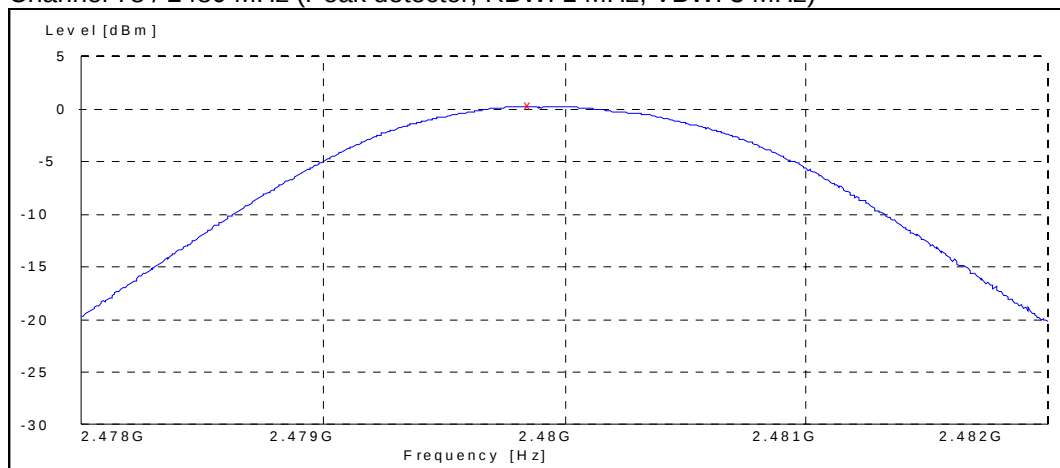

4. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5)

EUT with DUT number	RM-272 DUT 41167
Accessories with DUT numbers	BL-4C DUT 41172, AC-4E DUT 41176, HS-47 DUT 41178
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 99.7
Date of measurements	29.06.2007
Measured by	Timo Raiskio

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

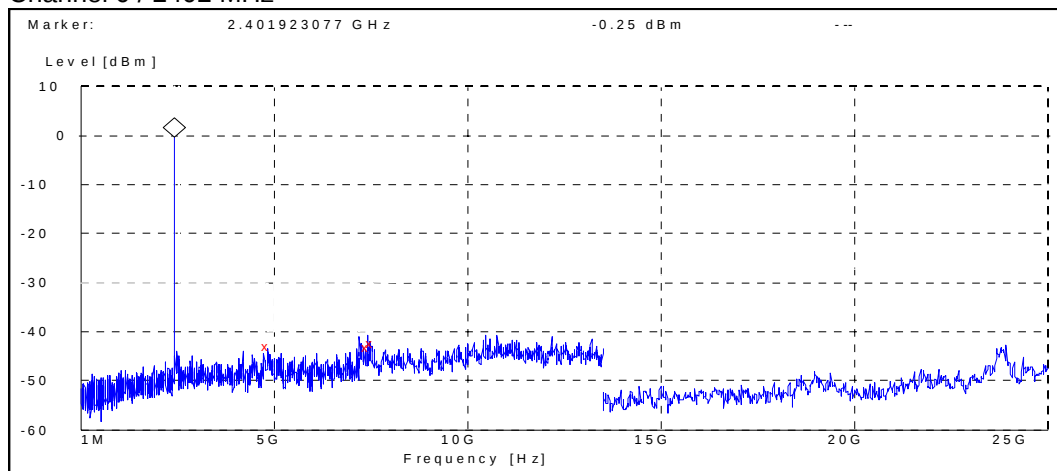


Frequency [MHz]	P [dBc]	Result
4805.769231	-42.749611	PASSED
7423.076923	-42.949611	PASSED
7500.000000	-42.349611	PASSED

Channel 40 / 2442 MHz

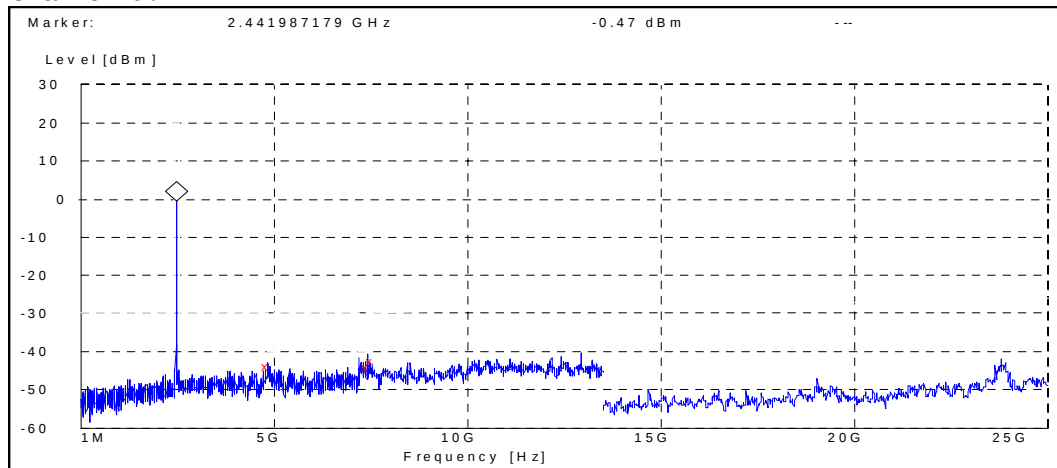

Frequency [MHz]	P [dBc]	Result
4821.474359	-43.330657	PASSED
7423.076923	-43.730657	PASSED
7500.000000	-42.230657	PASSED


Channel 78 / 2480 MHz

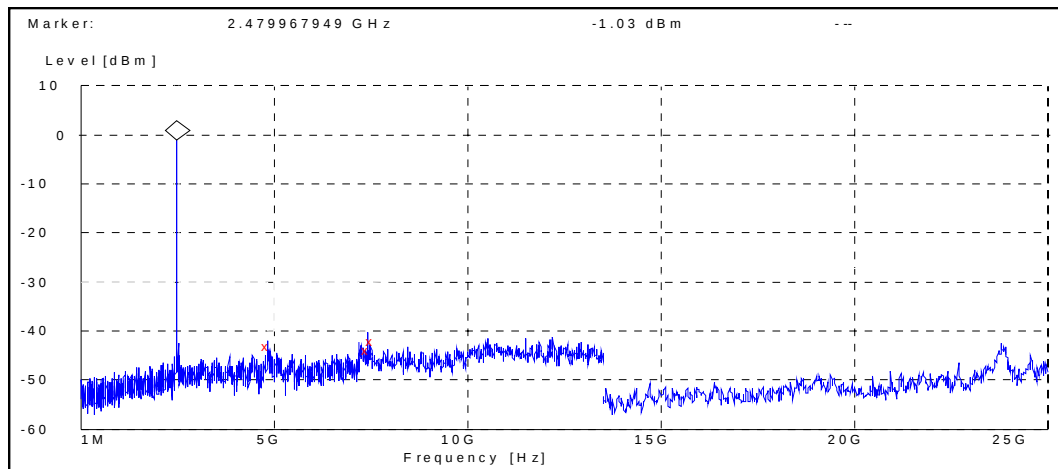

Frequency [MHz]	P [dBc]	Result
4817.948718	-42.273409	PASSED
7423.076923	-42.873409	PASSED
7500.000000	-41.273409	PASSED


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

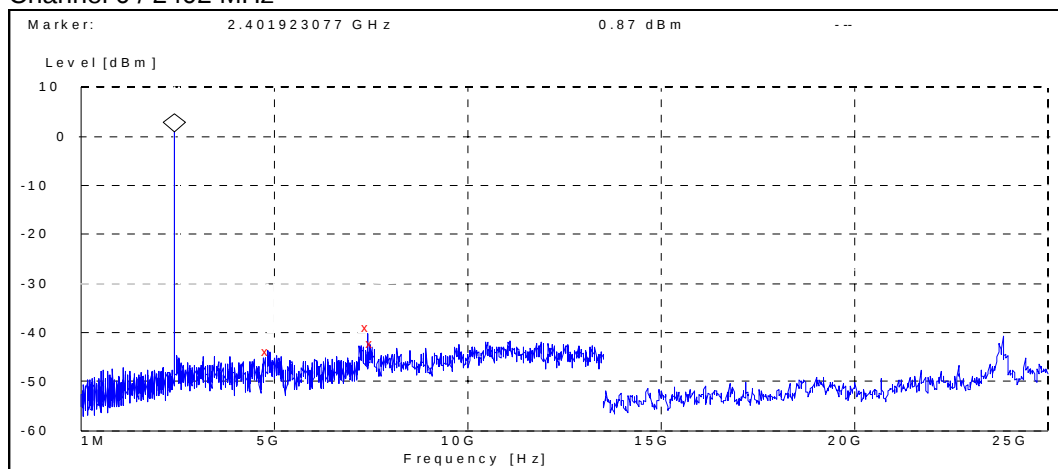


Frequency [MHz]	P [dBc]	Result
4812.179487	-44.867386	PASSED
7423.076923	-39.867386	PASSED
7500.000000	-43.067386	PASSED

Channel 40 / 2442 MHz

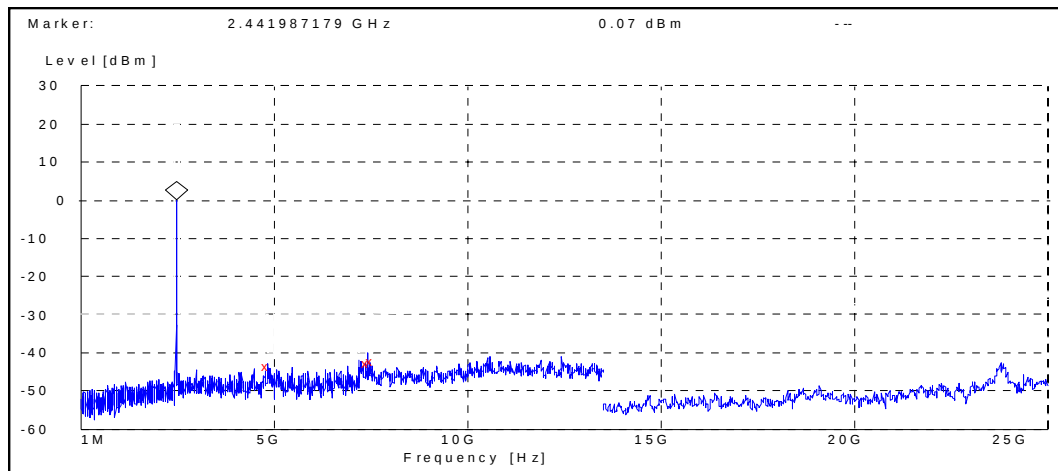

Frequency [MHz]	P [dBc]	Result
4815.705128	-43.674168	PASSED
7423.076923	-42.874168	PASSED
7500.000000	-42.374168	PASSED

Channel 78 / 2480 MHz

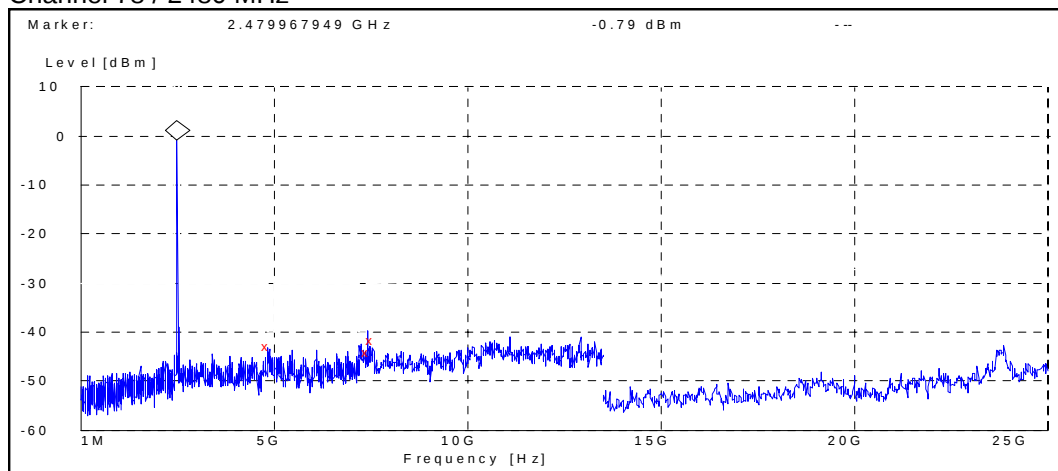

Frequency [MHz]	P [dBc]	Result
4810.256410	-42.111858	PASSED
7423.557692	-43.311858	PASSED
7500.000000	-41.011858	PASSED

5. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))

EUT with DUT number	RM-272 DUT 41167
Accessories with DUT numbers	BL-4C DUT 41172, AC-4E DUT 41176, HS-47 DUT 41178
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 99.7
Date of measurements	29.06.2007
Measured by	Timo Raiskio

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

5.2. Bluetooth Test results


5.2.1 GFSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	794.872	PASSED
40 / 2442	794.872	PASSED
78 / 2480	794.872	PASSED


Channel 0 / 2402 MHz

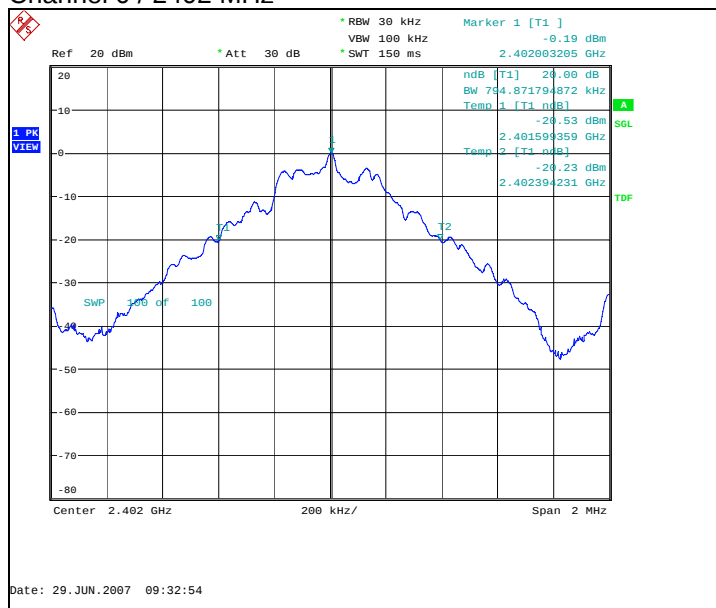

Channel 40 / 2442 MHz

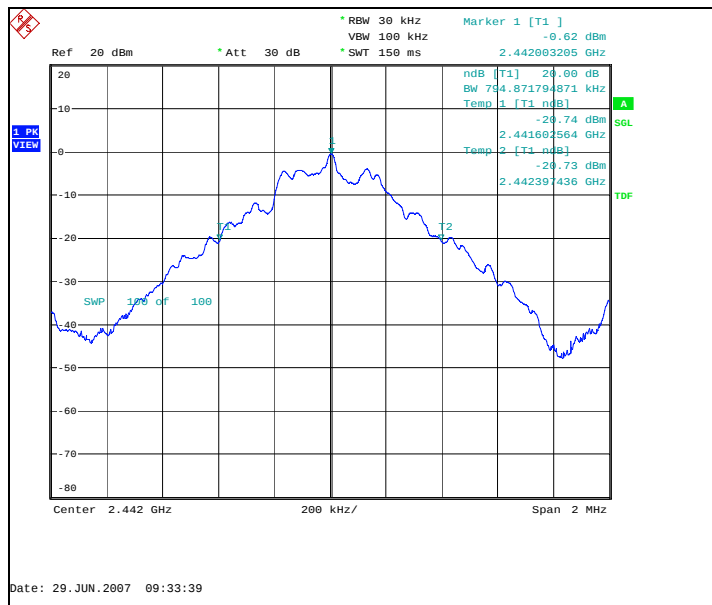


Channel 78 / 2480 MHz

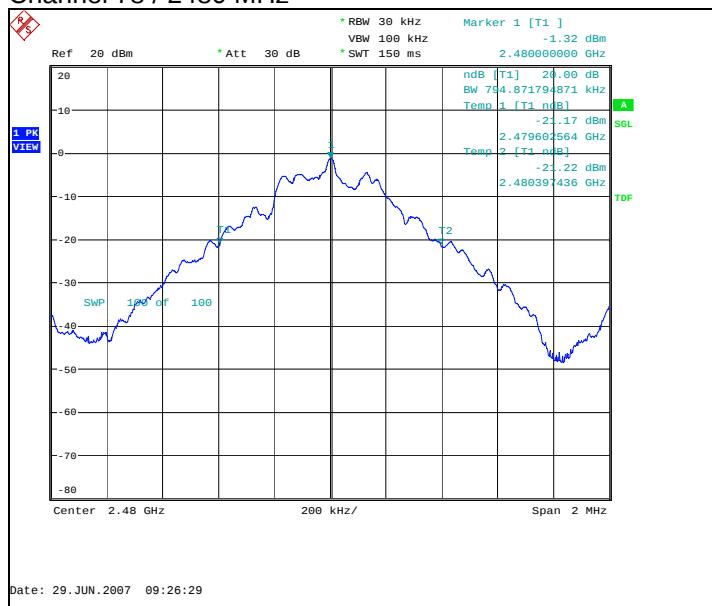


5.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1262.821	PASSED
40 / 2442	1262.821	PASSED
78 / 2480	1259.615	PASSED


Channel 0 / 2402 MHz

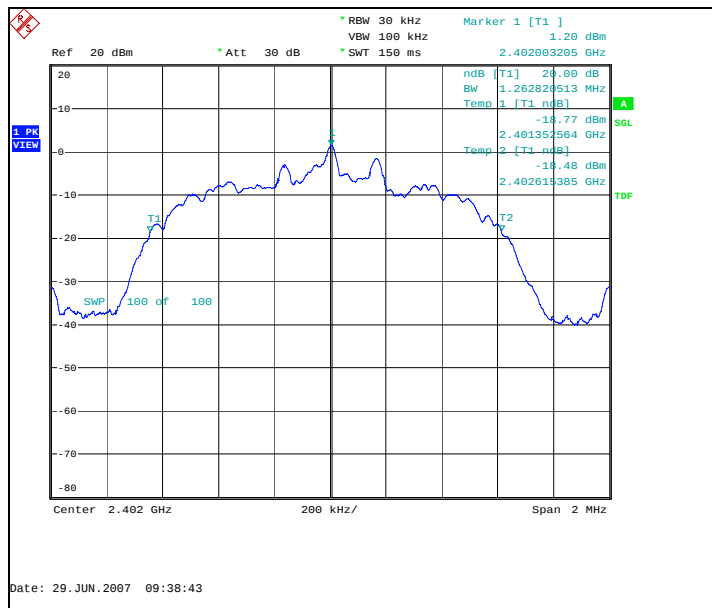

Channel 40 / 2442 MHz

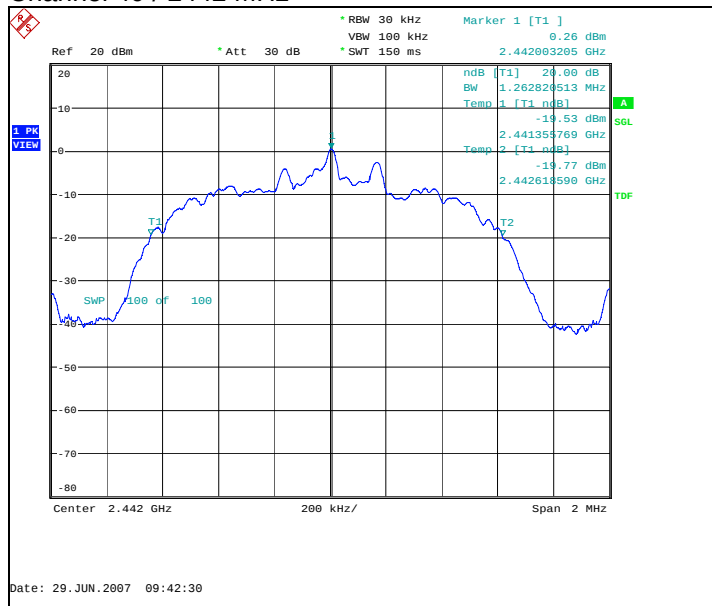

Channel 78 / 2480 MHz

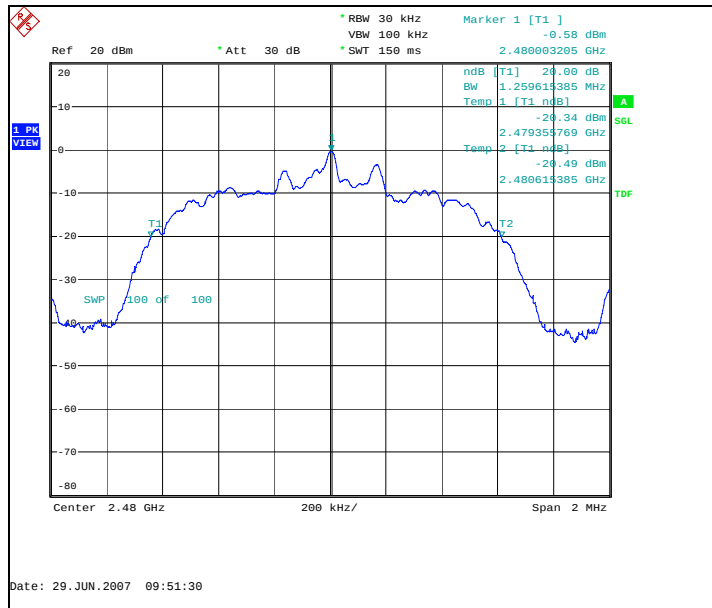

6. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))

EUT with DUT number	RM-272 DUT 41167
Accessories with DUT numbers	BL-4C DUT 41172, AC-4E DUT 41176, HS-47 DUT 41178
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 99.7
Date of measurements	29.06.2007
Measured by	Timo Raiskio

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1009.615	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

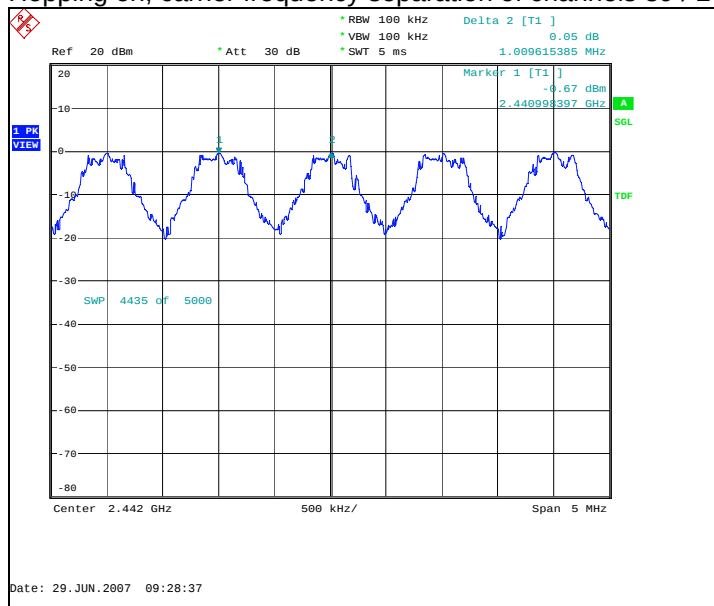

6.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1025.641	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

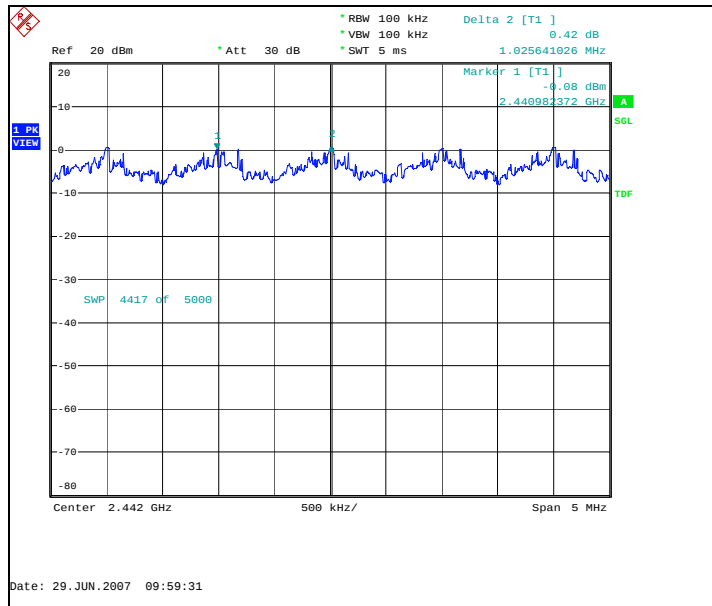

7. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-272 DUT 41167
Accessories with DUT numbers	BL-4C DUT 41172, AC-4E DUT 41176, HS-47 DUT 41178
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 99.7
Date of measurements	29.06.2007
Measured by	Timo Raiskio

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED


Hopping on, number of hopping frequencies

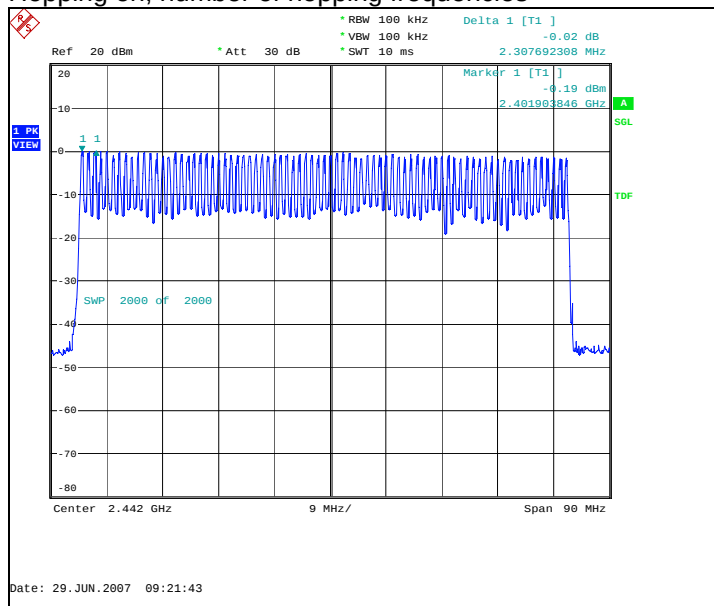

7.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
71	PASSED

Hopping on, number of hopping frequencies

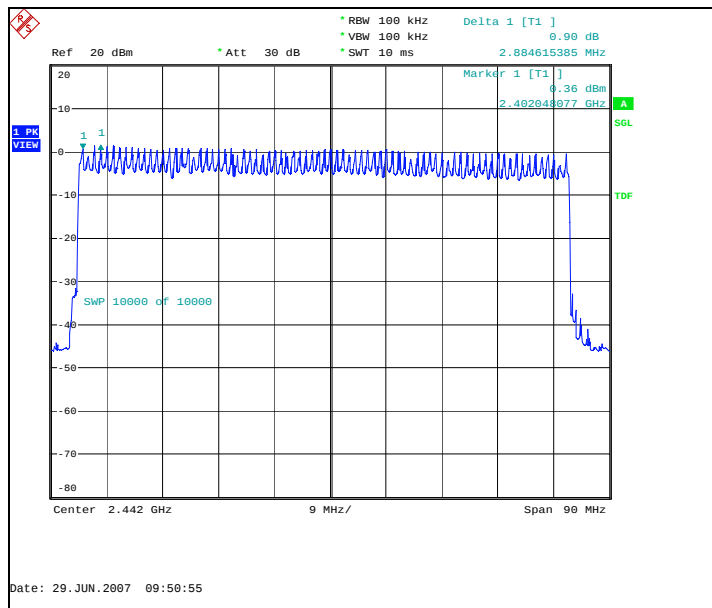

8. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-272 DUT 41167
Accessories with DUT numbers	BL-4C DUT 41172, AC-4E DUT 41176, HS-47 DUT 41178
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 99.7
Date of measurements	29.06.2007
Measured by	Timo Raiskio

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

8.2. Bluetooth test results


8.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
91	2 968	0.270083	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

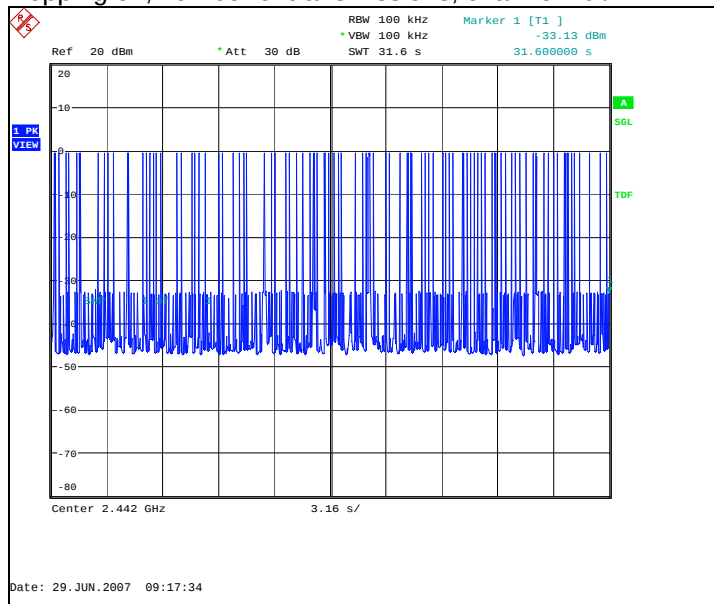


Hopping on, duration of one transmission, channel 40 / 2442 MHz

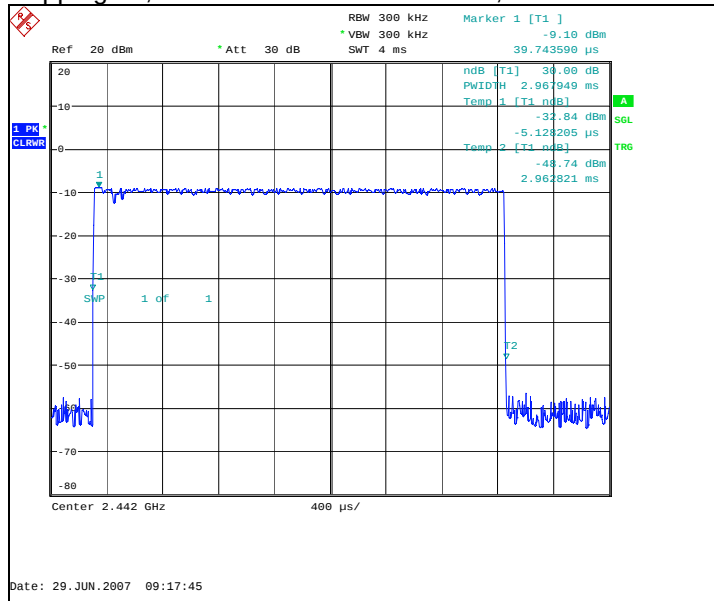


8.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
86	2 981	0.256346	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

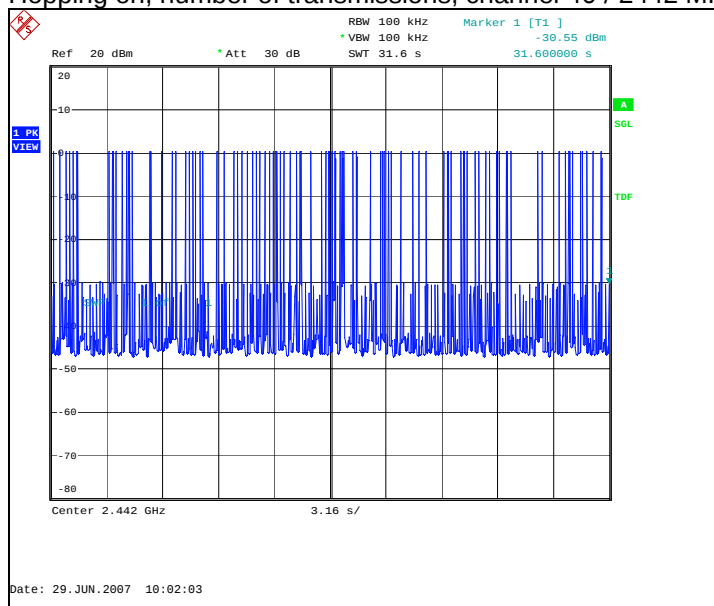

Hopping on, duration of one transmission, channel 40 / 2442 MHz

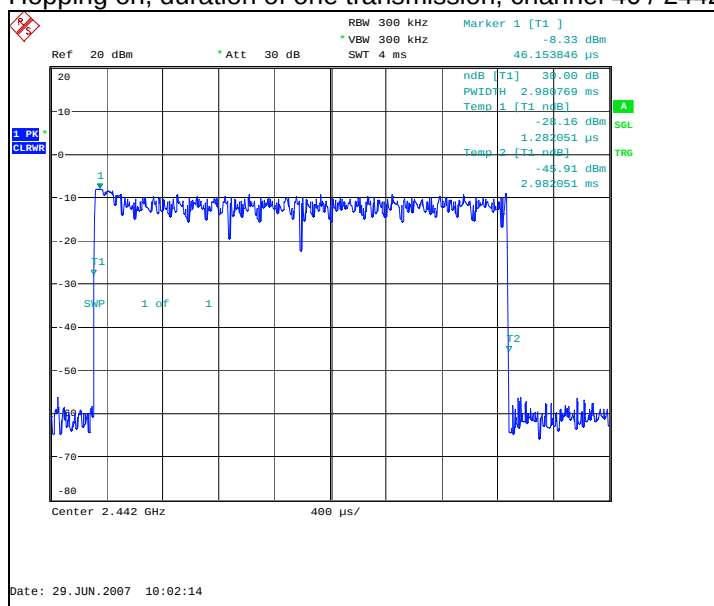

9. Test Equipment

9.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	22/24, 15C
TM37678	Radio communication tester	CMU-200	R&S	22/24, 15C
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	22/24, 15C
TM37499	Power splitter	11667A	Agilent	22/24, 15C
	Temperature chamber	VT4002	Vötsch	22/24, 15C
TM38112	DC power supply	6632A	Agilent	22/24, 15C
TM38111	Multimeter	34401A	Agilent	22/24, 15C
	EMI Test receiver	ESPC	R&S	15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	15C, 15B
TM38631	Signal generator	83640L	Agilent	15C, 15B
TM38114	DC power supply	6632A	Agilent	15C, 15B
TM22835	Multimeter	87	Fluke	15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15C, 15B
TM30636	LISN 50 µH	L2-16/	PMM	15C, 15B

9.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	22/24, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24, 15C, 15B
	High pass filter	WHK2010-10SS	Trilithic	22/24, 15C, 15B
	Low pass filter	WLK1750-10SS	Trilithic	22/24, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	22/24, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24, 15C, 15B
TM22835	Multimeter	87	Fluke	22/24, 15C, 15B