

FCC Part 15C Compliance Test Report

Test Report no.:	Tre_FCC_0731_02.doc	Date of Report:	9.8.2007
Number of pages:	40	Customer's Contact person:	Ralph Schwarz
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	GSM phone RM-303 / Battery BL-4CT, AC Charger AC-3E, Headset HS-45, Audio adapter AD-57		
FCC ID:	PPIRM-303	IC:	661U-RM303
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	27.7.2007
Testing completed	2.8.2007
The customer's contact person	Ralph Schwarz
Test Plan referred to	T:\Projects\
Notes	-
Document name	T:\Projects\RM-303\EMC\Results\FCC\Tre_FCC_0731_02.doc

1.1. EUT and Accessory Information

The EUT is a 3-band (GSM900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
GSM phone	RM-303	004401012703159	0310	-	Vp pl3.06	41207
GSM phone	RM-303	004401012702813	0310	-	Vp pl3.06	41208
Battery	BL-4CT	-	-	-	-	41200
Battery	BL-4CT	-	-	-	-	41201
AC charger	AC-3E	-	-	-	-	41202
AC charger	AC-3E	-	-	-	-	41203
Headset	HS-45	-	-	-	-	41204
Audio adapter	AD-57	0789	0.5	0.4	-	41205

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(c)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(c)	A8.5	Spurious RF conducted emissions	PASSED
15.247(c), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup.....	5
2.3. Spurious radiated emissions test setup	5
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	6
3.1. Test method and limit.....	6
3.2. Bluetooth Test results	7
4. Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 A8.5)	10
4.1. Test method and limit.....	10
4.2. Bluetooth Test results	11
5. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5).....	15
5.1. Test method and limit.....	15
5.2. Bluetooth Test results	16
6. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 A8.5).....	19
6.1. Test method and limit.....	19
6.2. Bluetooth Test results	20
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	23
7.1. Test method and limit.....	23
7.2. Bluetooth Test results	24
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))	26
8.1. Test method and limit.....	26
8.2. Bluetooth Test results	27
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))	31
9.1. Test method and limit.....	31
9.2. Bluetooth Test results	32
10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	34
10.1. Test method and limit.....	34
10.2. Bluetooth Test results	35
11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	37


11.1.	Test method and limit	37
11.2.	Bluetooth test results	38
12.	Test Equipment	40
12.1.	Conducted measurements	40
12.2.	Radiated measurements	40

2. Test setups


2.1. Conducted RF test setup

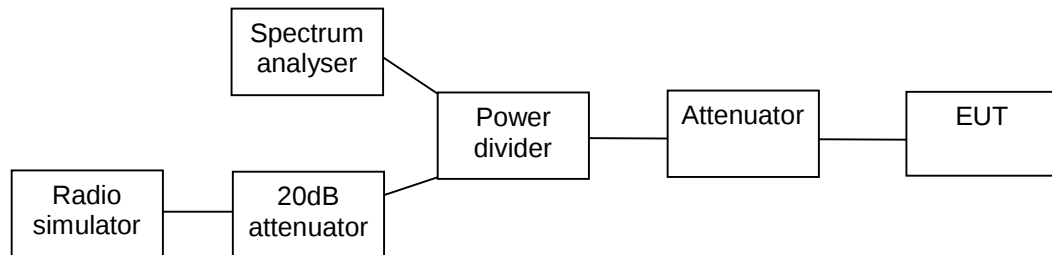

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

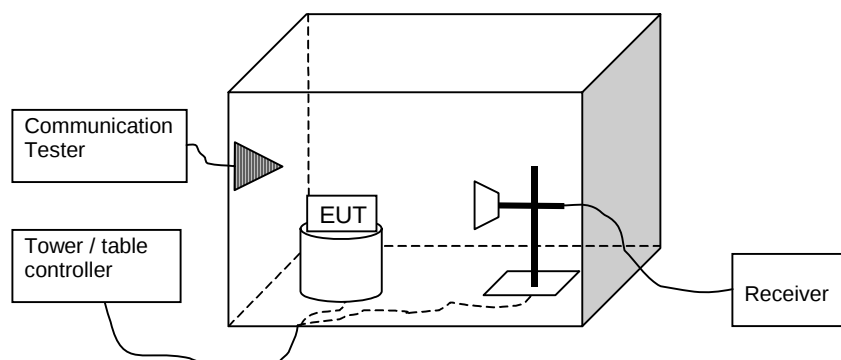

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-303 DUT 41207
Accessories with DUT numbers	BL-4CT DUT 41201, AC-3E DUT 41203
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 101.0
Date of measurements	02.08.2007
Measured by	Timo Raiskio

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-2.20	0.603	PASSED
40 / 2442	-1.40	0.724	PASSED
78 / 2480	-1.20	0.759	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

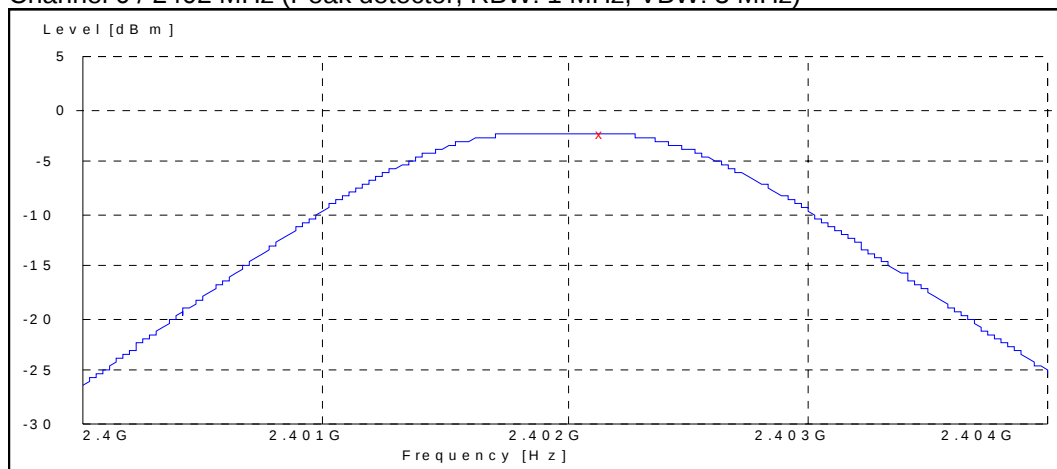

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

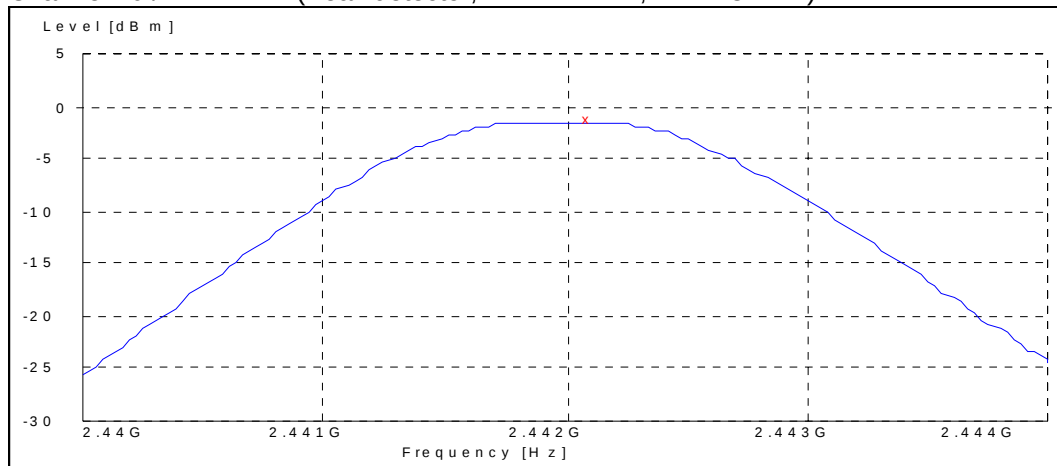


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

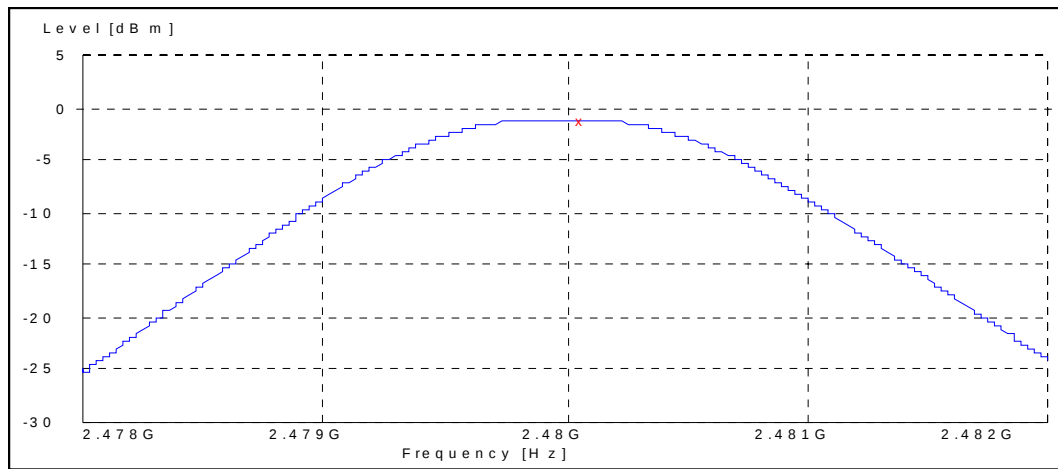


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-0.40	0.912	PASSED
40 / 2442	0.20	1.047	PASSED
78 / 2480	0.40	1.096	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

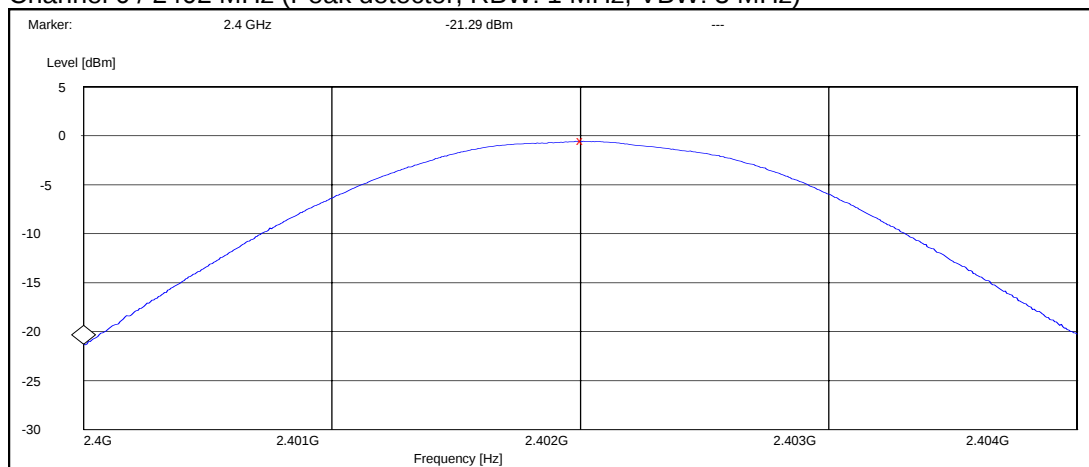

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

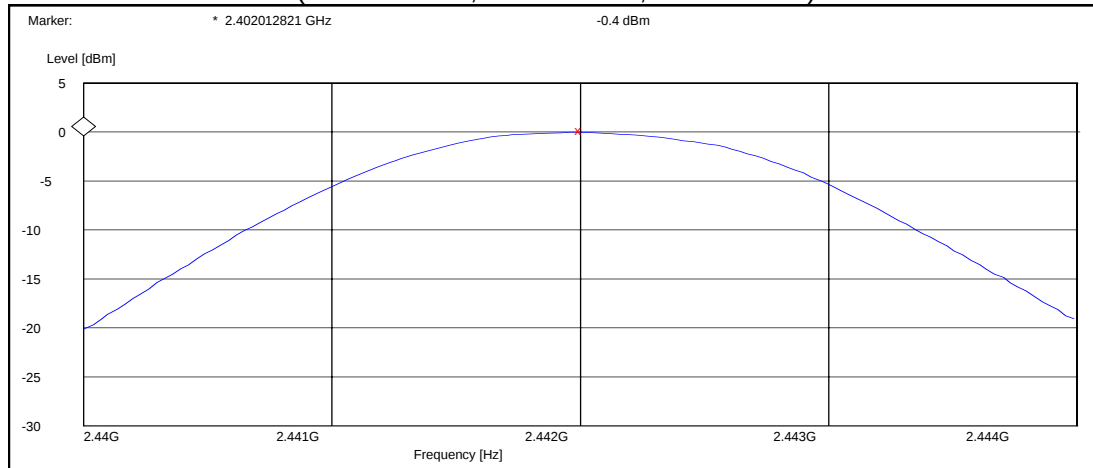

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

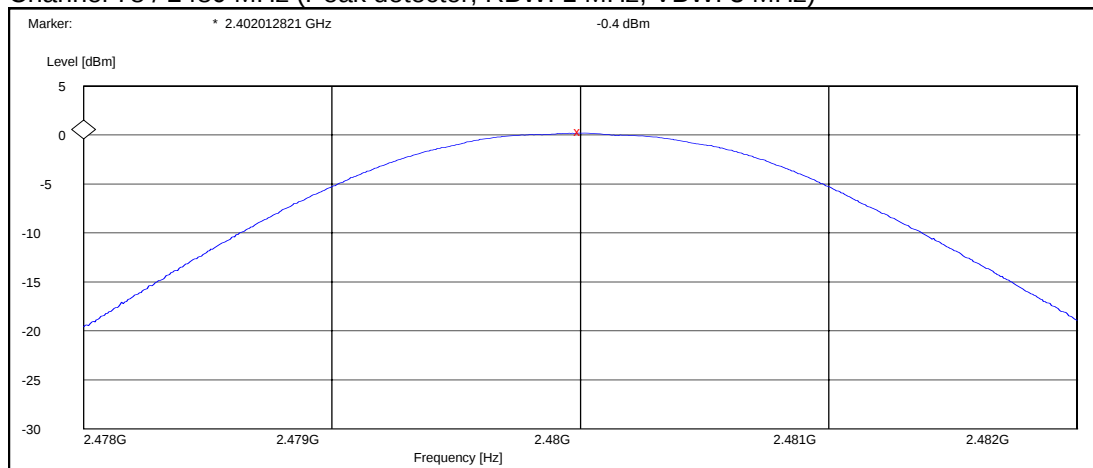

Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 A8.5)

EUT with DUT number	RM-303 DUT 41208
Accessories with DUT numbers	BL-4CT DUT 41200, AC-3E DUT 41202, HS-45 DUT 41204, AD-57 DUT 41205
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 50 / 100.1
Date of measurements	30.7.2007
Measured by	Jari Jantunen

3.3. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

3.4. Bluetooth Test results

3.4.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
0 / 2402	39.07	PASSED
78 / 2480	41.89	PASSED
Hopping on, low end	34.74	PASSED
Hopping on, high end	39.60	PASSED


Peak (RBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
0 / 2402	53.96	PASSED
78 / 2480	66.12	PASSED
Hopping on, low end	46.39	PASSED
Hopping on, high end	57.51	PASSED


Channel 0 / 2402 MHz

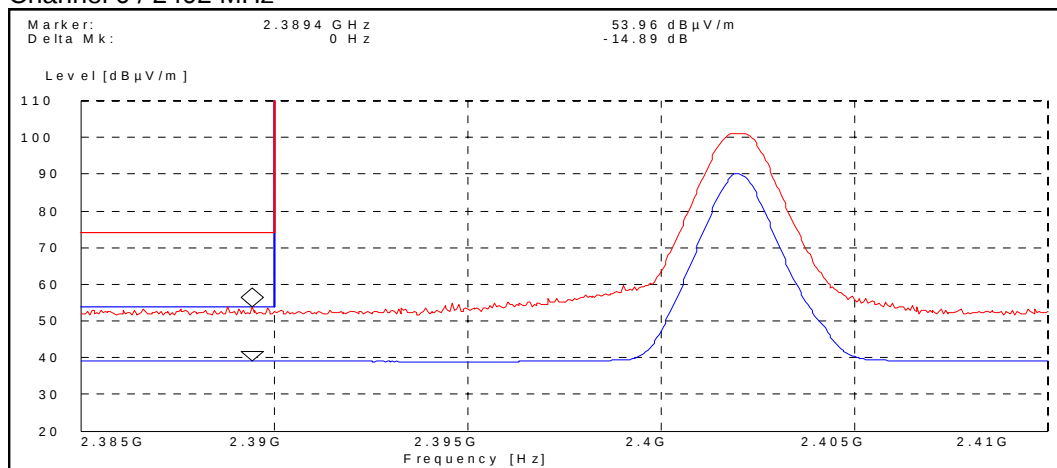


Channel 78 / 2480 MHz

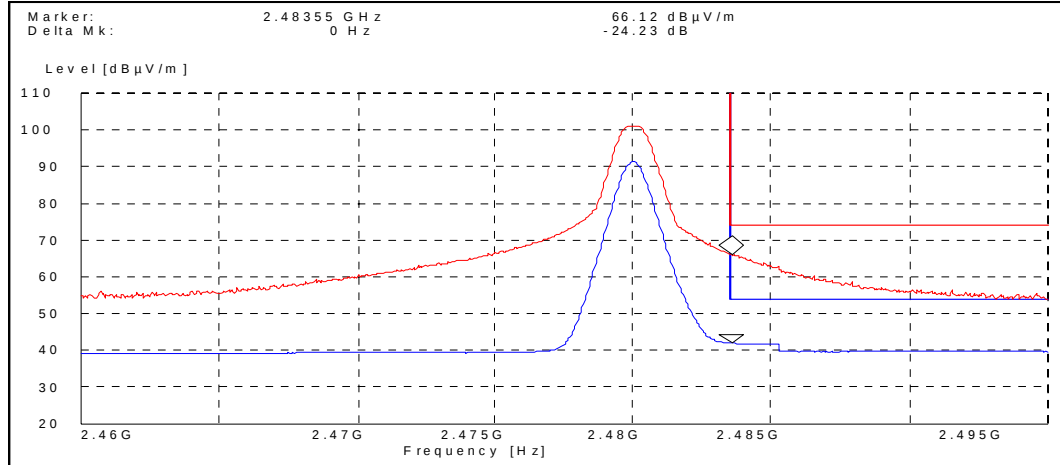

Hopping on, low end

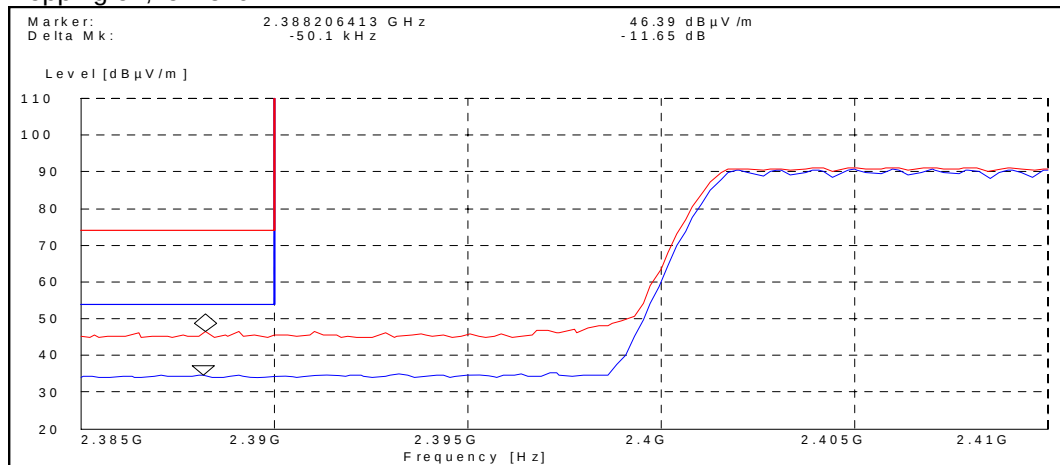

Hopping on, high end

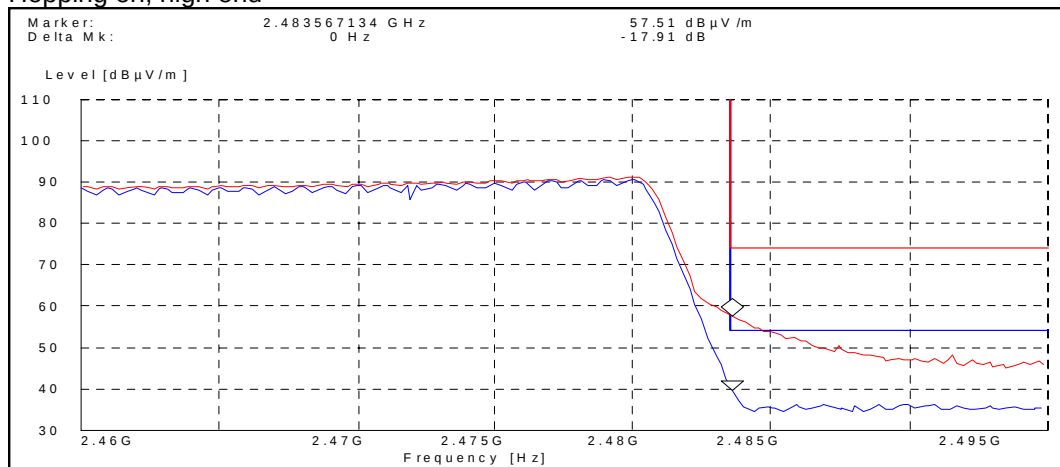

3.4.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
0 / 2402	39.09	PASSED
78 / 2480	41.74	PASSED
Hopping on, low end	34.36	PASSED
Hopping on, high end	40.94	PASSED


Peak (RBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
0 / 2402	53.44	PASSED
78 / 2480	63.58	PASSED
Hopping on, low end	46.00	PASSED
Hopping on, high end	55.44	PASSED


Channel 0 / 2402 MHz

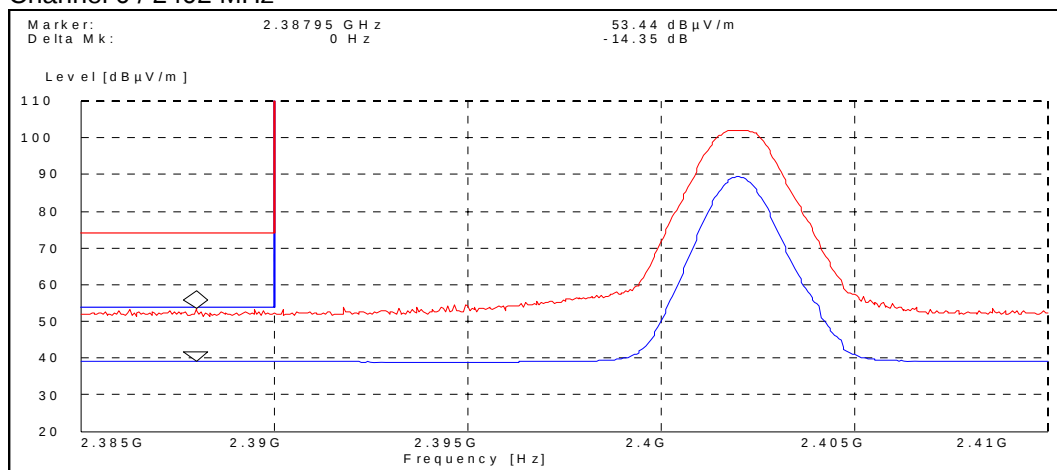


Channel 78 / 2480 MHz

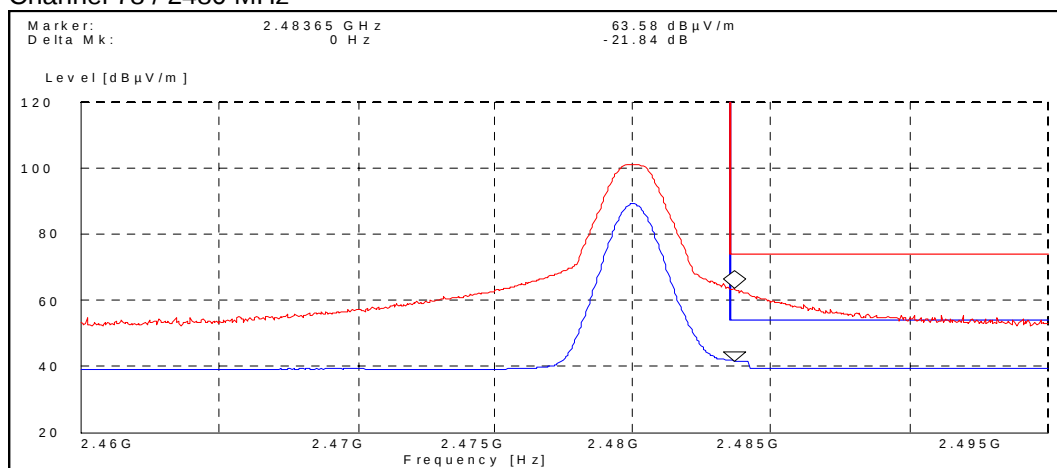

Hopping on, low end

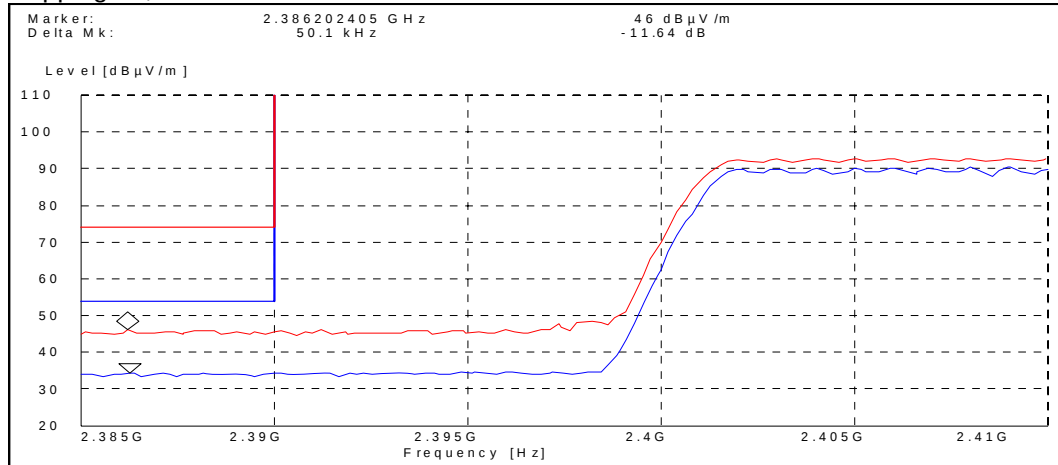

Hopping on, high end

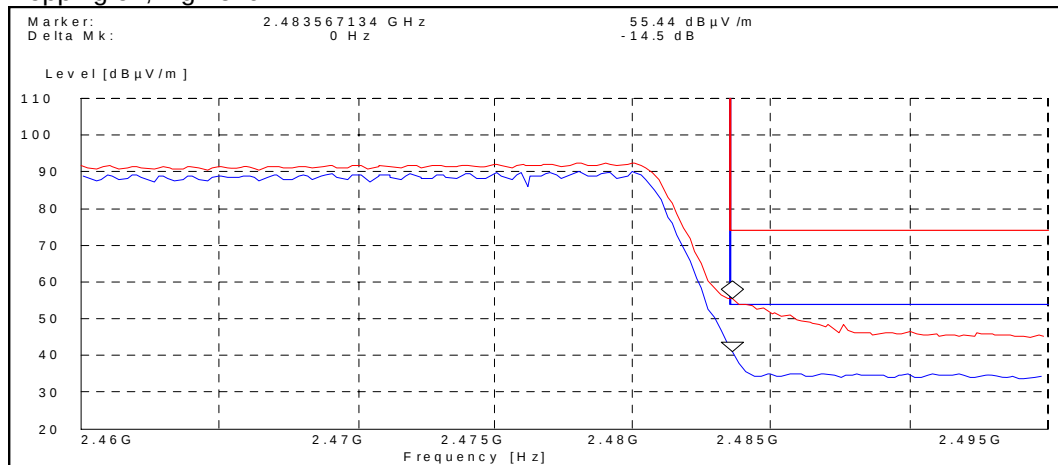

4. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5)

EUT with DUT number	RM-303 DUT 41207
Accessories with DUT numbers	BL-4CT DUT 41201, AC-3E DUT 41203
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 101.0
Date of measurements	02.08.2007
Measured by	Timo Raiskio

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

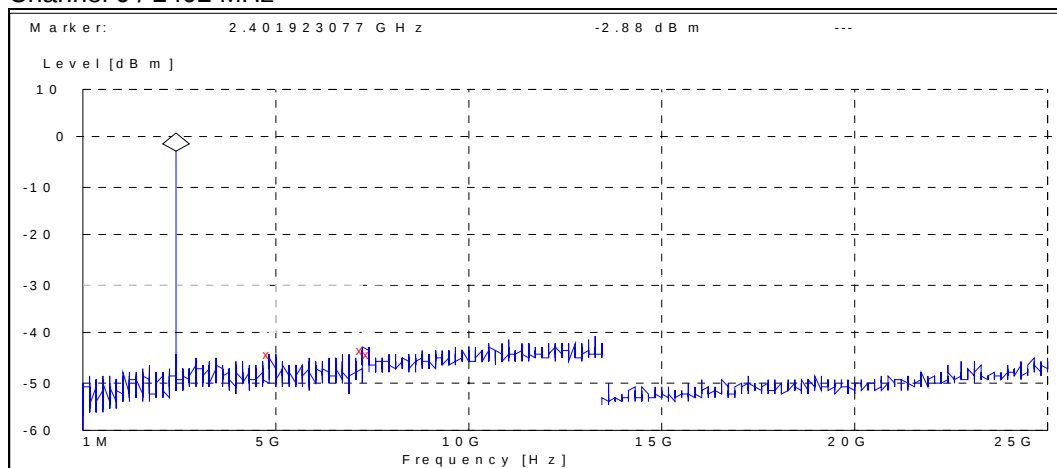


Frequency [MHz]	P [dBc]	Result
4910.576923	-41.519873	PASSED
7277.403846	-40.919873	PASSED
7500.000000	-41.419873	PASSED

Channel 40 / 2442 MHz

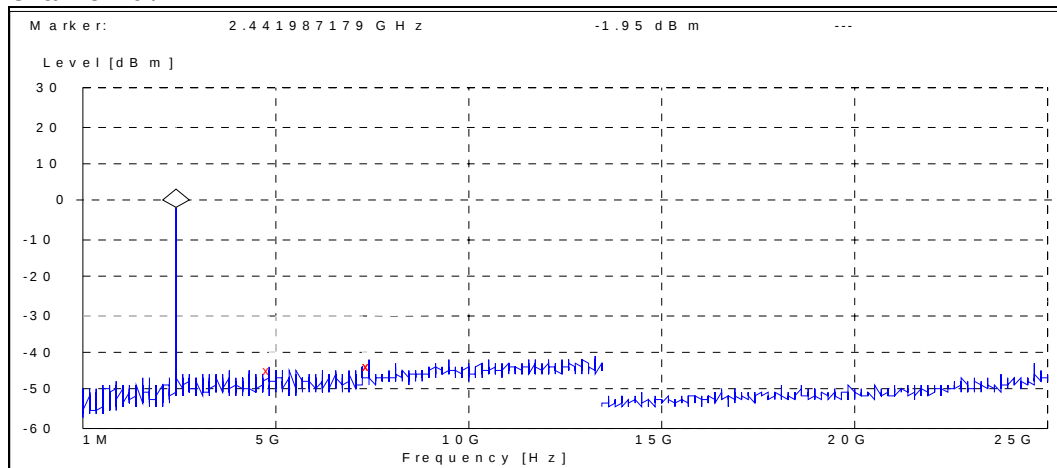

Frequency [MHz]	P [dBc]	Result
4817.948718	-42.751441	PASSED
7423.557692	-41.551441	PASSED
7500.000000	-42.051441	PASSED


Channel 78 / 2480 MHz

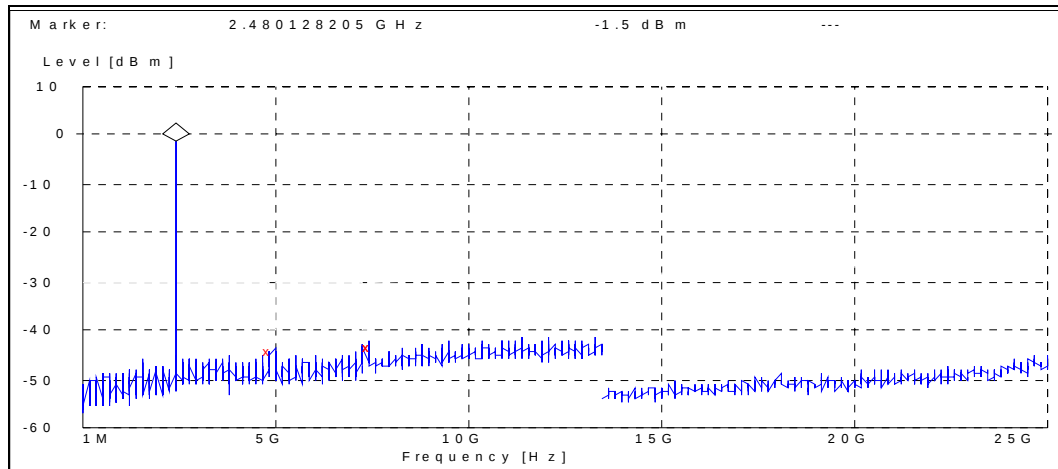

Frequency [MHz]	P [dBc]	Result
4941.987179	-42.796030	PASSED
7423.557692	-42.296030	PASSED
7500.000000	-42.396030	PASSED


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

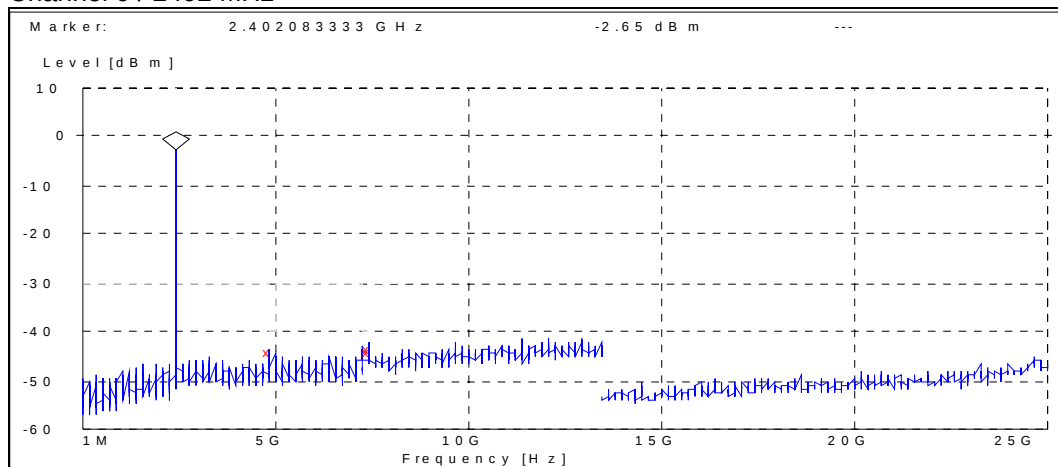


Frequency [MHz]	P [dBc]	Result
4878.525641	-41.648504	PASSED
7423.557692	-41.648504	PASSED
7500.000000	-41.048504	PASSED

Channel 40 / 2442 MHz

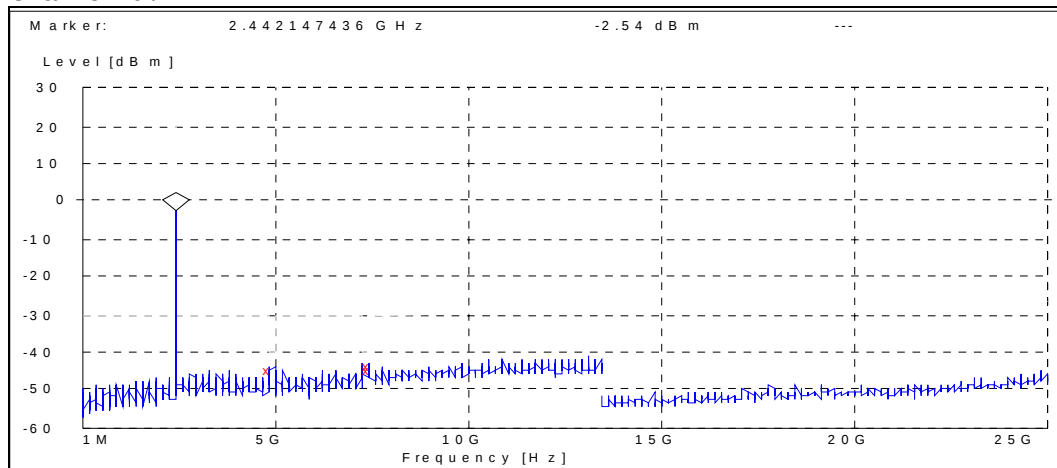

Frequency [MHz]	P [dBc]	Result
4936.538462	-42.162791	PASSED
7396.634615	-42.062791	PASSED
7500.000000	-40.862791	PASSED

Channel 78 / 2480 MHz

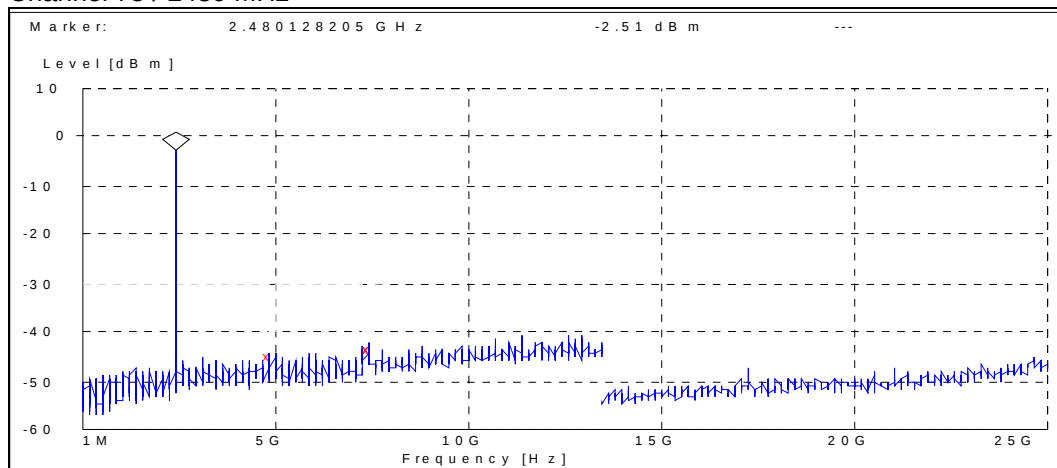

Frequency [MHz]	P [dBc]	Result
4861.538462	-42.388401	PASSED
7423.557692	-41.188401	PASSED
7500.000000	-41.288401	PASSED

5. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-303 DUT 41208
Accessories with DUT numbers	BL-4CT DUT 41200, AC-3E DUT 41202, HS-45 DUT 41204, AD-57 DUT 41205
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	RM-304 DUT 41208
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 50 / 100.1
Date of measurements	30.7.2007
Measured by	Jari Jantunen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	39.30	92.26	41.00	-1.7	HORIZONTAL	PASSED
7206.000000	41.90	124.45	40.20	1.7	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	26.10	20.18	27.80	-1.7	VERTICAL	PASSED
7206.000000	28.50	26.61	26.80	1.7	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
38.035872	7.10	2.26	18.40	-11.3	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4874.255511	39.70	96.61	41.30	-1.6	HORIZONTAL	PASSED
4954.405812	40.00	100.00	41.20	-1.2	HORIZONTAL	PASSED
7282.059118	42.80	138.04	40.40	2.4	VERTICAL	PASSED
7283.063126	42.50	133.35	40.10	2.4	VERTICAL	PASSED
7414.329659	42.80	138.04	40.00	2.8	VERTICAL	PASSED
17993.487976	55.30	582.10	34.00	21.3	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4881.255511	26.80	21.88	28.40	-1.6	HORIZONTAL	PASSED
4952.405812	27.30	23.17	28.50	-1.2	HORIZONTAL	PASSED
7276.059118	29.70	30.55	27.30	2.4	VERTICAL	PASSED
7281.563126	29.80	30.90	27.40	2.4	VERTICAL	PASSED
7417.329659	29.70	30.55	26.90	2.8	VERTICAL	PASSED
17990.487976	42.40	131.83	21.10	21.3	HORIZONTAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.50	105.93	41.70	-1.2	HORIZONTAL	PASSED
7440.000000	42.20	128.82	39.50	2.7	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	27.10	22.65	28.30	-1.2	VERTICAL	PASSED
7440.000000	29.70	30.55	27.00	2.7	VERTICAL	PASSED

5.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	39.30	92.26	41.00	-1.7	HORIZONTAL	PASSED
7206.000000	41.20	114.82	39.50	1.7	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	26.10	20.18	27.80	-1.7	VERTICAL	PASSED
7206.000000	28.50	26.61	26.80	1.7	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
38.095391	7.00	2.24	18.40	-11.4	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4950.899800	39.80	97.72	41.00	-1.2	VERTICAL	PASSED
7276.059118	42.80	138.04	40.40	2.4	VERTICAL	PASSED
7282.063126	43.00	141.25	40.60	2.4	VERTICAL	PASSED
7416.333667	42.40	131.83	39.60	2.8	VERTICAL	PASSED
17912.319639	54.60	537.03	33.50	21.1	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4949.899800	27.20	22.91	28.40	-1.2	VERTICAL	PASSED
7280.559118	29.80	30.90	27.40	2.4	VERTICAL	PASSED
7285.063126	29.70	30.55	27.30	2.4	VERTICAL	PASSED
7419.333667	29.80	30.90	27.00	2.8	VERTICAL	PASSED
17910.319639	42.10	127.35	21.00	21.1	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.20	102.33	41.40	-1.2	HORIZONTAL	PASSED
7440.000000	43.00	141.25	40.30	2.7	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	27.10	22.65	28.30	-1.2	HORIZONTAL	PASSED
7440.000000	29.70	30.55	27.00	2.7	VERTICAL	PASSED

6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-303 DUT 41208
Accessories with DUT numbers	BL-4CT DUT 41200, AC-3E DUT 41202, HS-45 DUT 41204, AD-57 DUT 41205
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 50 / 100.1
Date of measurements	30.7.2007
Measured by	Jari Jantunen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

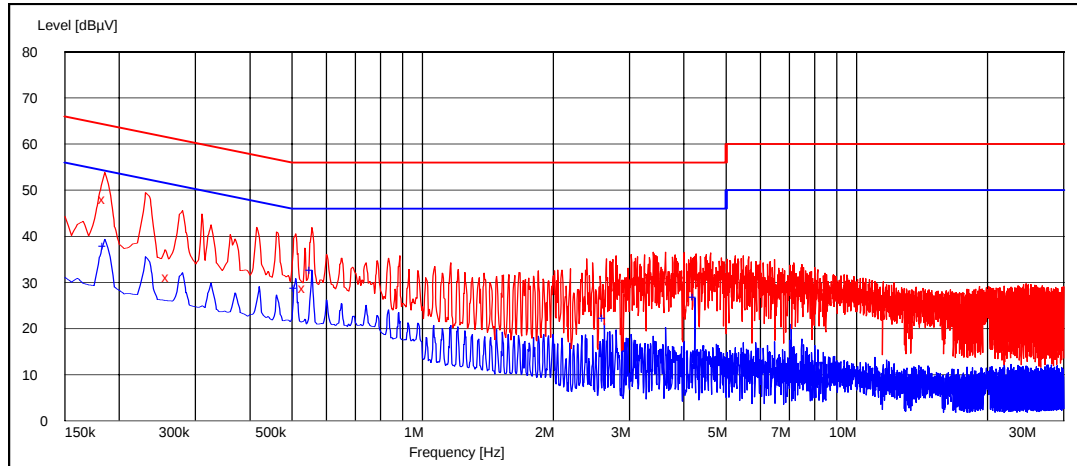

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.185000	48.10	N	PASSED
0.260000	31.20	L1	PASSED
0.535000	28.80	L1	PASSED
3.355000	30.70	L1	PASSED
3.635000	31.80	L1	PASSED
4.010000	30.70	L1	PASSED
4.615000	31.40	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.185000	37.80	N	PASSED
0.510000	28.80	N	PASSED
0.555000	32.60	L1	PASSED
2.625000	22.20	L1	PASSED
4.240000	26.80	L1	PASSED

6.2.2 8DPSK modulation, PRBS packet type

Channel 40 / 2442 MHz

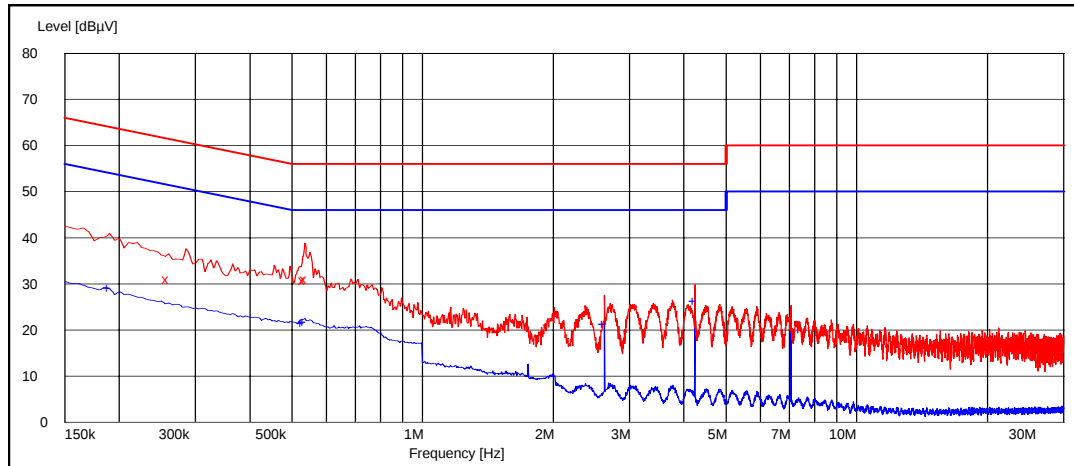

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.260000	31.10	L1	PASSED
0.535000	30.90	L1	PASSED
0.540000	31.10	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.190000	29.20	N	PASSED
0.530000	21.50	L1	PASSED
0.535000	21.70	L1	PASSED
2.625000	21.20	N	PASSED
4.240000	26.20	N	PASSED

7. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))

EUT with DUT number	RM-303 DUT 41207
Accessories with DUT numbers	BL-4CT DUT 41201, AC-3E DUT 41203
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 101.0
Date of measurements	02.08.2007
Measured by	Timo Raiskio

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

7.2. Bluetooth Test results


7.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	897.436	PASSED
40 / 2442	900.641	PASSED
78 / 2480	900.641	PASSED


Channel 0 / 2402 MHz

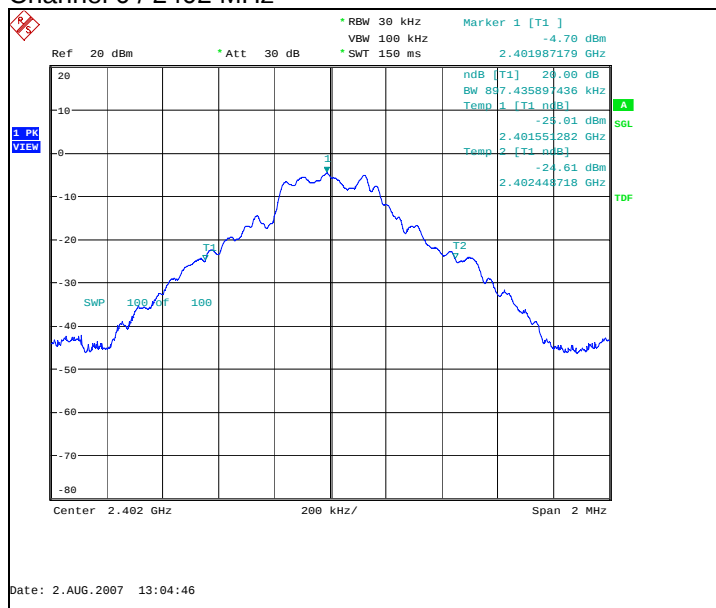

Channel 40 / 2442 MHz

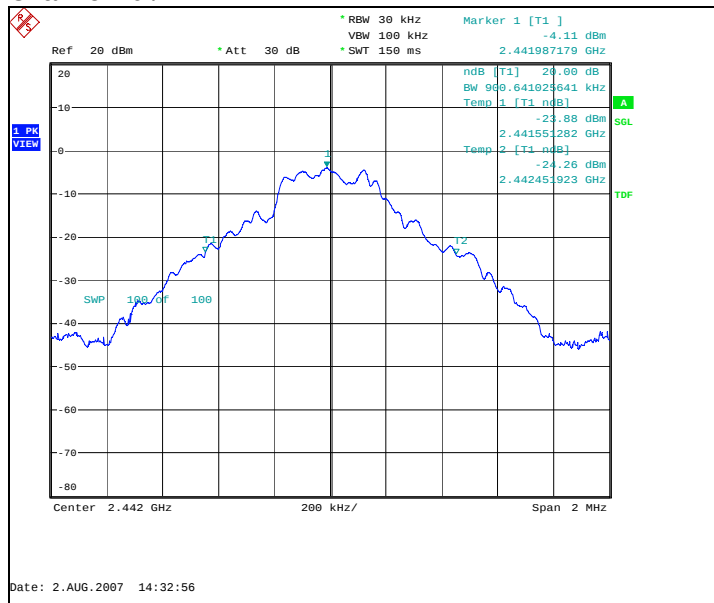


Channel 78 / 2480 MHz

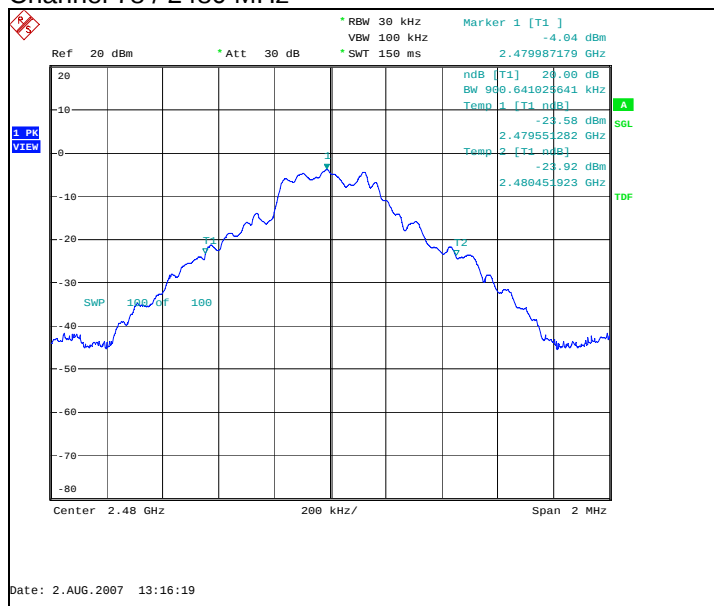


7.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1314.103	PASSED
40 / 2442	1314.103	PASSED
78 / 2480	1317.308	PASSED


Channel 0 / 2402 MHz

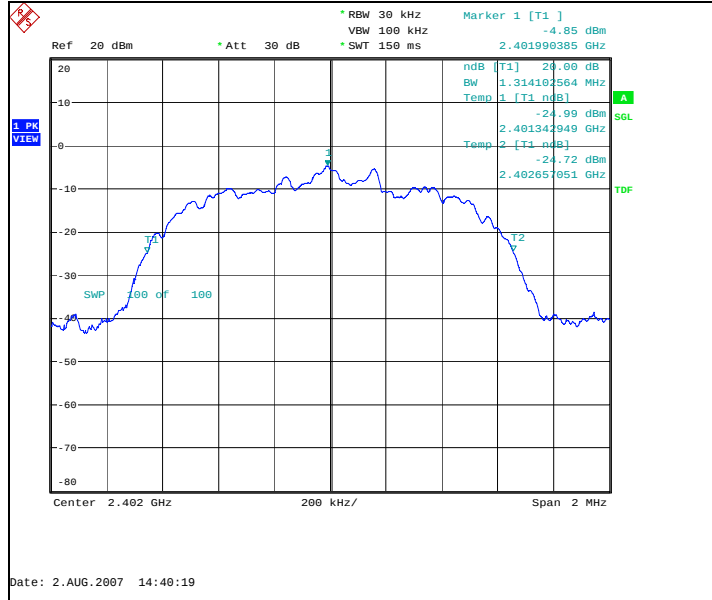

Channel 40 / 2442 MHz

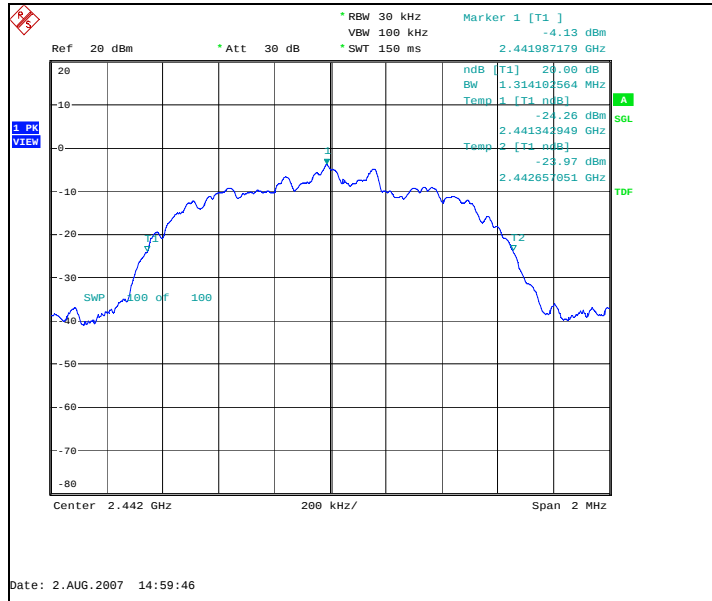

Channel 78 / 2480 MHz

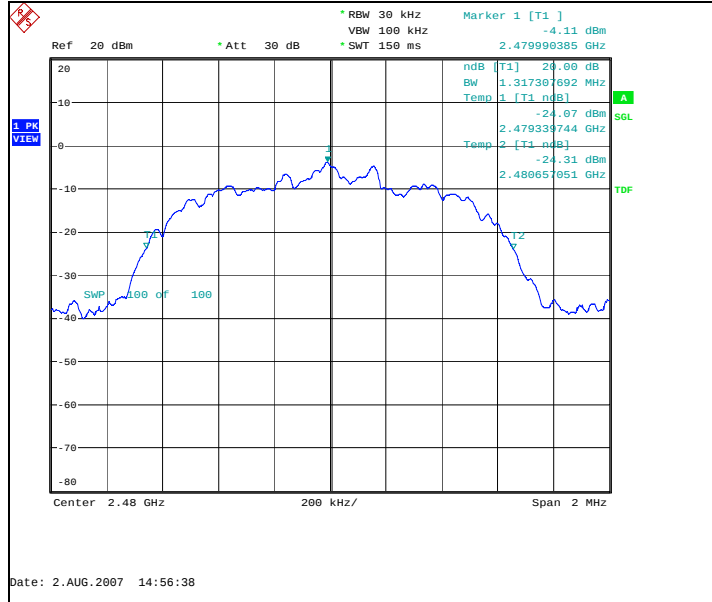

8. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))

EUT with DUT number	RM-303 DUT 41207
Accessories with DUT numbers	BL-4CT DUT 41201, AC-3E DUT 41203
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 101.0
Date of measurements	02.08.2007
Measured by	Timo Raiskio

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or 2/3 of the 20 dB bandwidth

8.2. Bluetooth Test results

8.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1001.603	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

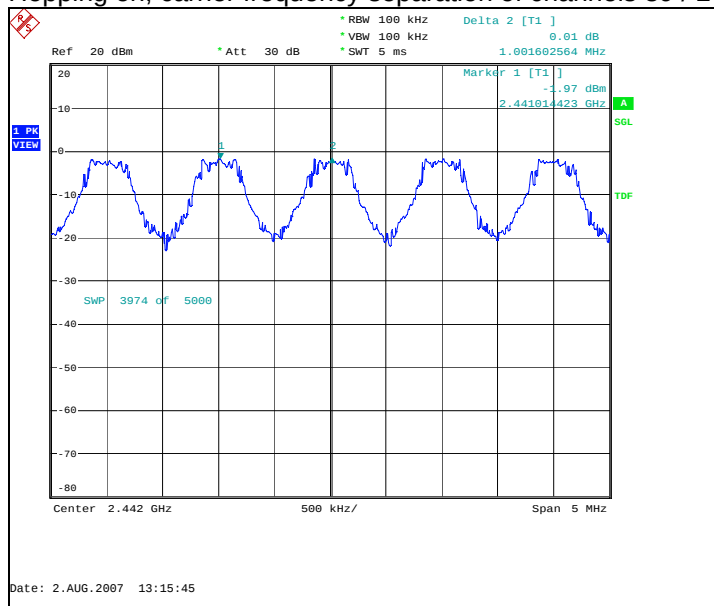

8.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1113.782	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

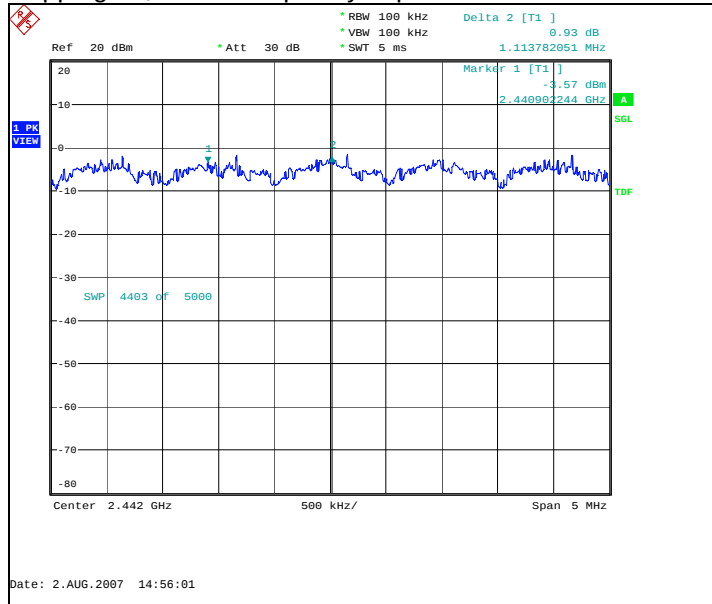

9. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-303 DUT 41207
Accessories with DUT numbers	BL-4CT DUT 41201, AC-3E DUT 41203
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 101.0
Date of measurements	02.08.2007
Measured by	Timo Raiskio

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED


Hopping on, number of hopping frequencies

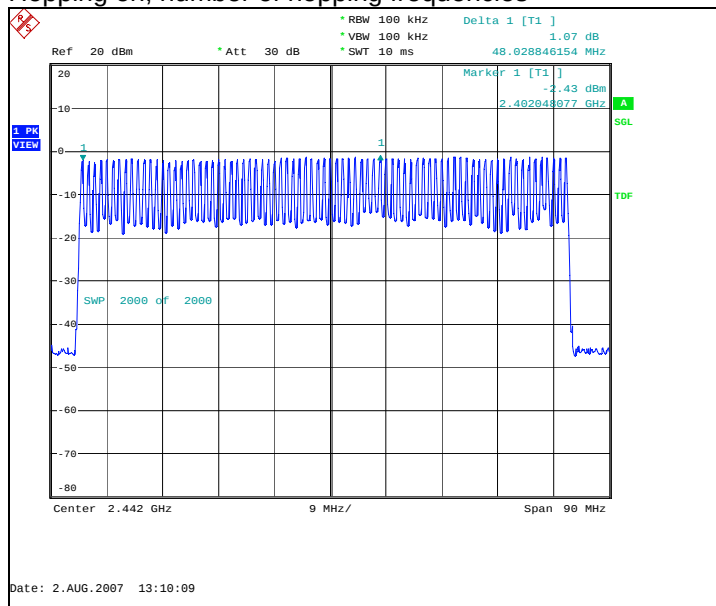

9.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED

Hopping on, number of hopping frequencies

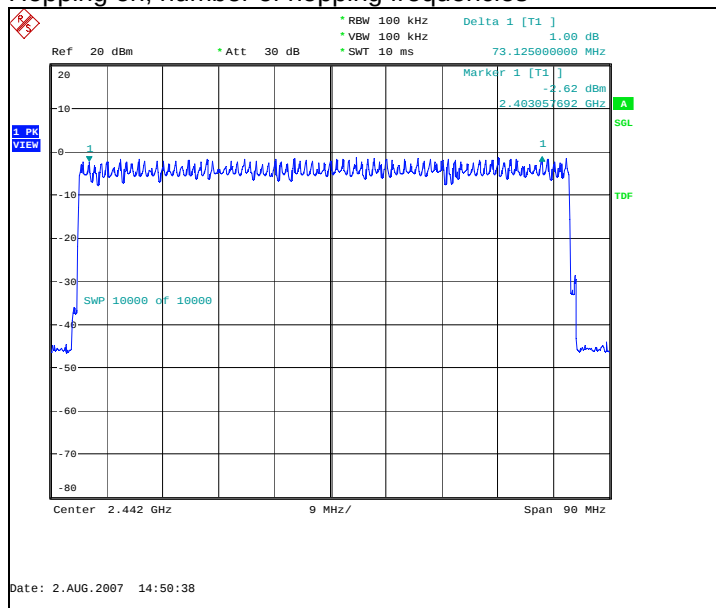

10. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-303 DUT 41207
Accessories with DUT numbers	BL-4CT DUT 41201, AC-3E DUT 41203
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 101.0
Date of measurements	02.08.2007
Measured by	Timo Raiskio

10.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

10.2. Bluetooth test results


10.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
76	2,917	0.221667	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

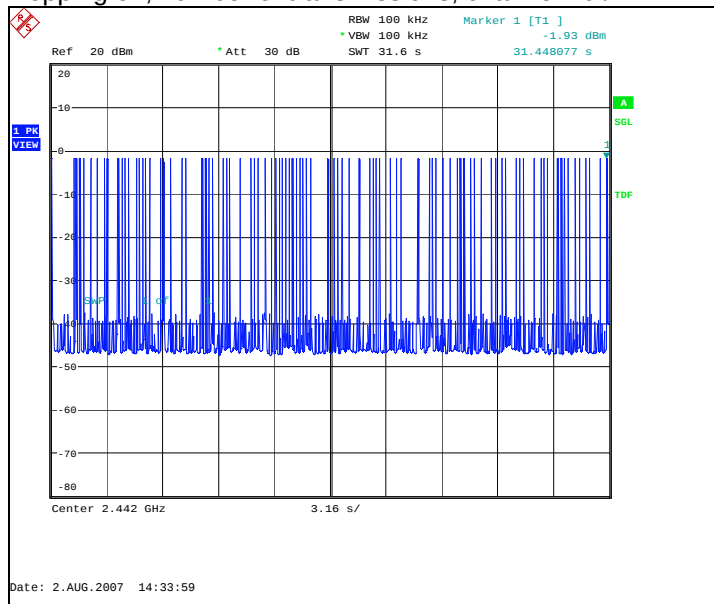


Hopping on, duration of one transmission, channel 40 / 2442 MHz

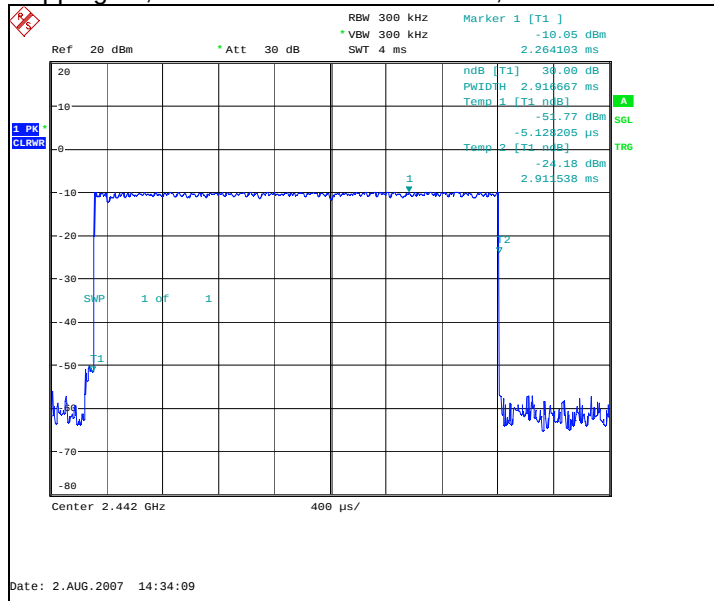


10.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
75	2,923	0.219231	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

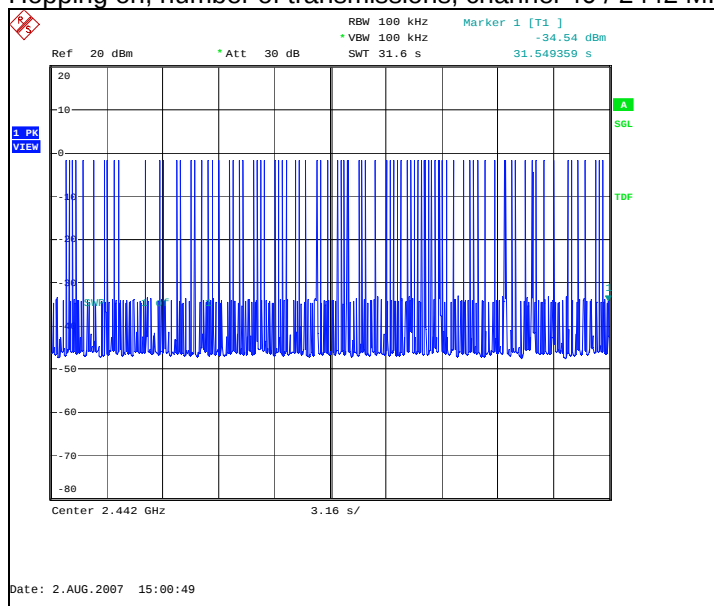

Hopping on, duration of one transmission, channel 40 / 2442 MHz

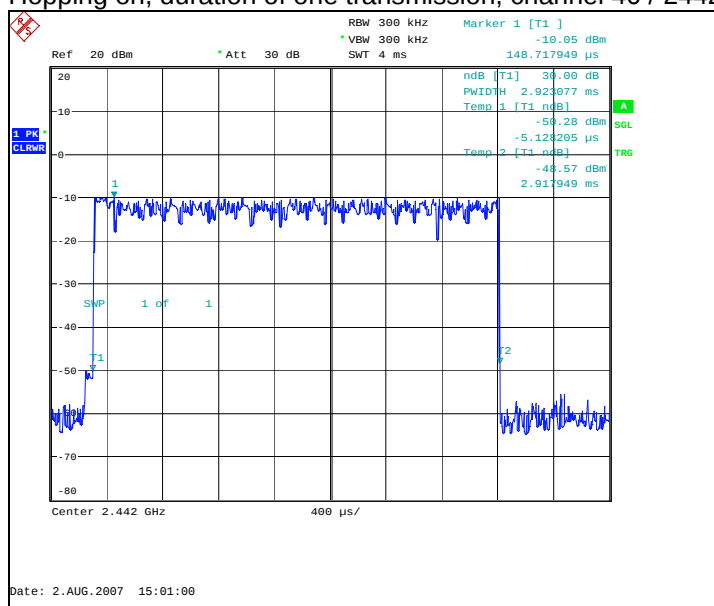

11. Test Equipment

11.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	22/24, 15C
TM37678	Radio communication tester	CMU-200	R&S	22/24, 15C
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	22/24, 15C
TM37499	Power splitter	11667A	Agilent	22/24, 15C
	Temperature chamber	VT4002	Vötsch	22/24, 15C
TM38112	DC power supply	6632A	Agilent	22/24, 15C
TM38111	Multimeter	34401A	Agilent	22/24, 15C
	EMI Test receiver	ESPC	R&S	15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	15C, 15B
TM38631	Signal generator	83640L	Agilent	15C, 15B
TM38114	DC power supply	6632A	Agilent	15C, 15B
TM22835	Multimeter	87	Fluke	15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15C, 15B
TM30636	LISN 50 µH	L2-16/	PMM	15C, 15B

11.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	22/24, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24, 15C, 15B
	High pass filter	WHK2010-10SS	Trilithic	22/24, 15C, 15B
	Low pass filter	WLK1750-10SS	Trilithic	22/24, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	22/24, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24, 15C, 15B
TM22835	Multimeter	87	Fluke	22/24, 15C, 15B