

FCC Part 15C Compliance Test Report

Test Report no.:	Cph_FCC_0806_24.doc	Date of Report:	08-Feb-2008
Number of pages:	22	Customer's Contact person:	Thomas Reitmayer
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	533467		
IC recognition no.:	5385		
Tested devices/ accessories:	Phone RM-337 / Battery BL-4C, Headset HS-47 and AC-Charger AC-5N		
FCC ID:	PPIRM-337	IC:	661U-RM337
Supplement reports:	This Test Report is based on Test Report No.: Salo_FCC_0735_10		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Allan F. Henriksen, Engineer

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	14.08.2007
Testing completed	29.08.2007
The customer's contact person	Thomas Reitmayer
Test Plan referred to	T:\Projects\RM-337\TestPlan_RS\RS_Testplan_RM-337.xls
Notes	The Test results in this Test Report is a copy from RM-322 Test Report No.: Salo_FCC_0735_10.doc
Document name	T:\Projects\RM-337\EMC\Results\FCC\Cph_FCC_0806_24.doc

1.1. EUT and Accessory Information

The EUT is a 3-band (GSM900/1800/1900) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-322	004401/01/363520/2	0211	-	Vp pr3.50.1	12180
Battery	BL-4C	0670389382066N524F1AW00964	-	-	-	12135
Headset	HS-47	0694579720212111343	-	-	-	12137
AC-Charger	AC-5E	3943497104090614542;0675540	-	-	-	12136

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	PASSED
15.247(c)	A8.5	Band edge compliance of RF emissions	NP
15.247(c)	A8.5	Spurious RF conducted emissions	PASSED
15.247(c), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(2)	A8.2 (1)	6 dB bandwidth	PASSED
15.247(e)	A8.2 (2)	Power spectral density	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP


The test was not performed by the TCC Nokia Salo Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Spurious radiated emissions test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))	5
3.1. Test method and limit.....	5
3.2. WLAN Test results	6
4. Spurious RF conducted emissions (FCC §15.247(c), RSS-210 A8.5).....	9
4.1. Test method and limit.....	9
4.2. WLAN Test results	10
5. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))	13
5.1. Test method and limit.....	13
5.2. WLAN test results	14
6. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))	17
6.1. Test method and limit.....	17
6.2. WLAN test results	18
7. Test Equipment.....	21
7.1. Conducted measurements	21
7.2. Radiated measurements	21

2. Test setups


2.1. Conducted RF test setup

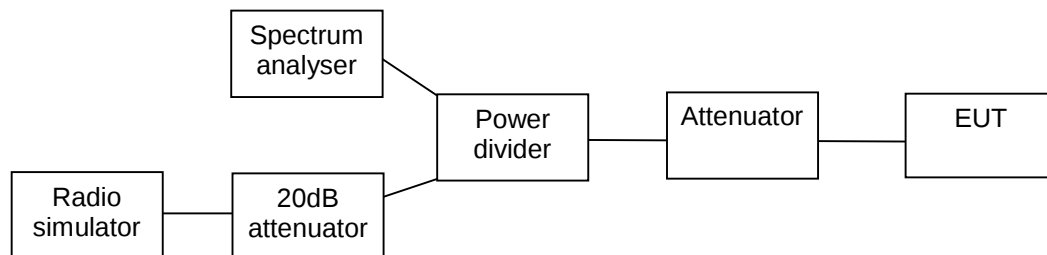

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

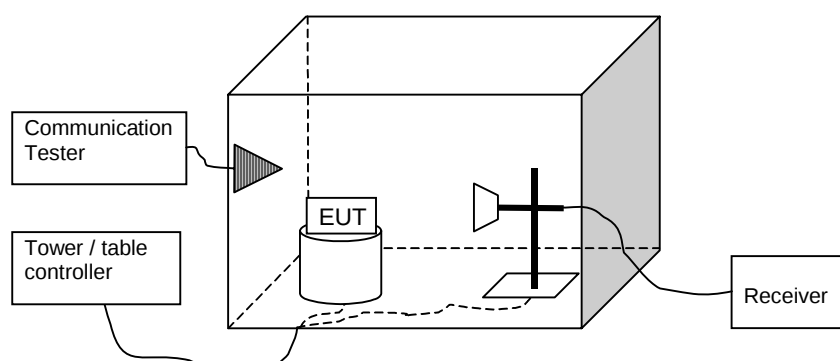

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	RM-322, DUT 12180
Accessories with DUT numbers	BL-4C, DUT 12135; HS-47, DUT 12137; AC-5E, DUT 12136
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 100
Date of measurements	29.08.2007
Measured by	Anni Manninen

3.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. WLAN Test results


3.2.1 DSSS mode, BPSK modulation, 1 Mbps data rate

Channel / f_c [MHz]	P [dBm]	P [W]	Result
1 / 2412	16.12	0.041	PASSED
7 / 2442	16.28	0.042	PASSED
11 / 2462	16.24	0.042	PASSED


Channel 1 / 2412 MHz

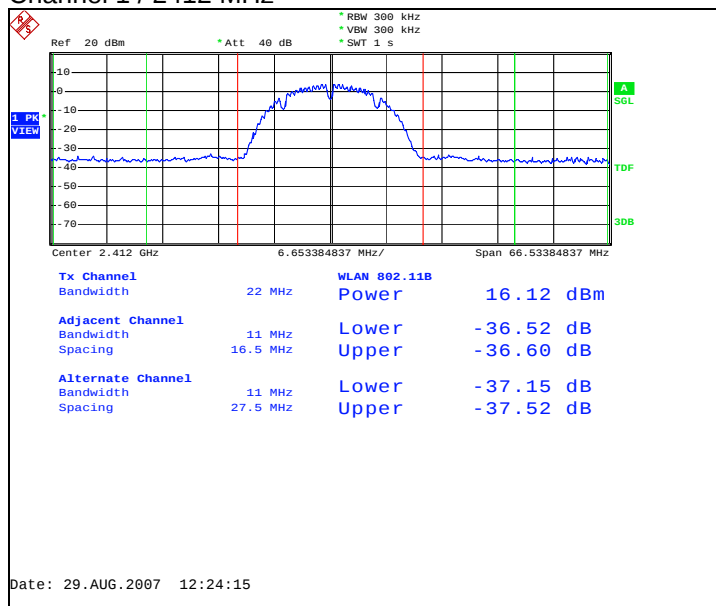

Channel 7 / 2442 MHz

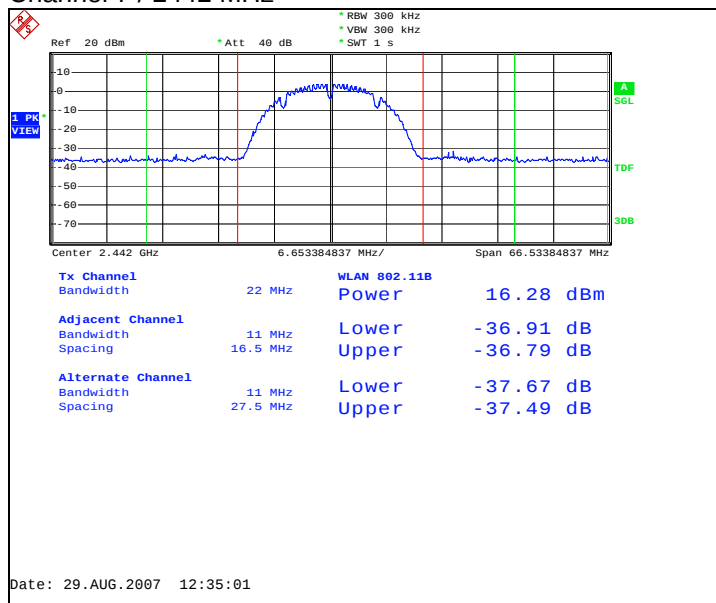


Channel 11 / 2462 MHz

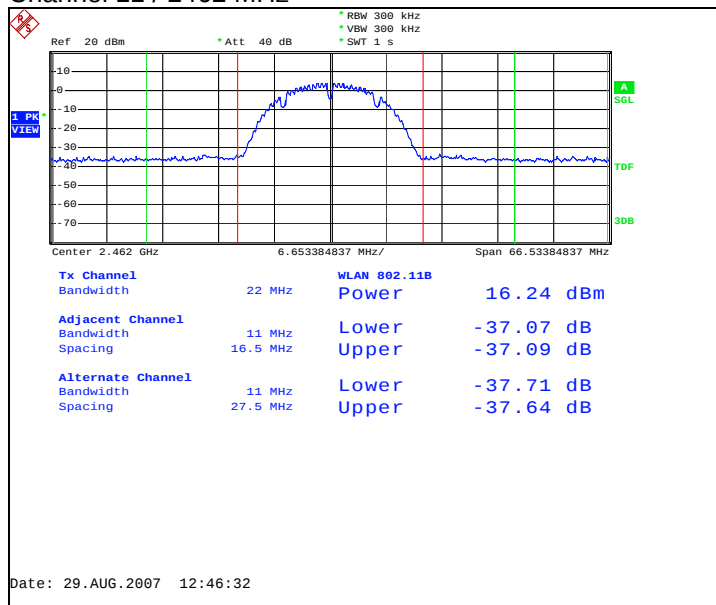


3.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	P [dBm]	P [W]	Result
1 / 2412	18.60	0.072	PASSED
7 / 2442	18.78	0.076	PASSED
11 / 2462	18.75	0.075	PASSED


Channel 1 / 2412 MHz

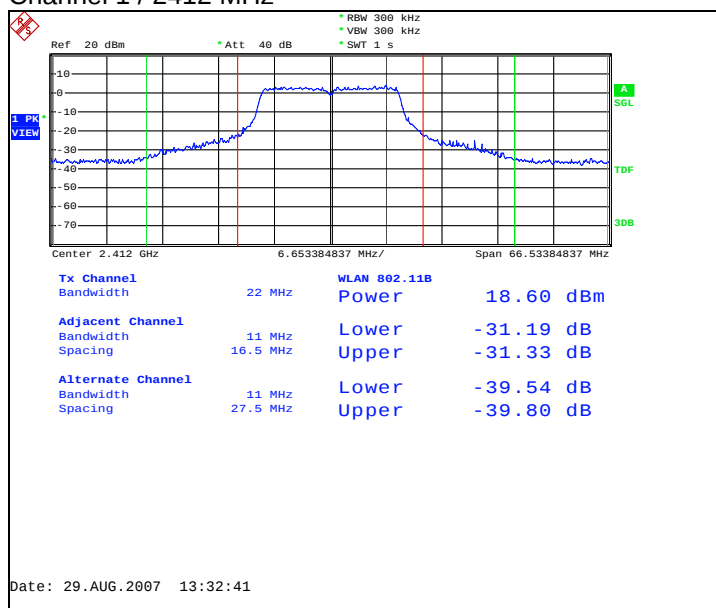

Channel 7 / 2442 MHz

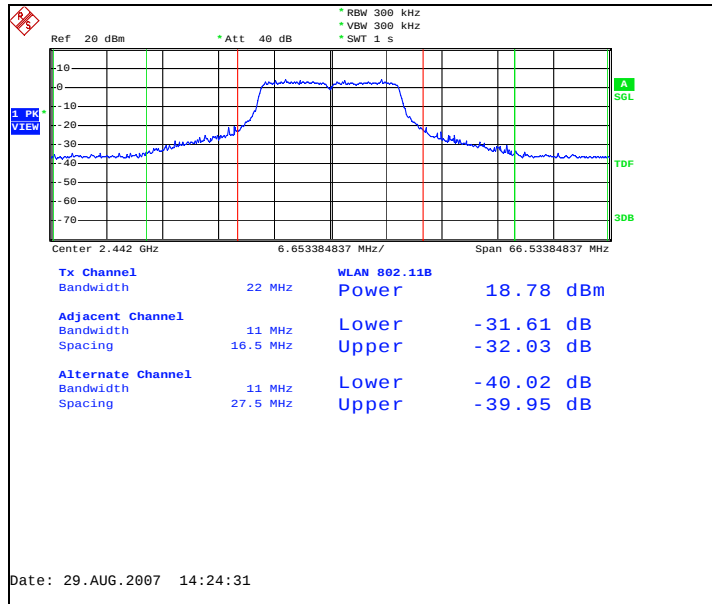

Channel 11 / 2462 MHz

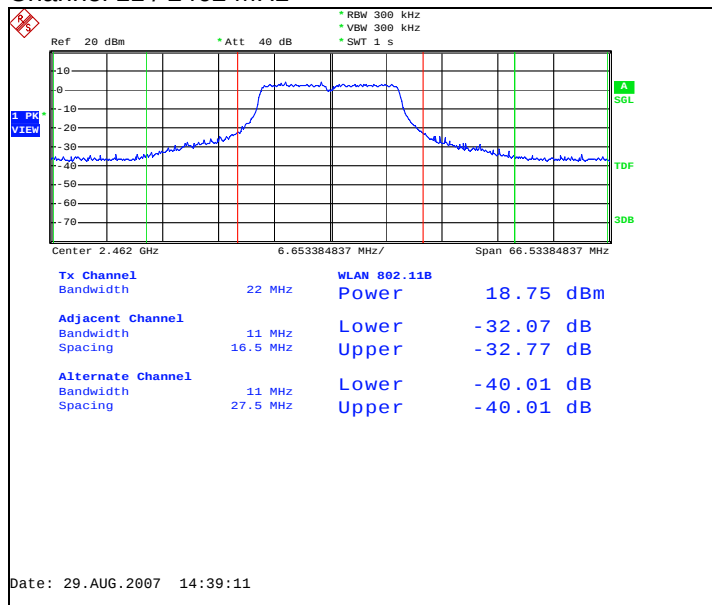

4. Spurious RF conducted emissions (FCC §15.247(c), RSS-210 A8.5)

EUT with DUT number	RM-322, DUT 12180
Accessories with DUT numbers	BL-4C, DUT 12135; HS-47, DUT 12137; AC-5E, DUT 12136
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 100
Date of measurements	29.08.2007
Measured by	Anni Manninen

4.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. WLAN Test results


4.2.1 DSSS mode, BPSK modulation, 1 Mbps data rate

Channel 1 / 2412 MHz

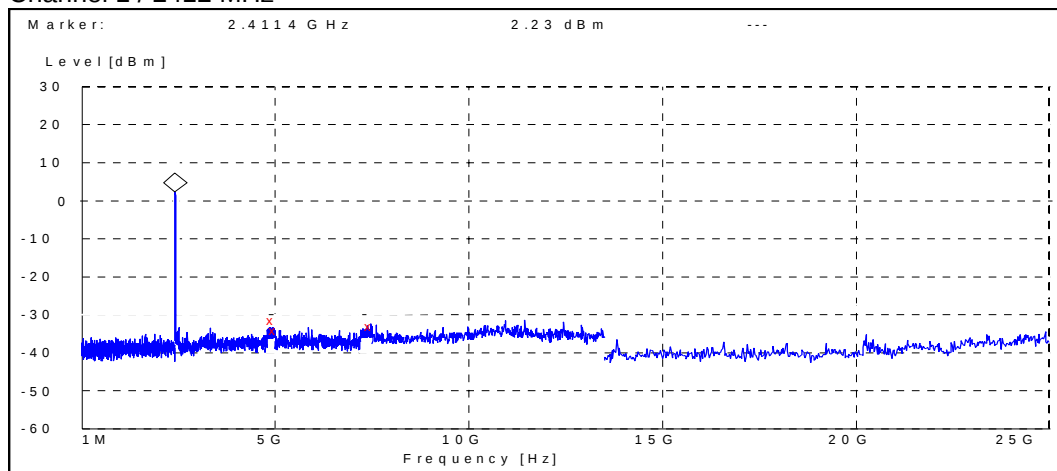


Frequency [MHz]	P [dBc]	Result
4928.400000	-33.725508	PASSED
5000.000000	-36.425508	PASSED
7477.800000	-35.225508	PASSED

Channel 7 / 2442 MHz

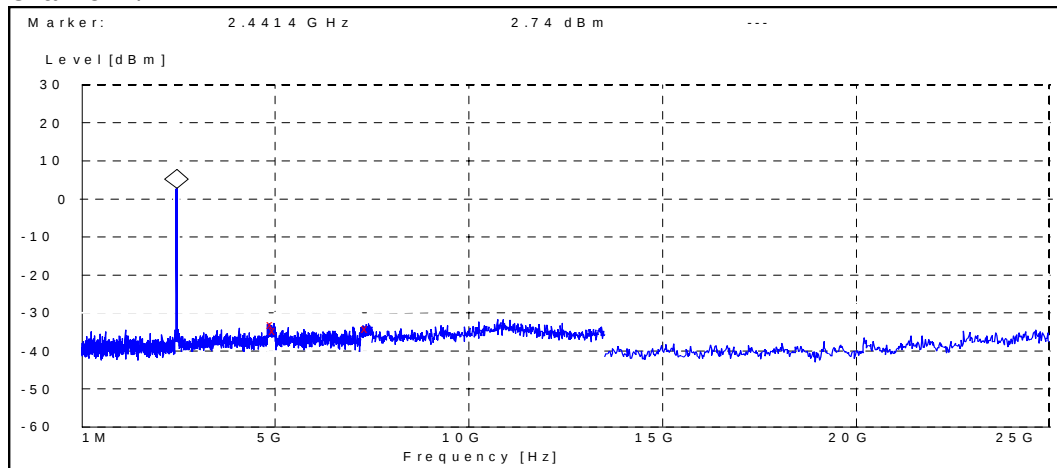

Frequency [MHz]	P [dBc]	Result
4949.200000	-35.742712	PASSED
5000.000000	-37.242712	PASSED
7400.400000	-36.742712	PASSED


Channel 11 / 2462 MHz

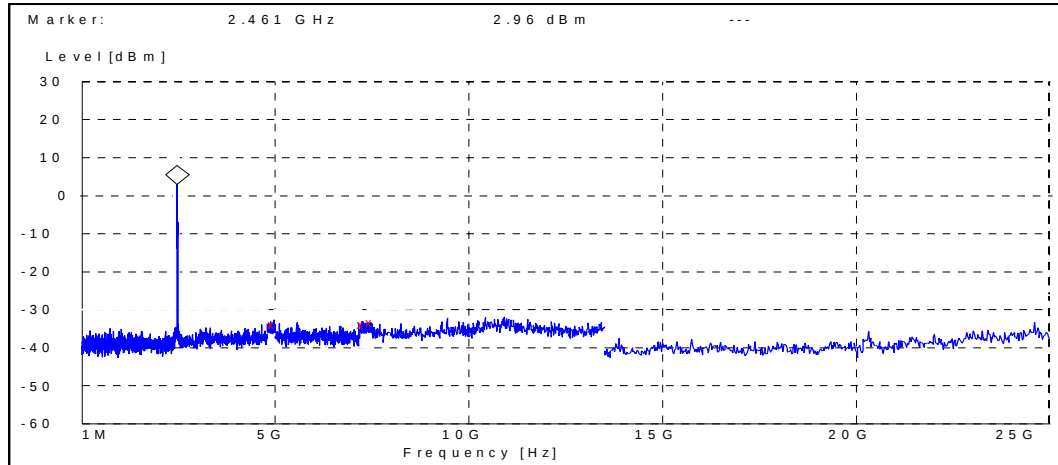

Frequency [MHz]	P [dBc]	Result
4963.600000	-36.957220	PASSED
7255.800000	-36.757220	PASSED
7500.000000	-36.157220	PASSED


4.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 1 / 2412 MHz

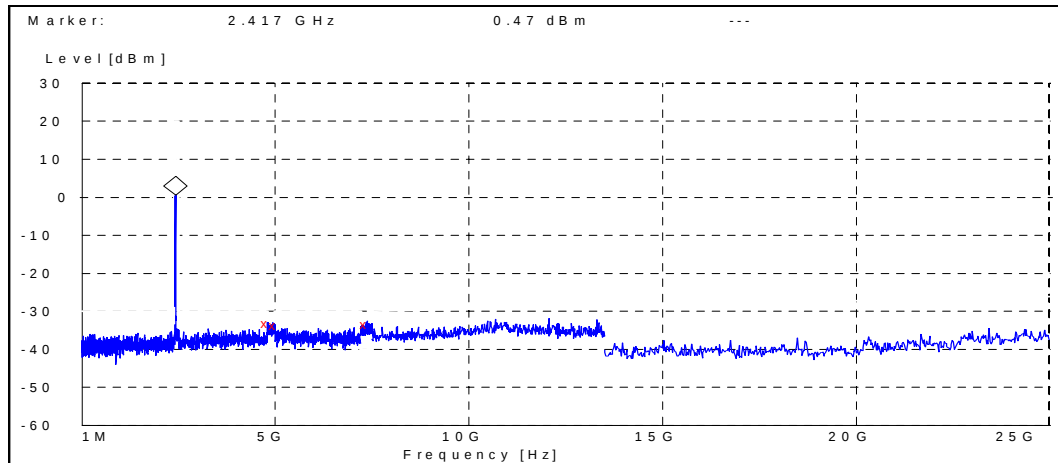


Frequency [MHz]	P [dBc]	Result
4805.200000	-33.669214	PASSED
5000.000000	-33.969214	PASSED
7365.600000	-33.869214	PASSED

Channel 7 / 2442 MHz

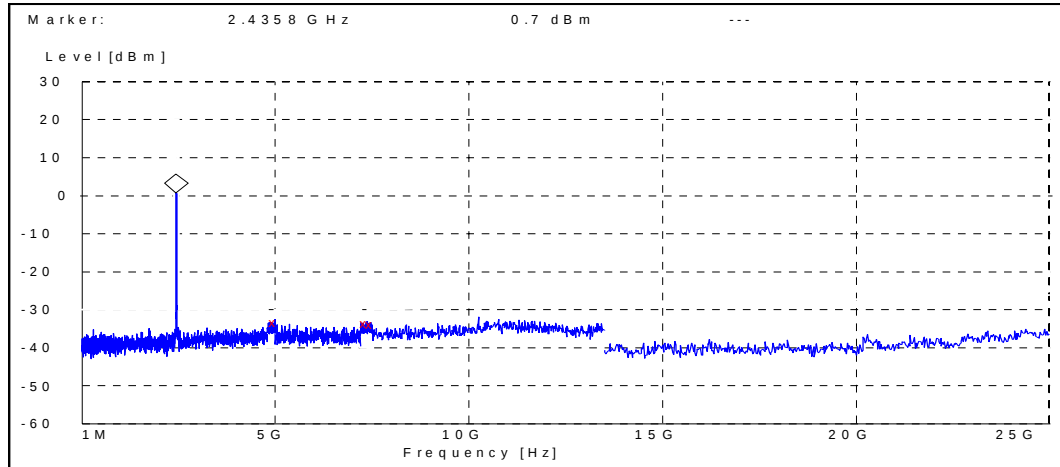

Frequency [MHz]	P [dBc]	Result
4986.800000	-34.104588	PASSED
7351.800000	-34.304588	PASSED
7500.000000	-34.604588	PASSED

Channel 11 / 2462 MHz

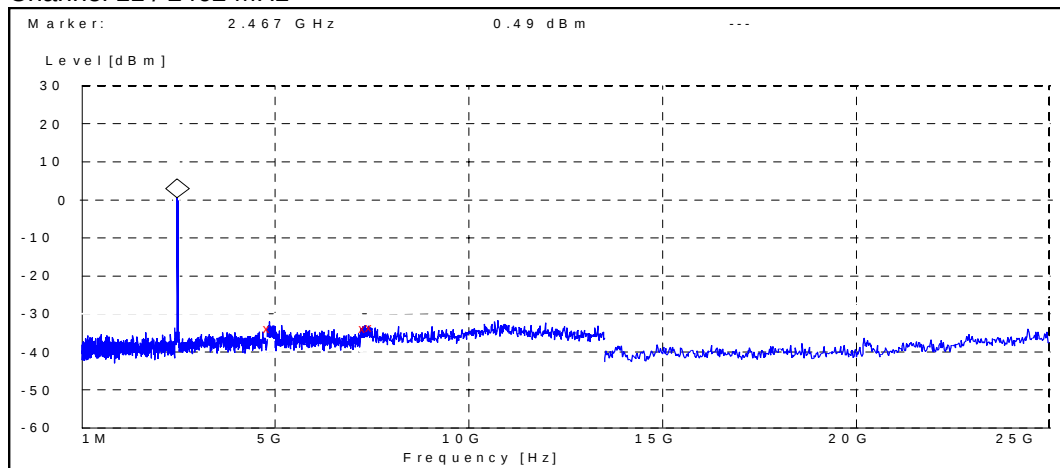

Frequency [MHz]	P [dBc]	Result
4852.400000	-34.394437	PASSED
7311.600000	-34.394437	PASSED
7500.000000	-34.094437	PASSED

5. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))

EUT with DUT number	RM-322, DUT 12180
Accessories with DUT numbers	BL-4C, DUT 12135; HS-47, DUT 12137; AC-5E, DUT 12136
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 100
Date of measurements	29.08.2007
Measured by	Anni Manninen

5.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
≥ 500

5.2. WLAN test results


5.2.1 DSSS mode, BPSK modulation, 1 Mbps data rate

Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	5100.000	PASSED
7	5000.000	PASSED
11	5000.000	PASSED


Channel 1 / 2412 MHz

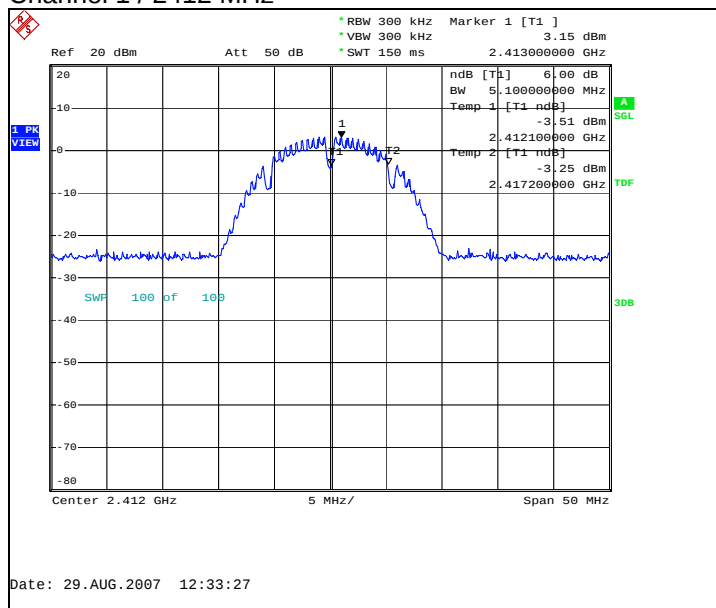

Channel 7 / 2442 MHz

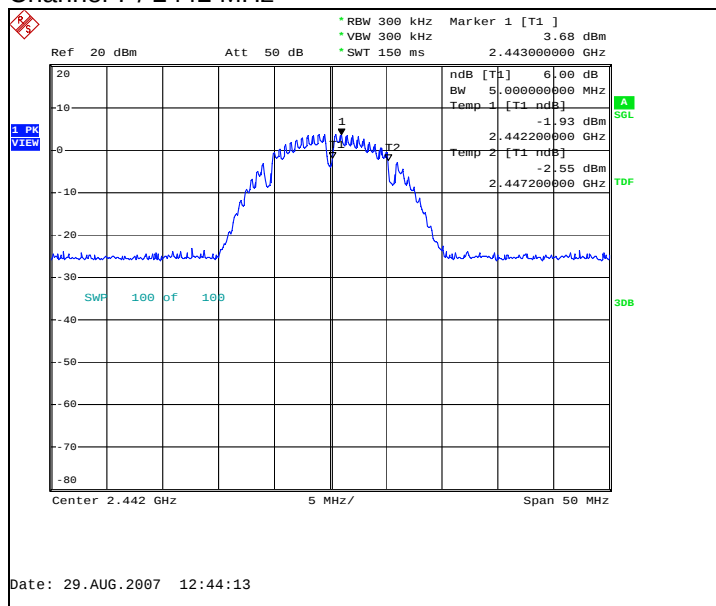


Channel 11 / 2462 MHz

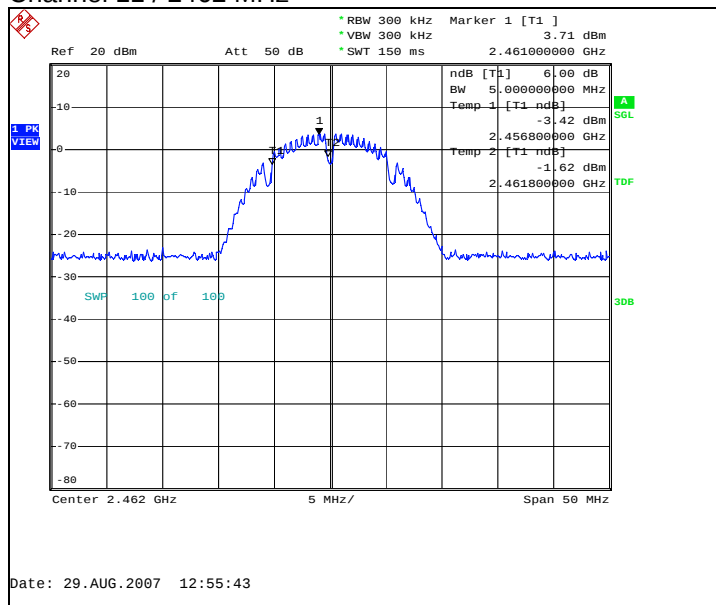


5.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1	16600.000	PASSED
7	16600.000	PASSED
11	16600.000	PASSED


Channel 1 / 2412 MHz

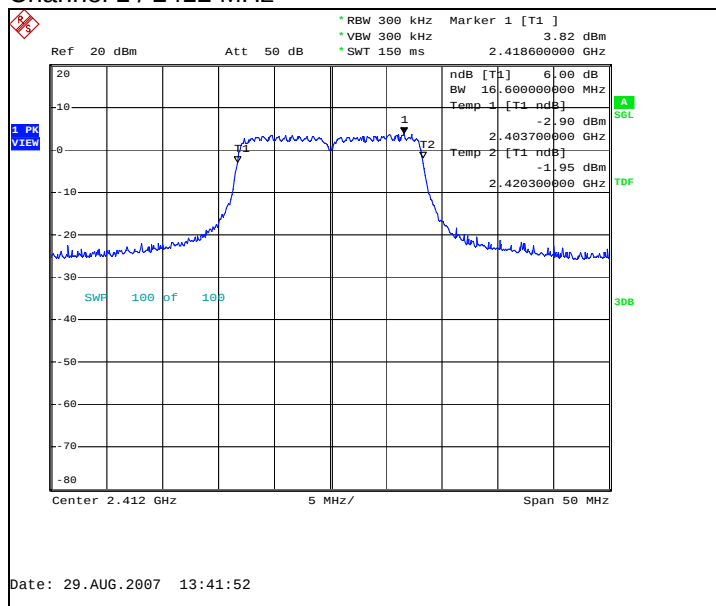

Channel 7 / 2442 MHz

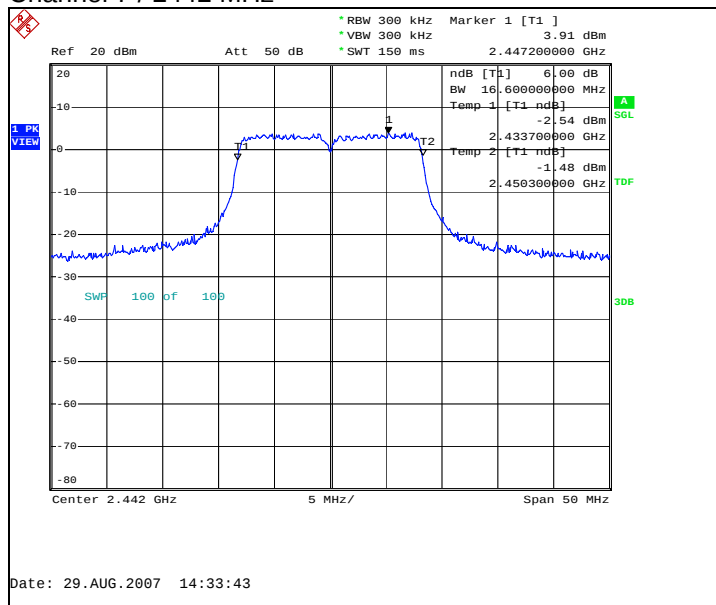

Channel 11 / 2462 MHz

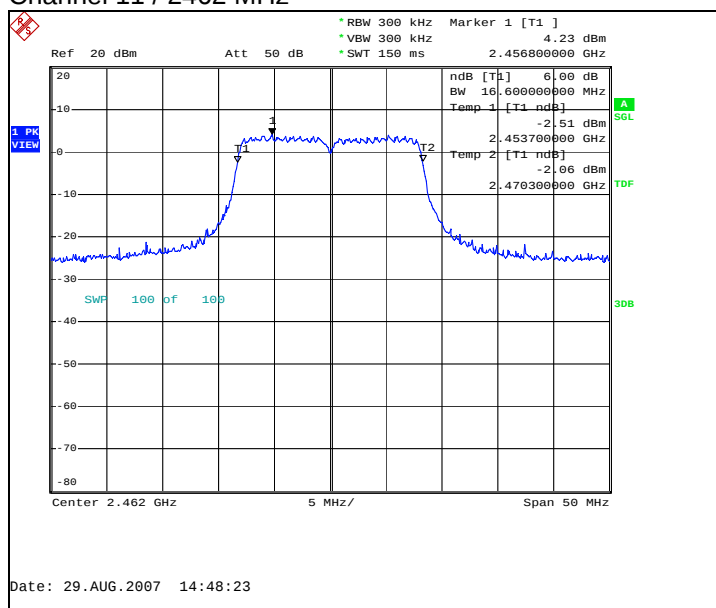

6. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))

EUT with DUT number	RM-322, DUT 12180
Accessories with DUT numbers	BL-4C, DUT 12135; HS-47, DUT 12137; AC-5E, DUT 12136
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 100
Date of measurements	29.08.2007
Measured by	Anni Manninen

6.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements


Limit [dBm] @ 3 kHz
≤ 8

6.2. WLAN test results


6.2.1 DSSS mode, BPSK modulation, 1 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-10.52	PASSED
7 / 2442	-9.44	PASSED
11 / 2462	-10.08	PASSED


Channel 1 / 2412 MHz

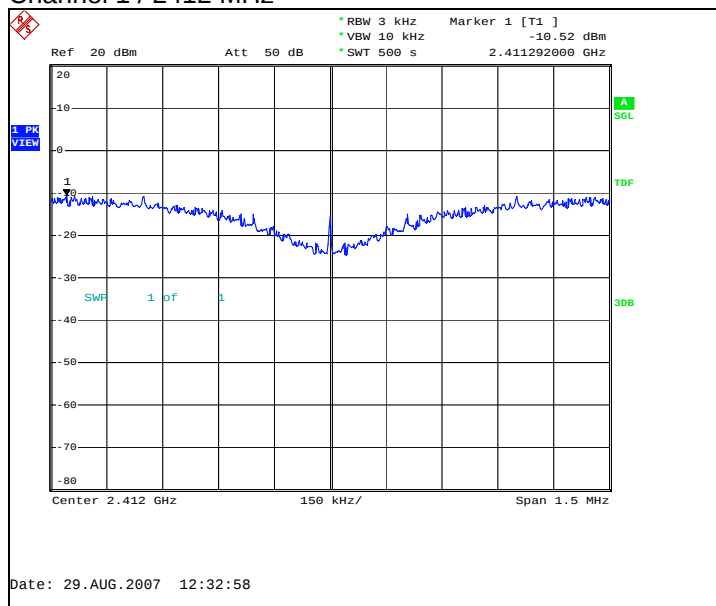

Channel 7 / 2442 MHz

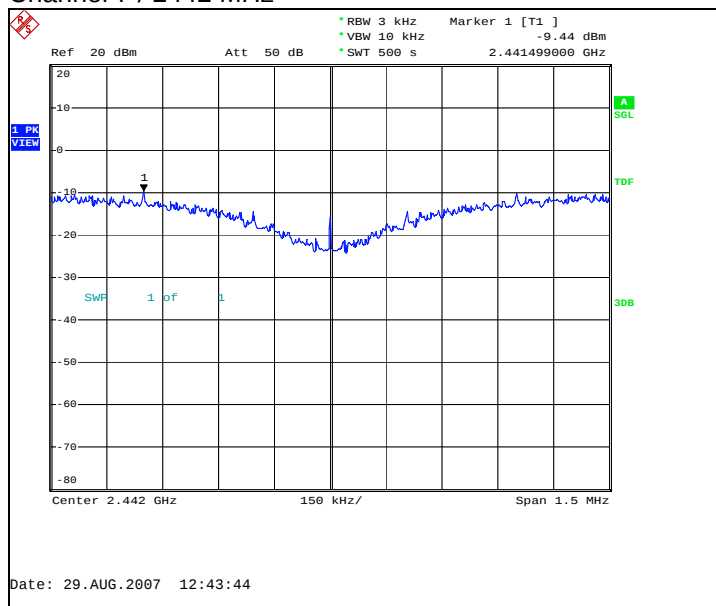


Channel 11 / 2462 MHz

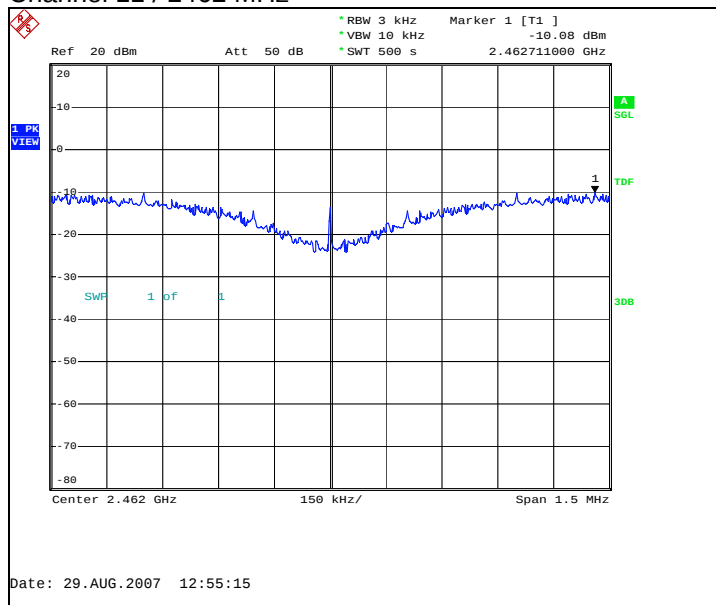


6.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-13.67	PASSED
7 / 2442	-12.80	PASSED
11 / 2462	-13.31	PASSED


Channel 1 / 2412 MHz

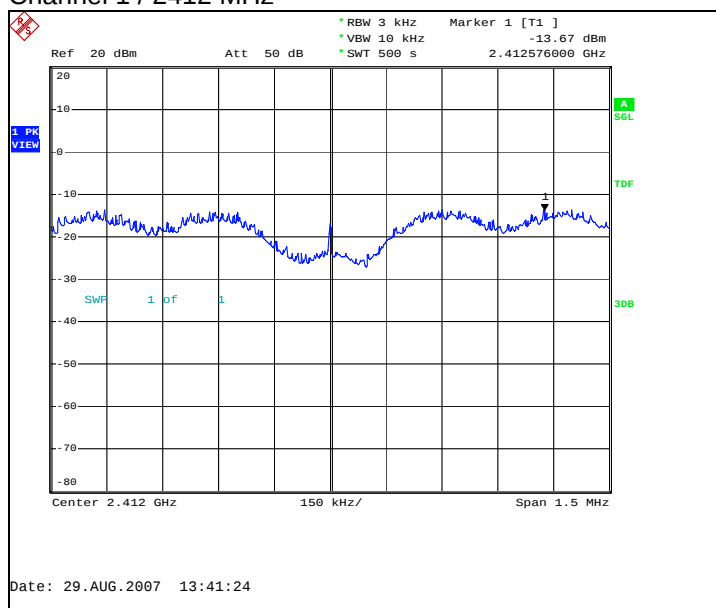

Channel 7 / 2442 MHz

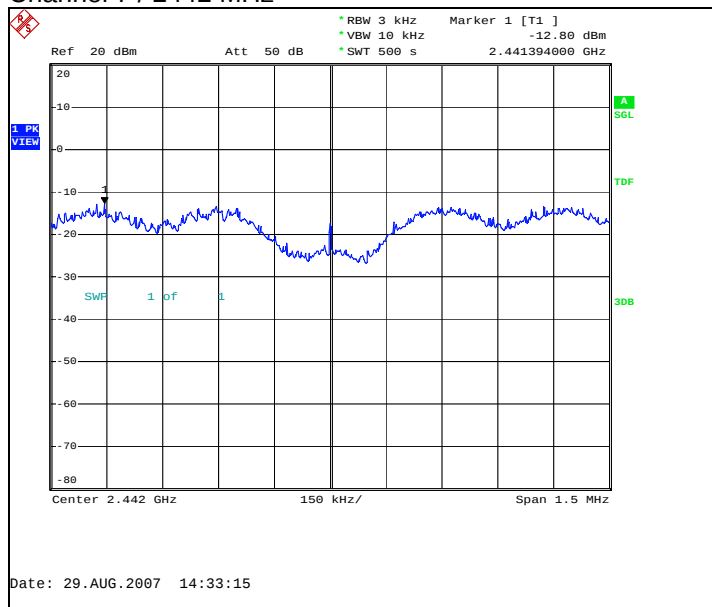

Channel 11 / 2462 MHz

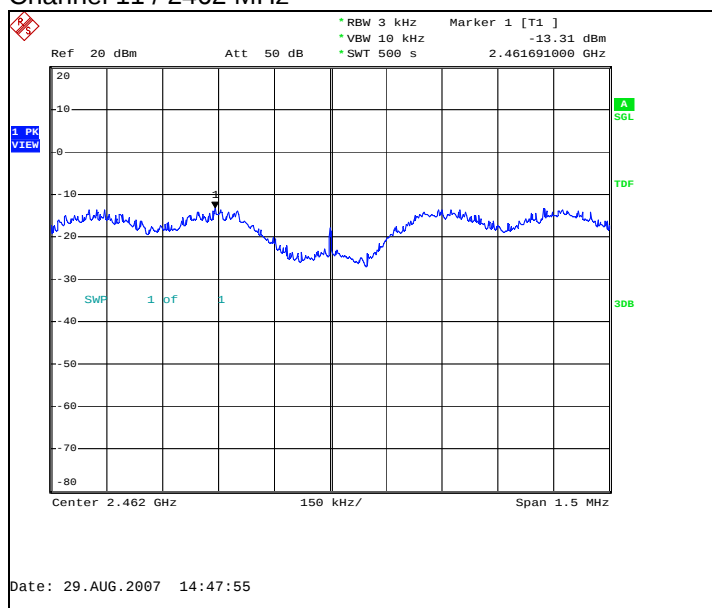

7. Test Equipment

7.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIB Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24
2362	Power Supply	NGPX 70/5	R&S	22/24
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24, 15C, 15B

7.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24, 15C
1749	Log. per. Antenna	HL025	R&S	22/24, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24, 15C
2006	Radiation Reference Source	VSQ	MEB	22/24, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24, 15C, 15B
2019	Multimeter	34401A	HP	22/24, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24, 15C, 15B
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22/24, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0,2-10SS	Wainwright	22/24, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24, 15C
2057	Log. per. Antenna	HL025	R&S	22/24, 15C

Eq. No	Equipment	Type	Manufacturer	Used in
2109	Power Supply	PL330QMD	THURLBY	22/24, 15C, 15B
2110	Multimeter	34401A	HP	22/24, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24, 15C
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24, 15C, 15B
2138	Ultra Broadband Antenna	HL562	R&S	22/24, 15C, 15B
2140	Biconical Antenna	EMCO93110B	EMCO	22/24, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24, 15C, 15B
2334	GPIO Switch 2 to 1	-	National Instruments	22/24, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24, 15C
2363	Band Reject Filter	WRCG 832/838-825/845/5SS	Wainwright	22/24
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	22/24
2365	Relay Switch Unit	TS-RSP	R&S	22/24, 15C, 15B
2366	Relay Switch Unit	TS-RSP	R&S	22/24, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22/24
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24, 15C, 15B