

## FCC Part 22/24/27 Compliance Test Report

|                                                         |                                                                                                                                                                                                                                                                                                                                                             |                                   |                                                                                                                       |
|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Test Report no.:</b>                                 | FCC22&24&27_RM-509_10.doc                                                                                                                                                                                                                                                                                                                                   | <b>Date of Report:</b>            | 18-Aug-2009                                                                                                           |
| <b>Number of pages:</b>                                 | 9                                                                                                                                                                                                                                                                                                                                                           | <b>Customer's Contact person:</b> | Ralph Schwarz                                                                                                         |
| <b>Testing laboratory:</b>                              | TCC Nokia Tampere Laboratory<br>P.O. Box 68<br>Sinitaival 5<br>FIN-33720 TAMPERE, FINLAND<br>Tel. +358 (0) 7180 46800<br>Fax. +358 (0) 7180 46880                                                                                                                                                                                                           | <b>Customer:</b>                  | Nokia Corporation<br>Lise Meitner Strasse 10<br>89081 ULM<br>GERMANY<br>Tel. +49 731 1754 0<br>Fax. +49 731 1754 6800 |
| <b>FCC listing no.:</b>                                 | 94436                                                                                                                                                                                                                                                                                                                                                       |                                   |                                                                                                                       |
| <b>IC recognition no.:</b>                              | 661AK-1                                                                                                                                                                                                                                                                                                                                                     |                                   |                                                                                                                       |
| <b>Tested devices/ accessories:</b>                     | <b>Phone RM-509 / Battery BL-4S</b>                                                                                                                                                                                                                                                                                                                         |                                   |                                                                                                                       |
| <b>FCC ID:</b>                                          | PPIRM-509                                                                                                                                                                                                                                                                                                                                                   | <b>IC:</b>                        | 661U-RM509                                                                                                            |
| <b>Supplement reports:</b>                              | -                                                                                                                                                                                                                                                                                                                                                           |                                   |                                                                                                                       |
| <b>Testing has been carried out in accordance with:</b> | CFR 47, FCC rules Parts 22, 24 and 27, TIA-603-C-2004 and IC standards RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009) and RSS-139 (Issue 1, February 2008). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit". |                                   |                                                                                                                       |
| <b>Documentation:</b>                                   | The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.                                                                                                        |                                   |                                                                                                                       |
| <b>Test Results:</b>                                    | <b>The EUT complies with the requirements in respect of all parameters subject to the test.</b><br>The test results relate only to devices specified in this document.                                                                                                                                                                                      |                                   |                                                                                                                       |
| <b>Date and signature for the contents:</b>             |                                                                                                                                                                                                                                                                                                                                                             |                                   |                                                                                                                       |

Jari Jantunen, System Manager, EMC

## 1. Summary for FCC Part 22/24/27 Compliance Test Report

|                               |                                                       |
|-------------------------------|-------------------------------------------------------|
| Date of receipt               | 17-Aug-2009                                           |
| Testing completed             | 18-Aug-2009                                           |
| The customer's contact person | Ralph Schwarz                                         |
| Test Plan referred to         | T:\Projects\RM-509\TestPlan_RS\RS_testplan_RM-509.xls |
| Notes                         | -                                                     |
| Document name                 | FCC22&24&27_RM-509_10.doc                             |

### 1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/IV(1700)/VIII) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

| Product | Type   | SN                          | HW   | MV | SW   | DUT   |
|---------|--------|-----------------------------|------|----|------|-------|
| Phone   | RM-509 | 004401106655455             | 0510 | -  | 3.08 | 41987 |
| Battery | BL-4S  | 3932138486260225081;0670577 | -    | -  | -    | 41986 |

### 1.2. Summary of Test Results

#### GSM 850:

| Section in CFR 47     | Section in RSS-GEN or RSS-132 | Name of the test                           | Result |
|-----------------------|-------------------------------|--------------------------------------------|--------|
| §2.1046(a), 22.913(a) | 4.4                           | Conducted RF output power                  | NP     |
| §22.913(a)            | 4.4                           | Radiated RF output power                   | PASSED |
| §2.1049(h)            | 4.6.1                         | 99 % occupied bandwidth                    | NP     |
| §22.917(a)            | 4.5                           | Band edge compliance                       | NP     |
| §22.917(a), §2.1051   | 4.5                           | Spurious emissions at antenna terminals    | NP     |
| §22.917(a), §2.1053   | 4.5                           | Spurious radiated emissions                | NP     |
| §2.1055(a)            | 4.3                           | Frequency stability, temperature variation | NP     |
| §2.1055(d)            | 4.3                           | Frequency stability, voltage variation     | NP     |

#### GSM 1900:

| Section in CFR 47   | Section in RSS-GEN or RSS-133 | Name of the test                           | Result |
|---------------------|-------------------------------|--------------------------------------------|--------|
| §2.1046(a)          | 6.4                           | Conducted RF output power                  | NP     |
| §24.232(b)          | 6.4                           | Radiated RF output power                   | PASSED |
| §2.1049(h)          | 4.6.1                         | 99 % occupied bandwidth                    | NP     |
| §24.238(a)          | 6.5                           | Band edge compliance                       | NP     |
| §24.238(a), §2.1051 | 6.5                           | Spurious emissions at antenna terminals    | NP     |
| §24.238(a), §2.1053 | 6.5                           | Spurious radiated emissions                | NP     |
| §2.1055(a)          | 6.3                           | Frequency stability, temperature variation | NP     |
| §2.1055(d)          | 6.3                           | Frequency stability, voltage variation     | NP     |

**WCDMA 1700 (Band IV):**

| Section in CFR 47  | Section in <i>RSS-GEN</i> or <i>RSS-139</i> | Name of the test                           | Result |
|--------------------|---------------------------------------------|--------------------------------------------|--------|
| §2.1046(a)         | 6.4                                         | Conducted RF output power                  | NP     |
| §27.50(d)(2)       | 6.4                                         | Radiated RF output power                   | PASSED |
| §2.1049(h)         | 4.6.1                                       | 99 % occupied bandwidth                    | NP     |
| §27.53(g)          | 6.5                                         | Band edge compliance                       | NP     |
| §27.53(g), §2.1051 | 6.5                                         | Spurious emissions at antenna terminals    | NP     |
| §27.53(g), §2.1053 | 6.5                                         | Spurious radiated emissions                | NP     |
| §2.1055(a)         | 6.3                                         | Frequency stability, temperature variation | NP     |
| §2.1055(d)         | 6.3                                         | Frequency stability, voltage variation     | NP     |

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Tampere Laboratory.

## CONTENTS


|                                                                                               |          |
|-----------------------------------------------------------------------------------------------|----------|
| <b>1. Summary for FCC Part 22/24/27 Compliance Test Report .....</b>                          | <b>2</b> |
| 1.1. EUT and Accessory Information .....                                                      | 2        |
| 1.2. Summary of Test Results .....                                                            | 2        |
| <b>2. Radiated RF output power</b>                                                            |          |
| <b>(FCC §22.913(a), §24.232(b), §27.50(d)(2), RSS-132 4.4, RSS-133 6.4, RSS-139 6.4) ....</b> | <b>5</b> |
| 2.1. Test setup .....                                                                         | 5        |
| 2.2. Test method and limit .....                                                              | 5        |
| 2.3. GSM 850 Test results / Flip open .....                                                   | 6        |
| 2.4. GSM 1900 Test results / Flip open .....                                                  | 6        |
| 2.5. WCDMA 1700 Test results / Flip open .....                                                | 7        |
| 2.6. GSM 850 Test results / Flip closed .....                                                 | 7        |
| 2.7. GSM 1900 Test results / Flip closed .....                                                | 7        |
| 2.8. WCDMA 1700 Test results / Flip closed .....                                              | 7        |
| <b>3. Test equipment .....</b>                                                                | <b>8</b> |
| 3.1. Conducted measurements .....                                                             | 8        |
| 3.2. Radiated measurements .....                                                              | 8        |

## 2. Radiated RF output power

(FCC §22.913(a), §24.232(b), §27.50(d)(2), RSS-132 4.4, RSS-133 6.4, RSS-139 6.4)

|                                                 |                  |
|-------------------------------------------------|------------------|
| EUT with DUT number                             | RM-509 DUT 41987 |
| Accessories with DUT numbers                    | BL-4S DUT 41986  |
| Operation Voltage [V] / [Hz]                    | 115 / 60         |
| Result                                          | PASSED           |
| Remarks                                         | Flip open/closed |
| Temp [°C] / Humidity [%RH] / Air Pressure [kPa] | 22 / 50 / 100.4  |
| Date of measurements                            | 17-Aug-2009      |
| Measured by                                     | Jari Jantunen    |

### 2.1. Test setup

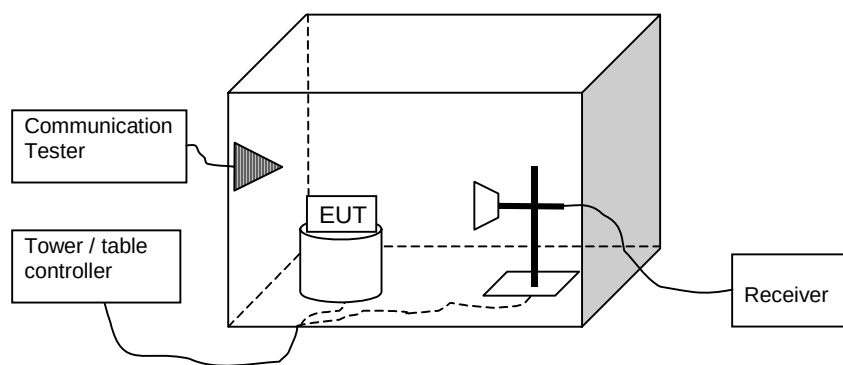

### 2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\_TX} - P_{SUBST\_RX} - L_{SUBST\_CABLES} + G_{SUBST\_TX\_ANT}$$

Where  $A_{SUBST}$  is the final substitution correction including receive antenna gain.  $P_{SUBST\_TX}$  is signal generator level,  $P_{SUBST\_RX}$  is receiver level,  $L_{SUBST\_CABLES}$  is cable losses including both TX and RX cables and  $G_{SUBST\_TX\_ANT}$  is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where  $P_{MEAS}$  is receiver reading in dBm and  $A_{TOT}$  is total correction factor including cable loss and substitution correction ( $A_{TOT} = L_{CABLES} + A_{SUBST}$ ).

Limits for radiated RF output power measurements

| Frequency range [MHz] | Limit [W] | Limit [dBm] |
|-----------------------|-----------|-------------|
| 824 - 849             | 7         | 38.5        |
| 1710 - 1755           | 1         | 30          |
| 1850 - 1910           | 2         | 33          |

### 2.3. GSM 850 Test results / Flip open

GSM mode

| Channel / $f_c$ [MHz] | ERP [dBm] | ERP [W] | $P_{MEAS}$ [dBm] | $A_{TOT}$ [dB] | Polarisation | Result |
|-----------------------|-----------|---------|------------------|----------------|--------------|--------|
| 128 / 824.2           | 29.60     | 0.912   | - 5.00           | 34.60          | VERTICAL     | PASSED |
| 190 / 836.6           | 30.20     | 1.047   | - 3.10           | 33.30          | VERTICAL     | PASSED |
| 251 / 848.8           | 30.30     | 1.072   | - 2.50           | 32.80          | VERTICAL     | PASSED |

EGPRS mode, 1 TX Slot

| Channel / $f_c$ [MHz] | ERP [dBm] | ERP [W] | $P_{MEAS}$ [dBm] | $A_{TOT}$ [dB] | Polarisation | Result |
|-----------------------|-----------|---------|------------------|----------------|--------------|--------|
| 128 / 824.2           | 20.70     | 0.117   | - 13.90          | 34.60          | VERTICAL     | PASSED |
| 190 / 836.6           | 21.20     | 0.132   | - 12.10          | 33.30          | VERTICAL     | PASSED |
| 251 / 848.8           | 20.80     | 0.120   | - 12.00          | 32.80          | VERTICAL     | PASSED |

### 2.4. GSM 1900 Test results / Flip open

GSM mode

| Channel / $f_c$ [MHz] | EIRP [dBm] | EIRP [W] | $P_{MEAS}$ [dBm] | $A_{TOT}$ [dB] | Polarisation | Result |
|-----------------------|------------|----------|------------------|----------------|--------------|--------|
| 512 / 1850.2          | 30.50      | 1.122    | - 12.00          | 42.50          | VERTICAL     | PASSED |
| 661 / 1880.0          | 31.00      | 1.259    | - 11.50          | 42.50          | HORIZONTAL   | PASSED |
| 810 / 1909.8          | 31.00      | 1.259    | - 11.80          | 42.80          | HORIZONTAL   | PASSED |

EGPRS mode, 1 TX Slot

| Channel / $f_c$ [MHz] | EIRP [dBm] | EIRP [W] | $P_{MEAS}$ [dBm] | $A_{TOT}$ [dB] | Polarisation | Result |
|-----------------------|------------|----------|------------------|----------------|--------------|--------|
| 512 / 1850.2          | 25.80      | 0.380    | - 16.70          | 42.50          | VERTICAL     | PASSED |
| 661 / 1880.0          | 26.40      | 0.437    | - 16.10          | 42.50          | HORIZONTAL   | PASSED |
| 810 / 1909.8          | 26.90      | 0.490    | - 15.90          | 42.80          | HORIZONTAL   | PASSED |

## 2.5. WCDMA 1700 Test results / Flip open

| Channel / $f_c$ [MHz] | EIRP [dBm] | EIRP [W] | $P_{MEAS}$ [dBm] | $A_{TOT}$ [dB] | Polarisation | Result |
|-----------------------|------------|----------|------------------|----------------|--------------|--------|
| 1312 / 1712.4         | 21.90      | 0.155    | - 19.70          | 41.60          | VERTICAL     | PASSED |
| 1412 / 1732.4         | 22.80      | 0.191    | - 19.20          | 42.00          | VERTICAL     | PASSED |
| 1513 / 1752.6         | 21.00      | 0.126    | - 21.10          | 42.10          | VERTICAL     | PASSED |

## 2.6. GSM 850 Test results / Flip closed

GSM mode

| Channel / $f_c$ [MHz] | ERP [dBm] | ERP [W] | $P_{MEAS}$ [dBm] | $A_{TOT}$ [dB] | Polarisation | Result |
|-----------------------|-----------|---------|------------------|----------------|--------------|--------|
| 128 / 824.2           | 25.90     | 0.389   | - 8.70           | 34.60          | VERTICAL     | PASSED |
| 190 / 836.6           | 25.50     | 0.355   | - 7.80           | 33.30          | VERTICAL     | PASSED |
| 251 / 848.8           | 26.10     | 0.407   | - 6.70           | 32.80          | VERTICAL     | PASSED |

EGPRS mode, 1 TX Slot

| Channel / $f_c$ [MHz] | ERP [dBm] | ERP [W] | $P_{MEAS}$ [dBm] | $A_{TOT}$ [dB] | Polarisation | Result |
|-----------------------|-----------|---------|------------------|----------------|--------------|--------|
| 128 / 824.2           | 16.30     | 0.043   | - 18.30          | 34.60          | VERTICAL     | PASSED |
| 190 / 836.6           | 16.60     | 0.046   | - 16.70          | 33.30          | VERTICAL     | PASSED |
| 251 / 848.8           | 16.40     | 0.044   | - 16.40          | 32.80          | VERTICAL     | PASSED |

## 2.7. GSM 1900 Test results / Flip closed

GSM mode

| Channel / $f_c$ [MHz] | EIRP [dBm] | EIRP [W] | $P_{MEAS}$ [dBm] | $A_{TOT}$ [dB] | Polarisation | Result |
|-----------------------|------------|----------|------------------|----------------|--------------|--------|
| 512 / 1850.2          | 28.30      | 0.676    | - 13.30          | 41.60          | HORIZONTAL   | PASSED |
| 661 / 1880.0          | 30.00      | 1.000    | - 12.50          | 42.50          | HORIZONTAL   | PASSED |
| 810 / 1909.8          | 30.00      | 1.000    | - 12.80          | 42.80          | HORIZONTAL   | PASSED |

EGPRS mode, 1 TX Slot

| Channel / $f_c$ [MHz] | EIRP [dBm] | EIRP [W] | $P_{MEAS}$ [dBm] | $A_{TOT}$ [dB] | Polarisation | Result |
|-----------------------|------------|----------|------------------|----------------|--------------|--------|
| 512 / 1850.2          | 22.80      | 0.191    | - 18.80          | 41.60          | HORIZONTAL   | PASSED |
| 661 / 1880.0          | 25.20      | 0.331    | - 17.30          | 42.50          | HORIZONTAL   | PASSED |
| 810 / 1909.8          | 26.00      | 0.398    | - 16.80          | 42.80          | HORIZONTAL   | PASSED |

## 2.8. WCDMA 1700 Test results / Flip closed

| Channel / $f_c$ [MHz] | EIRP [dBm] | EIRP [W] | $P_{MEAS}$ [dBm] | $A_{TOT}$ [dB] | Polarisation | Result |
|-----------------------|------------|----------|------------------|----------------|--------------|--------|
| 1312 / 1712.4         | 22.10      | 0.162    | - 19.50          | 41.60          | VERTICAL     | PASSED |
| 1412 / 1732.4         | 22.10      | 0.162    | - 19.90          | 42.00          | VERTICAL     | PASSED |
| 1513 / 1752.6         | 21.10      | 0.129    | - 21.00          | 42.10          | VERTICAL     | PASSED |

### 3. Test equipment

#### 3.1. Conducted measurements

| Eq. No  | Equipment                  | Type        | Manufacturer | Used in            |
|---------|----------------------------|-------------|--------------|--------------------|
| TM30597 | Power splitter             | 11667A      | Agilent      | 22/24/27, 15C      |
| TM37499 | Power splitter             | 11667A      | Agilent      | 22/24/27, 15C      |
| TM38111 | Multimeter                 | 34401A      | Agilent      | 22/24/27, 15C      |
| TM38112 | DC power supply            | 6632A       | Agilent      | 22/24/27, 15C      |
| TM22901 | Attenuator                 | 8496A       | Agilent      | 22/24/27, 15C      |
| TM30636 | Artificial mains net       | L2-16       | PMM          | 15C, 15B           |
| TM37678 | Radio communication tester | CMU-200     | R&S          | 22/24/27, 15C, 15B |
| TM37773 | Radio communication tester | CMU-200     | R&S          | 22/24/27, 15C, 15B |
| TM30600 | Pulse Limiter              | ESH3-Z2     | R&S          | 15C, 15B           |
| TM26490 | LISN 50 $\mu$ H            | ESH3-Z5     | R&S          | 15C, 15B           |
| TM37610 | Spectrum analyzer          | FSU         | R&S          | 22/24/27, 15C      |
| TM22835 | Multimeter                 | 87          | Fluke        | 15C, 15B           |
| TM37500 | Microwave switch system    | 7116-MSW    | Keithley     | 22/24/27, 15C, 15B |
| TM22638 | Power supply               | OL63743-901 | Transmatic   | 22/24/27, 15C, 15B |
|         | Temperature chamber        | VT4002      | Vötsch       | 22/24/27, 15C      |
| 2058    | EMI Test receiver          | ESPC        | R&S          | 15C, 15B           |
| 2001    | Bluetooth tester           | CBT         | R&S          | 22/24/27, 15C, 15B |
| 2002    | Radio communication tester | CMU-200     | R&S          | 22/24/27, 15C, 15B |

#### 3.2. Radiated measurements

| Eq. No  | Equipment                       | Type                          | Manufacturer   | Used in            |
|---------|---------------------------------|-------------------------------|----------------|--------------------|
| TM30599 | 3m semi-anechoic chamber        |                               | TDK            | 22/24/27, 15C, 15B |
| TM38845 | EMI receiver                    | ESI 40                        | R&S            | 22/24/27, 15C, 15B |
| TM37498 | Preamplifier                    | AMF-5D-020180-26-10P          | MITEQ          | 22/24/27, 15C, 15B |
| TM37523 | Preamplifier                    | AMF-4D-10M-3G-25-20P          | MITEQ          | 22/24/27, 15C, 15B |
| TM37516 | Biconilog antenna               | HL562                         | R&S            | 22/24/27, 15C, 15B |
| TM26496 | Double ridged waveguide antenna | 3115                          | EMCO           | 22/24/27, 15C, 15B |
| TM39158 | Horn antenna                    | 3116                          | EMCO           | 22/24/27, 15C, 15B |
| TM26492 | Reference dipole set            | UHAP/VHAP                     | Schwarzbeck    | 22/24/27, 15C, 15B |
| TM37501 | Dipole antenna                  | 3125-870                      | EMCO           | 22/24/27           |
| TM37502 | Dipole antenna                  | 3125-1880                     | EMCO           | 22/24/27           |
| TM37773 | Radio communication tester      | CMU-200                       | R&S            | 22/24/27, 15C, 15B |
| TM38631 | Signal generator                | 83640L                        | Agilent        | 22/24/27, 15C, 15B |
| TM38066 | High pass filter                | 4HC3000/18000-3-KK            | Trilithic      | 22/24/27, 15C, 15B |
| TM26511 | Tunable notch filter            | WRCA870                       | Wainwright     | 22/24/27           |
| TM38215 | Tunable notch filter            | WRCD1850/1910-0.2/40          | Wainwright     | 22/24/27           |
| TM38214 | Band reject filter              | WRCT 2402/2480-2400/2483.5-30 | Wainwright     | 15C                |
| TM30642 | Mast/Turntable controller       | HD-100                        | Deisel         | 22/24/27, 15C, 15B |
| TM26500 | Turntable                       | DS412                         | Deisel         | 22/24/27, 15C, 15B |
| TM38842 | Antenna mast controller         | 2090                          | EMCO           | 22/24/27, 15C, 15B |
| TM38843 | Antenna mast                    | 2075                          | EMCO           | 22/24/27, 15C, 15B |
| TM38114 | DC power supply                 | 6632A                         | Agilent        | 22/24/27, 15C, 15B |
| TM38323 | Preamplifier                    | PA-02 18-26 GHz               | EMC Automation | 22/24/27, 15C, 15B |
| TM37678 | Radio communication tester      | CMU-200                       | R&S            | 22/24/27, 15C, 15B |
| TM22638 | Power supply                    | OL63743-901                   | Transmatic     | 22/24/27, 15C, 15B |
| TM23892 | Yaesu controller                | G-1000SDX                     | Yaesu          | 22/24/27, 15C, 15B |
| 2001    | Bluetooth tester                | CBT                           | R&S            | 22/24/27, 15C, 15B |



---

| Eq. No | Equipment                  | Type    | Manufacturer | Used in            |
|--------|----------------------------|---------|--------------|--------------------|
| 2002   | Radio communication tester | CMU-200 | R&S          | 22/24/27, 15C, 15B |