

FCC Part 22/24/27 Compliance Test Report

Test Report no.:	FCC22&24&27_RM-511_07.doc	Date of Report:	21-Aug-2009
Number of pages:	24	Customer's Contact person:	Ralph Schwarz
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	99059		
IC recognition no.:	661AD-1		
Tested devices/ accessories:	Phone; RM-511, Battery; BL-4S, Headset; HS-105, AC Charger; AC-8E		
FCC ID:	PPIRM-511	IC:	661U-RM511
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22, 24 and 27, TIA-603-C-2004 and IC standards RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009) and RSS-139 (Issue 2, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Sami Lehtonen, System Specialist, EMC

1. Summary for FCC Part 22/24/27 Compliance Test Report

Date of receipt	20-Jul-2009
Testing completed	03-Aug-2009
The customer's contact person	Ralph Schwarz
Test Plan referred to	T:\Projects\RM-509\TestPlan_RS\RS_testplan_RM-509.xls
Notes	None
Document name	FCC22&24&27_RM-511_07.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/IV(1700)/VIII) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-509	004401106655471	0510	-	3.10	24937
Battery	BL-4S	3932138486260225094;0670577	-	-	-	24934
Headset	HS-105	0694287913411200175	-	-	-	24927
AC Charger	AC-8E	1103339131030310170;0675387	-	-	-	24924
Phone	RM-509	004401106655216	0510	-	3.10	24939
Battery	BL-4S	3932138486260225107;0670577	-	-	-	24936
Headset	HS-105	0694287913411200217	-	-	-	24928
AC Charger	AC-8E	1103339131030310156;0675387	-	-	-	24922
Dummy Battery	SD-40	-	V.2636	-	-	24925

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	Passed
§22.917(a)	4.5	Band edge compliance	Passed
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	Passed
§2.1055(a)	4.3	Frequency stability, temperature variation	Passed
§2.1055(d)	4.3	Frequency stability, voltage variation	Passed

GSM 1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	Passed
§24.238(a)	6.5	Band edge compliance	Passed
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	Passed
§2.1055(a)	6.3	Frequency stability, temperature variation	Passed
§2.1055(d)	6.3	Frequency stability, voltage variation	Passed

WCDMA 1700 (Band IV):

Section in CFR 47	Section in RSS-GEN or RSS-139	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§27.50(d)(2)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	Passed
§27.53(g)	6.5	Band edge compliance	Passed
§27.53(g), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§27.53(g), §2.1053	6.5	Spurious radiated emissions	Passed
§2.1055(a)	6.3	Frequency stability, temperature variation	Passed
§2.1055(d)	6.3	Frequency stability, voltage variation	Passed

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Copenhagen Laboratory.

"The test results of PPIRM-509 are re-used for certification of the PPIRM-511. The table above indicates the results, which will be re-used."

CONTENTS


1. Summary for FCC Part 22/24/27 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)	6
2.1. Test setup	6
2.2. Test method and limit	6
2.3. GSM 850 Test results	7
2.4. GSM 1900 Test results	8
2.5. WCDMA 1700 Test results	9
3. Band edge compliance (FCC §22.917(a), 24.238(a), §27.53(g), RSS-132 4.5, RSS-133 6.5, RSS-139 6.5)	10
3.1. Test setup	10
3.2. Test method and limit	10
3.3. GSM 850 Test results	11
3.4. GSM 1900 Test results	13
3.5. WCDMA 1700 Test results	15
4. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §27.53(g), §2.1053, RSS-132 4.5, RSS-133 6.5, RSS-139 6.5) 16	16
4.1. Test setup	16
4.2. Test method and limit	16
4.3. GSM 850 Test results	17
4.4. GSM 1900 Test results	17
4.5. WCDMA 1700 Test results	18
5. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)	19
5.1. Test setup	19
5.2. Test method and limit	19
5.3. GSM 850 Test results	20
5.4. GSM 1900 Test results	20
5.5. WCDMA 1700 Test results	20
6. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)	21
6.1. Test setup	21
6.2. Test method and limit	21
6.3. GSM 850 Test results	22
6.4. GSM 1900 Test results	22
6.5. WCDMA 1700 Test results	22

7. Test Equipment.....	23
7.1. Conducted measurements	23
7.2. Radiated measurements	23

2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RM-509 DUT 24939
Accessories with DUT numbers	BL-4S DUT 24936, AC-8E DUT 24922, HS-105 DUT 24928
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 61 / 102.4
Date of measurements	03-Aug-2009
Measured by	Christian Andersen

2.1. Test setup

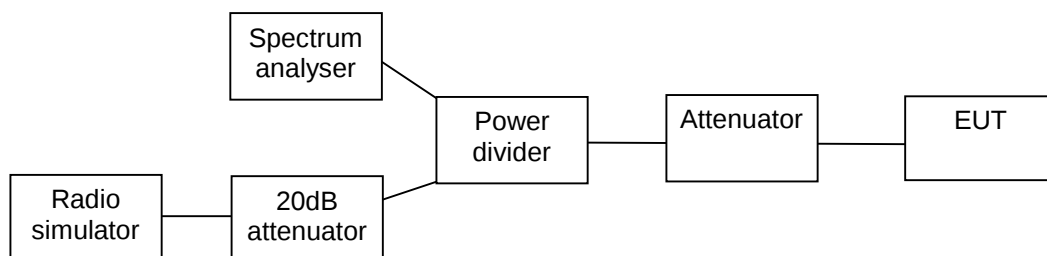


2.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and 27 and IC standard RSS-GEN.

2.3. GSM 850 Test results


Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	242.000
EGPRS	248.000

GSM mode, channel 190 / 836.6 MHz

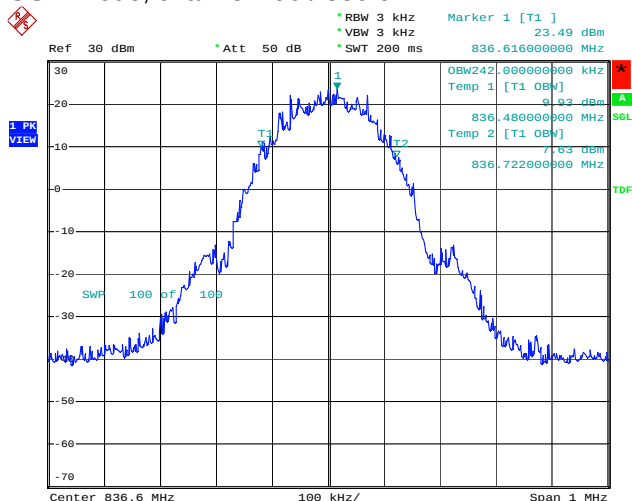

Date: 31.JUL.2009 09:51:20

EGPRS mode, channel 190 / 836.6 MHz

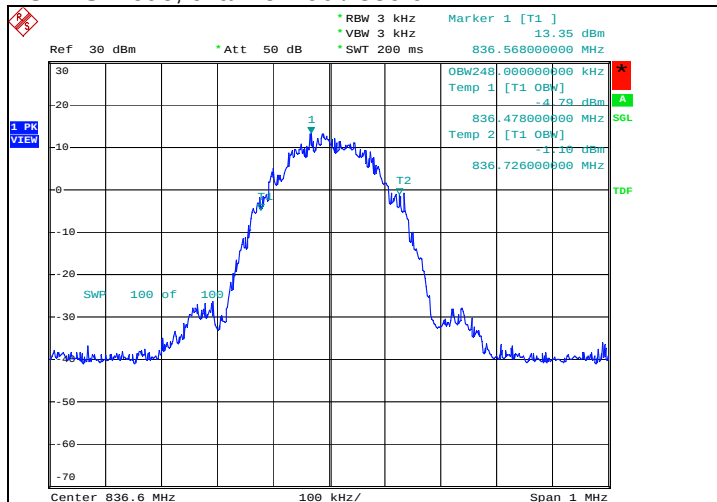


Date: 31.JUL.2009 09:53:06


2.4. GSM 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	244.000
EGPRS	240.000

GSM mode, channel 661 / 1880.0 MHz

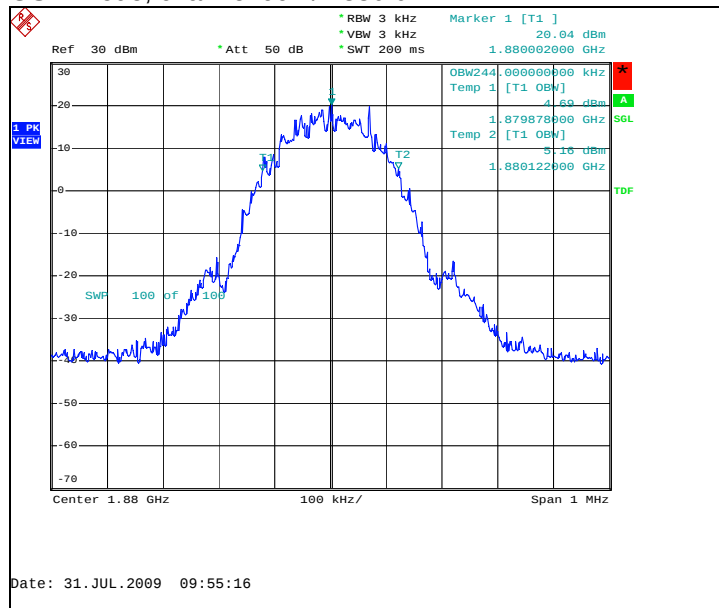


EGPRS mode, channel 661 / 1880.0 MHz

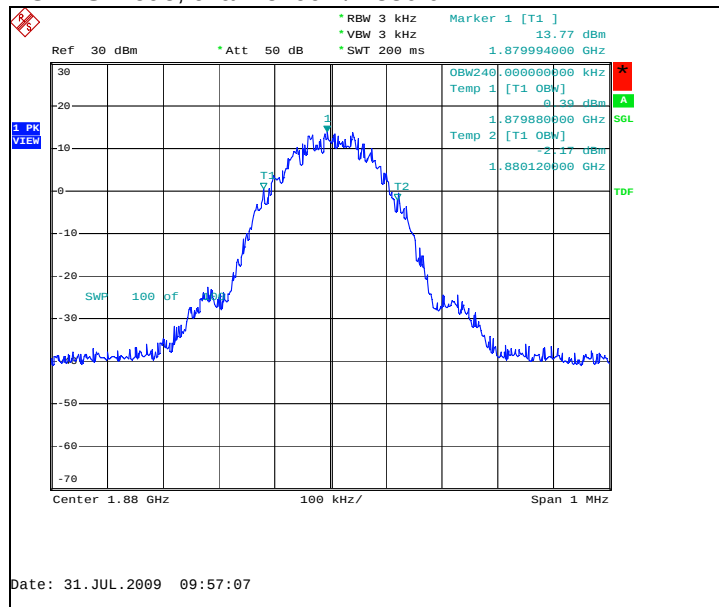

2.5. WCDMA 1700 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4160.000

Channel 1412 / 1732.4 MHz

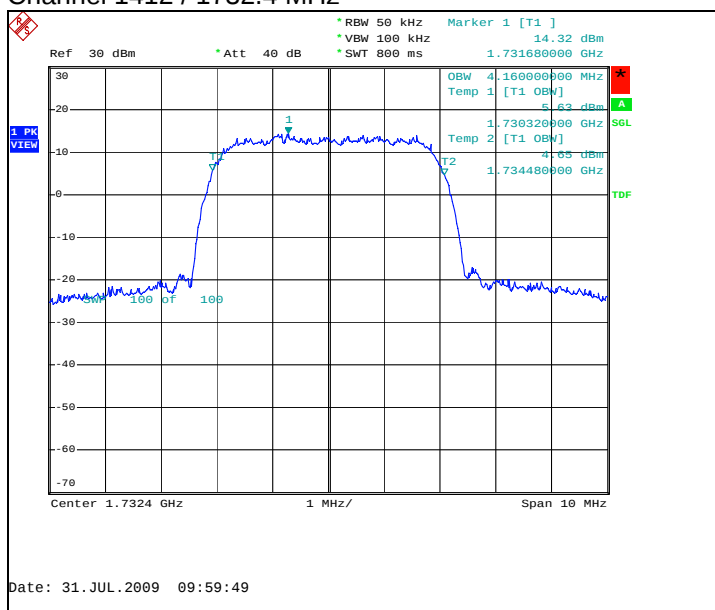


3. Band edge compliance

(FCC §22.917(a), 24.238(a), §27.53(g), RSS-132 4.5, RSS-133 6.5, RSS-139 6.5)

EUT with DUT number	RM-509 DUT 24937
Accessories with DUT numbers	BL-4S DUT 24934, HS-105 DUT 24927, AC-8E DUT 24924
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 61 / 102.4
Date of measurements	03-Aug-2009
Measured by	Christian Andersen

3.1. Test setup

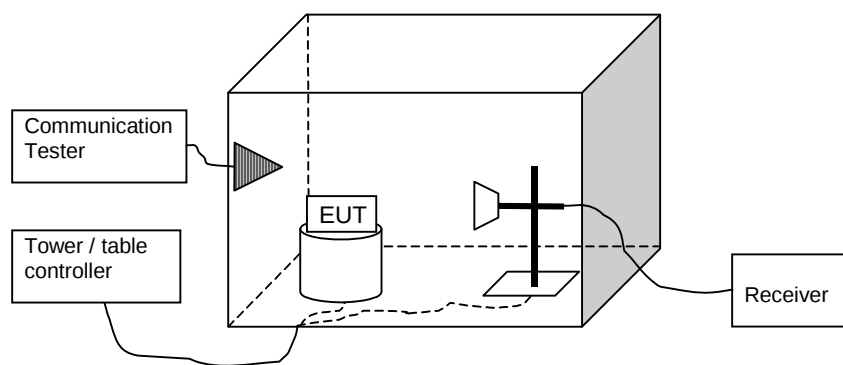

3.2. Test method and limit


The measurement is made according to FCC rules parts 22, 24 and 27 and IC standards RSS-132, RSS-133 and RSS-139.

Limits for band edge compliance measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850	Below 824 and above 849	-13
WCDMA 1700	Below 1710 and above 1755	-13
GSM 1900	Below 1850 and above 1910	-13


3.3. GSM 850 Test results

GSM mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

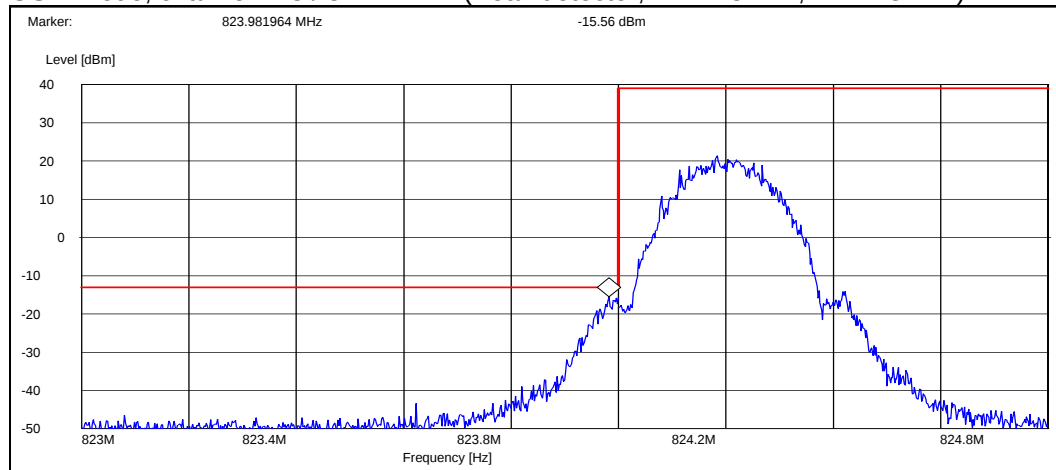


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	128 / 824.2	-15.60

GSM mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

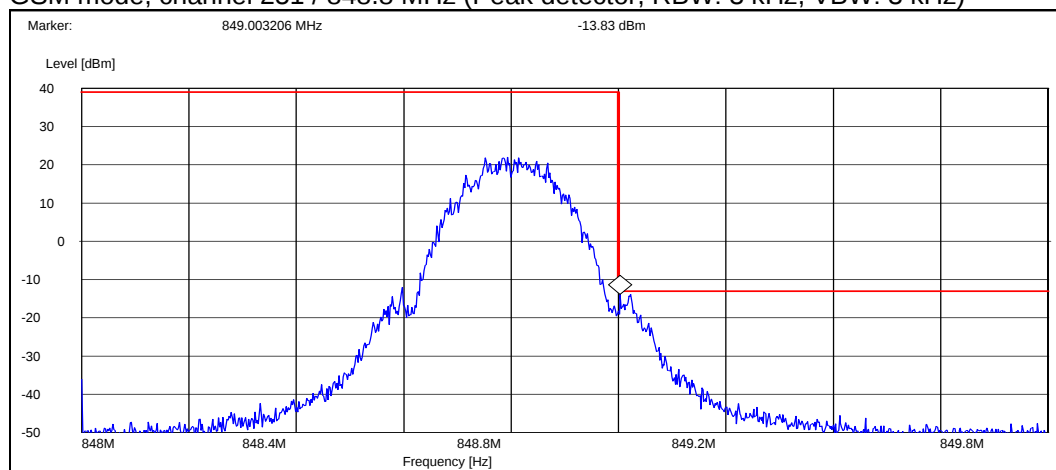


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	251 / 848.8	-13.80

EGPRS mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

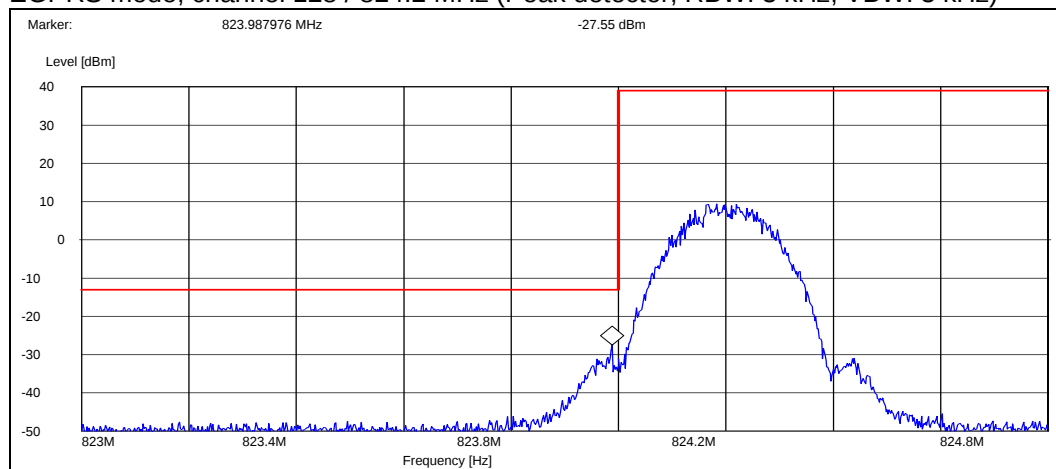

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	128 / 824.2	-27.50


EGPRS mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

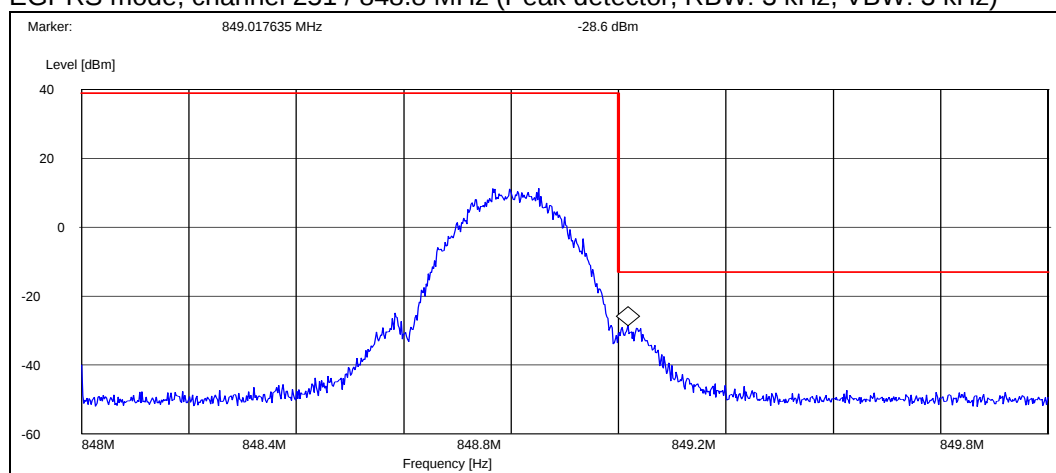

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	251 / 848.8	-28.60


3.4. GSM 1900 Test results

GSM mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

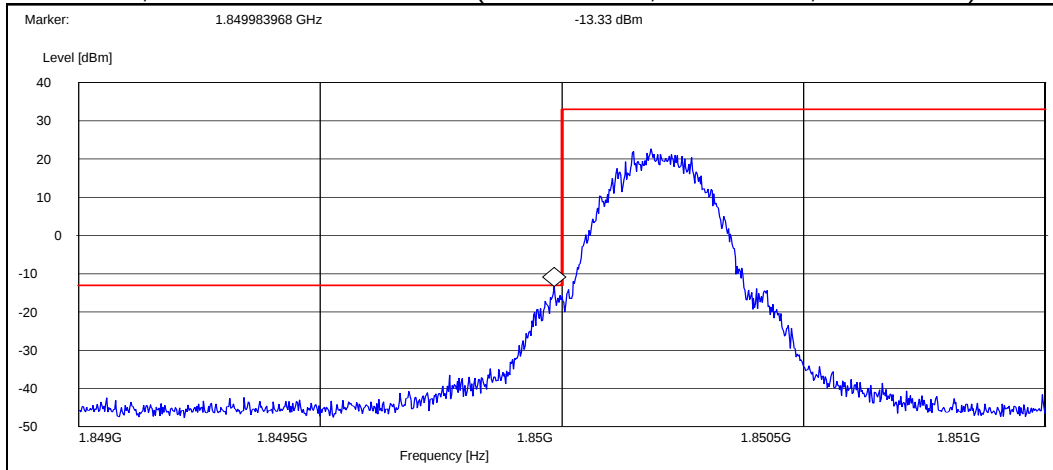


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	512 / 1850.2	-13.30

GSM mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

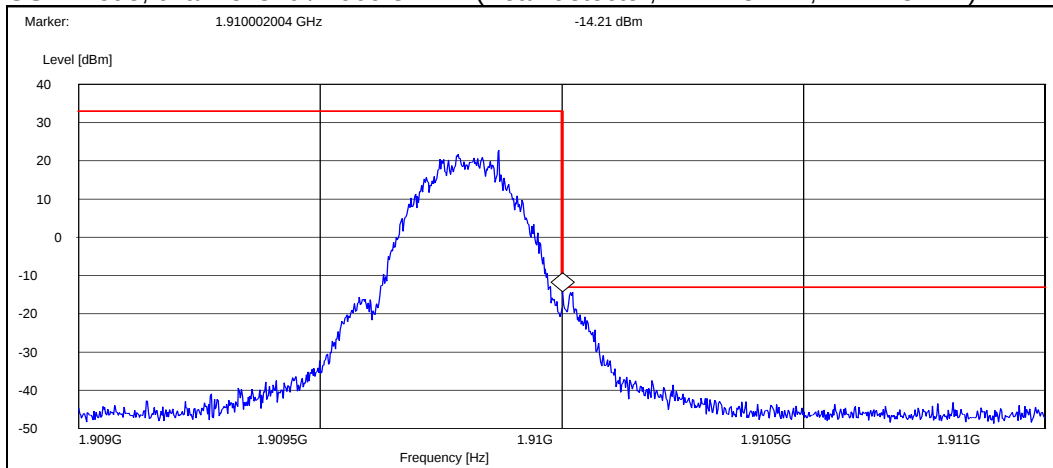


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	810 / 1909.8	-14.20

EGPRS mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

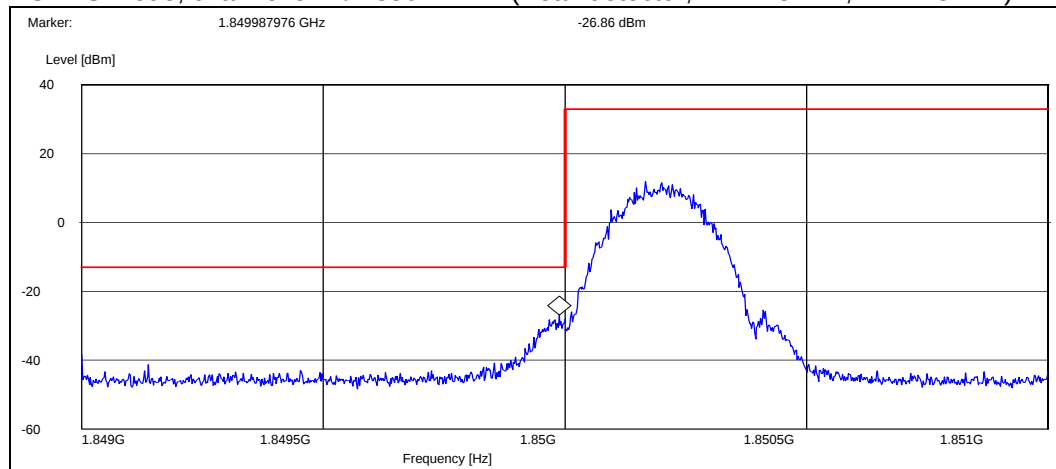

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	512 / 1850.2	-26.90


EGPRS mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

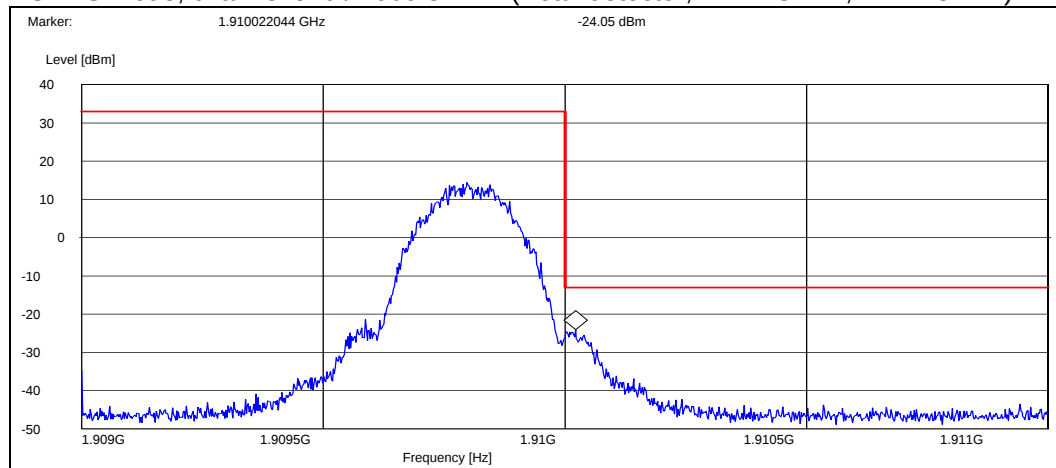

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	810 / 1909.8	-24.00


3.5. WCDMA 1700 Test results

Channel 1312 / 1712.4 MHz (Peak detector, RBW: 50 kHz, VBW: 50 kHz)

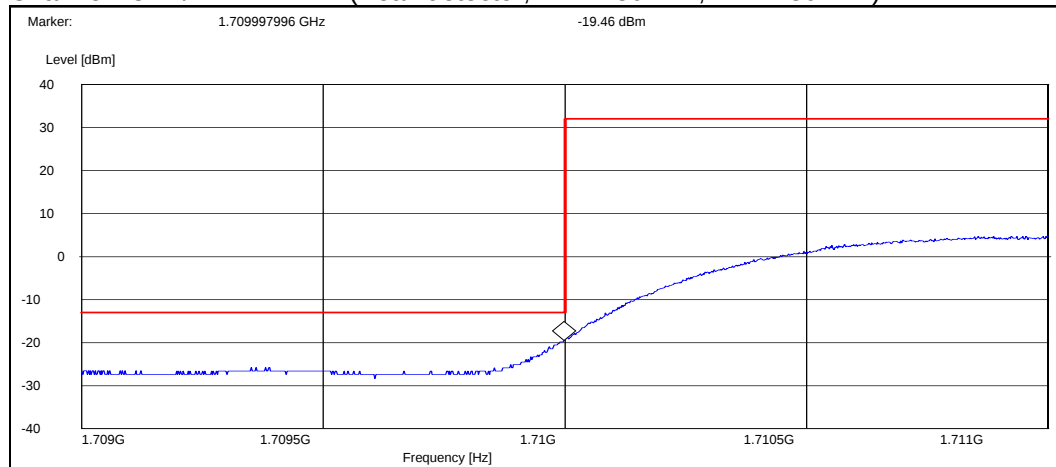

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
FDD	1312 / 1712.4	-19.50

Channel 1513 / 1752.6 MHz (Peak detector, RBW: 50 kHz, VBW: 50 kHz)

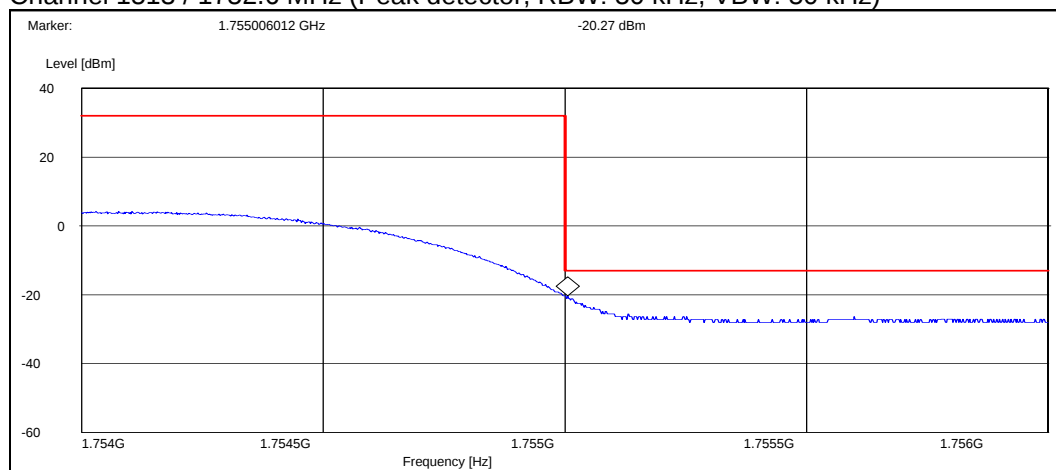


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
FDD		-20.30

4. Spurious radiated emissions

(FCC §22.917(a), §24.238(a), §27.53(g), §2.1053, RSS-132 4.5, RSS-133 6.5, RSS-139 6.5)

EUT with DUT number	RM-509 DUT 24937
Accessories with DUT numbers	BL-4S DUT 24934, HS-105 DUT 24927, AC-8E DUT 24924
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 61 / 102.4
Date of measurements	03-Aug-2009
Measured by	Christian Andersen

4.1. Test setup

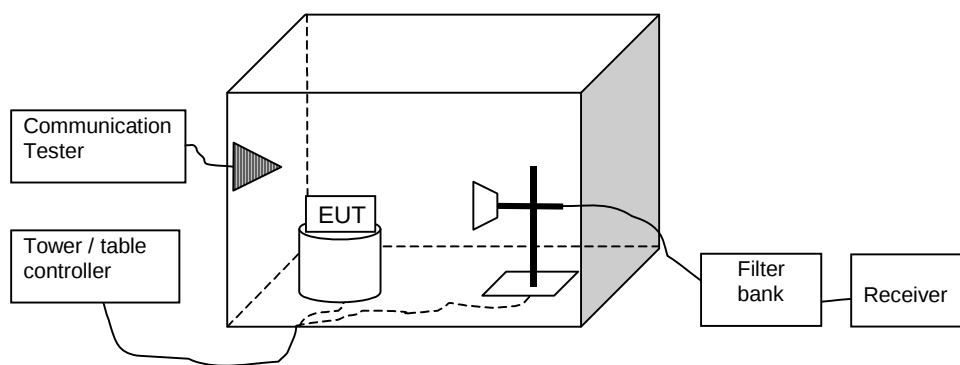

4.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss, preamplifier gain and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1700	30 - 18000	-13

4.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-48.30	0.01479	-53.20	4.90	VERTICAL	Passed
1681.259519	-59.20	0.00120	-64.30	5.10	VERTICAL	Passed
2509.820641	-44.70	0.03388	-55.60	10.90	VERTICAL	Passed
3336.673347	-60.70	0.00085	-66.40	5.70	HORIZONTAL	Passed

EGPRS mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-50.00	0.01000	-54.90	4.90	VERTICAL	Passed
1678.759519	-58.40	0.00145	-63.50	5.10	VERTICAL	Passed
2510.320641	-52.20	0.00603	-63.10	10.90	VERTICAL	Passed
3337.673347	-61.10	0.00078	-66.80	5.70	HORIZONTAL	Passed

4.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
3760.023046	-51.40	0.00724	-60.00	8.60	VERTICAL	Passed
5639.782565	-39.90	0.10233	-53.10	13.20	VERTICAL	Passed
5653.310621	-51.80	0.00661	-65.40	13.60	VERTICAL	Passed
7500.002004	-46.70	0.02138	-69.30	22.60	VERTICAL	Passed
7520.042084	-36.80	0.20893	-57.40	20.60	HORIZONTAL	Passed

EGPRS mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1959.864930	-26.40	2.29087	-35.40	9.00	VERTICAL	Passed
5631.762525	-52.50	0.00562	-65.90	13.40	VERTICAL	Passed
5639.782565	-46.00	0.02512	-59.20	13.20	VERTICAL	Passed
7520.042084	-41.60	0.06918	-62.20	20.60	HORIZONTAL	Passed

*1960.0 MHz frequency is coming from communication tester and thus ignored.

4.5. WCDMA 1700 Test results


Channel 1450 / 1740.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
5200.392786	-50.90	0.00813	-62.90	12.00	VERTICAL	Passed
5236.464930	-52.80	0.00525	-65.30	12.50	VERTICAL	Passed
6949.899800	-48.40	0.01445	-68.40	20.00	HORIZONTAL	Passed
6955.919840	-48.40	0.01445	-68.40	20.00	HORIZONTAL	Passed

5. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)

EUT with DUT number	RM-509 DUT 24939
Accessories with DUT numbers	BI-4S DUT 24936, AC-8E DUT 24922, HS-105 DUT 24928
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 61 / 102.4
Date of measurements	03-Aug-2009
Measured by	Christian Andersen

5.1. Test setup

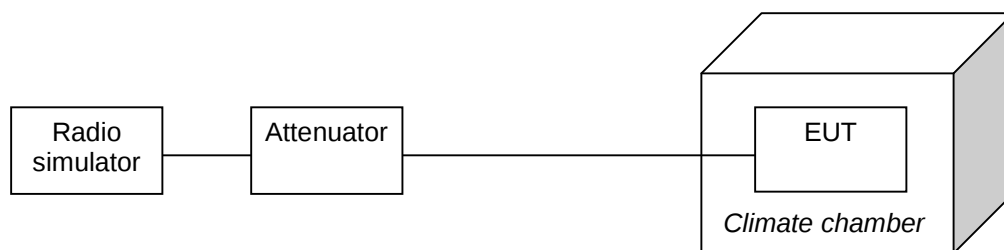

5.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and 27 and IC standards RSS-132, RSS-133 and RSS-139 as follows:

The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
The EUT is placed in the chamber.
The EUT is set in idle mode for 15 minutes.
The EUT is set to transmit.
The transmit frequency error was measured immediately.
The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

5.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-24	-0.0287
40	-24	-0.0287
30	-29	-0.0347
20	-26	-0.0311
10	30	0.0359
0	30	0.0359
-10	30	0.0359
-20	11	0.0131
-30	-18	-0.0215

5.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-38	-0.0202
40	-49	-0.0261
30	-48	-0.0255
20	-40	-0.0213
10	57	0.0303
0	77	0.0410
-10	61	0.0324
-20	26	0.0138
-30	-31	-0.0165

5.5. WCDMA 1700 Test results


Channel 1412 / 1732.4 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-231	-0.1333
40	-138	-0.0797
30	-144	-0.0831
20	-148	-0.0854
10	-138	-0.0797
0	-140	-0.0808
-10	-123	-0.0710
-20	-92	-0.0531
-30	9	0.0052

6. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)

EUT with DUT number	RM-509 DUT 24939
Accessories with DUT numbers	SD-40 DUT 24925
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 61 / 102.4
Date of measurements	03-Aug-2009
Measured by	Christian Andersen

6.1. Test setup



6.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and 27 and IC standards RSS-132, RSS-133 and RSS-139 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

6.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.50	-22	-0.0263
Nominal / 3.70	-22	-0.0263

6.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.50	-54	-0.0287
Nominal / 3.70	-52	-0.0277

6.5. WCDMA 1700 Test results

Channel 1412 / 1732.4 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.50	-149	-0.0860
Nominal / 3.70	-165	-0.0952

7. Test Equipment

7.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B

7.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24/27, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24/27, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24/27, 15C, 15B
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24/27, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24/27, 15C, 15B
20335	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter 3GHz	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
	WHK3.0/18G-10ss			
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	Highpass filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	WDCMA Band 2 filter		Wainwright	24, 15C, 15B
20114	WDCMA Band 4 filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	27, 15C, 15B
20116	WDCMA Band 5&6 filter	WRCG832/83/-825/845-40/5SS	Wainwright	22, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	22/24/27, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Magnetic Loop Antenna 9 kHz - 30 MHz	HFH2-Z2	Rohde&Schwarz	15C, 15B
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B