

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-511_10.doc	Date of Report:	24-Aug-2009
Number of pages:	21	Customer's Contact person:	Ralph Schwarz
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-511 / Battery BL-4S, AC charger AC-8E, Headset HS-105		
FCC ID:	PPIRM-511	IC:	661U-RM511
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Sami Lehtonen, System Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	14-Aug-2009
Testing completed	19-Aug-2009
The customer's contact person	Ralph Schwarz
Test Plan referred to	T:\Projects\RM-509\TestPlan_RS\RS_testplan_RM-509_CR_HW0410.xls
Notes	-
Document name	FCC15C_RM-511_10.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/IV(1700)/VIII) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-509	004401106632801	0410	-	3.10	41978
Phone	RM-509	004401106632843	0410	-	3.10	41977
Battery	BL-4S	3820668095140100000;0670577	-	-	-	41979
AC charger	AC-8E	1103338411070317367;0675387	-	-	-	41980
Headset	HS-105	0694287913411200016	-	-	-	41981

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.


"The test results of PPIRM-509 are re-used for certification of the PPIRM-511. The table above indicates the results, which will be re-used."

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Radiated test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	8
4.1. Test method and limit.....	8
4.2. Bluetooth Test results	9
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	13
5.1. Test method and limit.....	13
5.2. Bluetooth Test results	14
6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	16
6.1. Test method and limit.....	16
6.2. Bluetooth Test results	17
7. Test Equipment.....	20
7.1. Conducted measurements	20
7.2. Radiated measurements	20

2. Test setups


2.1. Conducted RF test setup

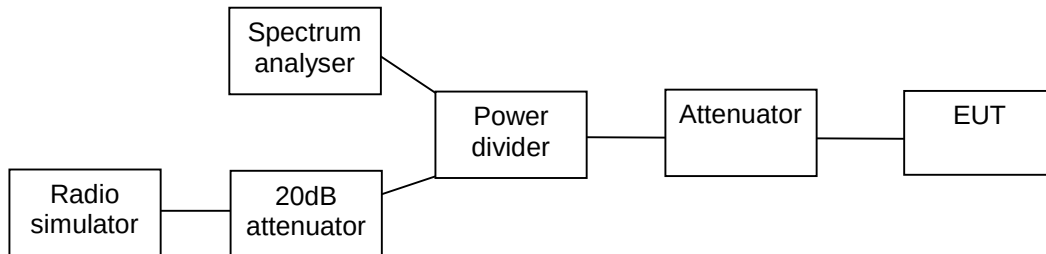

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

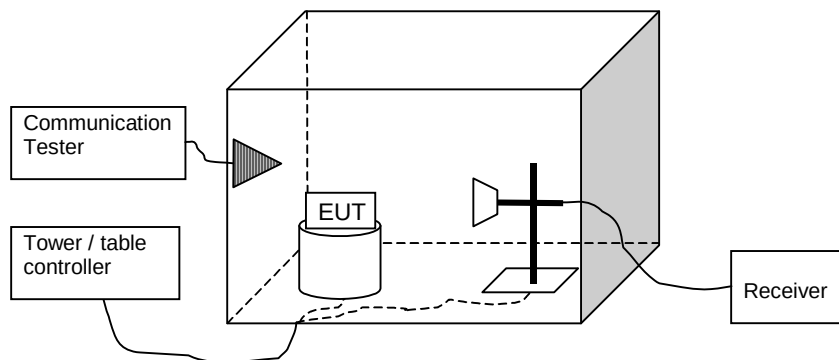

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-509 DUT41977
Accessories with DUT numbers	BL-4S DUT 41979
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 45 / 101.5
Date of measurements	19-Aug-2009
Measured by	Hannu Söderholm

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	5.80	3.802	PASSED
40 / 2442	6.80	4.786	PASSED
78 / 2480	7.40	5.495	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

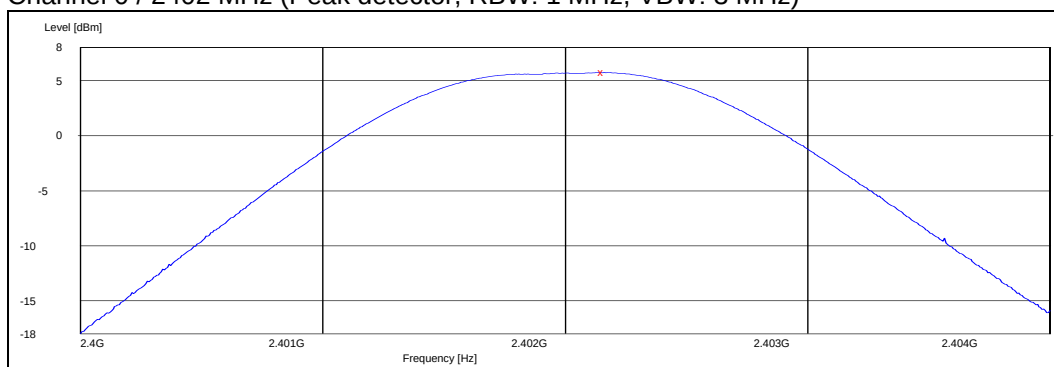

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

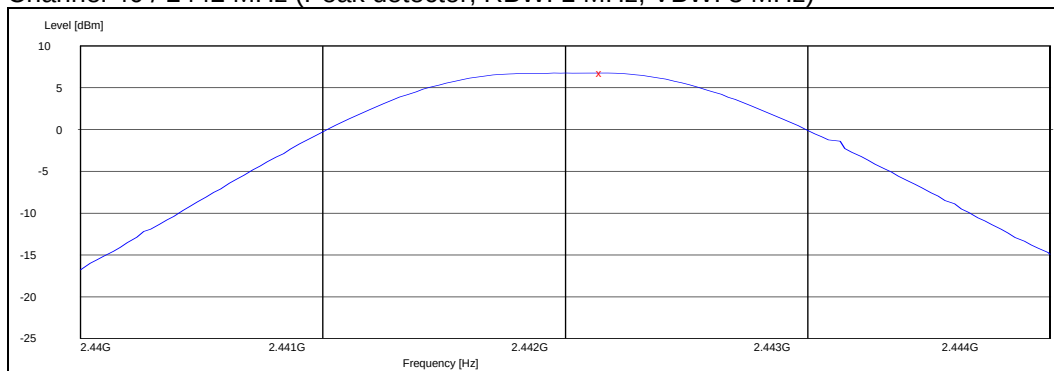


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

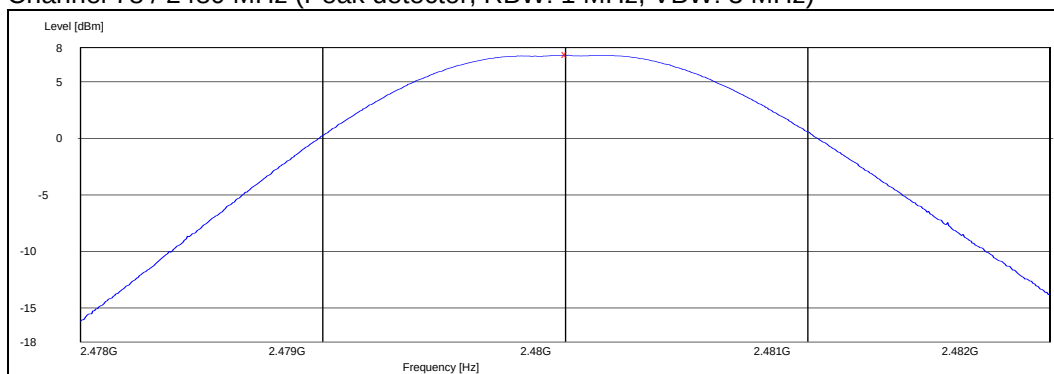


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	4.70	2.951	PASSED
40 / 2442	6.00	3.981	PASSED
78 / 2480	6.70	4.677	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

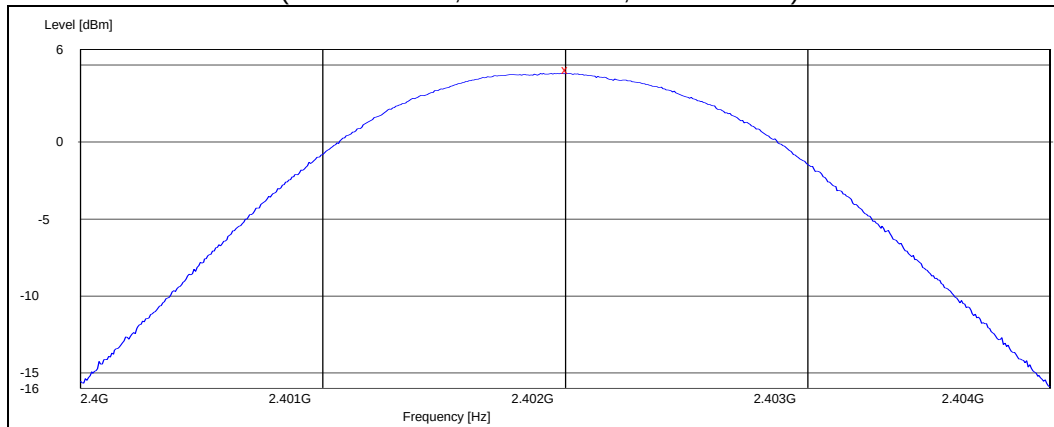

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

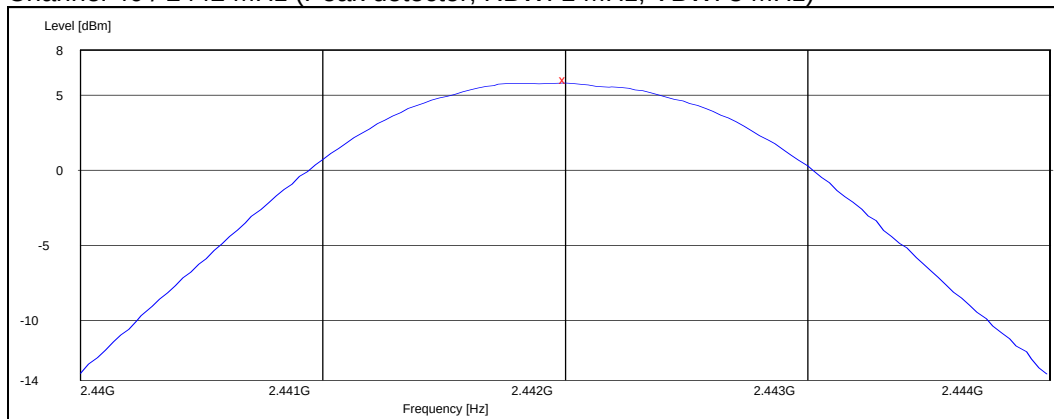

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

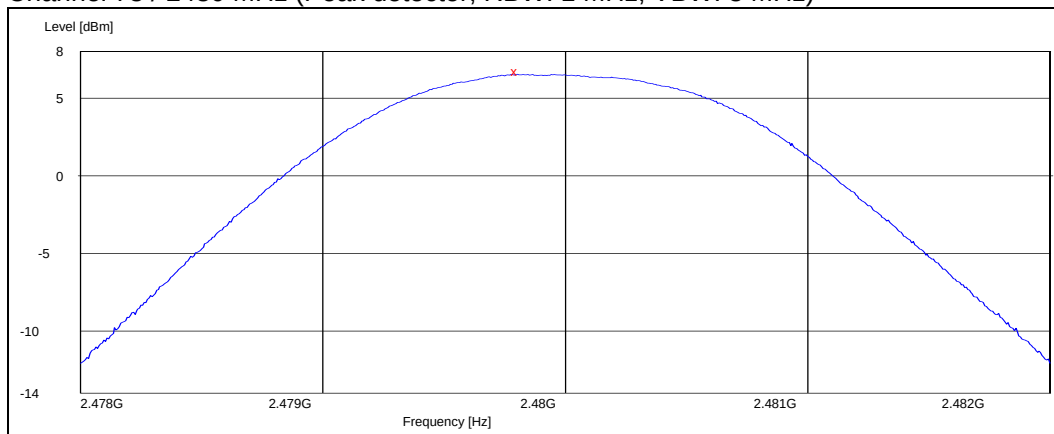

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-509 DUT 41978
Accessories with DUT numbers	BL-4S DUT 41979, AC-8E DUT 41980, HS-105 DUT 41981
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 50 / 100.5
Date of measurements	18-Aug-2009
Measured by	Jari Jantunen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

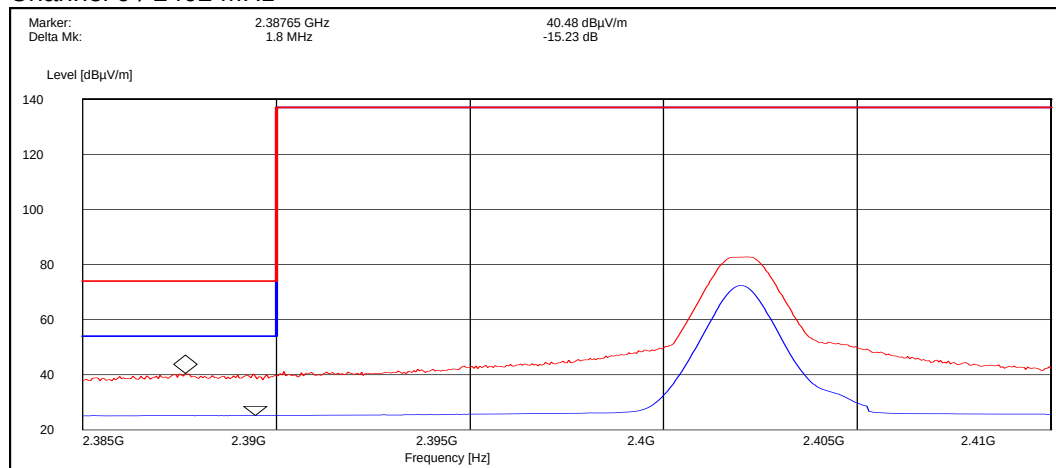


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	40.50	PASSED
Average	25.30	PASSED

Channel 78 / 2480 MHz

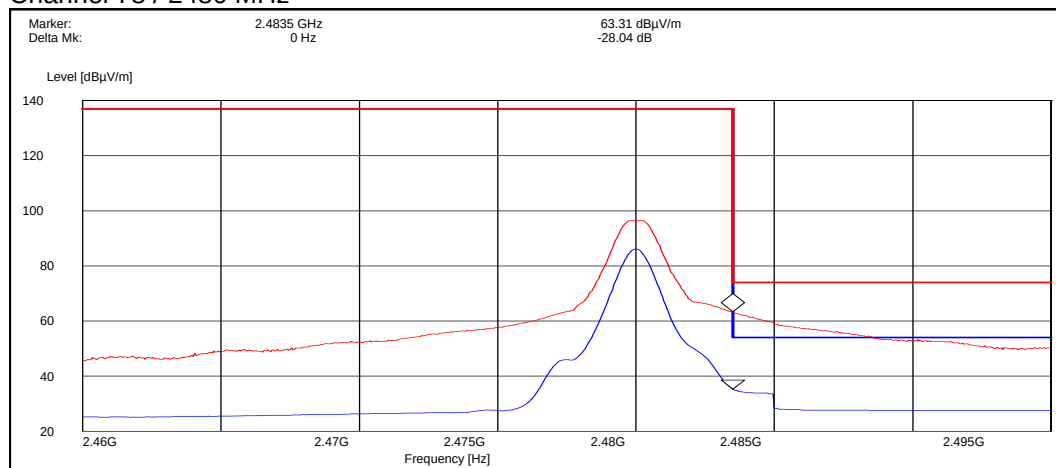


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	63.30	PASSED
Average	35.30	PASSED

Hopping on, low end

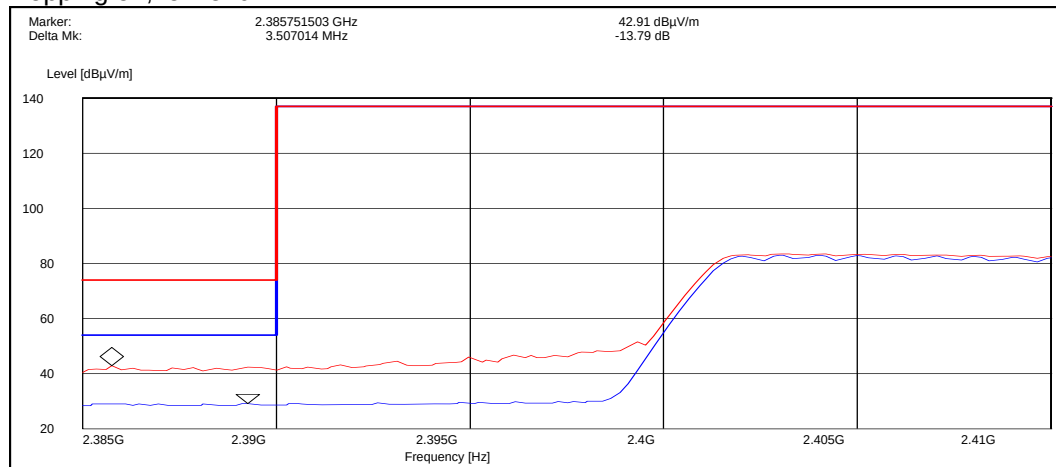

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	42.90	PASSED
Average	29.10	PASSED


Hopping on, high end

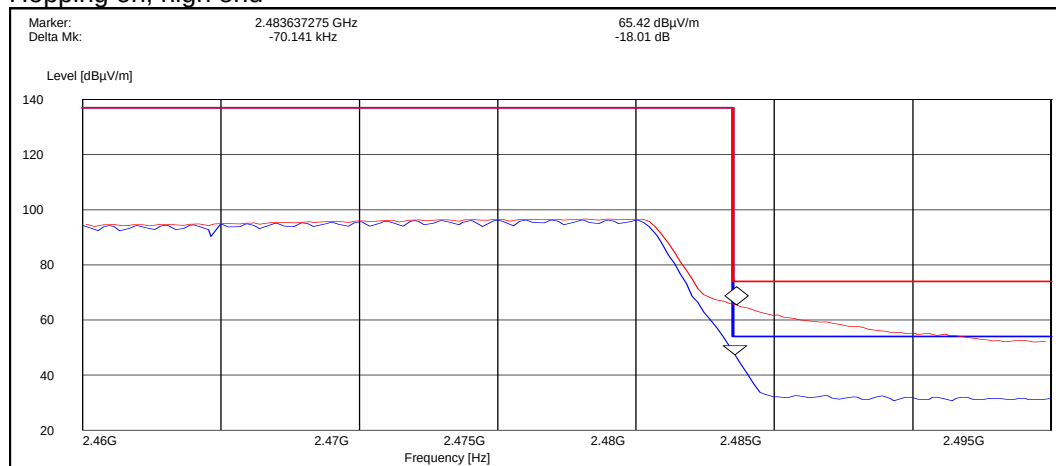

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	65.40	PASSED
Average	47.40	PASSED


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

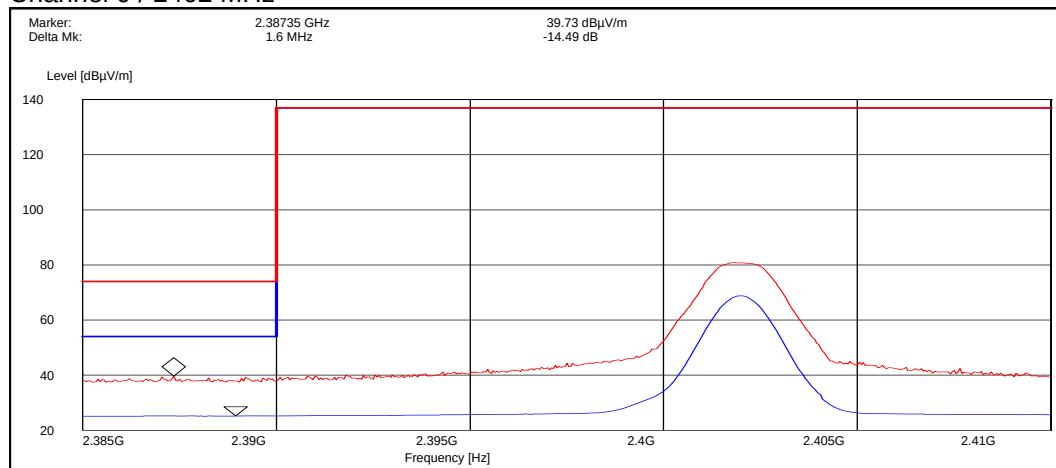


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	39.70	PASSED
Average	25.20	PASSED

Channel 78 / 2480 MHz

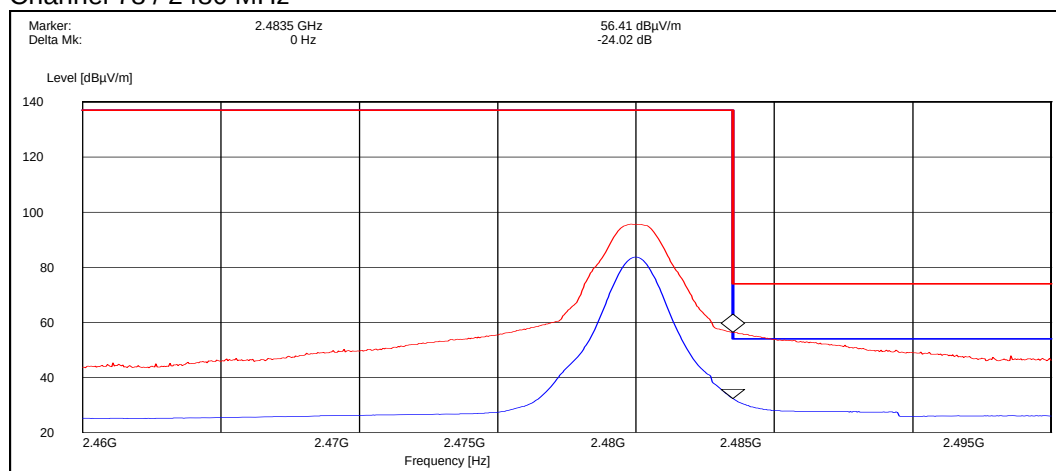


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	56.40	PASSED
Average	32.40	PASSED

Hopping on, low end

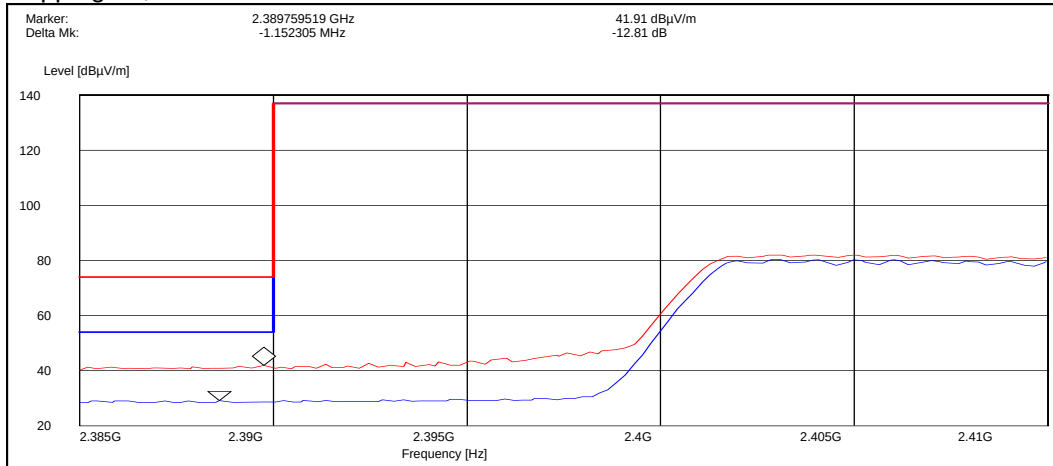

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	41.90	PASSED
Average	29.10	PASSED

Hopping on, high end

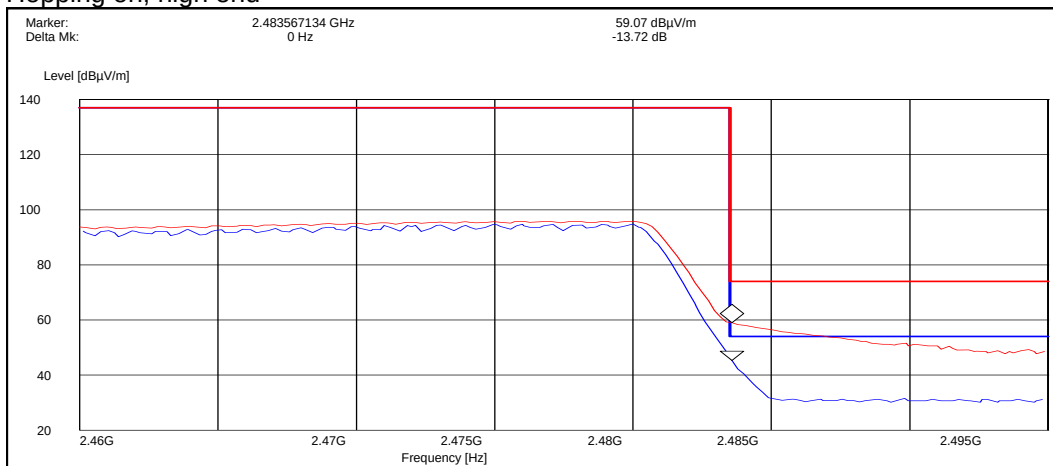

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	59.10	PASSED
Average	45.40	PASSED

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-509 DUT41977
Accessories with DUT numbers	BL-4S DUT 41979
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 45 / 101.5
Date of measurements	19-Aug-2009
Measured by	Hannu Söderholm

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

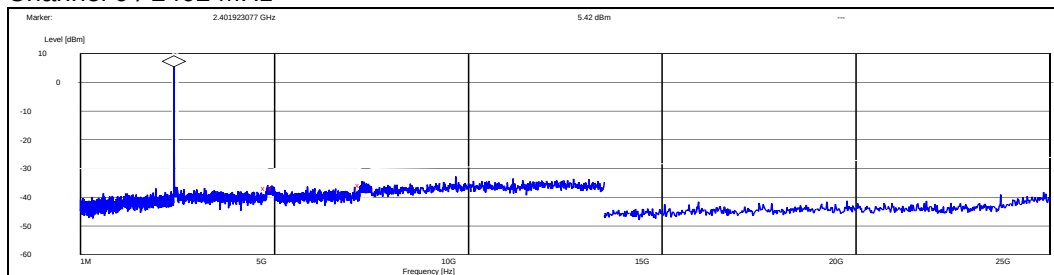

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4825.320513	-42.217118	PASSED
5000.000000	-42.317118	PASSED
7259.615385	-41.417118	PASSED


Channel 40 / 2442 MHz

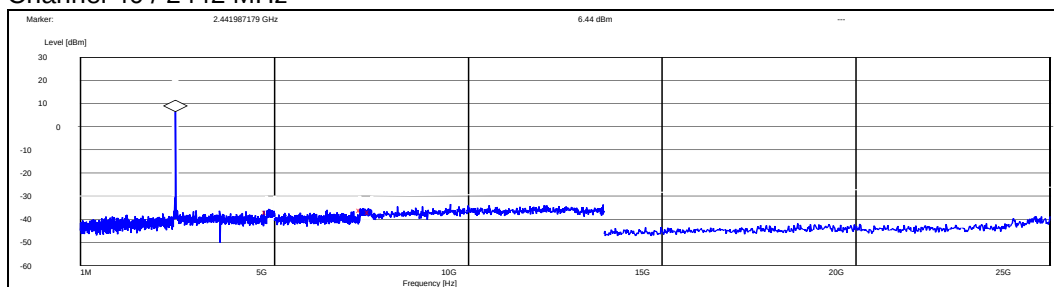

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4854.807692	-43.444193	PASSED
7287.980769	-42.644193	PASSED
7500.000000	-43.244193	PASSED

Channel 78 / 2480 MHz

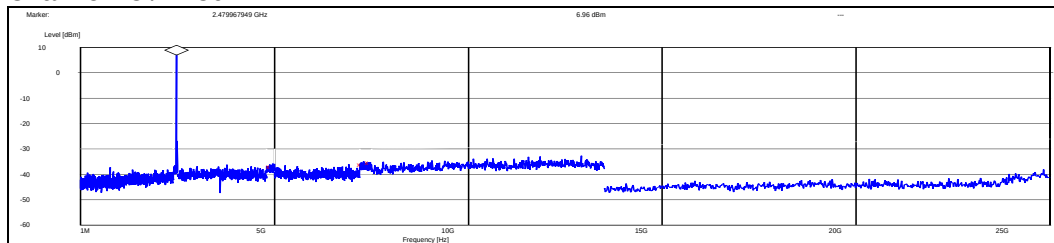


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4962.179487	-43.856352	PASSED
7295.673077	-43.156352	PASSED
7500.000000	-42.356352	PASSED

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

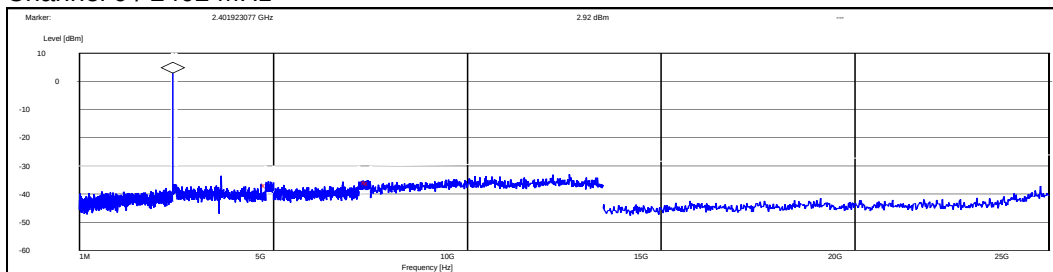

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4861.858974	-39.715394	PASSED
7436.057692	-38.715394	PASSED
7500.000000	-39.015394	PASSED


Channel 40 / 2442 MHz

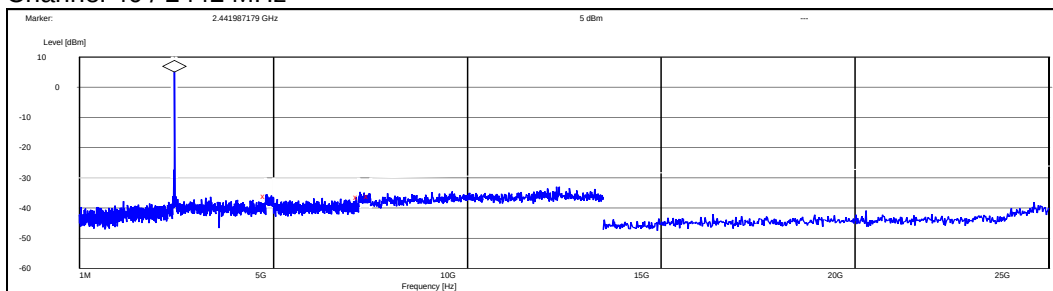

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4839.102564	-41.097255	PASSED
7229.326923	-41.397255	PASSED
7500.000000	-40.997255	PASSED

Channel 78 / 2480 MHz

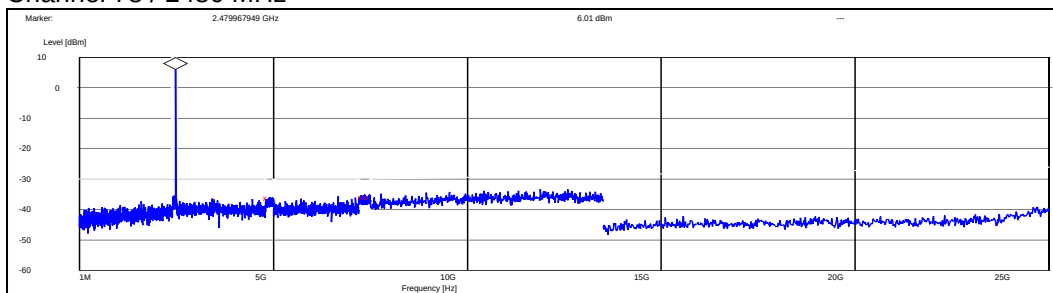

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4914.423077	-42.212306	PASSED
7350.480769	-42.012306	PASSED
7500.000000	-42.012306	PASSED

6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-509 DUT 41978
Accessories with DUT numbers	BL-4S DUT 41979, AC-8E DUT 41980, HS-105 DUT 41981
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 50 / 100.5
Date of measurements	18-Aug-2009
Measured by	Jari Jantunen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	43.20	144.54	44.30	-1.1	HORIZONTAL	PASSED
7206.000000	42.80	138.04	40.00	2.8	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	29.90	31.26	31.00	-1.1	HORIZONTAL	PASSED
7206.000000	29.90	31.26	27.10	2.8	HORIZONTAL	PASSED

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
33.145291	36.50	66.83	47.40	-10.9	VERTICAL	PASSED
38.176353	28.50	26.61	42.70	-14.2	VERTICAL	PASSED
73.386573	20.20	10.23	44.00	-23.8	HORIZONTAL	PASSED
74.169940	20.30	10.35	44.00	-23.7	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4884.269539	43.70	153.11	45.10	-1.4	HORIZONTAL	PASSED
7314.625251	43.30	146.22	39.90	3.4	VERTICAL	PASSED
7317.631263	43.30	146.22	39.90	3.4	VERTICAL	PASSED
9769.037074	56.10	638.26	48.60	7.5	VERTICAL	PASSED
17886.269539	53.50	473.15	33.90	19.6	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4884.769539	27.40	23.44	28.80	-1.4	HORIZONTAL	PASSED
7313.625251	30.60	33.88	27.20	3.4	VERTICAL	PASSED
7313.631263	30.70	34.28	27.30	3.4	VERTICAL	PASSED
9768.037074	41.90	124.45	34.40	7.5	VERTICAL	PASSED

17887.269539	40.70	108.39	21.10	19.6	VERTICAL	PASSED
--------------	-------	--------	-------	------	----------	--------

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	44.60	169.82	45.10	-0.5	VERTICAL	PASSED
7440.000000	45.10	179.89	41.60	3.5	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	31.00	35.48	31.50	-0.5	VERTICAL	PASSED
7440.000000	30.70	34.28	27.20	3.5	VERTICAL	PASSED

6.2.2 8DPSK modulation, PRBS packet type

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	40.60	107.15	41.70	-1.1	VERTICAL	PASSED
7206.000000	42.60	134.90	39.80	2.8	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	29.30	29.17	30.40	-1.1	VERTICAL	PASSED
7206.000000	29.90	31.26	27.10	2.8	VERTICAL	PASSED

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.676353	18.90	8.81	32.80	-13.9	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	43.10	142.89	44.60	-1.5	VERTICAL	PASSED
4953.901804	40.10	101.16	40.60	-0.5	HORIZONTAL	PASSED
7270.537074	42.70	136.46	39.40	3.3	HORIZONTAL	PASSED
7316.125251	43.00	141.25	39.60	3.4	VERTICAL	PASSED
17905.313627	54.10	506.99	34.10	20.0	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4884.769539	27.40	23.44	28.80	-1.4	VERTICAL	PASSED
4952.401804	27.50	23.71	28.10	-0.6	HORIZONTAL	PASSED
7271.037074	30.30	32.73	27.00	3.3	HORIZONTAL	PASSED

7309.125251	30.60	33.88	27.10	3.5	VERTICAL	PASSED
17906.813627	41.00	112.20	21.10	19.9	VERTICAL	PASSED

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	43.20	144.54	43.70	-0.5	VERTICAL	PASSED
7440.000000	43.20	144.54	39.70	3.5	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	31.40	37.15	31.90	-0.5	VERTICAL	PASSED
7440.000000	30.00	31.62	26.50	3.5	HORIZONTAL	PASSED

7. Test Equipment

7.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

7.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B