

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CWLANg_RM-714_13.docx	Date of Report:	23-Dec-2011
Number of pages:	17	Customer's Contact person:	Bruno Ramelli
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-714 / Battery BL-4U / AC charger AC-11E / Headset WH-102		
FCC ID:	PPIRM-714	IC:	661U-RM714
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	14-Dec-2011
Testing completed	23-Dec-2011
The customer's contact person	Bruno Ramelli
Test Plan referred to	T:\Projects\RM-714\TestPlan\RS_testplan_RM-714.xls
Notes	-
Document name	T:\Projects\RM-714\EMC\FCC15CWLANg_RM-714_13.docx

1.1. EUT and Accessory Information

The EUT is a 9-band mobile phone:

GSM850/900/1800/1900/GPRS/EGPRS

WCDMA I/II(1900)/IV(1700)/V(850)/VIII/HSDPA/HSUPA

WLAN/Bluetooth

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-714	004402136825662	0420	-	Vp hwi11w47	42723
Battery	BL-4U	4620408324i20179508;0670560	-	-	-	42730
AC charger	AC-11E	4090491212970500298;0675479	-	-	-	42735
Headset	WH-102	06943230363MA615055	-	-	-	42736

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	NP
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(2)	A8.2 (a)	6dB(bandwidth)	NP
15.247(e)	A8.2 (b)	Power spectral density	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	4
2.2. Test method and limit.....	4
2.3. WLANg Test results	5
3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	8
3.2. Test method and limit.....	8
3.3. WLAN Test results	10
4. Test Equipment.....	16
4.1. Conducted measurements	16
4.2. Radiated measurements	16

2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-714, DUT 42723
Accessories with DUT numbers	BL-4U, DUT 42730 ; AC-11E, DUT 42735 ; WH-102, DUT 42736
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 52 / 98.3
Date of measurements	12-Dec-2011
Measured by	Jari Jantunen

2.1.1 Test Setup

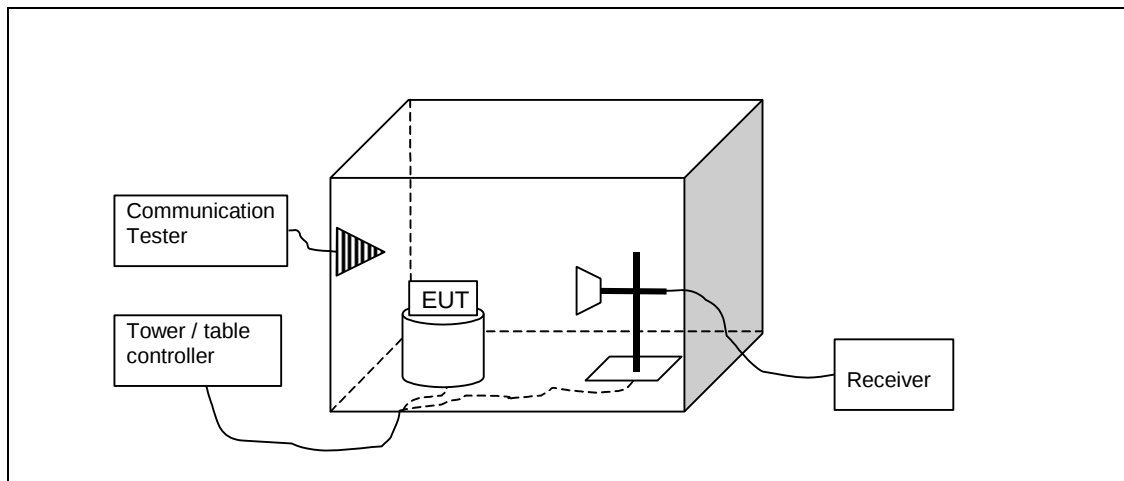

2.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

2.3. WLANg Test results


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
1 / 2412 (DSSS, QPSK, 11)	50.54	PASSED
11 / 2462 (DSSS, QPSK, 11)	44.61	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
1 / 2412 (DSSS, QPSK, 11)	58.31	PASSED
11 / 2462 (DSSS, QPSK, 11)	53.3	PASSED

DSSS mode, QPSK modulation, 11 Mbps data rate. Channel 1 / 2412 MHz

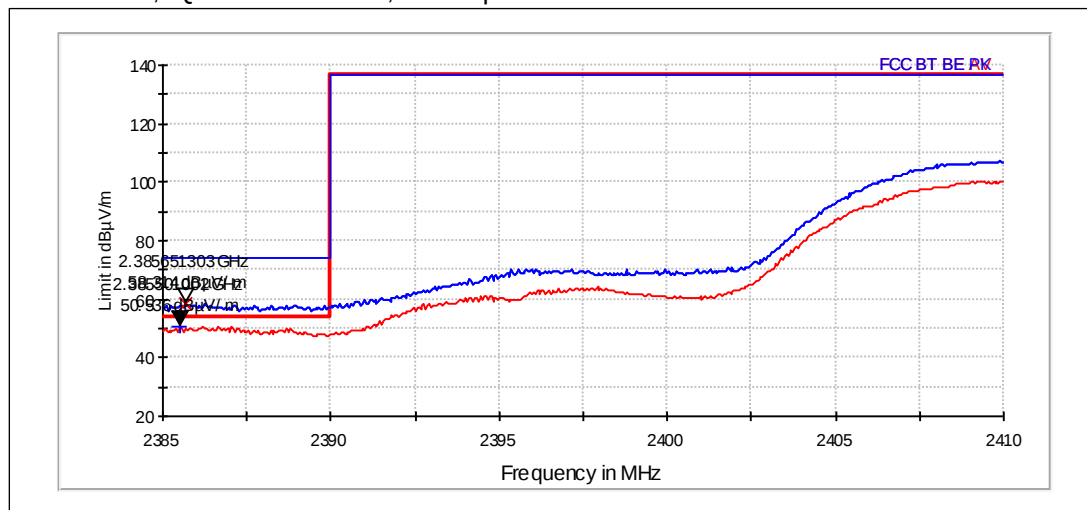

DSSS mode, QPSK modulation, 11 Mbps data rate. Channel 11 / 2462 MHz

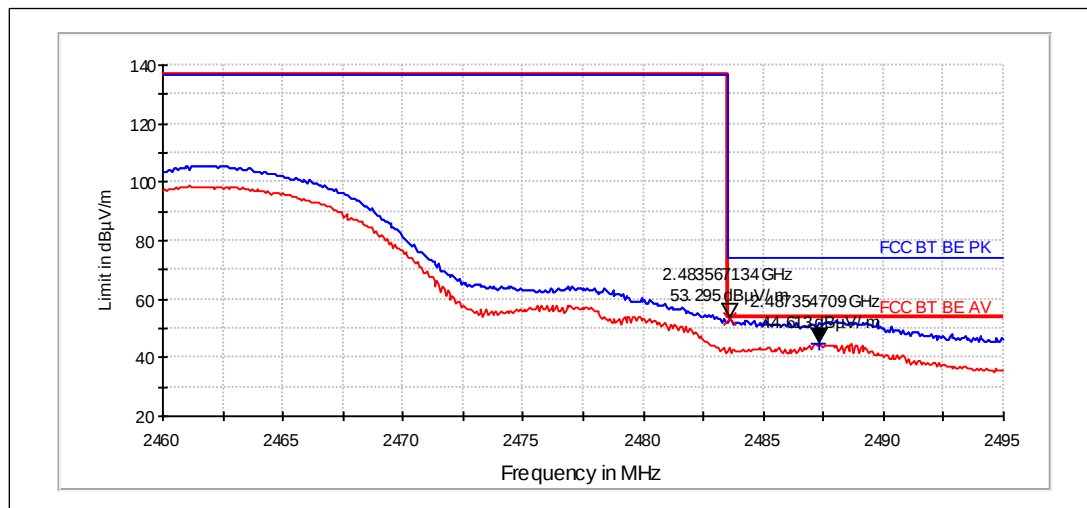


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
1 / 2412 (OFDM, BPSK, 6)	51.09	PASSED
11 / 2462 (OFDM, BPSK, 6)	50.33	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
1 / 2412 (OFDM, BPSK, 6)	64.95	PASSED
11 / 2462 (OFDM, BPSK, 6)	64.49	PASSED

OFDM mode, BPSK modulation, 6 Mbps data rate. Channel 1 / 2412 MHz

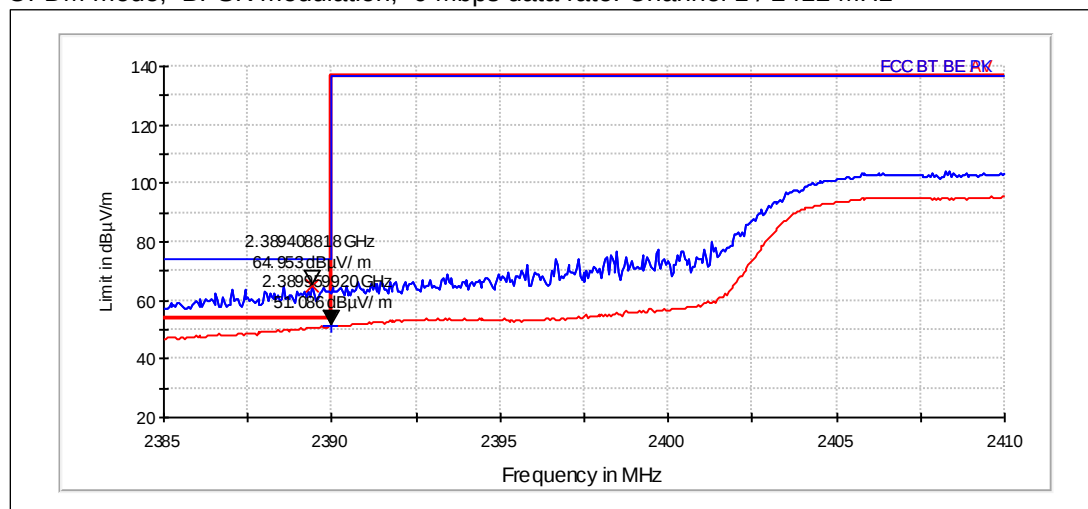

OFDM mode, BPSK modulation, 6 Mbps data rate. Channel 11 / 2462 MHz

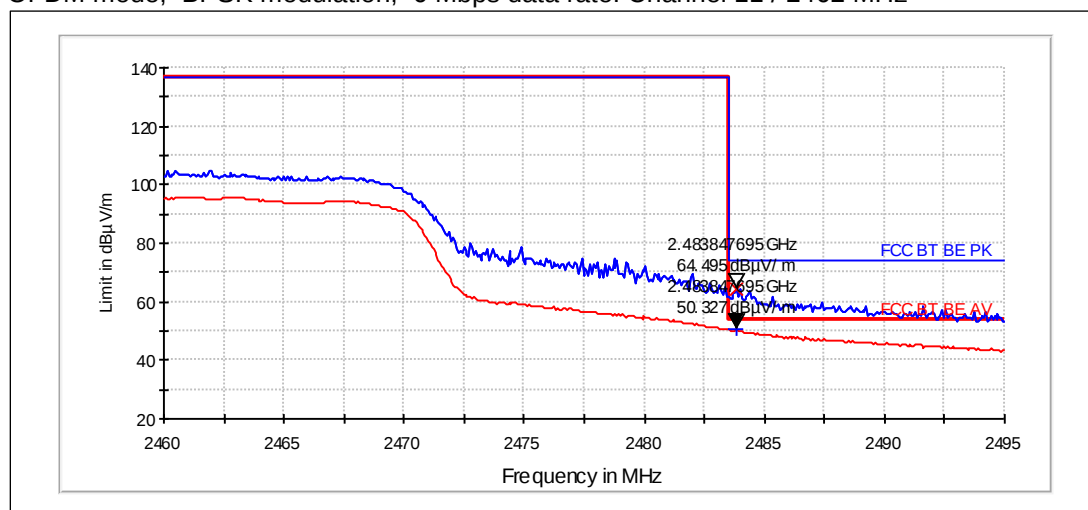


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
1 / 2412 (802.11n HT20 MCS0)	53.67	PASSED
11 / 2462 (802.11n HT20 MCS0)	50.57	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
1 / 2412 (802.11n HT20 MCS0)	66.56	PASSED
11 / 2462 (802.11n HT20 MCS0)	67.77	PASSED

802.11n HT20 MCS0 mode, QPSK modulation, Mbps data rate. Channel 1 / 2412 MHz

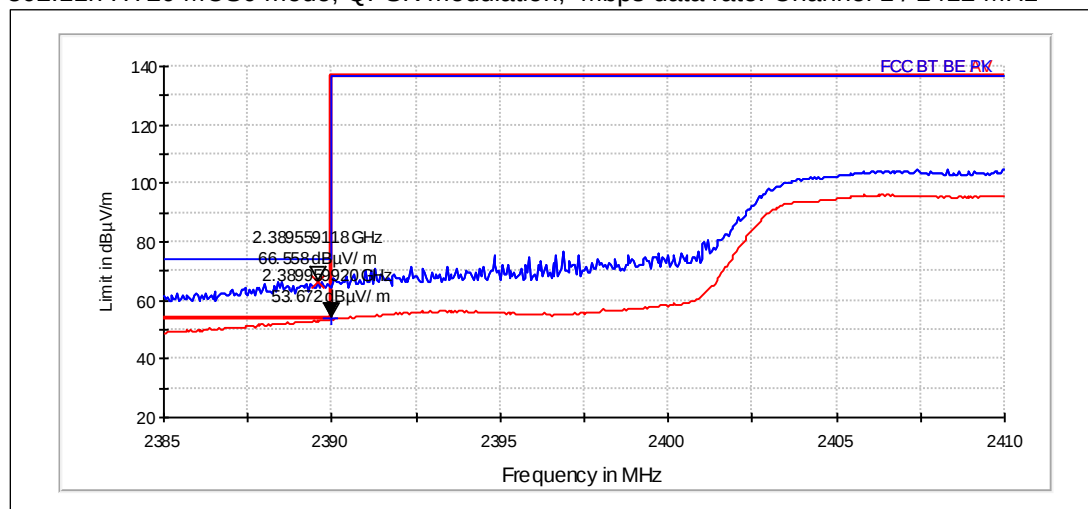


802.11n HT20 MCS0 mode, QPSK modulation, Mbps data rate. Channel 11 / 2462 MHz

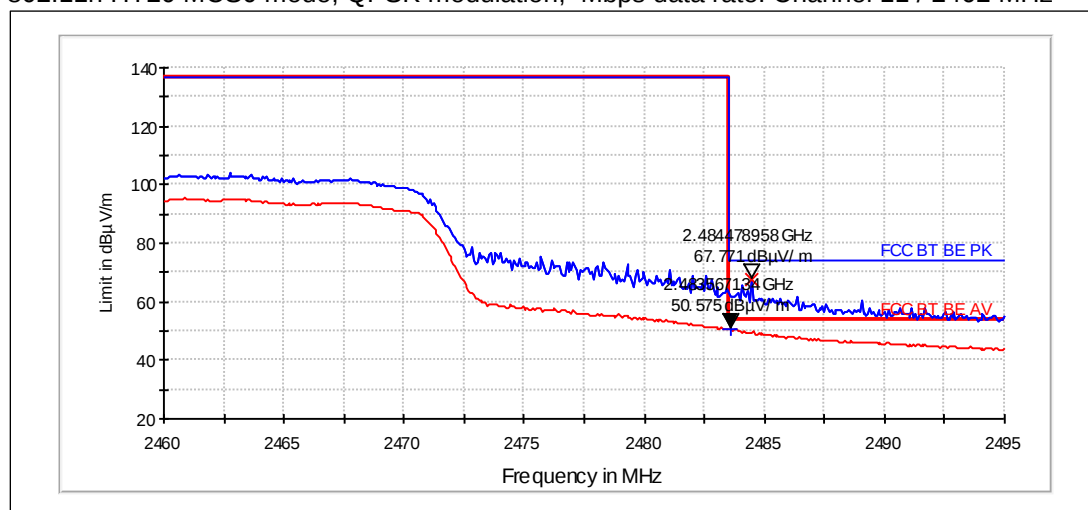

3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-714, DUT 42723
Accessories with DUT numbers	BL-4U, DUT 42730 ; AC-11E, DUT 42735 ; WH-102, DUT 42736
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 52 / 98.3
Date of measurements	12-Dec-2011
Measured by	Jari Jantunen

3.1.1 Test Setup

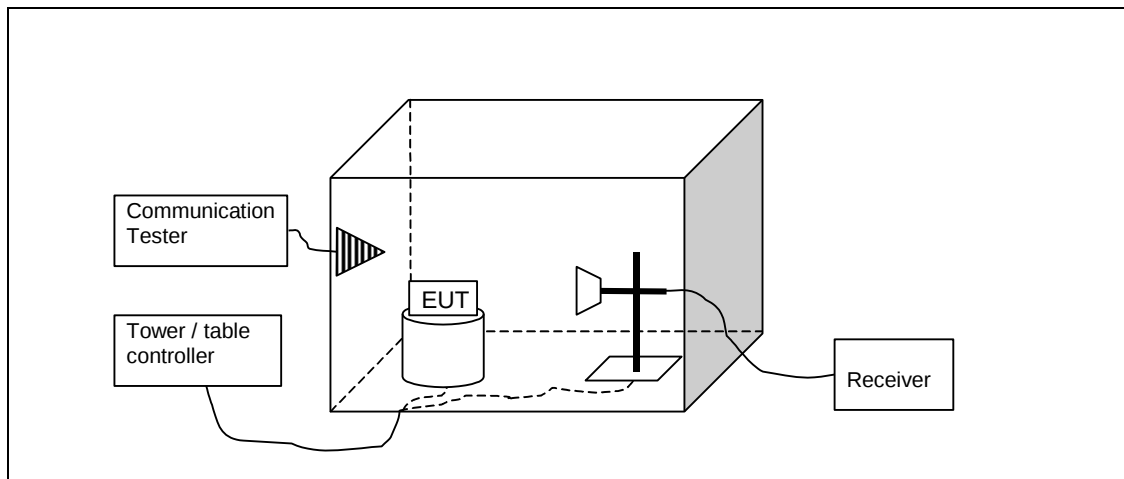

3.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. WLAN Test results

3.3.1 WLAN TX DSSS mode QPSK modulation 11 Mbps data speed

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824	45.76	193.999	48.01	-2.25	HORIZONTAL	PASSED
7235.8	49.94	314.123	48.26	1.68	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824	34.69	54.288	36.94	-2.25	HORIZONTAL	PASSED
7235.8	35.57	60.062	33.89	1.68	HORIZONTAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
31.74	25.46	18.754	47.51	-22.05	VERTICAL	PASSED
31.77	20.32	10.371	42.38	-22.06	VERTICAL	PASSED
31.83	24.3	16.4	46.38	-22.08	VERTICAL	PASSED
33.57	21.96	12.529	44.7	-22.74	VERTICAL	PASSED
34.88	25.04	17.869	48.28	-23.24	VERTICAL	PASSED
946.022	35.59	60.173	50.01	-14.42	HORIZONTAL	PASSED
956.012	36.78	69	51.25	-14.47	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3907.716	39.22	91.422	42.5	-3.28	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3907.716	25.95	19.84	29.23	-3.28	VERTICAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924	45.78	194.536	48.13	-2.35	HORIZONTAL	PASSED
7386	51.02	355.549	49.01	2.01	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924	34.07	50.501	36.42	-2.35	HORIZONTAL	PASSED
7386	35.85	61.987	33.84	2.01	HORIZONTAL	PASSED

3.3.2 WLAN TX OFDM mode BPSK modulation 6 Mbps data speed

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4822.7	42.1	127.35	44.36	-2.26	HORIZONTAL	PASSED
7235.5	47.83	246.434	46.14	1.69	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4822.7	28.15	25.548	30.41	-2.26	HORIZONTAL	PASSED
7235.5	32.81	43.682	31.12	1.69	HORIZONTAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.39	23.94	15.745	45.48	-21.54	VERTICAL	PASSED
30.39	23.83	15.536	45.37	-21.54	VERTICAL	PASSED
30.45	18.34	8.257	39.9	-21.56	VERTICAL	PASSED
32.989	24.83	17.436	47.35	-22.52	VERTICAL	PASSED
34.7	25.46	18.739	48.63	-23.17	VERTICAL	PASSED
946.022	35.13	57.095	49.55	-14.42	HORIZONTAL	PASSED
956.012	36.9	69.976	51.37	-14.47	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3907.816	39.22	91.422	42.5	-3.28	VERTICAL	PASSED
3936.772	39.15	90.657	42.38	-3.23	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3907.816	25.89	19.704	29.17	-3.28	VERTICAL	PASSED
3936.772	26.21	20.439	29.44	-3.23	HORIZONTAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4922.7	42.69	136.254	45.03	-2.34	HORIZONTAL	PASSED
7386.9	48.55	267.547	46.53	2.02	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4922.7	29.48	29.782	31.82	-2.34	HORIZONTAL	PASSED
7386.9	33.22	45.83	31.2	2.02	HORIZONTAL	PASSED

3.3.3 802.11n HT20 MCS0

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.1	40.83	109.977	43.01	-2.18	VERTICAL	PASSED
7236.1	47.58	239.414	45.9	1.68	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.1	27.28	23.115	29.46	-2.18	VERTICAL	PASSED
7236.1	33.14	45.394	31.46	1.68	HORIZONTAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
33	24.57	16.93	47.1	-22.53	VERTICAL	PASSED
34.902	25.09	17.966	48.34	-23.25	VERTICAL	PASSED
39.59	20.69	10.832	45.84	-25.15	VERTICAL	PASSED
909.622	21.62	12.055	37.06	-15.44	VERTICAL	PASSED
945.932	35.47	59.354	49.89	-14.42	HORIZONTAL	PASSED
950.131	35.22	57.65	49.69	-14.47	HORIZONTAL	PASSED
956.062	35.79	61.581	50.26	-14.47	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3917.038	38.5	84.091	41.87	-3.37	HORIZONTAL	PASSED
3943.787	39.35	92.811	42.37	-3.02	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3917.038	25.99	19.939	29.36	-3.37	HORIZONTAL	PASSED
3943.787	26.39	20.857	29.41	-3.02	VERTICAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.8	41.89	124.337	44.22	-2.33	HORIZONTAL	PASSED
7384.3	49.51	298.951	47.51	2	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.8	28.71	27.262	31.04	-2.33	HORIZONTAL	PASSED
7384.3	34.12	50.793	32.12	2	HORIZONTAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM06312	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
-	High pass filter	WHKX 1.6/15G-12SS	Wainwright	22/24/27, 15C, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	22
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C