

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-721_11.docx	Date of Report:	03-Dec-2010
Number of pages:	14	Customer's Contact person:	Tobias Cremer
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-721 / Battery BL-5C / AC charger AC-3E / Headset WH-102		
FCC ID:	PPIRM-721	IC:	661U-RM721
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	17-Nov-2010
Testing completed	18-Nov-2010
The customer's contact person	Tobias Cremer
Test Plan referred to	T:\Projects\RM-722\TestPlan\RS_testplan_RM-722.xls
Notes	-
Document name	T:\Projects\RM-722\EMC\FCC15C_RM-722_06.docx

1.1. EUT and Accessory Information

The EUT is a 8-band (GSM850/900/1800/1900) and WCDMA Band (I/II(1900)/VIII) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-722	004402132259536;8DA187522	0220	-	Vp jn09w09_10w39	42409
Battery	BL-5C	0670400462040R293A12001737	-	-	-	42410
AC charger	AC-3E	4090498422971301617;0675370	-	-	-	42411
Headset	WH-102	06943238376B3100389	-	-	-	42413

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	NP
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Laboratory.

The test results of PPIRM-722 are re-used for certification of the PPIRM -721. The table above indicates the results, which will be re-used.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	4
2.2. Test method and limit	4
2.3. Bluetooth Test results.....	5
3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	9
3.2. Test method and limit	10
3.3. Bluetooth Test results.....	11
4. Test Equipment	13
4.1. Conducted measurements	13
4.2. Radiated measurements	14

2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-722, DUT 42409
Accessories with DUT numbers	BL-5C, DUT 42410 ; AC-3E, DUT 42411 ; WH-102, DUT 42413
Operation Voltage [V] / [Hz]	110V / 60Hz
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 47 / 103.2
Date of measurements	17-Nov-2010
Measured by	Hannu Söderholm

2.1.1 Test Setup

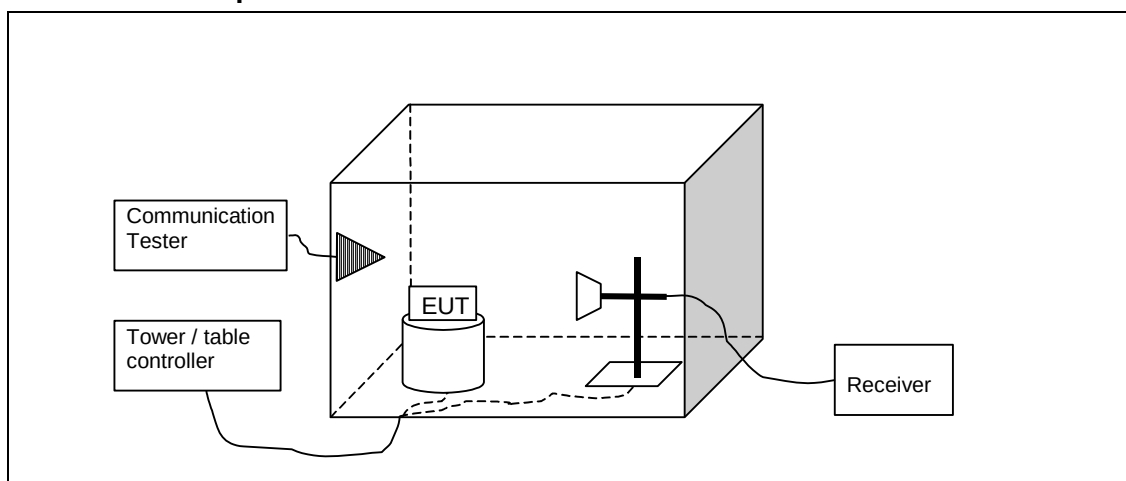

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

2.3. Bluetooth Test results

2.3.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Result
0 / 2402	32.85	43.898	41.77	-8.92	PASSED
Hopping on, low end	34.95	55.937	43.87	-8.92	PASSED
78 / 2480	51.94	395.212	60.65	-8.71	PASSED
Hopping on, high end	51.81	389.342	60.52	-8.71	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Result
0 / 2402	53.43	469.619	62.35	-8.92	PASSED
Hopping on, low end	54.02	502.19	62.94	-8.92	PASSED
78 / 2480	70.57	3377.328	79.28	-8.71	PASSED
Hopping on, high end	70.21	3238.128	78.92	-8.71	PASSED


GFSK mode. Channel 0 / 2402 MHz

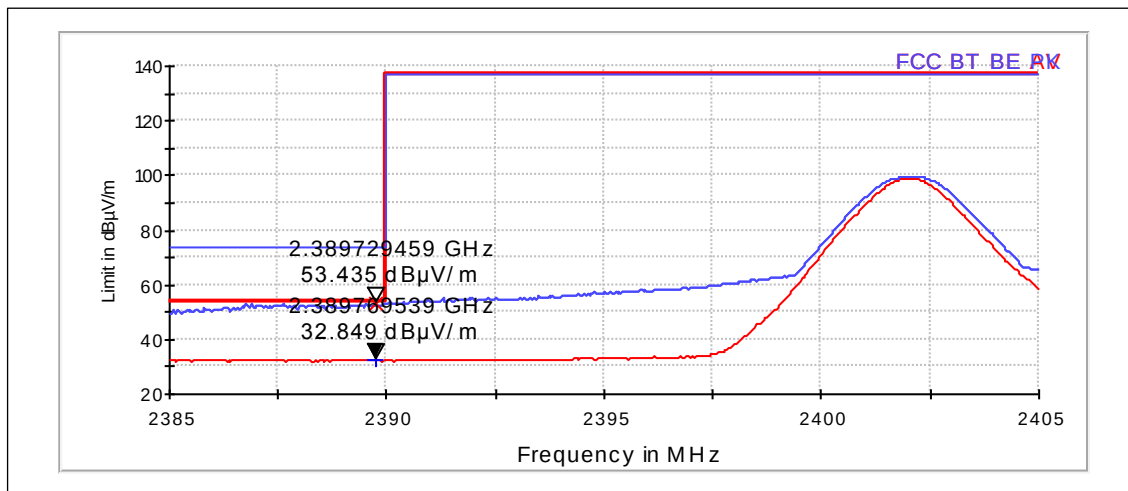


GFSK mode. Hopping on, low end

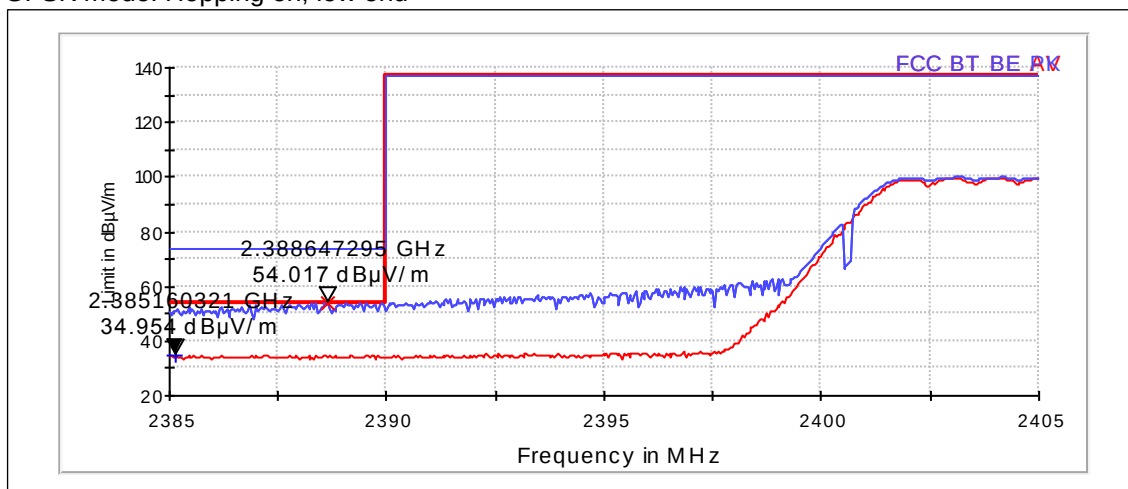

GFSK mode. Channel 78 / 2480 MHz

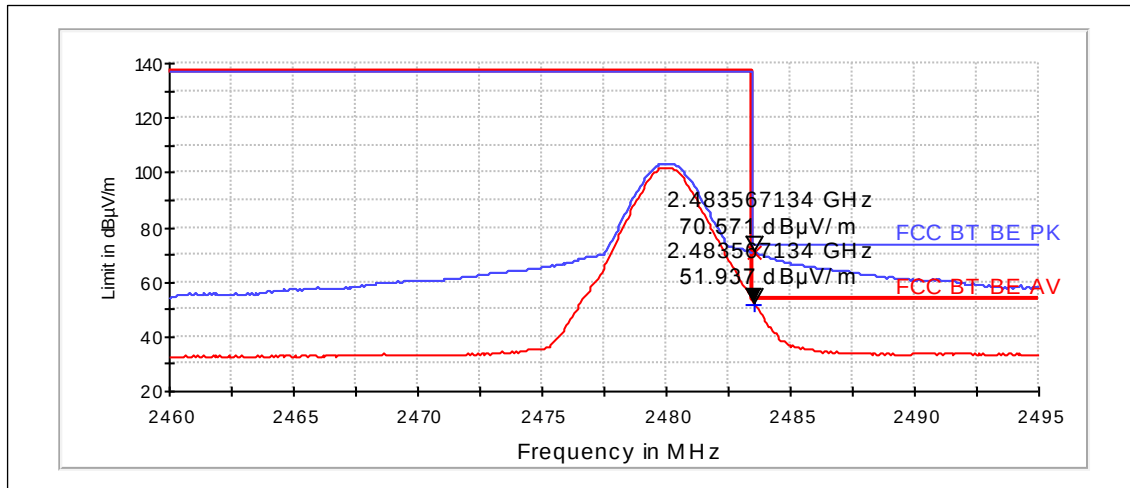

GFSK mode. Hopping on, high end

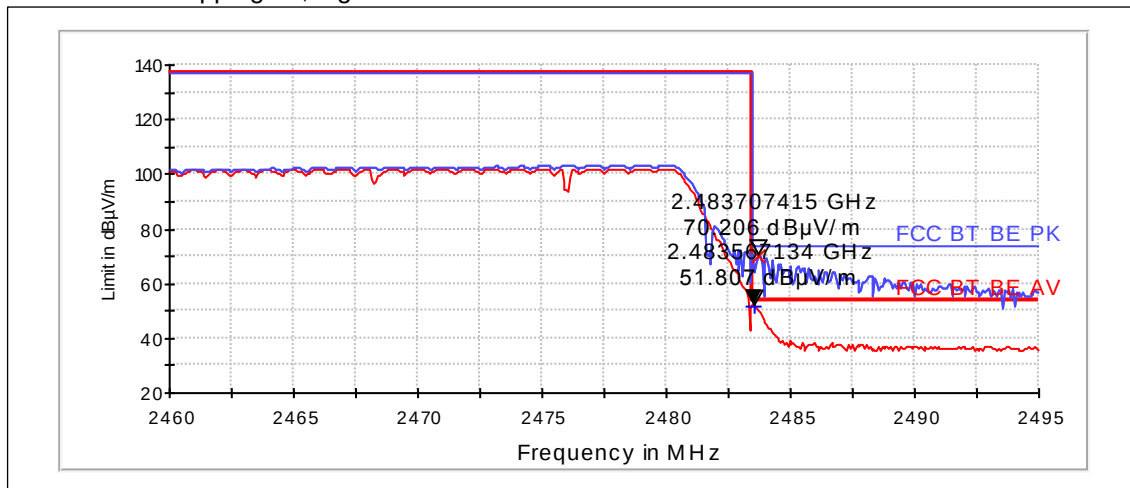

2.3.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	32.81	43.722	41.73	-8.92	PASSED
Hopping on, low end	34.49	53.056	43.41	-8.92	PASSED
78 / 2480	50.64	340.43	59.35	-8.71	PASSED
Hopping on, high end	51.17	361.952	59.88	-8.71	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	51.02	355.709	59.94	-8.92	PASSED
Hopping on, low end	51.67	383.331	60.59	-8.92	PASSED
78 / 2480	64.14	1611.54	72.85	-8.71	PASSED
Hopping on, high end	61.87	1240.005	70.58	-8.71	PASSED


8DPSK mode. Channel 0 / 2402 MHz

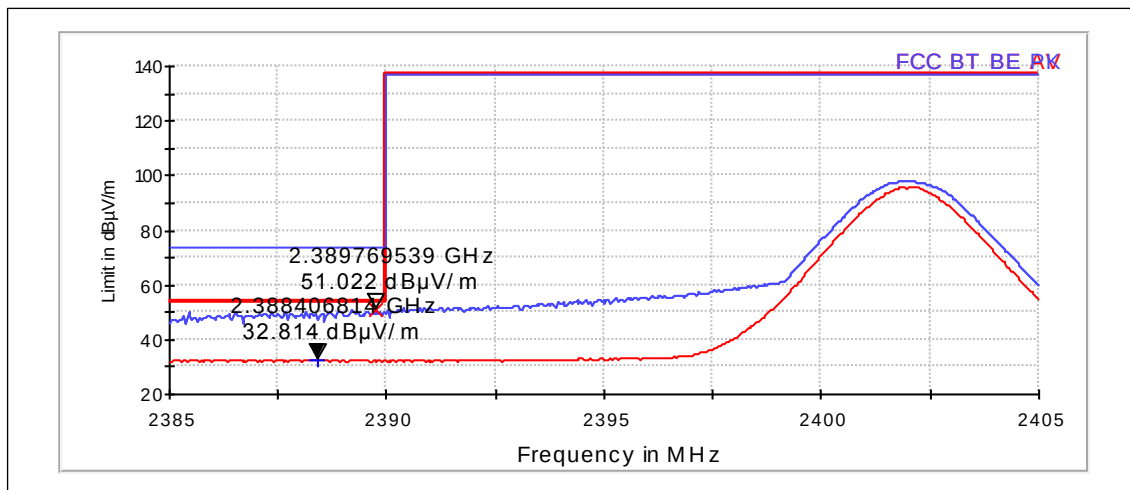


8DPSK mode. Hopping on, low end

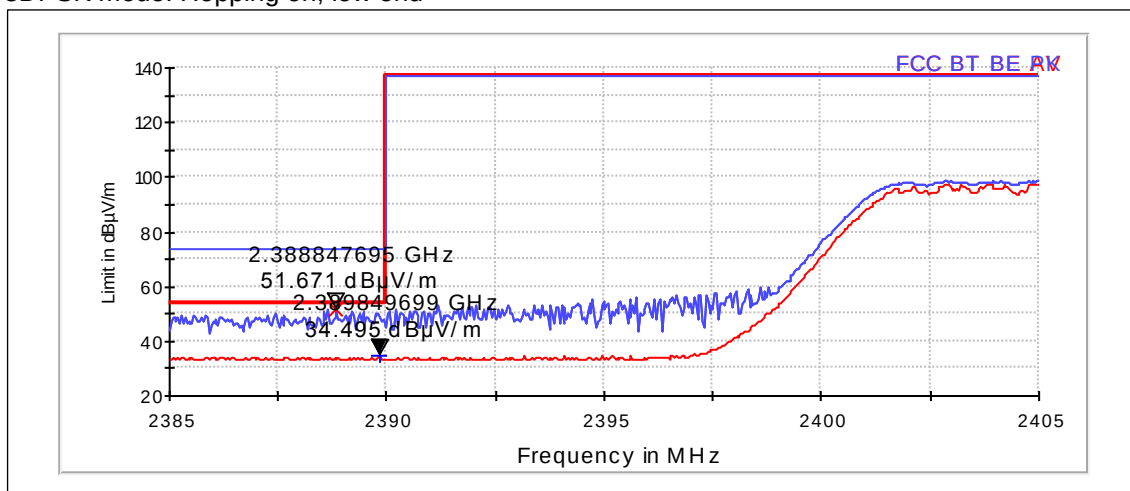

8DPSK mode. Channel 78 / 2480 MHz

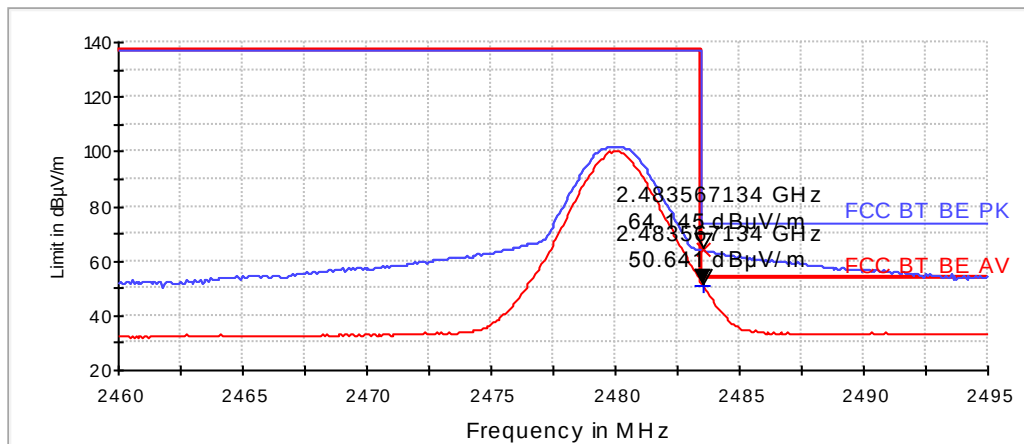


8DPSK mode. Hopping on, high end

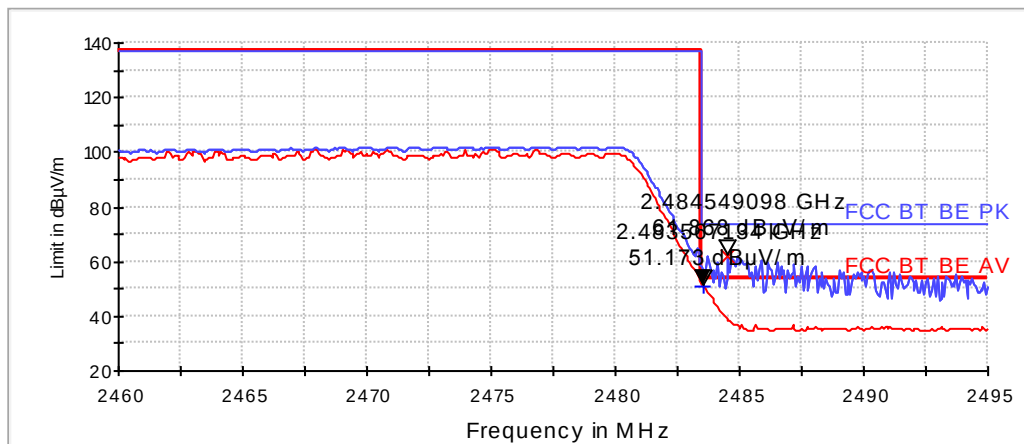

3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-722, DUT 42409
Accessories with DUT numbers	BL-5C, DUT 42410 ; AC-3E, DUT 42411 ; WH-102, DUT 42413
Operation Voltage [V] / [Hz]	110V / 60Hz
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 102.2
Date of measurements	18-Nov-2010
Measured by	Hannu Söderholm

3.1.1 Test Setup

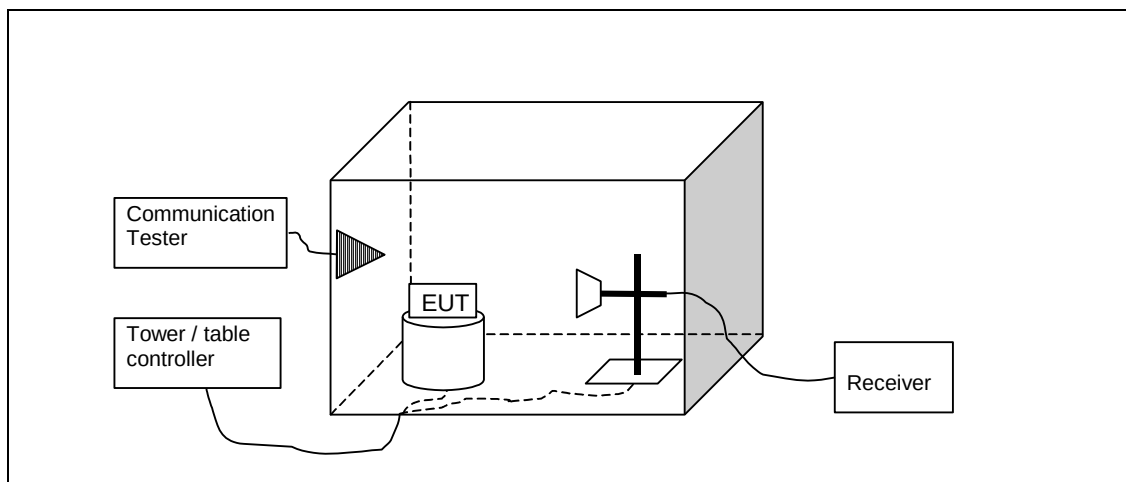

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4803.9	39.99	99.839	42.74	-2.75	HORIZONTAL	PASSED
7205.8	43.3	146.134	42.49	0.81	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4803.9	27.3	23.171	30.05	-2.75	HORIZONTAL	PASSED
7205.8	30.21	32.389	29.4	0.81	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.33	19.83	9.808	41.46	-21.63	VERTICAL	PASSED
32.808	26.34	20.749	48.91	-22.57	VERTICAL	PASSED
33.206	31.12	35.967	53.84	-22.72	VERTICAL	PASSED
33.527	26.07	20.116	48.91	-22.84	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2496.945	51.26	365.553	56.64	-5.38	HORIZONTAL	PASSED
3907.113	40.2	102.27	42.87	-2.67	HORIZONTAL	PASSED
3941.679	40.69	108.318	43.38	-2.69	VERTICAL	PASSED
17846.389	60.32	1037.409	40.31	20.01	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2496.945	32.3	41.2	37.68	-5.38	HORIZONTAL	PASSED
3907.113	27.21	22.925	29.88	-2.67	HORIZONTAL	PASSED
3941.679	27.34	23.273	30.03	-2.69	VERTICAL	PASSED
17846.389	46.76	217.721	26.75	20.01	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959.9	43.11	143.103	44.85	-1.74	HORIZONTAL	PASSED
7441.6	43.96	157.797	42.48	1.48	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959.9	29.97	31.517	31.71	-1.74	HORIZONTAL	PASSED
7441.6	30.23	32.464	28.75	1.48	HORIZONTAL	PASSED

3.3.2 8DPSK modulation, PRBS packet type

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959.7	42.17	128.307	43.92	-1.75	HORIZONTAL	PASSED
7440.6	43.82	155.274	42.35	1.47	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959.7	29.24	28.963	30.99	-1.75	HORIZONTAL	PASSED
7440.6	30.35	32.904	28.88	1.47	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.03	23.53	15.005	45.04	-21.51	VERTICAL	PASSED
30.06	28.89	27.832	50.41	-21.52	VERTICAL	PASSED
30.39	23.6	15.143	45.25	-21.65	VERTICAL	PASSED
30.57	30.03	31.743	51.75	-21.72	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3913.529	40.2	102.294	42.87	-2.67	VERTICAL	PASSED
3940.679	39.66	96.194	42.35	-2.69	VERTICAL	PASSED
17905.41	58.99	890.02	39.3	19.69	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3913.529	27.01	22.4	29.68	-2.67	VERTICAL	PASSED
3940.679	27.06	22.529	29.75	-2.69	VERTICAL	PASSED
17905.41	46.36	207.874	26.67	19.69	VERTICAL	PASSED

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.7	39.35	92.832	42.1	-2.75	VERTICAL	PASSED
7207	43.3	146.251	42.48	0.82	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.7	26.73	21.71	29.48	-2.75	VERTICAL	PASSED
7207	30.23	32.468	29.41	0.82	HORIZONTAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM06312	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Torqueleader	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870/	Wainwright	27
TM38215	Band reject filter	WRCD 1920/1980-1918/1982-40/20	Wainwright UMTS	27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30/	Wainwright ISM	15C
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	27
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	27
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C