

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-776_09.docx	Date of Report:	13-May-2011
Number of pages:	40	Customer's Contact person:	Vivian Kill-Tollnek
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	99059		
IC recognition no.:	661AL-1		
Tested devices/ accessories:	Phone RM-776 / Battery BL-5CT / Charger AC-8 / Headset WH-102		
FCC ID:	PPIRM-776	IC:	661U-RM776
Supplement reports:	This test report is a copy of FCC15C_RM-640_18		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 3, December 2010) and RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	03-June-2010
Testing completed	09-July-2010
The customer's contact person	Vivian Kill-Tollnek
Test Plan referred to	T:\Projects\RM-640\TestPlan\RS_testplan_RM-640.xls
Notes	None
Document name	FCC15C_RM-640_18

1.1. EUT and Accessory Information

The EUT is a Bluetooth device. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-640	004402/13/036951/9	0210	-	re 5.04	24275
Phone	RM-640	004402/13/036968/1	0210	-	re 5.04	24274
Battery	BL-5CT	3820669492155081010;0670555	-	-	-	24257
Battery	BL-5CT	3820669492155081047;0670555	-	-	-	24263
Charger	AC-8	4090499301040501808;0675387	-	-	-	24255
Charger	AC-8	4090499301040501804;0675387	-	-	-	24250
Headset	WH-102	06943239431A4102158	-	-	-	24240
Headset	WH-102	06943239431A4102160	-	-	-	24247

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Copenhagen Laboratory.

The test results of PPIRM-640 are re-used for certification of the PPIRM-776. The table above indicates the results, which will be re-used.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups	5
2.1. Conducted RF test setup.....	5
2.2. AC powerline conducted emissions test setup.....	5
2.3. Radiated test setup	5
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	6
3.1. Test method and limit	6
3.2. Bluetooth Test results.....	7
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	10
4.1. Test Setup.....	10
4.2. Test method and limit	10
4.3. Bluetooth Test results.....	11
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)	16
5.1. Test method and limit	16
5.2. Bluetooth Test results.....	17
6. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5).....	20
6.1. Test Setup.....	20
6.2. Test method and limit	20
6.3. Bluetooth Test results.....	22
7. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	24
7.1. Test setup	24
7.2. Test method and limit	24
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))	26
8.1. Test method and limit	26
8.2. Bluetooth Test results.....	27
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))	30
9.1. Test method and limit	30
9.2. Bluetooth Test results.....	31
10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d)).....	33
10.1. Test method and limit.....	33
10.2. Bluetooth Test results	34


11.	Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	36
11.1.	Test method and limit.....	36
11.2.	Bluetooth test results	37
13.	Test Equipment	39
13.1.	Conducted measurements	39
13.2.	Radiated measurements	39

2. Test setups


2.1. Conducted RF test setup

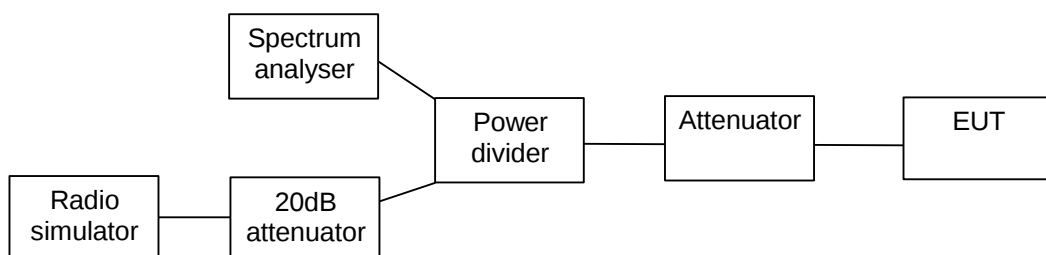

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

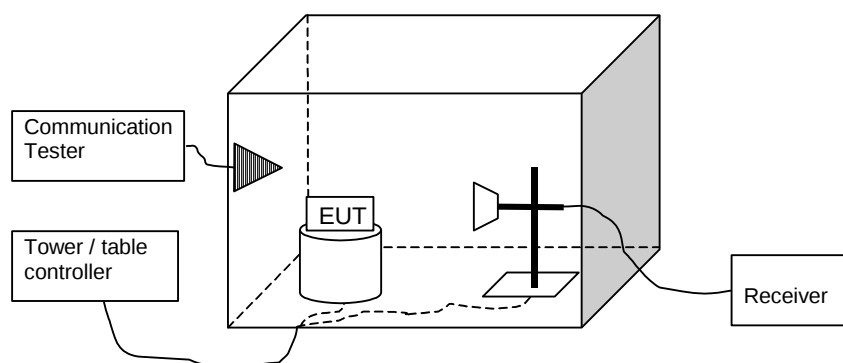

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-640, DUT 24274
Accessories with DUT numbers	BL-5CT, DUT 24263 ; AC-8E, DUT 24250 ; WH-102, DUT 24247
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 44 / 1013
Date of measurements	28-June-2010
Measured by	Ruben Hansen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	5.80	3.802	Passed
40 / 2442	6.60	4.571	Passed
78 / 2480	6.90	4.898	Passed


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

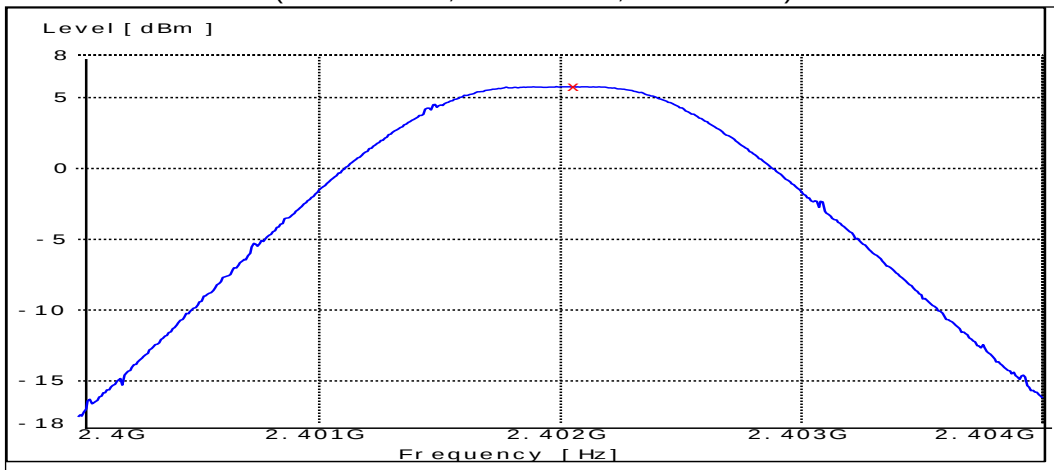

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

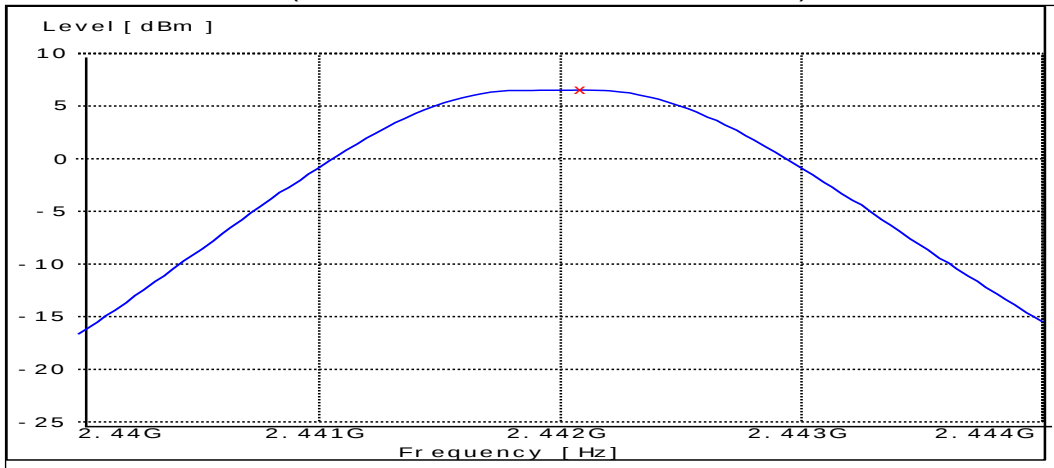


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

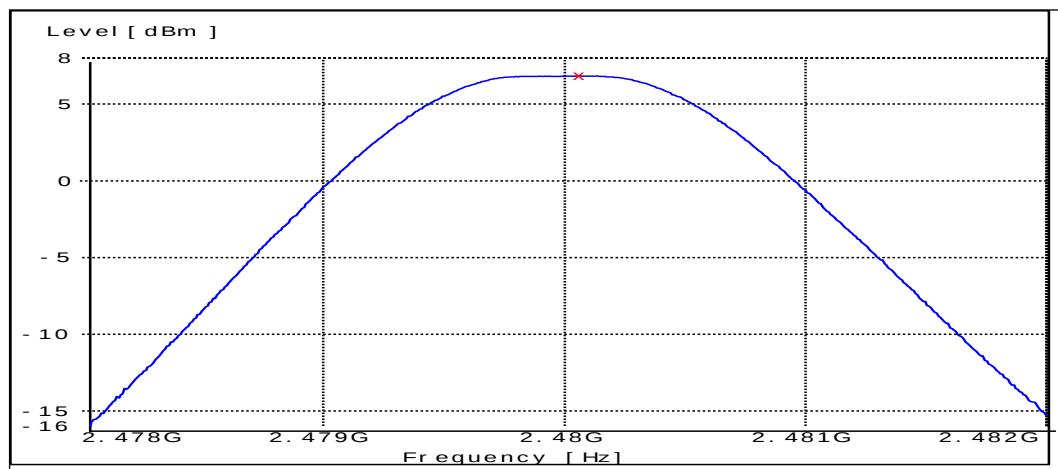


3.2.2 8DPSK modulation, PRBS packet type

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	5.70	3.715	Passed
40 / 2442	6.30	4.266	Passed
78 / 2480	6.70	4.677	Passed


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

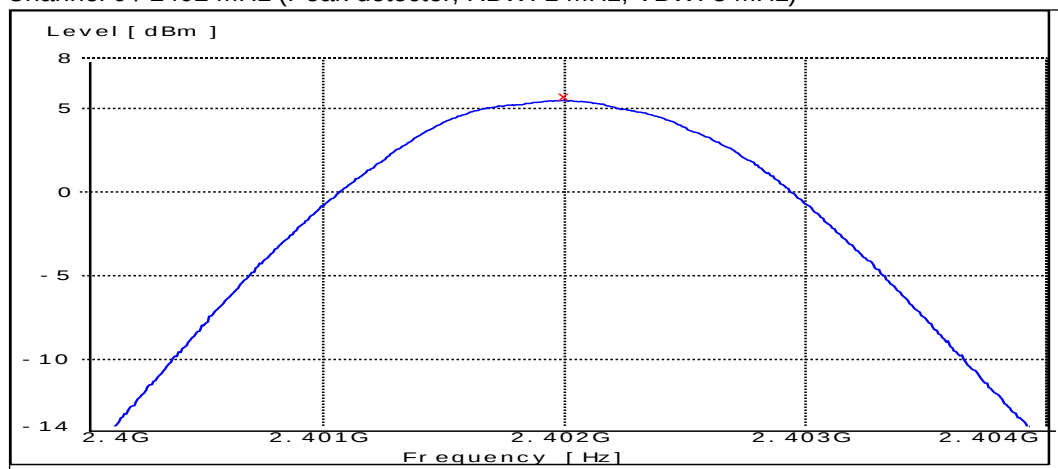

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

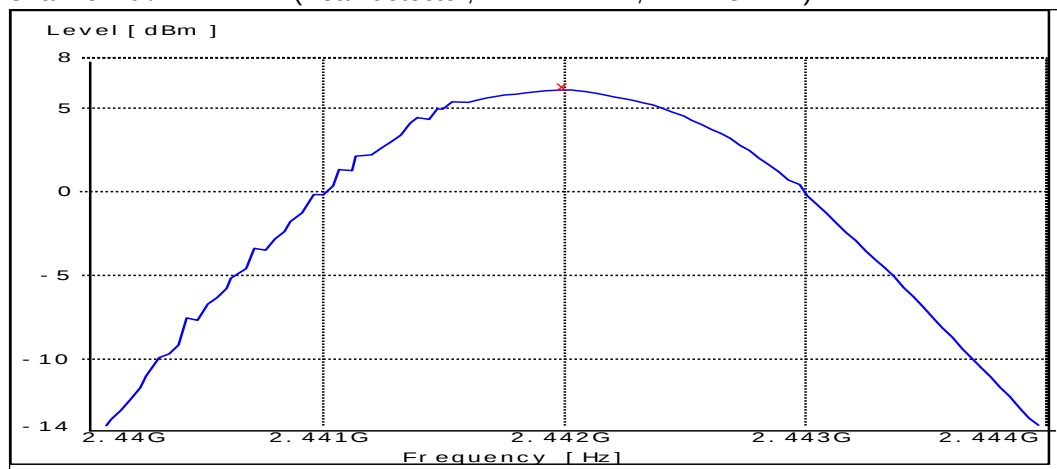


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

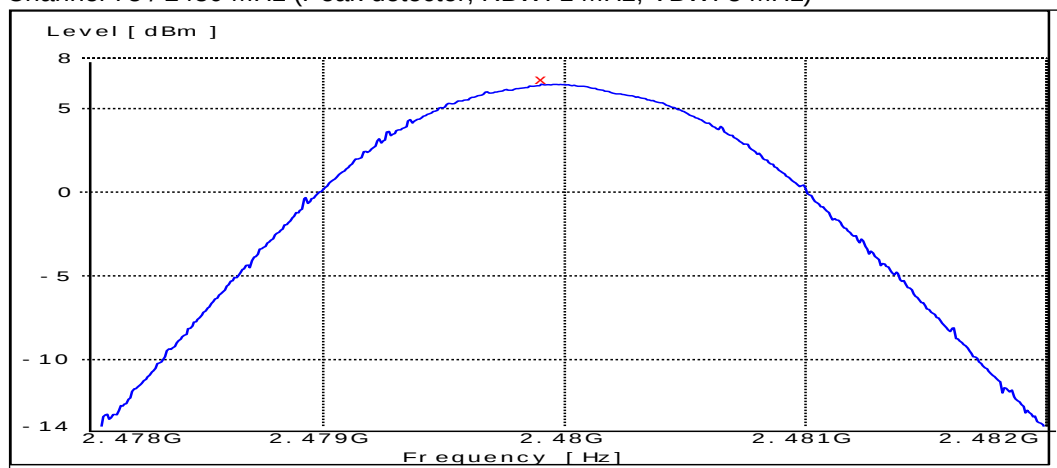

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-640, DUT 24275
Accessories with DUT numbers	BL-5CT, DUT 24257 ; AC-8E, DUT 24255 ; WH-102, DUT 24240
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] /	23 / 45
Date of measurements	23-Jun-2010
Measured by	Ruben Hansen

4.1. Test Setup

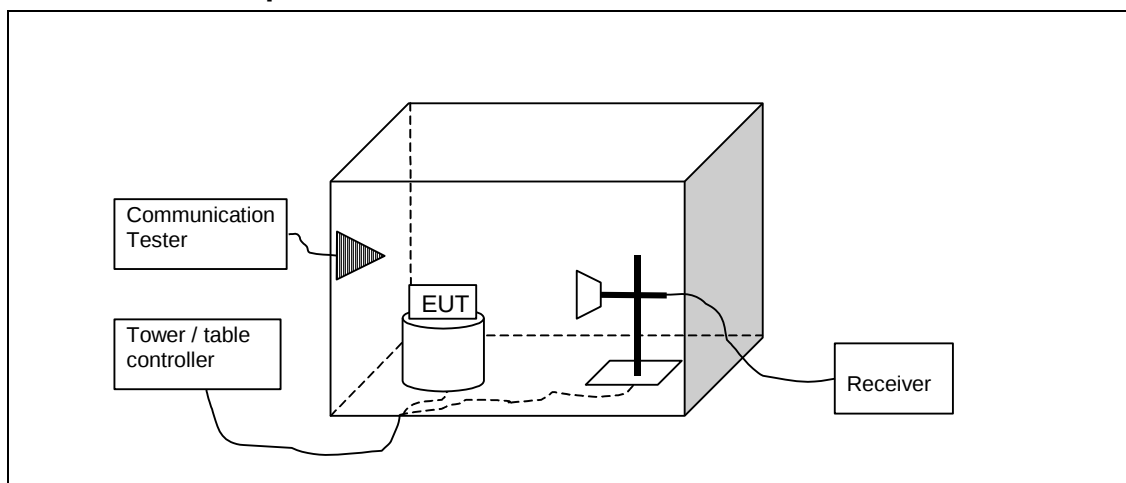

4.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

4.3. Bluetooth Test results

4.3.1 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	46.48	210.874	48.1	-1.62	Passed
Hopping on, low end	47.41	234.725	49.03	-1.62	Passed
78 / 2480	51.72	385.473	52.96	-1.24	Passed
Hopping on, high end	51.99	397.71	53.23	-1.24	Passed


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	57.75	771.766	59.37	-1.62	Passed
Hopping on, low end	57.68	765.74	59.3	-1.62	Passed
78 / 2480	59.55	949.228	60.79	-1.24	Passed
Hopping on, high end	59.66	961.73	60.9	-1.24	Passed


8DPSK mode. Hopping on, high end

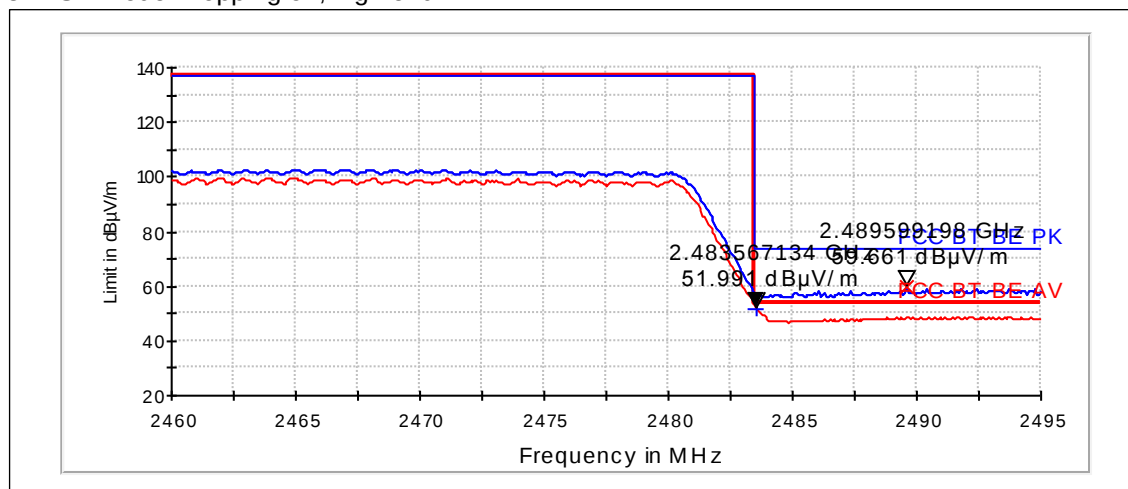


8DPSK mode. Hopping on, low end

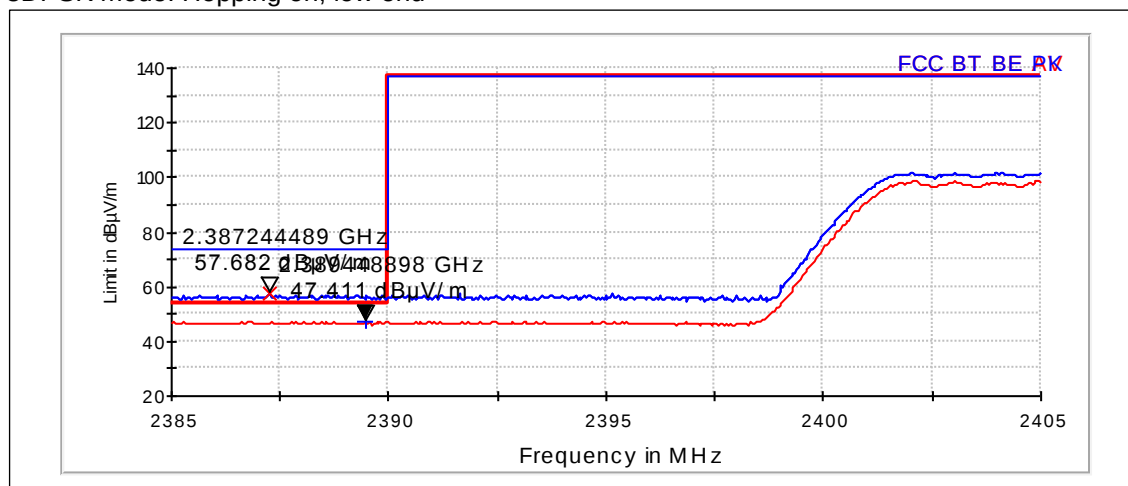


8DPSK mode. Hopping on, low end

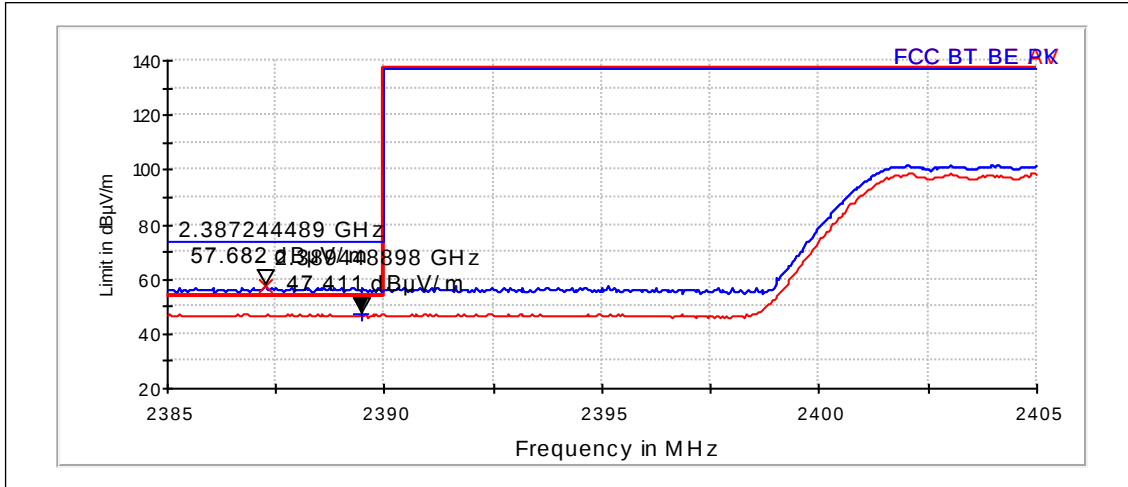

8DPSK mode. Channel 78 / 2480 MHz

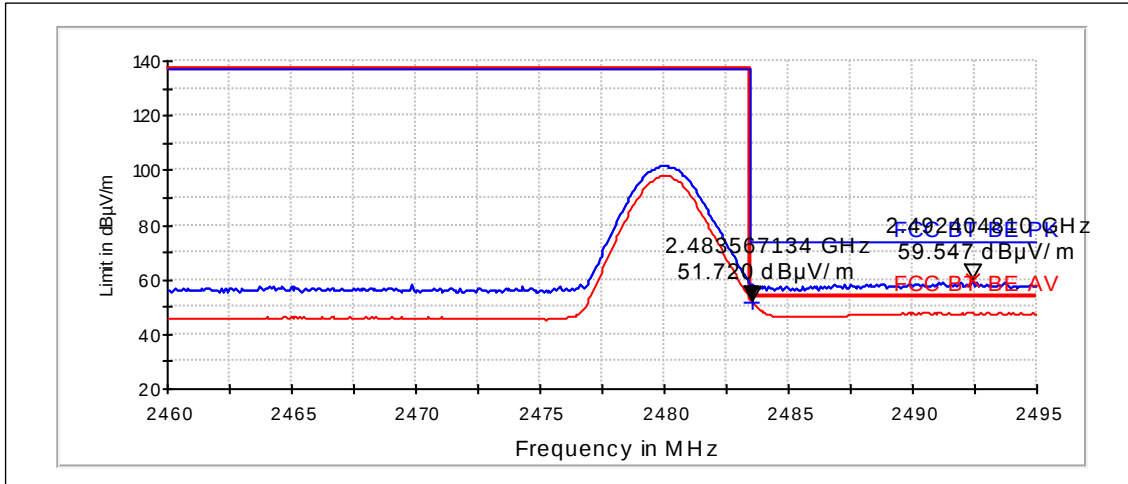

8DPSK mode. Channel 0 / 2402 MHz

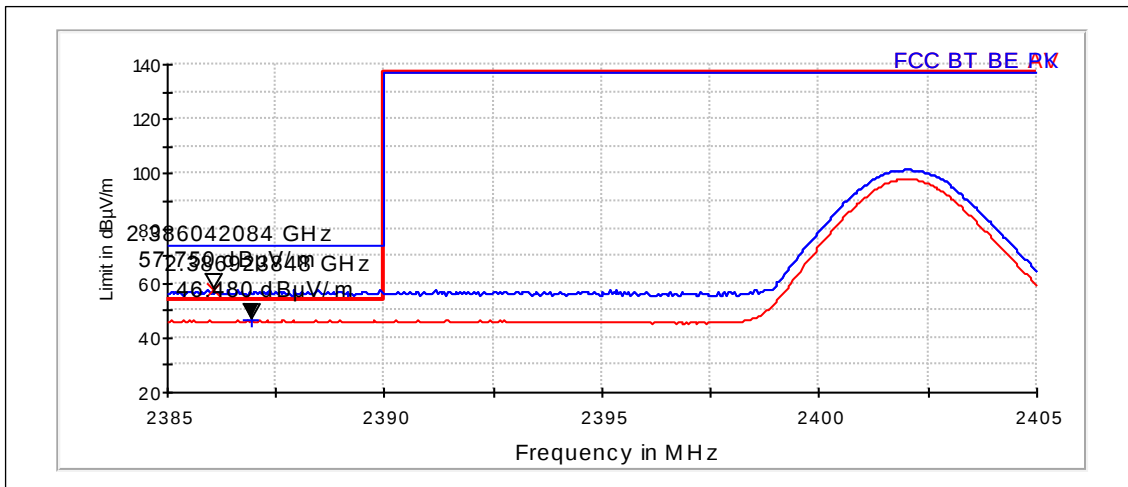

4.3.2 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	46.23	204.956	47.85	-1.62	Passed
Hopping on, low end	47.37	233.683	48.99	-1.62	Passed
78 / 2480	52.09	402.299	53.33	-1.24	Passed
Hopping on, high end	52.38	416.066	53.62	-1.24	Passed


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	57.49	748.849	59.11	-1.62	Passed
Hopping on, low end	57.48	747.958	59.1	-1.62	Passed
78 / 2480	59.23	915.421	60.47	-1.24	Passed
Hopping on, high end	59.16	907.601	60.4	-1.24	Passed


GFSK mode. Hopping on, high end

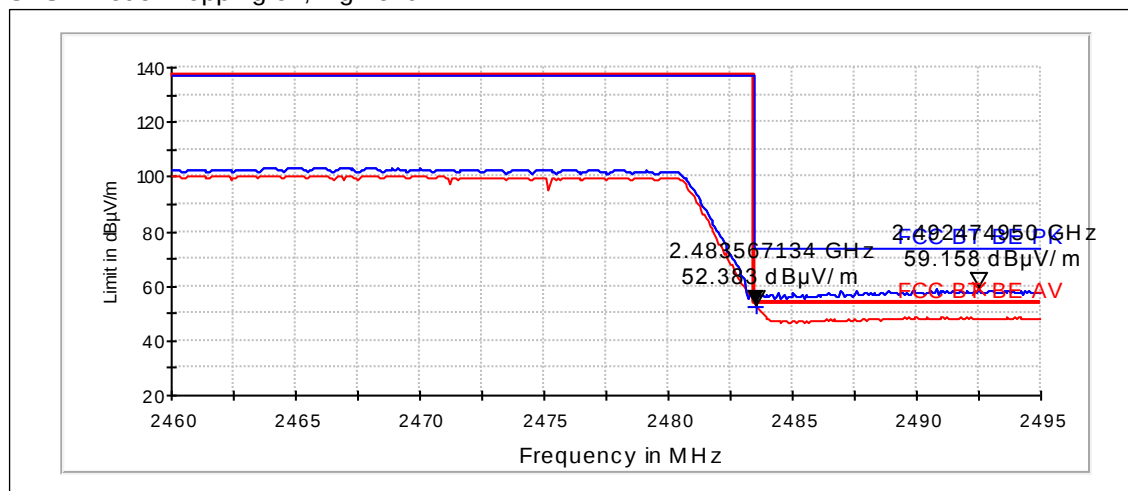


GFSK mode. Hopping on, low end

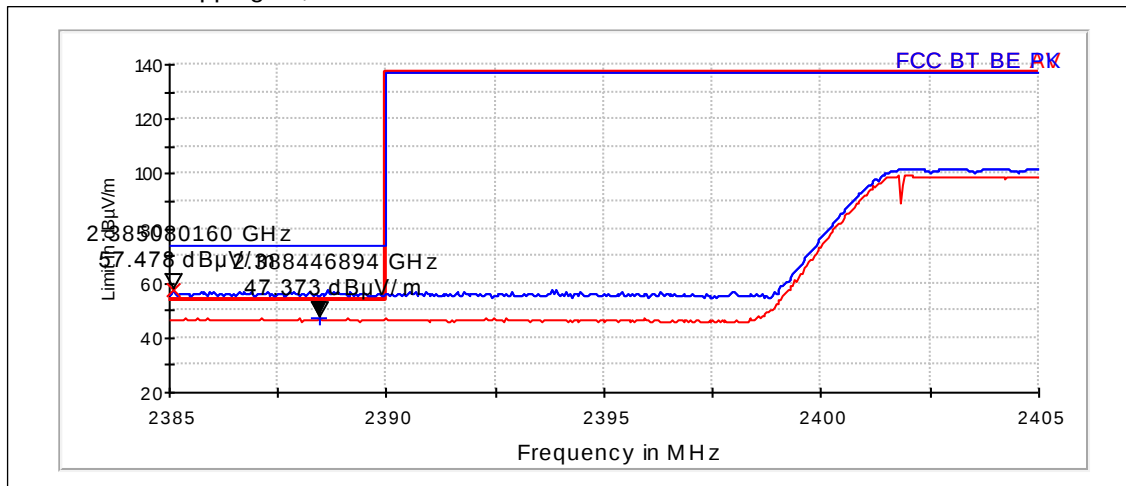

GFSK mode. Channel 78 / 2480 MHz

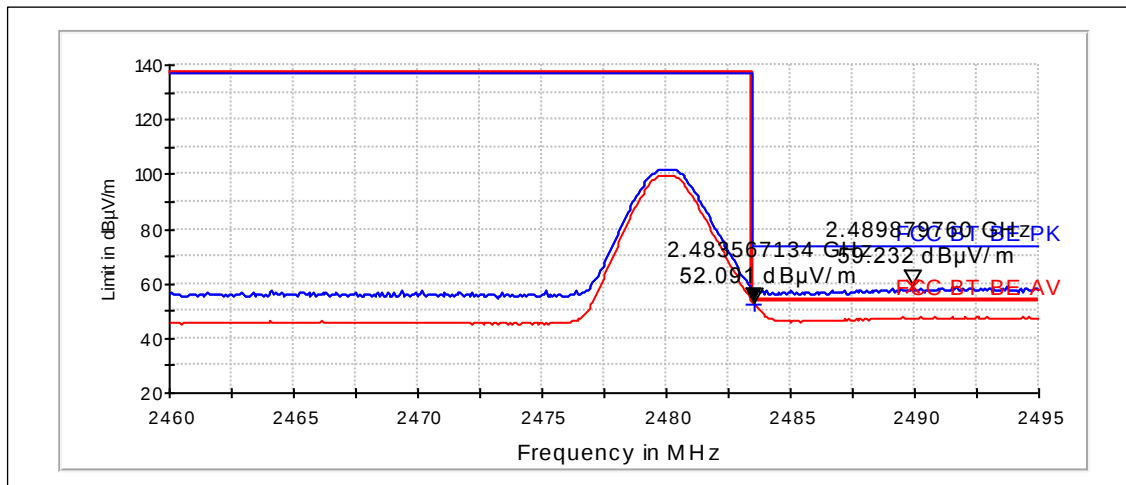

GFSK mode. Channel 0 / 2402 MHz

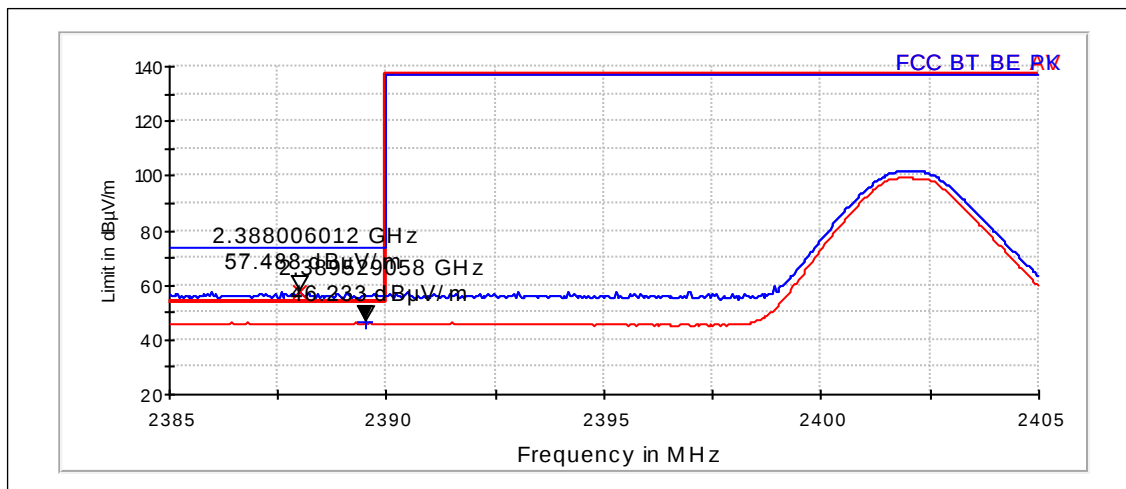

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-640, DUT 24274
Accessories with DUT numbers	BL-5CT, DUT 24263 ; AC-8E, DUT 24250 ; WH-102, DUT 24247
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 44 / 1013
Date of measurements	28-June-2010
Measured by	Ruben Hansen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

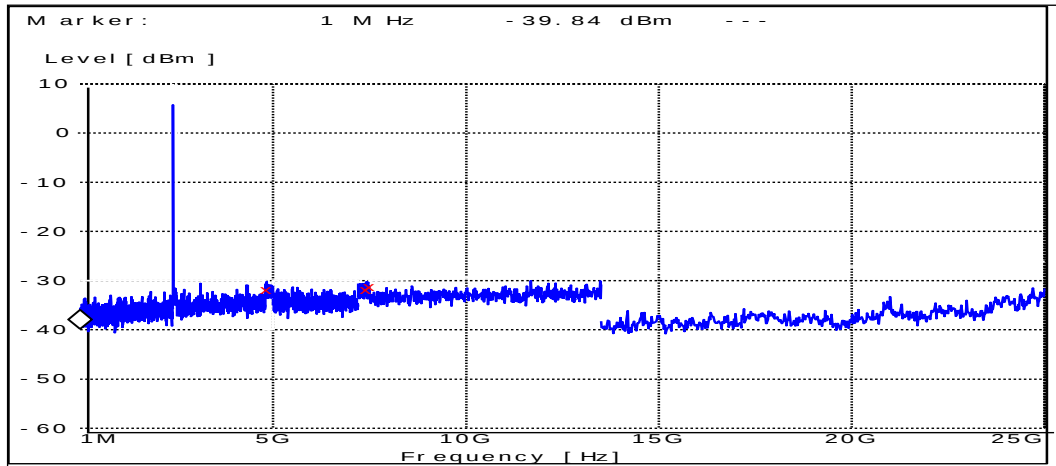

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4841.200000	-32.135964	PASSED
7428.600000	-33.135964	PASSED
7500.000000	-33.535964	PASSED


Channel 40 / 2442 MHz

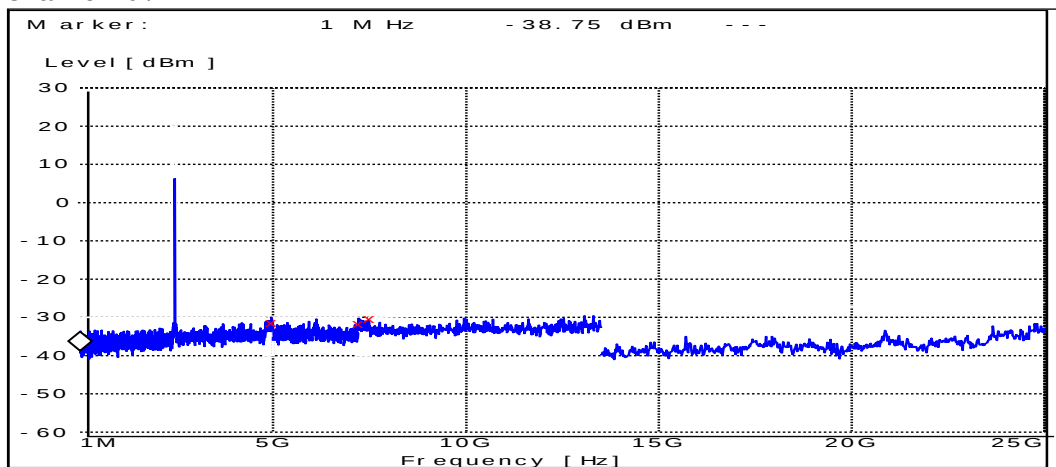

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4958.000000	-32.252174	PASSED
7223.400000	-32.952174	PASSED
7500.000000	-32.352174	PASSED

Channel 78 / 2480 MHz

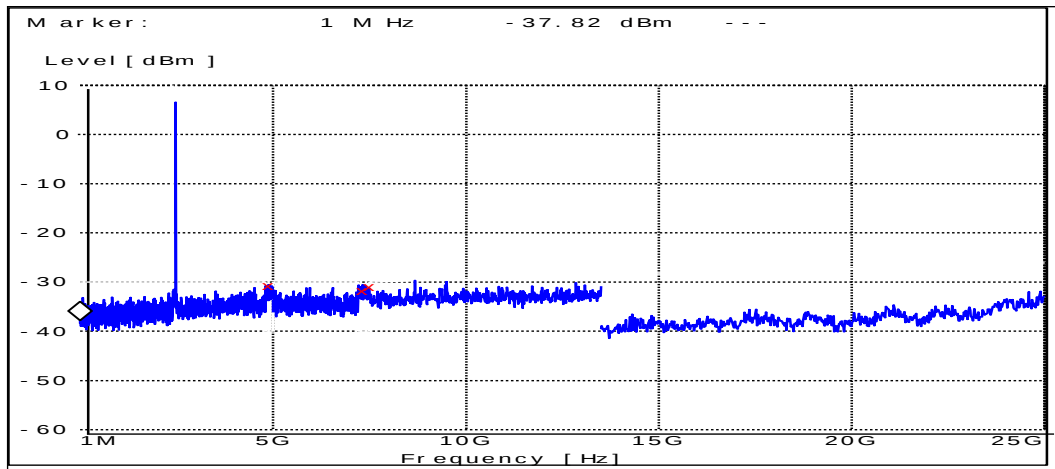


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4878.000000	-32.015865	PASSED
7329.000000	-33.115865	PASSED
7500.000000	-33.915865	PASSED

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

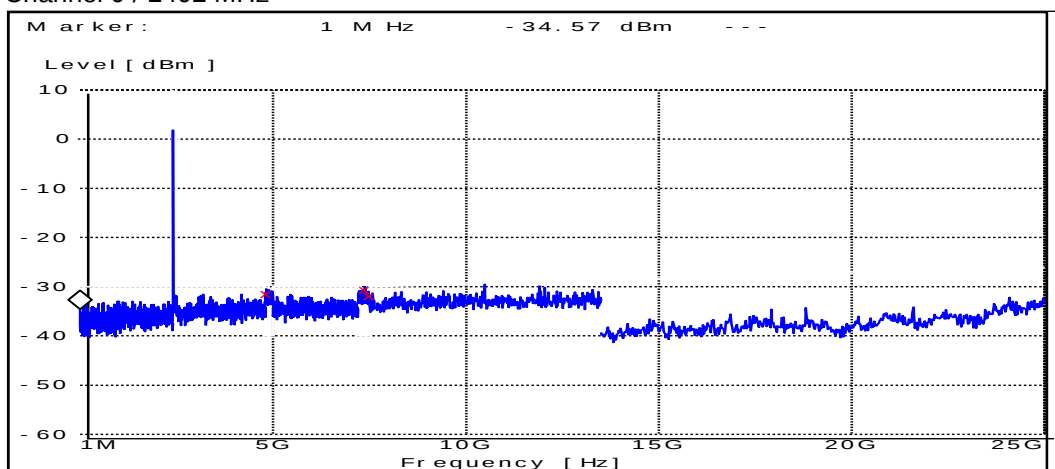

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4825.600000	-33.166982	PASSED
7380.000000	-33.966982	PASSED
7500.000000	-32.766982	PASSED


Channel 40 / 2442 MHz

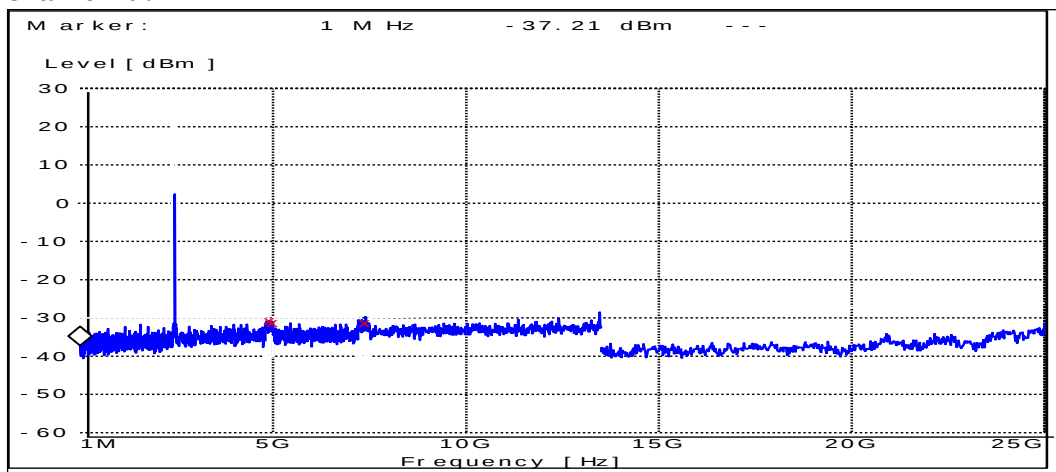

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4924.000000	-33.412376	PASSED
5000.000000	-32.012376	PASSED
7390.800000	-31.912376	PASSED

Channel 78 / 2480 MHz

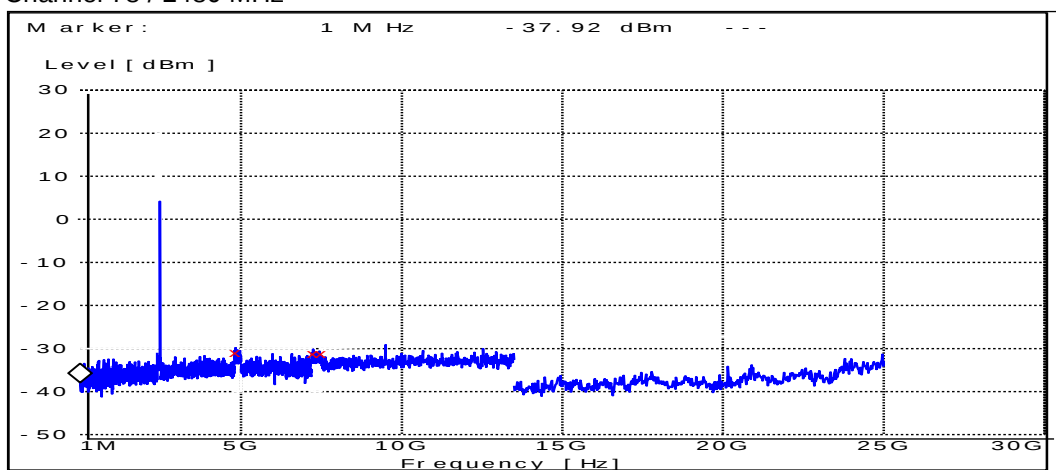

Peak (RBW: 100 kHz, VBW: 100 kHz)


Frequency [MHz]	P [dBc]	Result
4837.600000	-31.916069	PASSED
7255.200000	-32.616069	PASSED
7500.000000	-32.716069	PASSED

6. Spurious radiated emissions

(FCC §22.917(a), §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-640, DUT 24275
Accessories with DUT numbers	BL-5CT, DUT 24257 ; AC-8E, DUT 24255 ; WH-102, DUT 24240
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] /	23 / 46
Date of measurements	23-Jun-2010
Measured by	Ruben Hansen

6.1. Test Setup

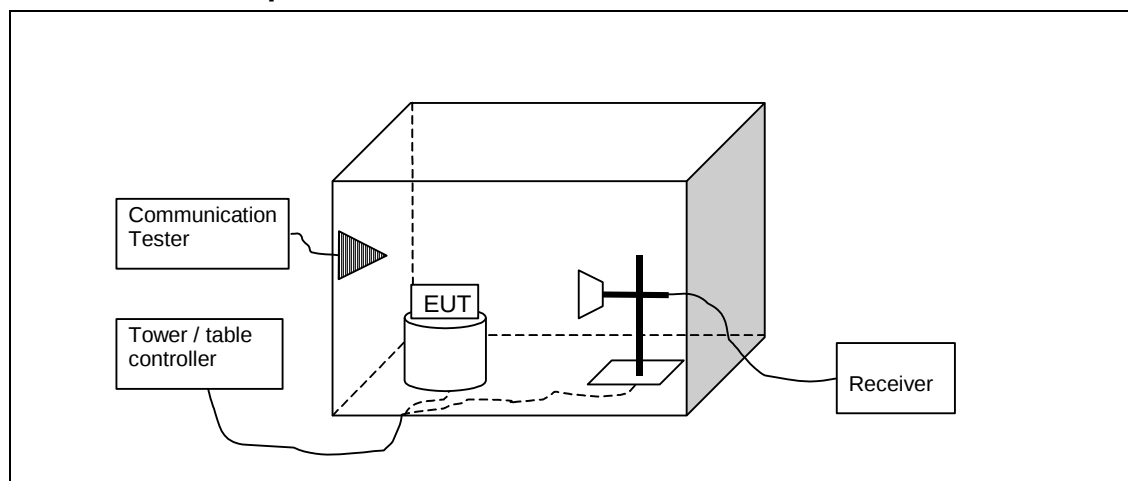

6.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.3. Bluetooth Test results

6.3.1 GFSK modulation, PRBS packet type

Average(RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
2339.919	30.29	32.681	30.37	-0.08	VERTICAL	PASSED
3915.231	24.56	16.91	25.65	-1.09	VERTICAL	PASSED
10631.863	41.88	124.222	24.31	17.57	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
2339.919	43.71	153.303	43.79	-0.08	VERTICAL	PASSED
3915.231	37.77	77.339	38.86	-1.09	VERTICAL	PASSED
10631.863	55.4	588.573	37.83	17.57	VERTICAL	PASSED

6.3.2 8DPSK modulation, PRBS packet type

Average(RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3906.714	24.7	17.181	25.78	-1.08	HORIZONTAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3906.714	37.91	78.596	38.99	-1.08	HORIZONTAL	PASSED

7. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-640, DUT 24276
Accessories with DUT numbers	BL-5CT, DUT 24253 ; AC-8E, DUT 24254 ; WH-102, DUT 24241
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 42 / 1007
Date of measurements	22-Jun-2010
Measured by	Bo Moltved Christiansen

7.1. Test setup



7.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:


$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

BT GFSK TX

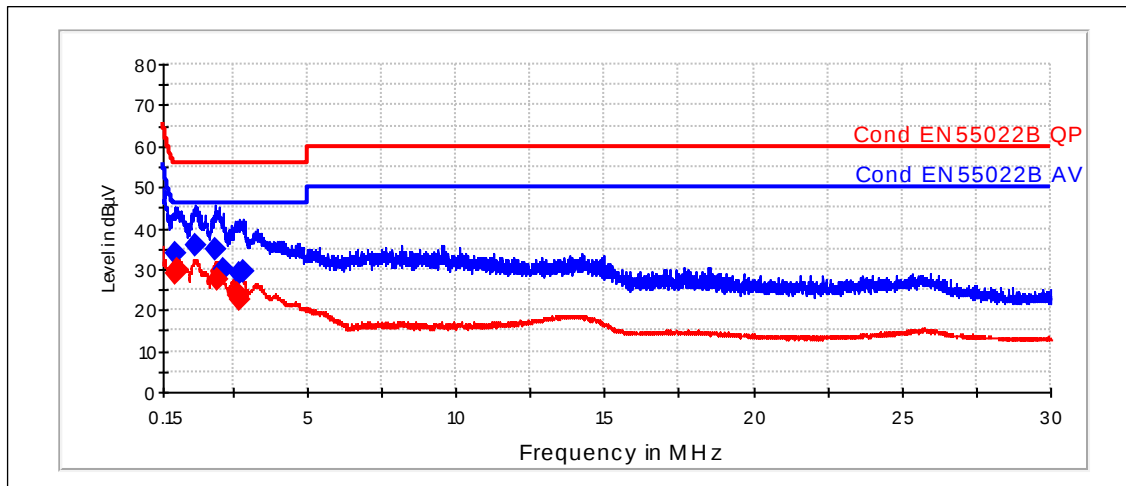

Quasi peak

Frequency [MHz]	Level [dBμV]	IF-BW[kHz]	Line	Margin	Result
0.54	34.04	10	L1	22	PASSED
1.24	35.79	10	N	20.2	PASSED
1.925	34.99	10	N	21	PASSED
2.15	30.09	10	N	25.9	PASSED
2.74	28.87	10	N	27.1	PASSED
2.855	29.57	10	N	26.4	PASSED

Average

Frequency [MHz]	Level [dBμV]	IF-BW[kHz]	Line	Margin	Result
0.54	29.12	10	N	16.9	PASSED
0.625	29.93	10	N	16.1	PASSED
1.96	27.36	10	N	18.6	PASSED
2.635	24	10	N	22	PASSED
2.665	23.34	10	N	22.7	PASSED
2.73	22.46	10	N	23.5	PASSED

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))

EUT with DUT number	RM-640, DUT 24274
Accessories with DUT numbers	BL-5CT, DUT 24263 ; AC-8E, DUT 24250 ; WH-102, DUT 24247
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 44 / 1013
Date of measurements	28-June-2010
Measured by	Ruben Hansen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	940.000	PASSED
40 / 2442	932.000	PASSED
78 / 2480	940.000	PASSED


Channel 0 / 2402 MHz

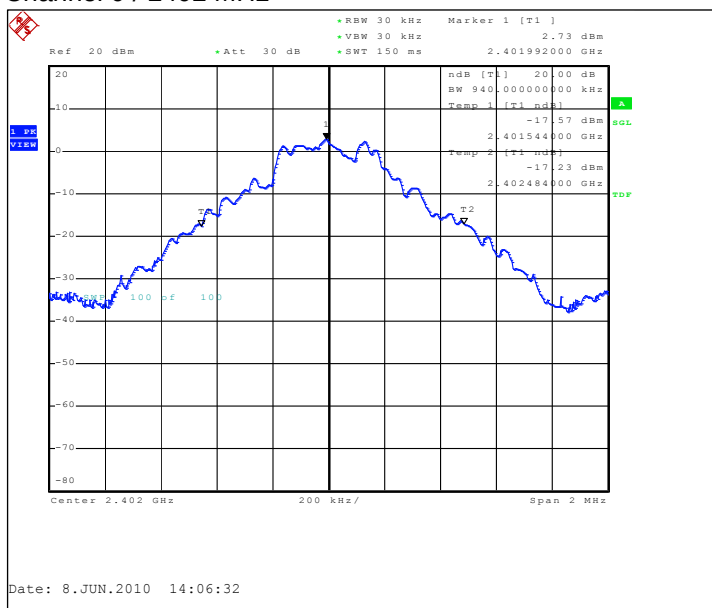

Channel 40 / 2442 MHz

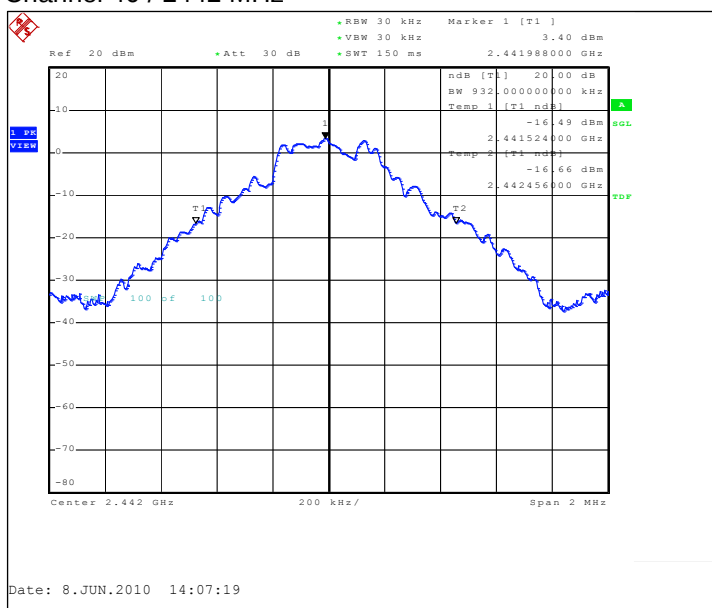


Channel 78 / 2480 MHz

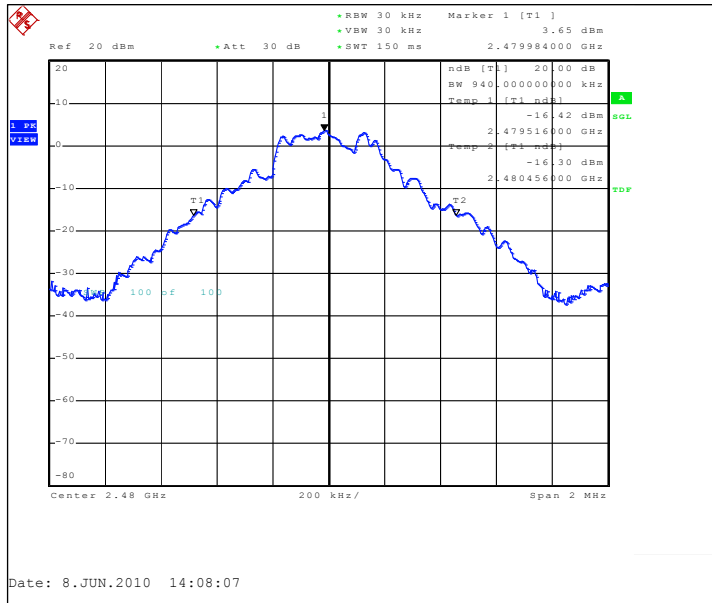


8.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1316.000	PASSED
40 / 2442	1312.000	PASSED
78 / 2480	1312.000	PASSED


Channel 0 / 2402 MHz

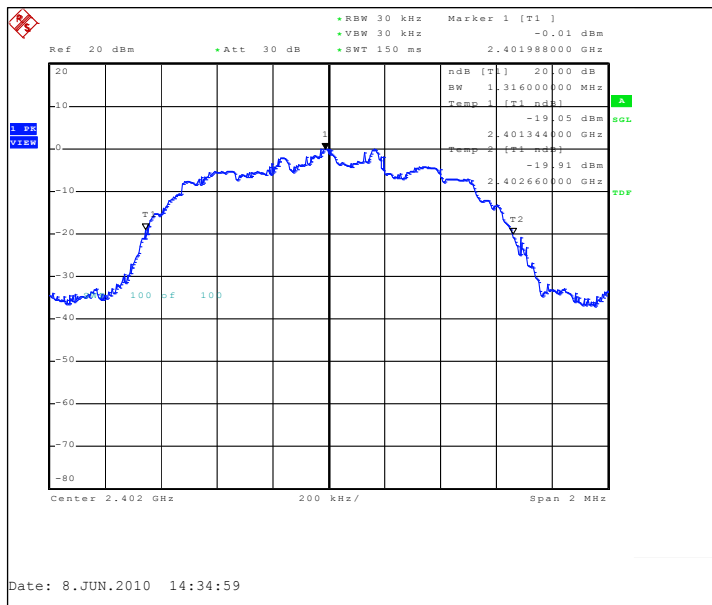

Channel 40 / 2442 MHz

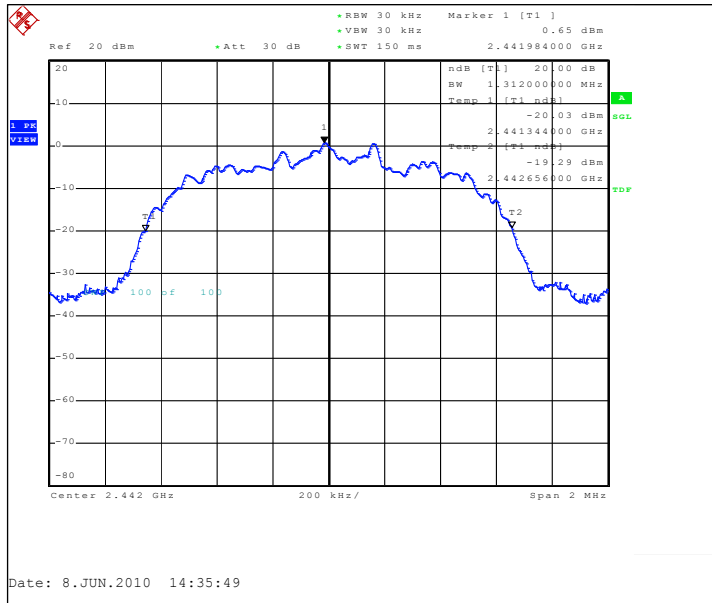

Channel 78 / 2480 MHz

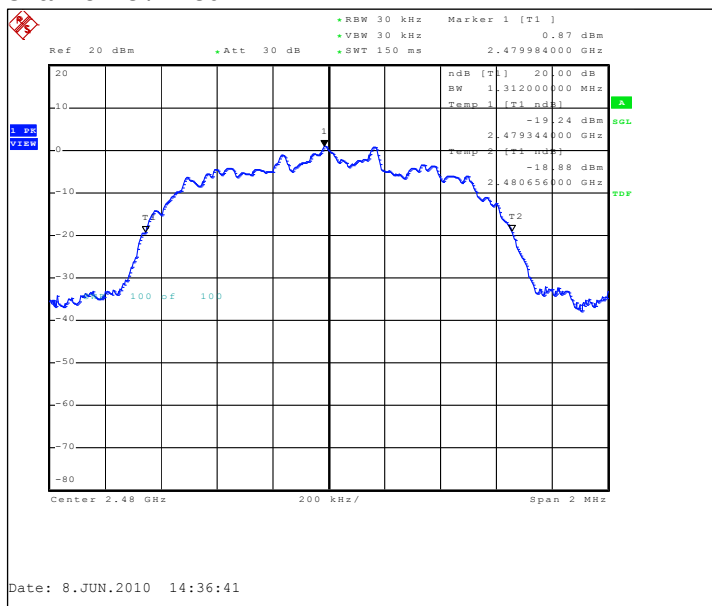

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))

EUT with DUT number	RM-640, DUT 24274
Accessories with DUT numbers	BL-5CT, DUT 24263 ; AC-8E, DUT 24250 ; WH-102, DUT 24247
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 44 / 1013
Date of measurements	28-June-2010
Measured by	Ruben Hansen

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1020	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

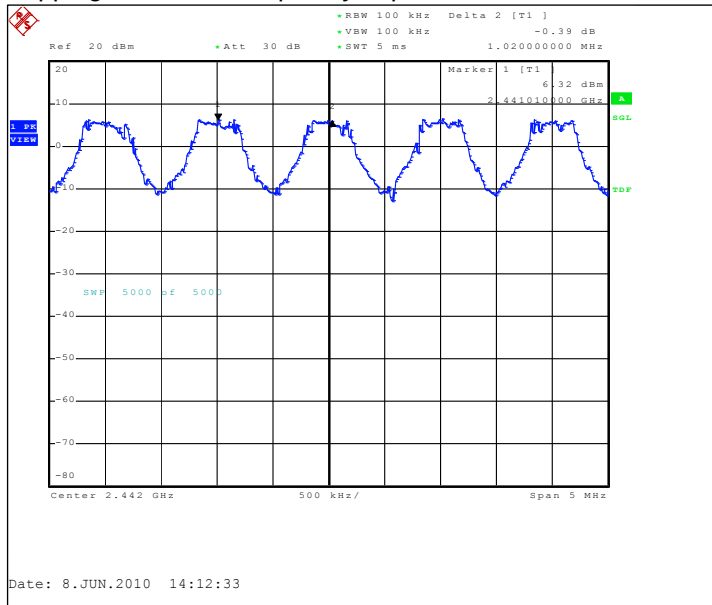

9.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
940	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

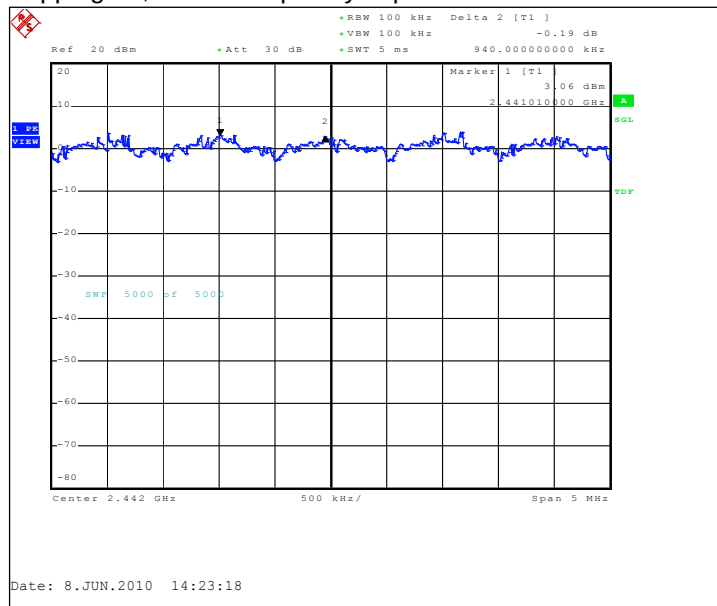

10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-640, DUT 24274
Accessories with DUT numbers	BL-5CT, DUT 24263 ; AC-8E, DUT 24250 ; WH-102, DUT 24247
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 44 / 1013
Date of measurements	28-June-2010
Measured by	Ruben Hansen

10.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

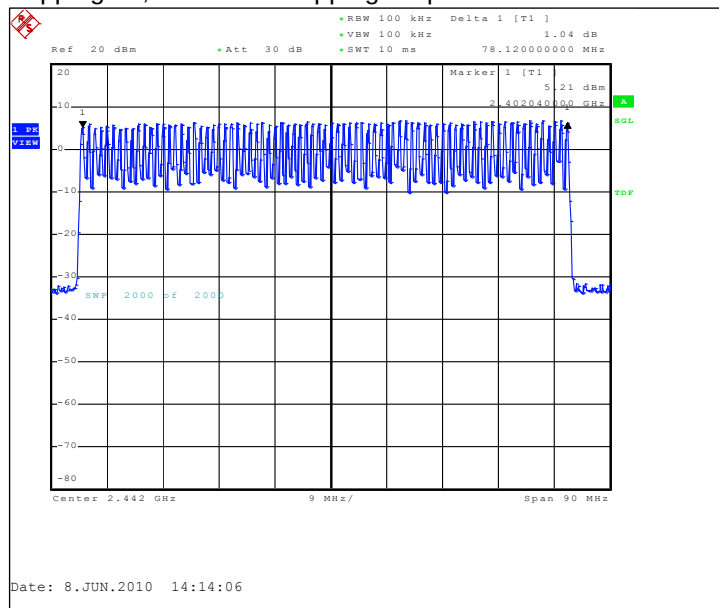

10.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
63	PASSED

Hopping on, number of hopping frequencies

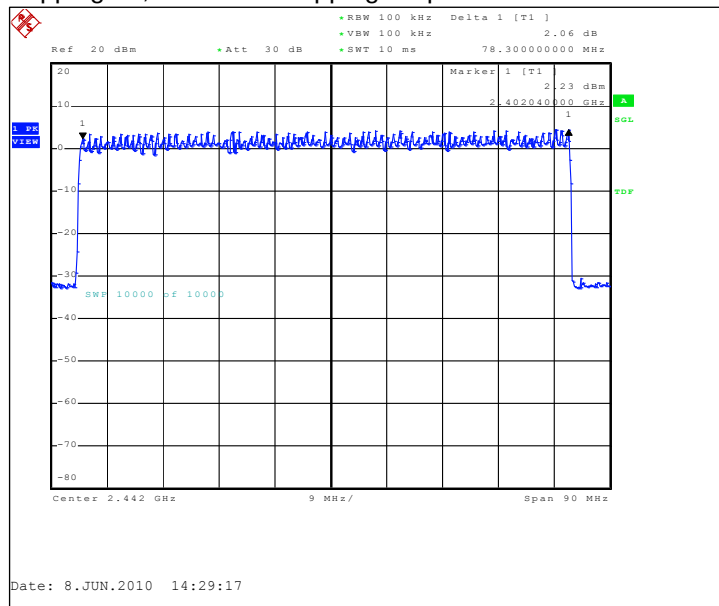

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-640, DUT 24274
Accessories with DUT numbers	BL-5CT, DUT 24263 ; AC-8E, DUT 24250 ; WH-102, DUT 24247
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 44 / 1013
Date of measurements	28-June-2010
Measured by	Ruben Hansen

11.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results


11.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
88	2,912	0.256256	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

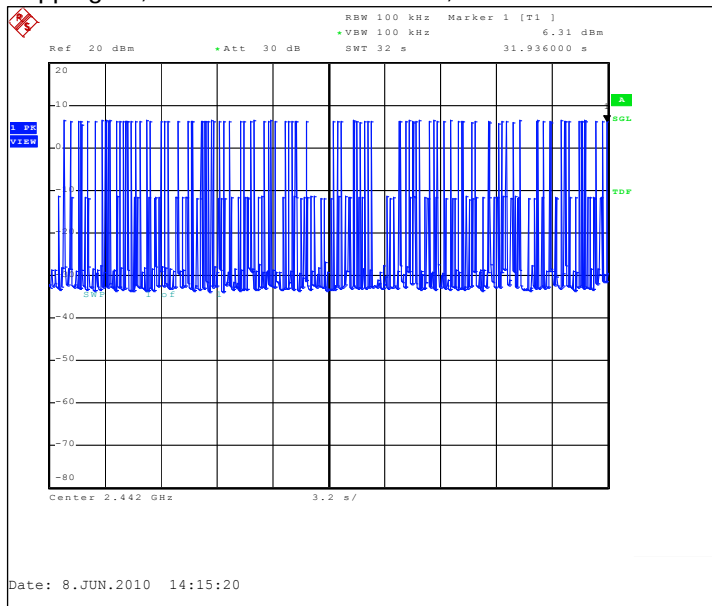


Hopping on, duration of one transmission, channel 40 / 2442 MHz

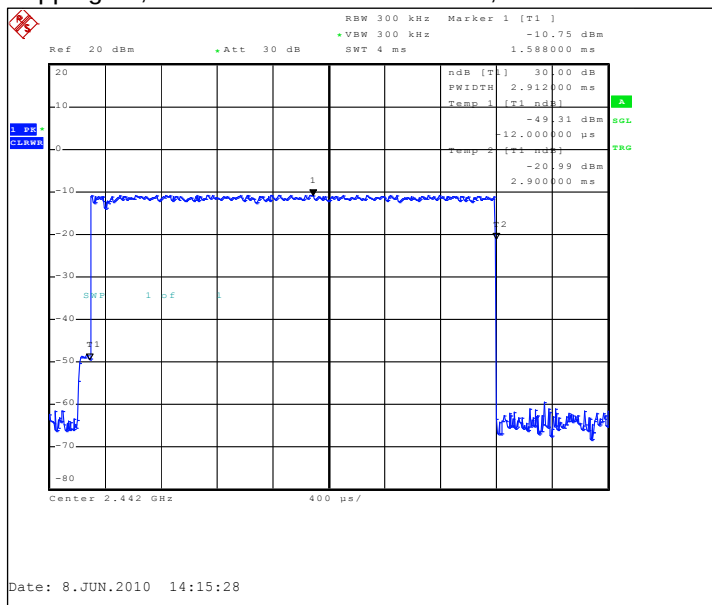


11.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
84	2,920	0.245280	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

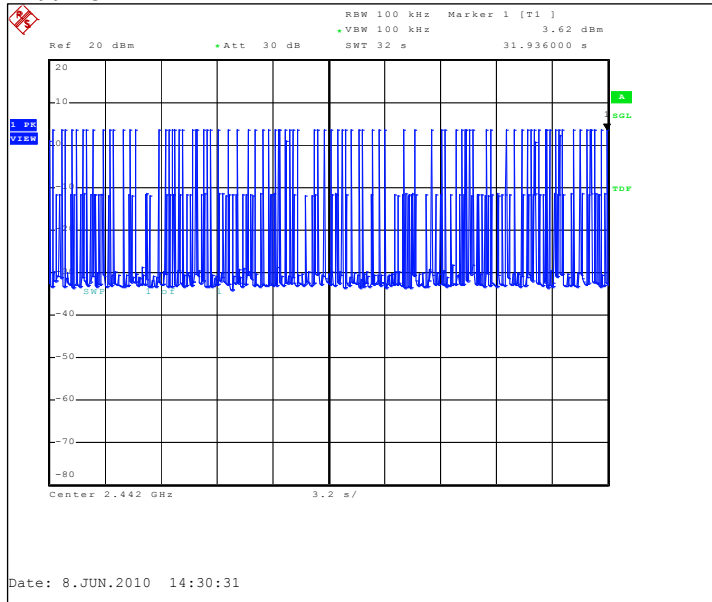

Hopping on, duration of one transmission, channel 40 / 2442 MHz

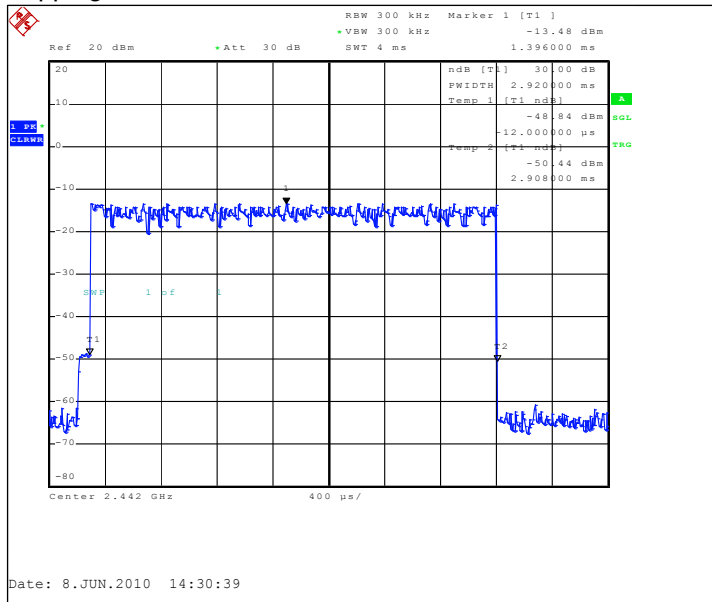

13. Test Equipment

13.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B

13.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18861	Receiver	EMI Test Receiver 20Hz-26,5GHz ESI	Rohde&Schwarz	22/24/27, 15C, 15B
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B