



7. Test of Conducted Spurious Emission

7.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 11.11.1


Below –30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data




Note: Test plots refers to the following pages.



Modulation Type: 802.11b CH01



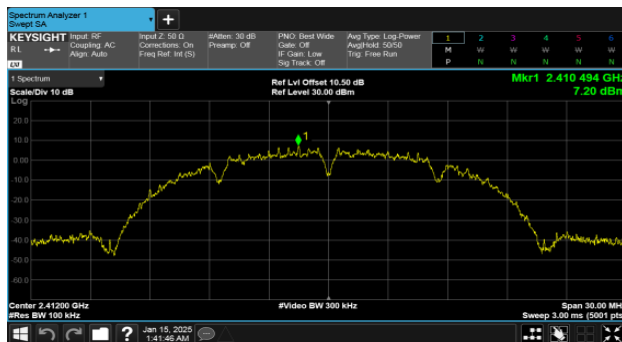


Modulation Type: 802.11b CH06

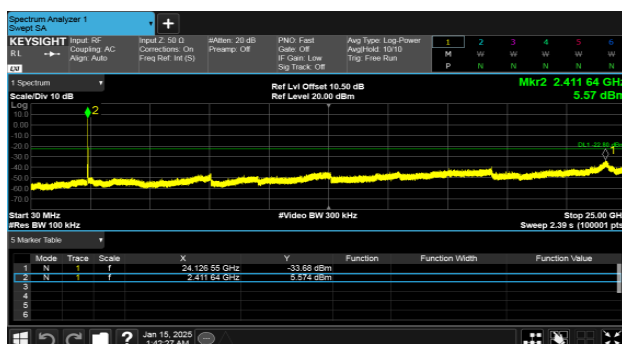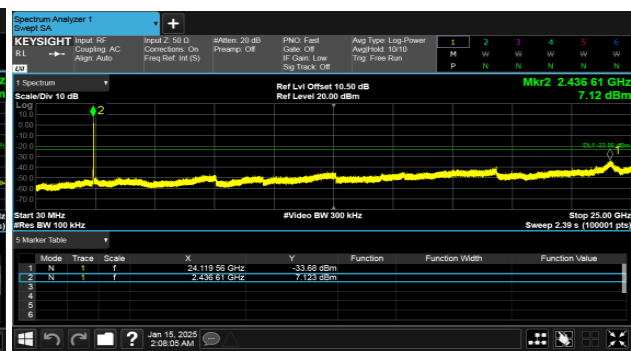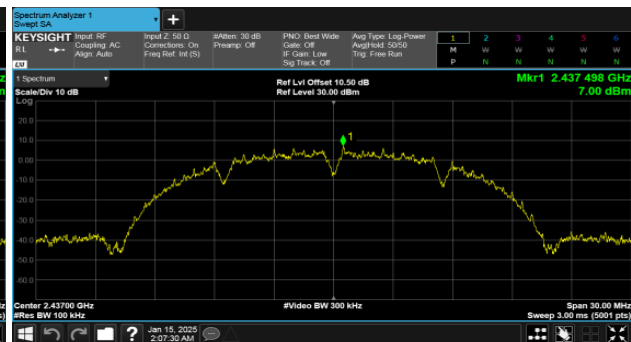




Modulation Type: 802.11b CH11


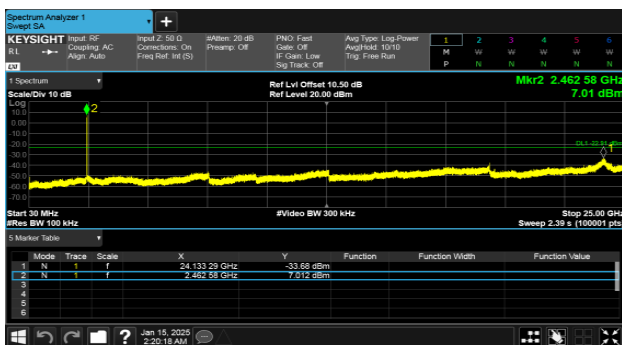
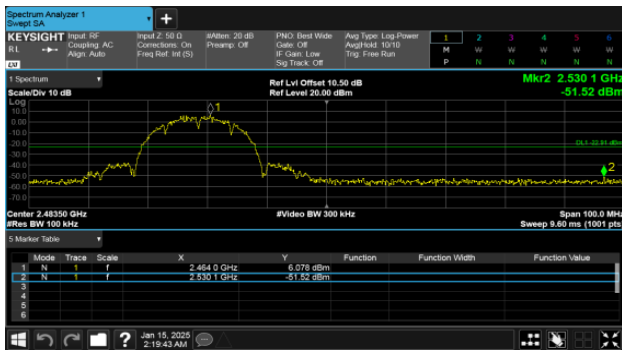
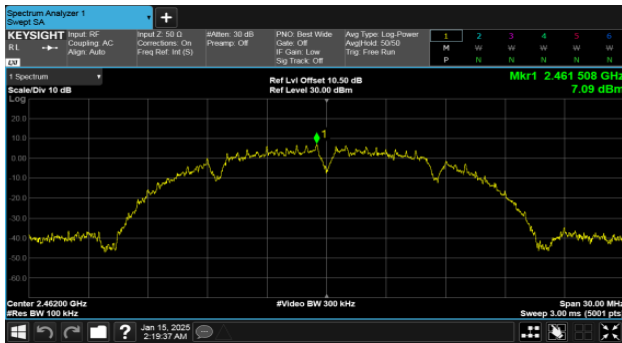




Modulation Type: 802.11g CH01



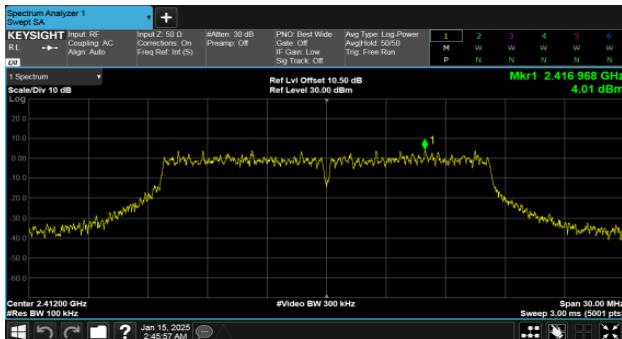


Modulation Type: 802.11g CH06

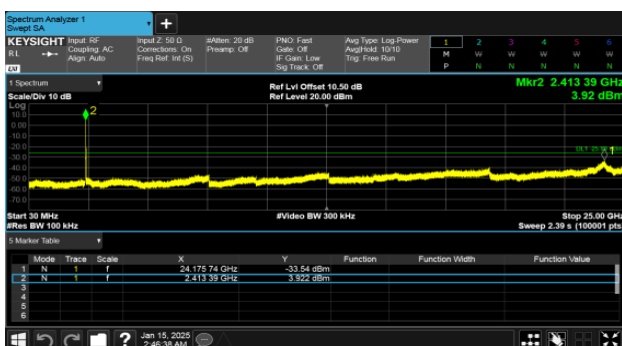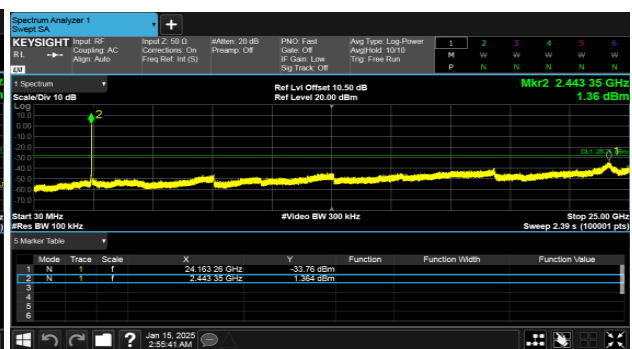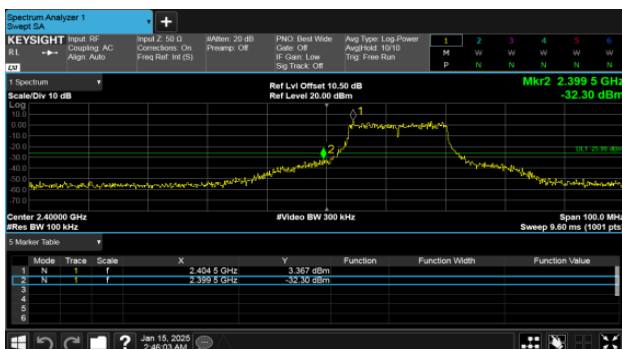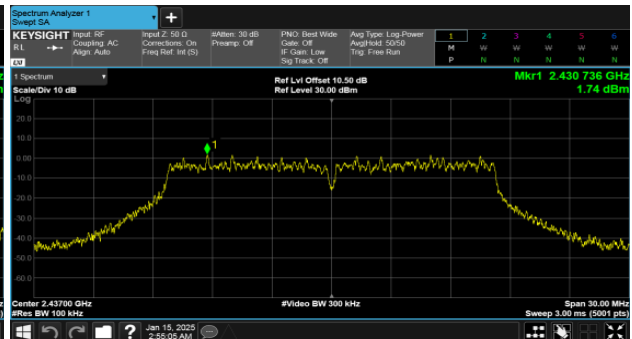




Modulation Type: 802.11g CH11


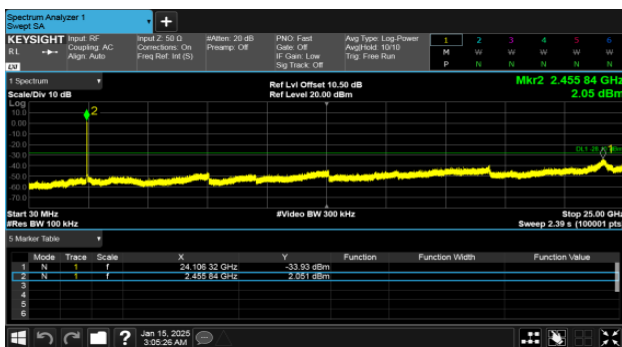
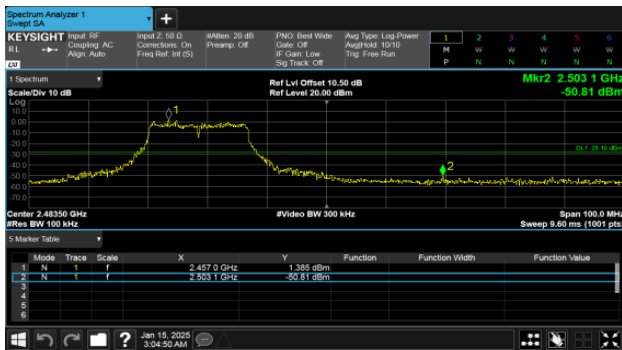
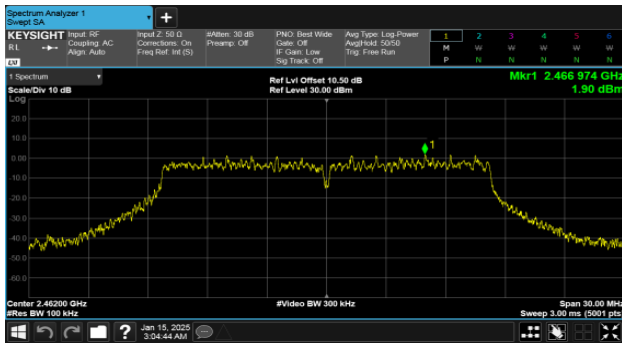




Modulation Type: 802.11n HT20 CH01



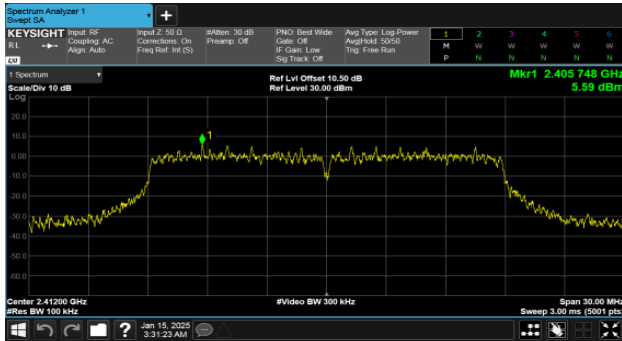


Modulation Type: 802.11n HT20 CH06

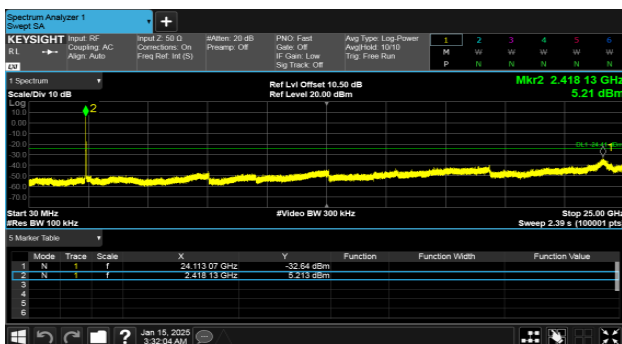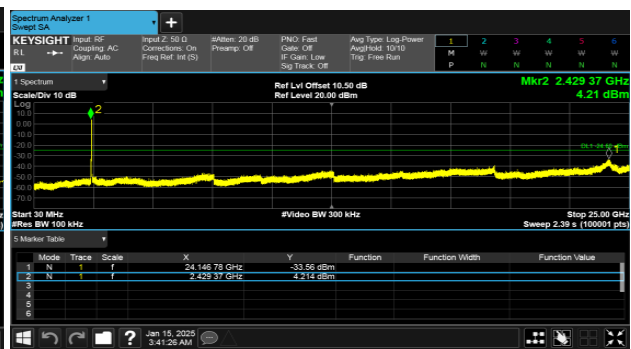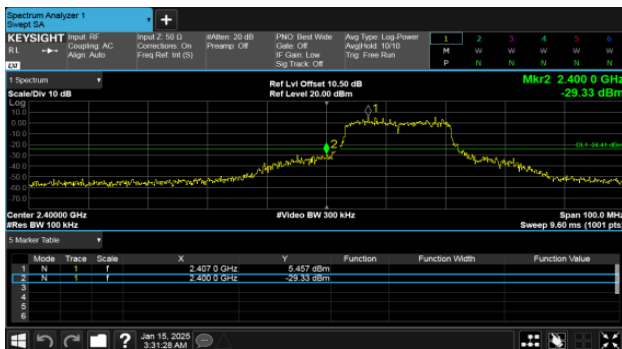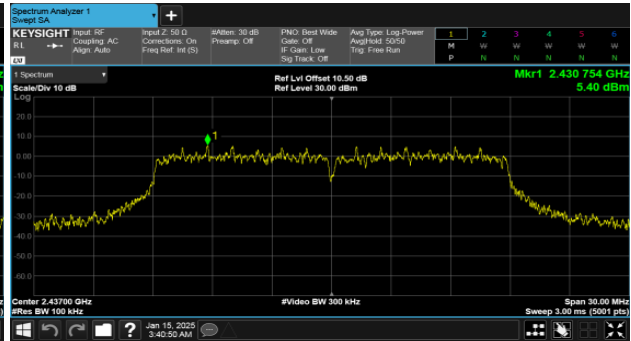




Modulation Type: 802.11n HT20 CH11


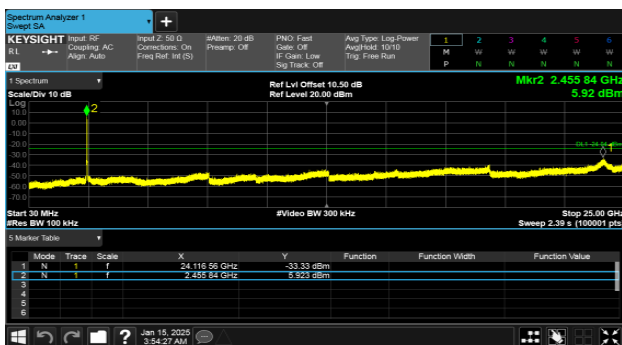
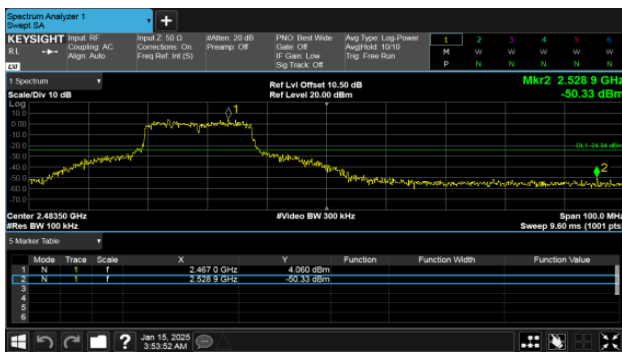
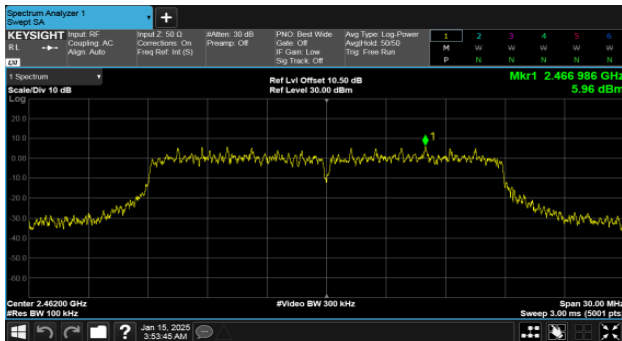




Modulation Type: 802.11n HT40 CH03


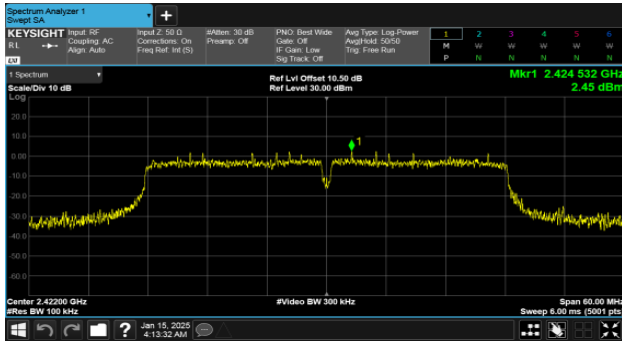


Modulation Type: 802.11n HT40 CH06

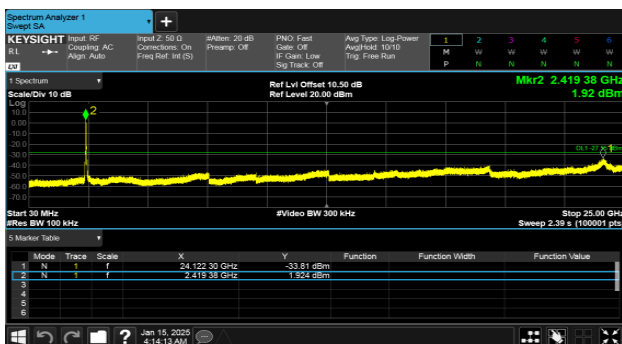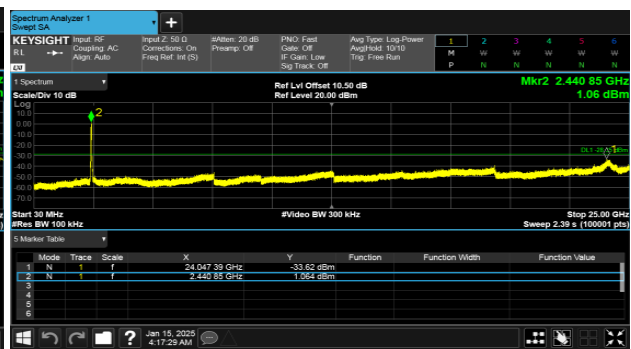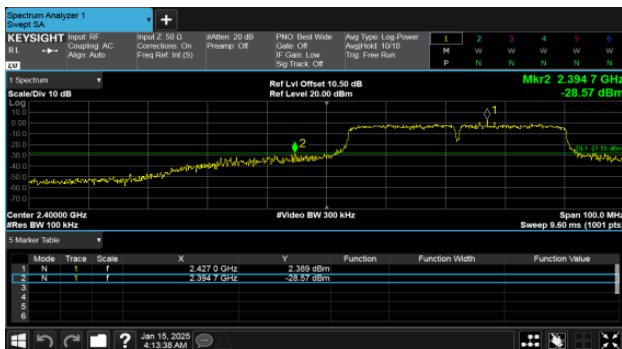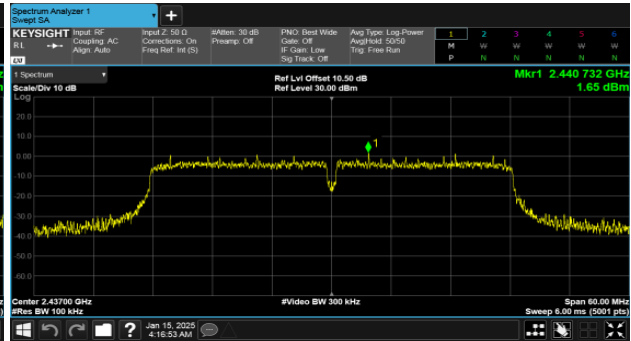



Modulation Type: 802.11n HT40 CH09

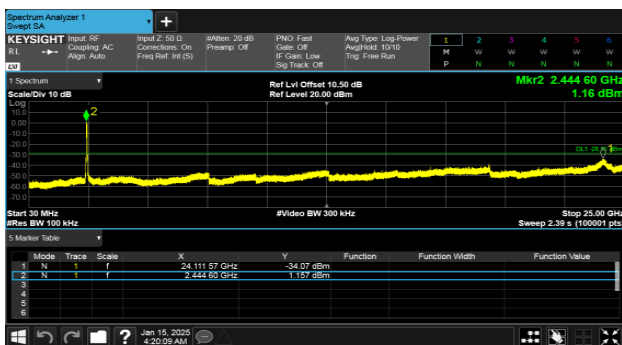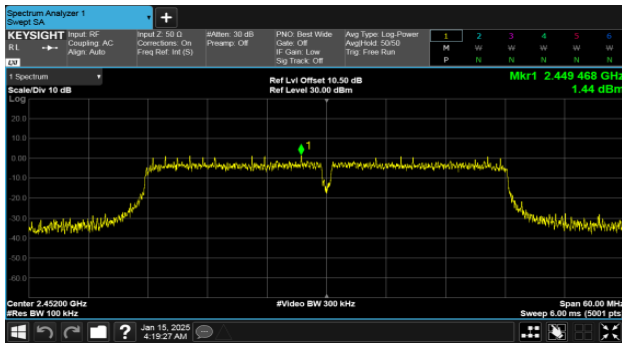



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6
Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout




8.4 Test Result and Data


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
11b,1M	12.440	12.480	99.68%
11g,6M	0.252	0.403	62.44%
11n HT20	0.231	0.365	63.46%
11n HT40	0.951	1.037	91.71%




Modulation Type: 802.11b(1Mbps)

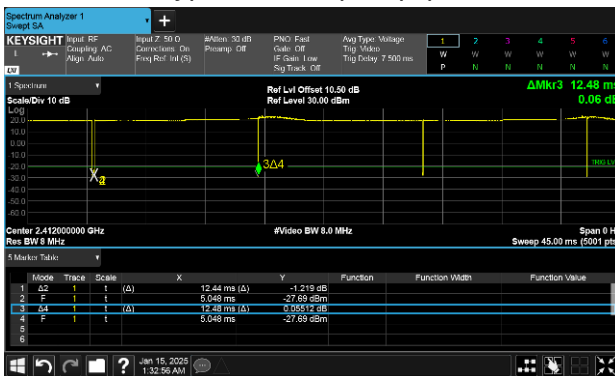


Modulation Type: 802.11n HT20 (6.5Mbps)

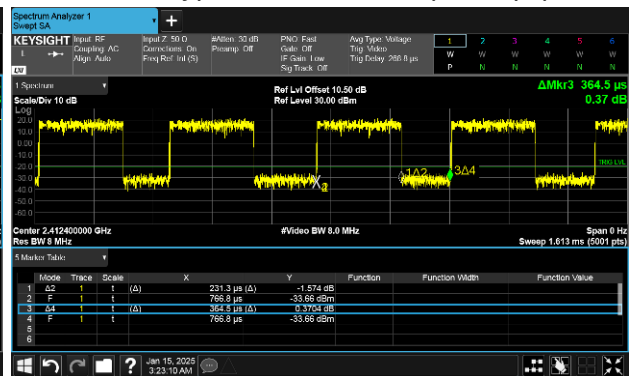

Modulation Type: 802.11g(6Mbps)

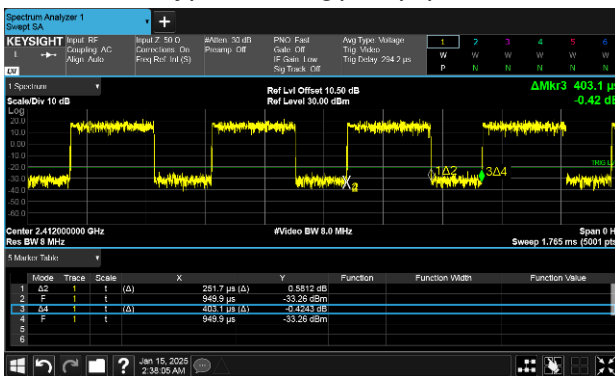

Modulation Type: 802.11n HT40 (13.5Mbps)

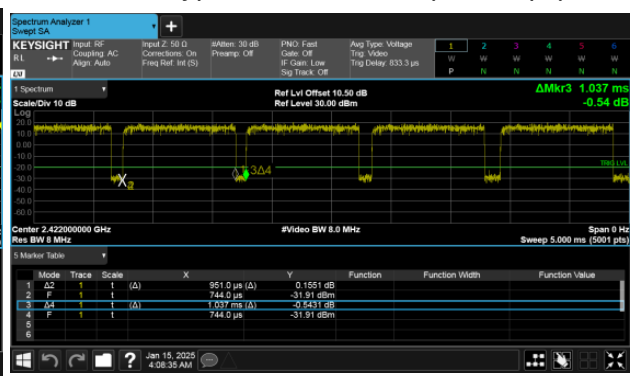



9. 6dB Bandwidth Measurement Data

9.1 Test Limit


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.8

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout



9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11b	1	2412	10.07	0.5
	6	2437	10.11	0.5
	11	2462	10.11	0.5
11g	1	2412	16.46	0.5
	6	2437	16.46	0.5
	11	2462	16.46	0.5
11n HT20	1	2412	17.27	0.5
	6	2437	17.23	0.5
	11	2462	17.25	0.5
11n HT40	3	2422	35.53	0.5
	6	2437	35.49	0.5
	9	2452	35.17	0.5



Modulation Type: 802.11b CH01



Modulation Type: 802.11b CH06




Modulation Type: 802.11b CH11






Modulation Type: 802.11g CH01

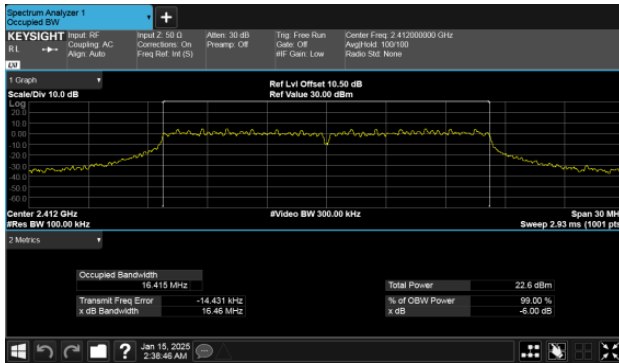

Modulation Type: 802.11g CH06

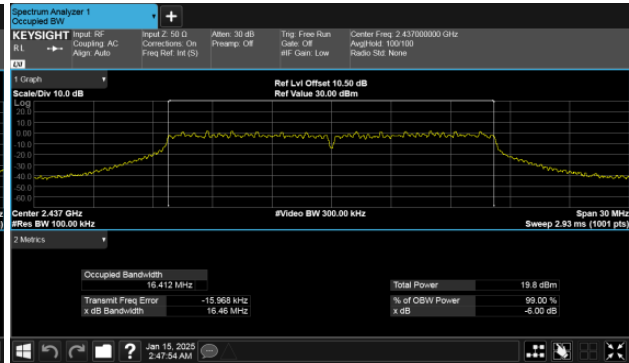


Modulation Type: 802.11g CH11







Modulation Type: 802.11n HT20 CH01

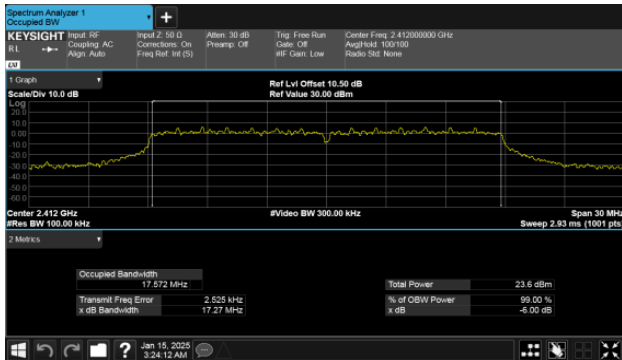

Modulation Type: 802.11n HT20 CH06

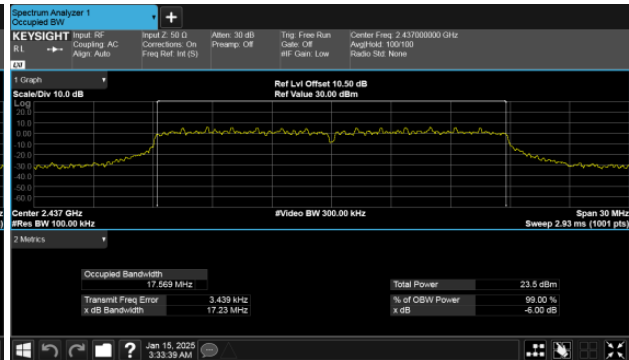


Modulation Type: 802.11n HT20 CH11

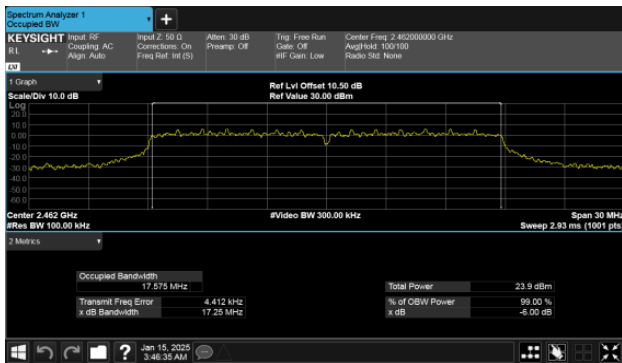





Modulation Type: 802.11n HT40 CH03

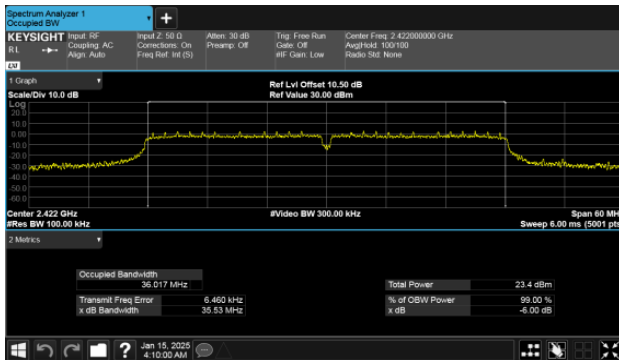

Modulation Type: 802.11n HT40 CH06

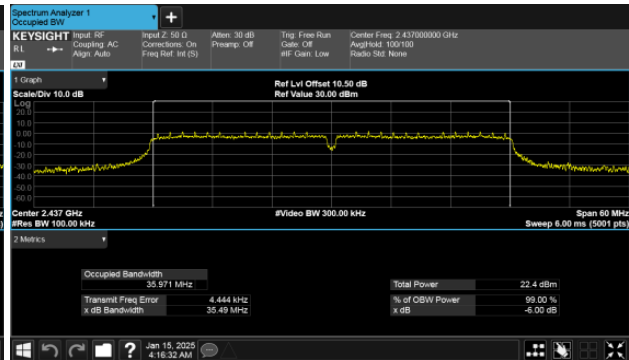

Modulation Type: 802.11n HT40 CH09

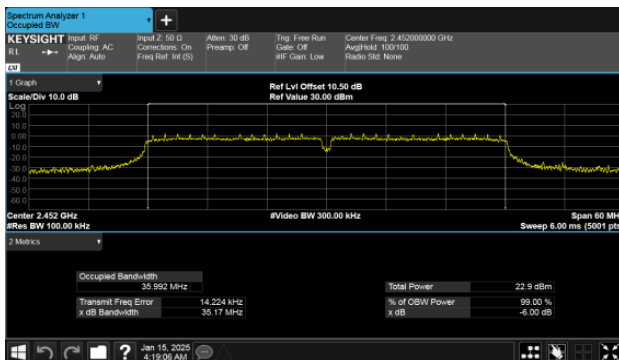



10. Maximum Average Output Power

10.1 Test Limit

The Maximum Average Output Power Measurement is 30dBm.


If transmitting antennas of directional gain greater than 6 dBi are used, the average output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.9.2.3.2

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



10.4 Test Result and Data

Data Rate	Setting	Modulation Mode	CH	Frequency (MHz)	Conducted (AV) output power (dBm)	Total AV power (dBm)	Total AV power (mW)	Power Limit (dBm)
1	40	11b	1	2412	17.96	17.96	62.517	30.00
	39		6	2437	17.69	17.69	58.749	30.00
	39		11	2462	17.63	17.63	57.943	30.00
6	48	11g	1	2412	16.34	16.34	43.053	30.00
	42		6	2437	13.45	13.45	22.131	30.00
	43		11	2462	13.74	13.74	23.659	30.00
MCS0	50	11n HT20	1	2412	16.91	16.91	49.091	30.00
	50		6	2437	16.82	16.82	48.084	30.00
	51		11	2462	17.02	17.02	50.350	30.00
MSC0	51	11n HT40	3	2422	17.46	17.46	55.719	30.00
	49		6	2437	16.45	16.45	44.157	30.00
	50		9	2452	16.92	16.92	49.204	30.00



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.10.

11.3 Test Setup Layout




11.4 Test Result and Data

Modulation Type	CH	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
11b	1	2412	-15.45	-15.45	0.00	-15.45	8.00
	6	2437	-16.188	-16.19	0.00	-16.19	8.00
	11	2462	-15.804	-15.80	0.00	-15.80	8.00
11g	1	2412	-13.8	-13.80	2.05	-11.75	8.00
	6	2437	-16.662	-16.66	2.05	-14.61	8.00
	11	2462	-15.945	-15.95	2.05	-13.90	8.00
11n HT20	1	2412	-13.139	-13.14	1.98	-11.16	8.00
	6	2437	-13.344	-13.34	1.98	-11.36	8.00
	11	2462	-12.923	-12.92	1.98	-10.94	8.00


Modulation Type	CH	Frequency (MHz)	Maximum Power Density of 100KHz Bandwidth(dBm)	Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
11n HT40	3	2422	-6.718	-6.72	0.38	-6.34	8.00
	6	2437	-7.125	-7.13	0.38	-6.75	8.00
	9	2452	-7.13	-7.13	0.38	-6.75	8.00




Modulation Type: 802.11b CH01

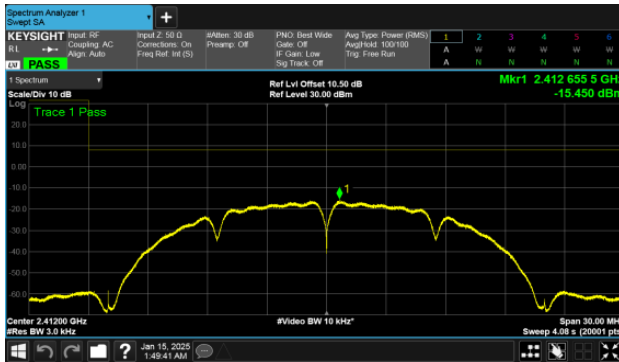

Modulation Type: 802.11b CH06

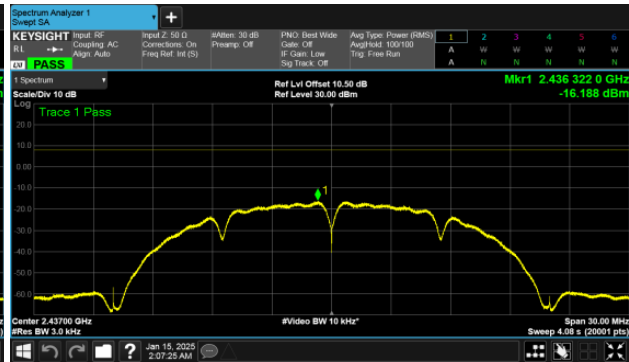


Modulation Type: 802.11b CH11

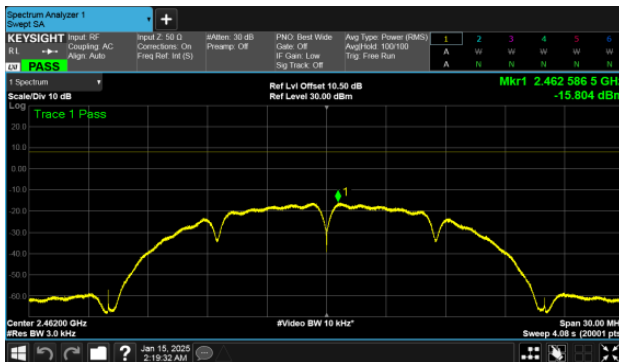





Modulation Type: 802.11g CH01

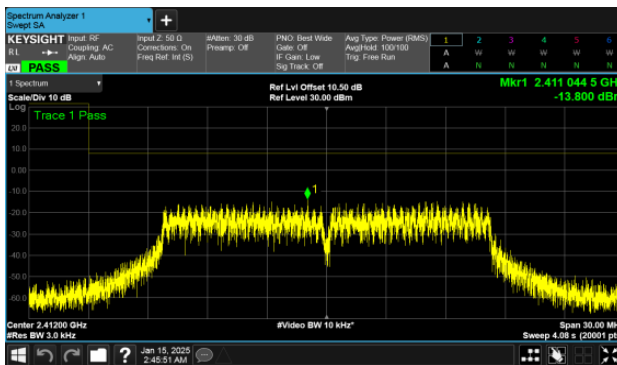

Modulation Type: 802.11g CH06

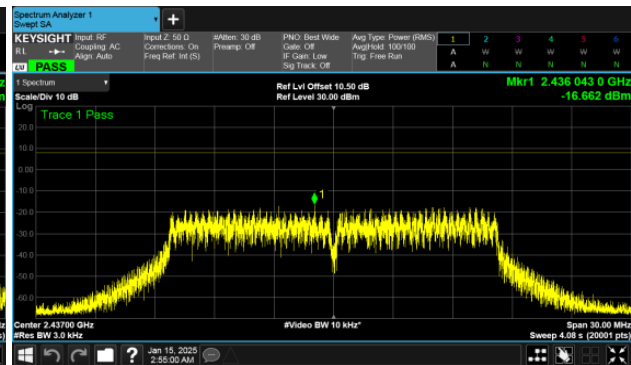


Modulation Type: 802.11g CH11

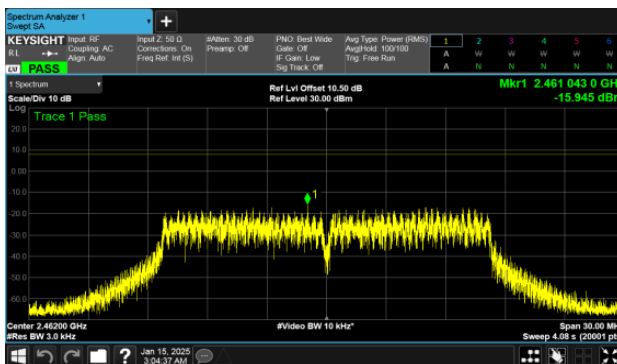





Modulation Type: 802.11n HT 20 CH01

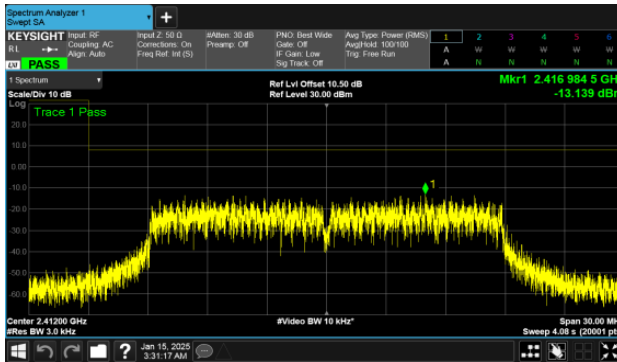

Modulation Type: 802.11n HT 20 CH06

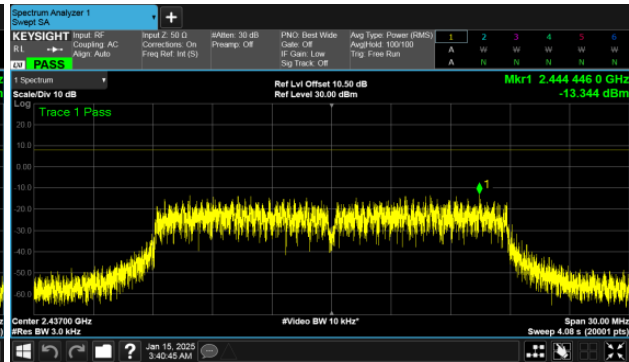


Modulation Type: 802.11n HT 20 CH11

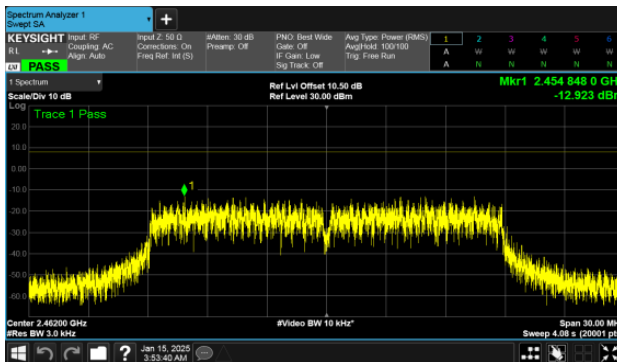





Modulation Type: 802.11n HT 40 CH03

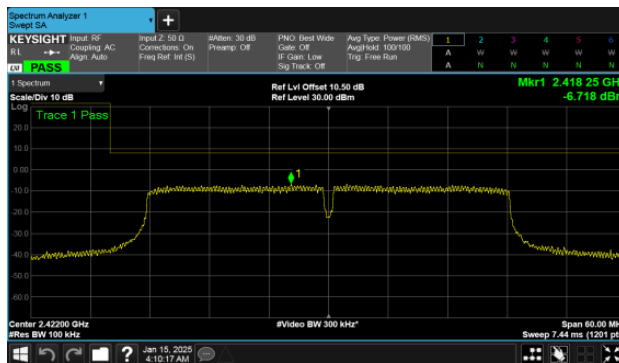

Modulation Type: 802.11n HT 40 CH06

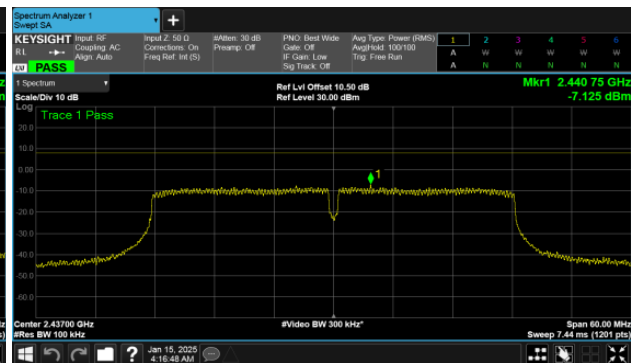

Modulation Type: 802.11n HT 40 CH09

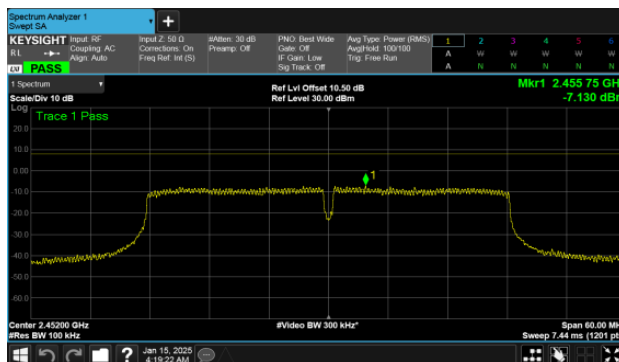

-----THE END OF REPORT-----