


**Test Mode** Mode 3, Band 2

Test Mode : 1TX 11ac40 CH62 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

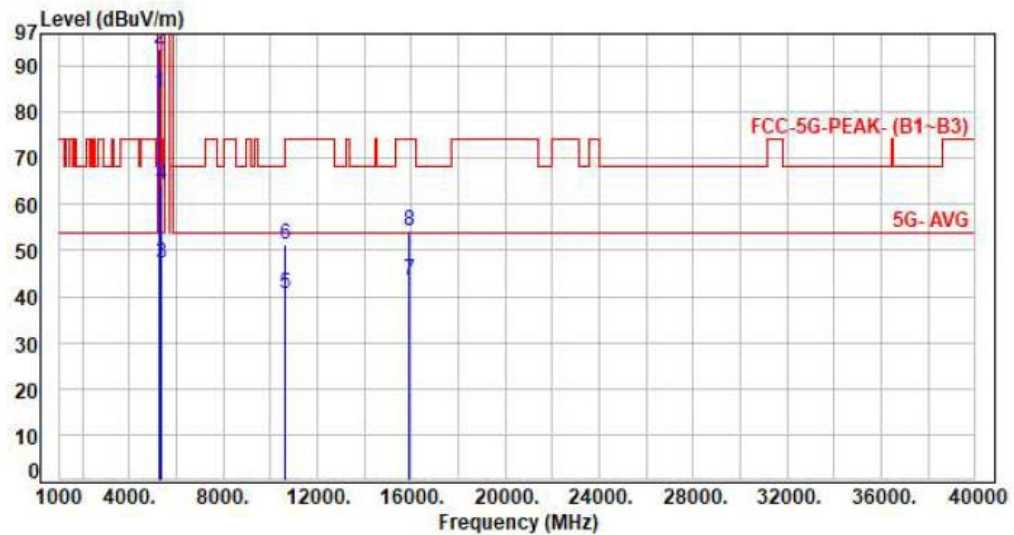

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	-0.59	84.63	84.04	200.00	-115.96	Average	115	211	P
2	5310.00	-0.59	94.20	93.61	200.00	-106.39	Peak	115	211	P
3	5350.00	-0.67	47.81	47.14	54.00	-6.86	Average	115	211	P
4	5350.00	-0.67	64.93	64.26	74.00	-9.74	Peak	115	211	P
5	10620.00	4.70	36.04	40.74	54.00	-13.26	Average	100	102	P
6	10620.00	4.70	46.51	51.21	74.00	-22.79	Peak	100	102	P
7	15930.00	7.53	35.85	43.38	54.00	-10.62	Average	100	304	P
8	15930.00	7.53	46.57	54.10	74.00	-19.90	Peak	100	304	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 2

Test Mode : 1TX 11ac80 CH58 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

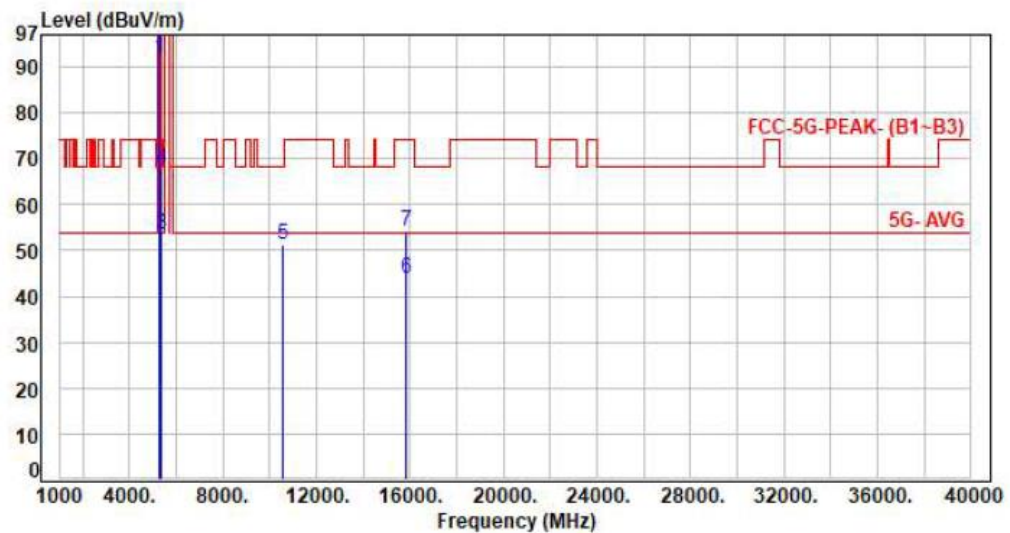

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	-0.45	92.31	91.86	200.00	-108.14	Average	167	296	P
2	5290.00	-0.45	101.57	101.12	200.00	-98.88	Peak	167	296	P
3	5350.00	-0.47	53.82	53.35	54.00	-0.65	Average	167	296	P
4	5350.00	-0.47	68.36	67.89	74.00	-6.11	Peak	167	296	P
5	10580.00	4.80	46.31	51.11	68.20	-17.09	Peak	100	253	P
6	15870.00	7.57	36.34	43.91	54.00	-10.09	Average	100	253	P
7	15870.00	7.57	46.65	54.22	74.00	-19.78	Peak	100	150	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 2

Test Mode : 1TX 11ac80 CH58 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

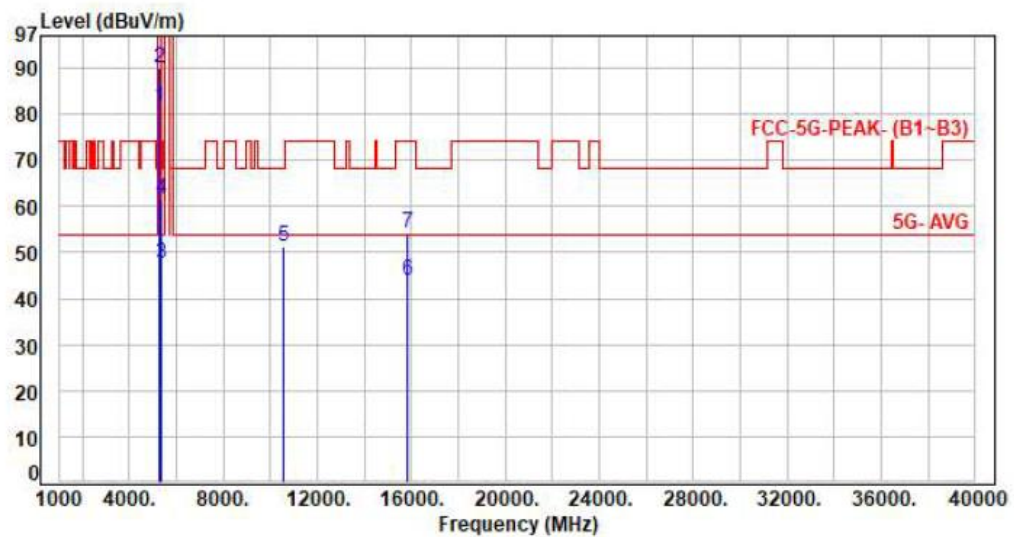

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	-0.57	81.98	81.41	200.00	-118.59	Average	218	211	P
2	5290.00	-0.57	90.73	90.16	200.00	-109.84	Peak	218	211	P
3	5350.00	-0.67	48.09	47.42	54.00	-6.58	Average	218	211	P
4	5350.00	-0.67	62.10	61.43	74.00	-12.57	Peak	218	211	P
5	10580.00	4.70	46.40	51.10	68.20	-17.10	Peak	100	106	P
6	15870.00	7.57	36.38	43.95	54.00	-10.05	Average	100	301	P
7	15870.00	7.57	46.79	54.36	74.00	-19.64	Peak	100	301	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH100 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

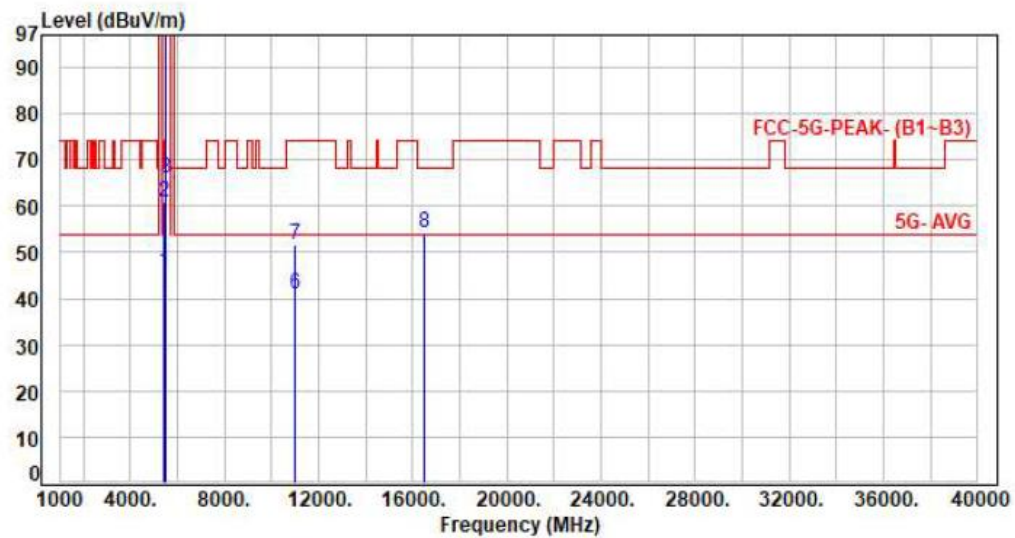


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	46.41	45.86	54.00	-8.14	Average	103	298	P
2	5460.00	-0.55	61.40	60.85	74.00	-13.15	Peak	103	298	P
3	5470.00	-0.51	66.37	65.86	68.20	-2.34	Peak	103	298	P
4	5500.00	-0.39	96.59	96.20	200.00	-103.80	Average	103	298	P
5	5500.00	-0.39	106.57	106.18	200.00	-93.82	Peak	103	298	P
6	11000.00	4.81	36.31	41.12	54.00	-12.88	Average	100	254	P
7	11000.00	4.81	46.92	51.73	74.00	-22.27	Peak	100	254	P
8	16500.00	6.78	47.35	54.13	68.20	-14.07	Peak	100	158	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH100 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

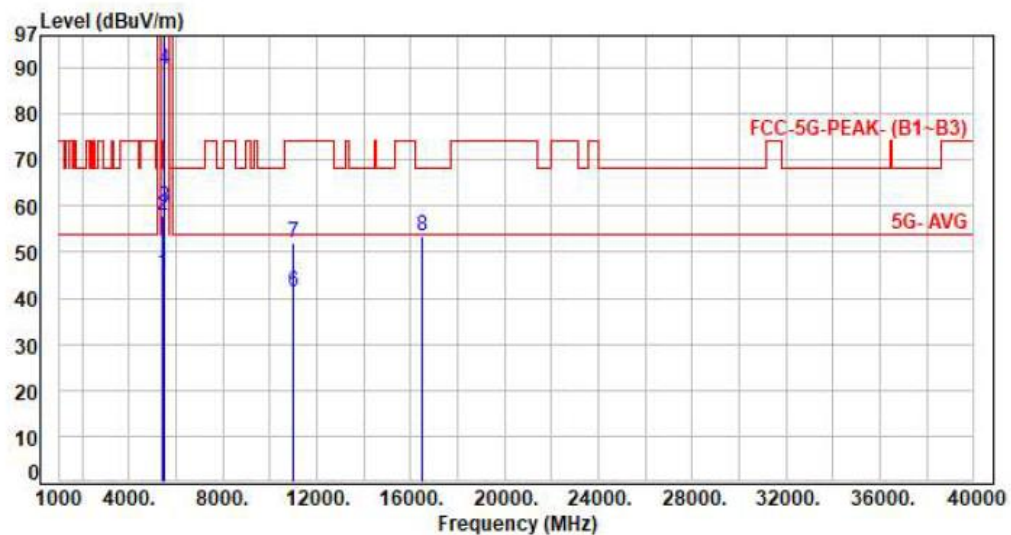


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.93	45.38	54.00	-8.62	Average	103	209	P
2	5460.00	-0.55	58.54	57.99	74.00	-16.01	Peak	103	209	P
3	5470.00	-0.51	60.43	59.92	68.20	-8.28	Peak	103	209	P
4	5500.00	-0.39	89.89	89.50	200.00	-110.50	Average	103	209	P
5	5500.00	-0.39	99.47	99.08	200.00	-100.92	Peak	103	209	P
6	11000.00	4.81	36.39	41.20	54.00	-12.80	Average	100	104	P
7	11000.00	4.81	47.11	51.92	74.00	-22.08	Peak	100	104	P
8	16500.00	6.78	46.55	53.33	68.20	-14.87	Peak	100	305	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH120 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

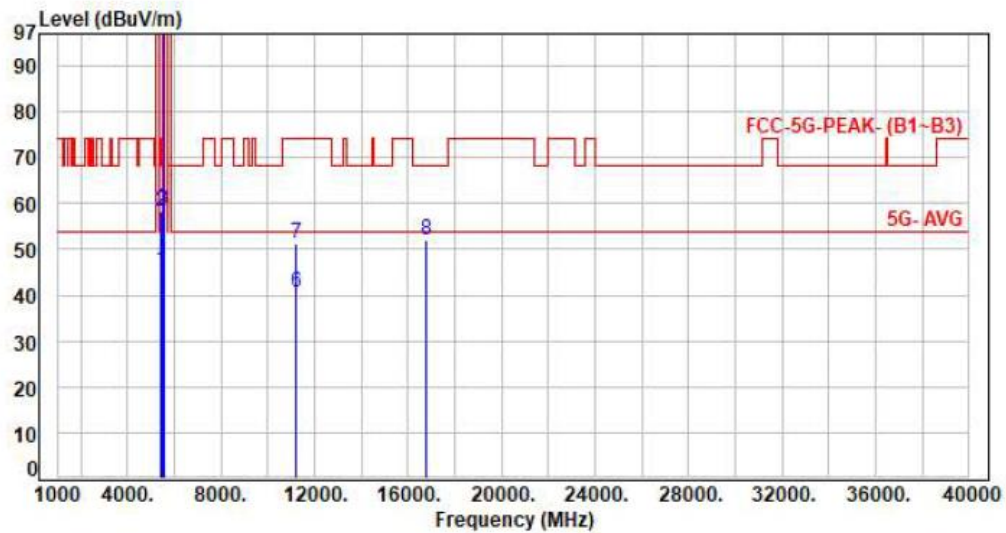

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.93	45.38	54.00	-8.62	Average	100	313	P
2	5460.00	-0.55	58.88	58.33	74.00	-15.67	Peak	100	313	P
3	5470.00	-0.51	58.98	58.47	68.20	-9.73	Peak	100	313	P
4	5600.00	0.01	96.09	96.10	200.00	-103.90	Average	100	313	P
5	5600.00	0.01	105.95	105.96	200.00	-94.04	Peak	100	313	P
6	11200.00	5.07	35.58	40.65	54.00	-13.35	Average	100	256	P
7	11200.00	5.07	46.01	51.08	74.00	-22.92	Peak	100	256	P
8	16800.00	5.89	46.29	52.18	68.20	-16.02	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH120 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

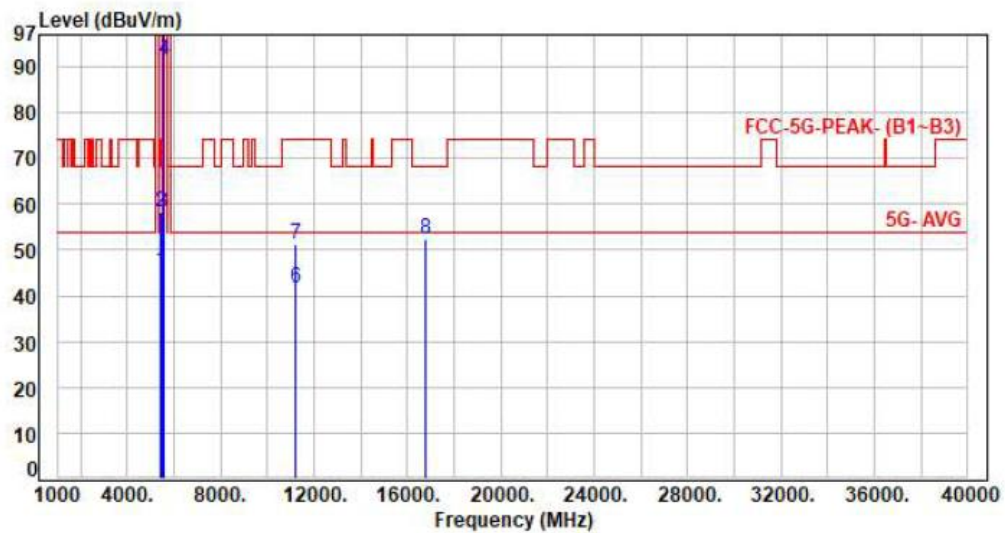

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.75	45.20	54.00	-8.80	Average	165	171	P
2	5460.00	-0.55	58.86	58.31	74.00	-15.69	Peak	165	171	P
3	5470.00	-0.51	58.76	58.25	68.20	-9.95	Peak	165	171	P
4	5600.00	0.01	91.37	91.38	200.00	-108.62	Average	165	171	P
5	5600.00	0.01	101.94	101.95	200.00	-98.05	Peak	165	171	P
6	11200.00	5.07	36.76	41.83	54.00	-12.17	Average	100	107	P
7	11200.00	5.07	46.13	51.20	74.00	-22.80	Peak	100	107	P
8	16800.00	5.89	46.54	52.43	68.20	-15.77	Peak	100	305	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH140 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

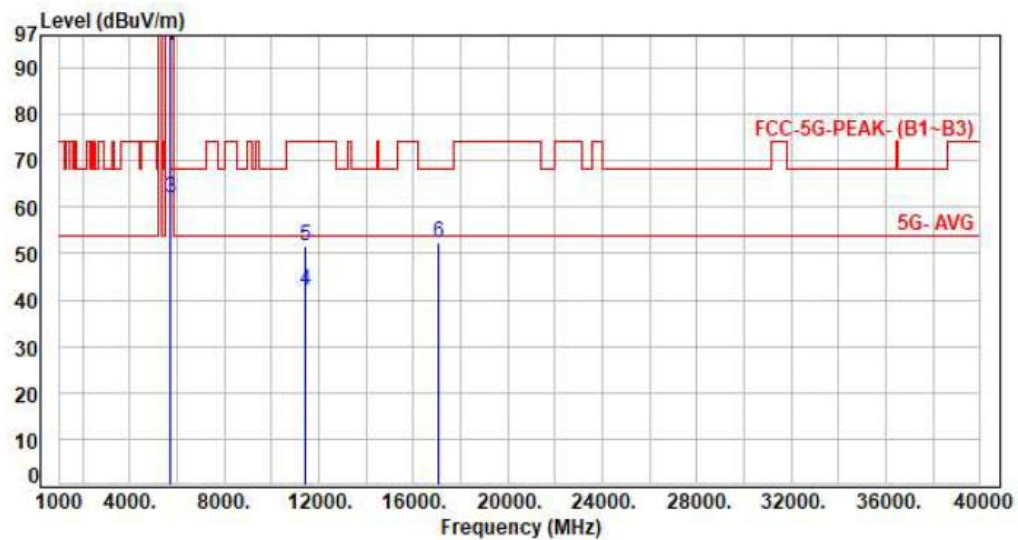


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	0.61	94.11	94.72	200.00	-105.28	Average	104	316	P
2	5700.00	0.61	104.08	104.69	200.00	-95.31	Peak	104	316	P
3	5725.00	0.66	61.36	62.02	68.20	-6.18	Peak	104	316	P
4	11400.00	5.31	36.86	42.17	54.00	-11.83	Average	100	105	P
5	11400.00	5.31	46.30	51.61	74.00	-22.39	Peak	100	105	P
6	17100.00	5.81	46.69	52.50	68.20	-15.70	Peak	100	302	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH140 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

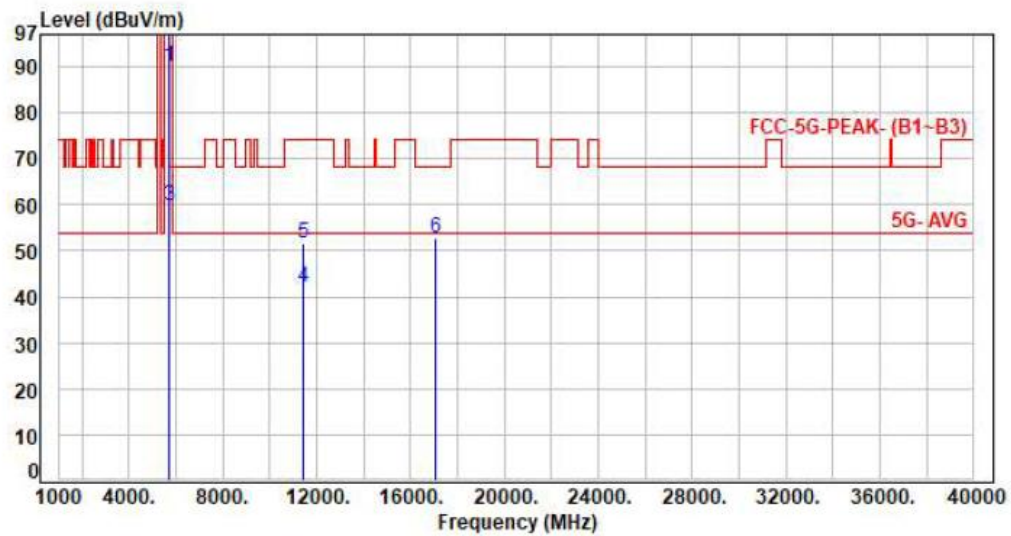

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	0.61	89.23	89.84	200.00	-110.16	Average	155	187	P
2	5700.00	0.61	98.74	99.35	200.00	-100.65	Peak	155	187	P
3	5725.00	0.66	58.94	59.60	68.20	-8.60	Peak	155	187	P
4	11400.00	5.31	36.59	41.90	54.00	-12.10	Average	100	251	P
5	11400.00	5.31	46.36	51.67	74.00	-22.33	Peak	100	251	P
6	17100.00	5.81	46.86	52.67	68.20	-15.53	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH100 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

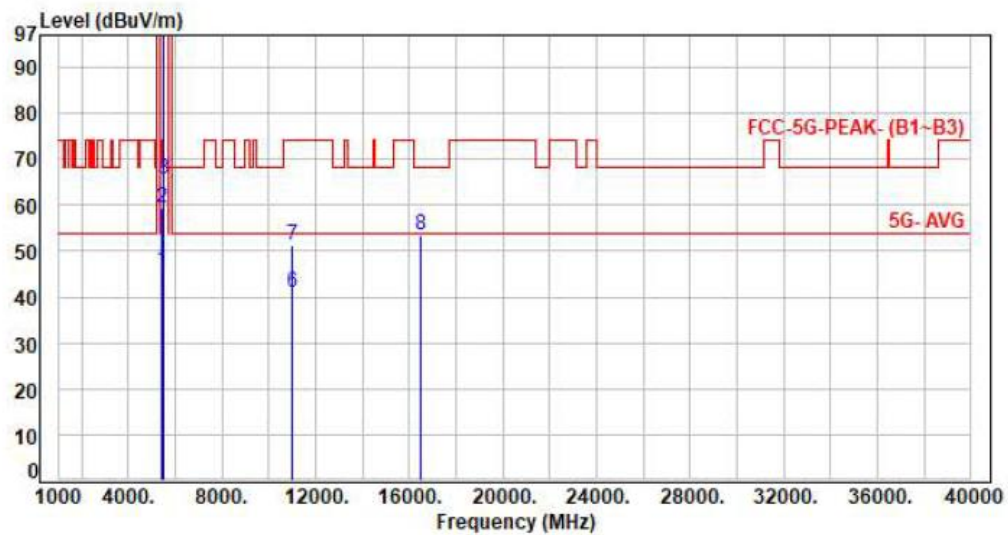

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	46.37	45.82	54.00	-8.18	Average	115	298	P
2	5460.00	-0.55	59.85	59.30	74.00	-14.70	Peak	115	298	P
3	5470.00	-0.51	66.07	65.56	68.20	-2.64	Peak	115	298	P
4	5500.00	-0.39	96.45	96.06	200.00	-103.94	Average	115	298	P
5	5500.00	-0.39	107.67	107.28	200.00	-92.72	Peak	115	298	P
6	11000.00	4.81	36.29	41.10	54.00	-12.90	Average	100	256	P
7	11000.00	4.81	46.58	51.39	74.00	-22.61	Peak	100	256	P
8	16500.00	6.78	46.54	53.32	68.20	-14.88	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH100 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

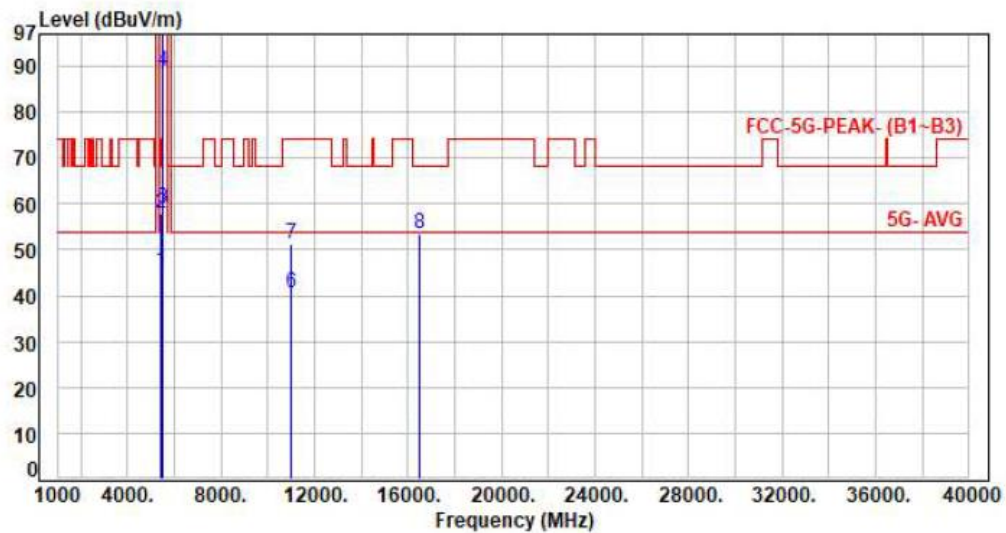

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.98	45.43	54.00	-8.57	Average	106	209	P
2	5460.00	-0.55	58.47	57.92	74.00	-16.08	Peak	106	209	P
3	5470.00	-0.51	59.39	58.88	68.20	-9.32	Peak	106	209	P
4	5500.00	-0.39	89.18	88.79	200.00	-111.21	Average	106	209	P
5	5500.00	-0.39	99.03	98.64	200.00	-101.36	Peak	106	209	P
6	11000.00	4.81	35.64	40.45	54.00	-13.55	Average	100	110	P
7	11000.00	4.81	46.35	51.16	74.00	-22.84	Peak	100	110	P
8	16500.00	6.78	46.52	53.30	68.20	-14.90	Peak	100	307	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH120 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

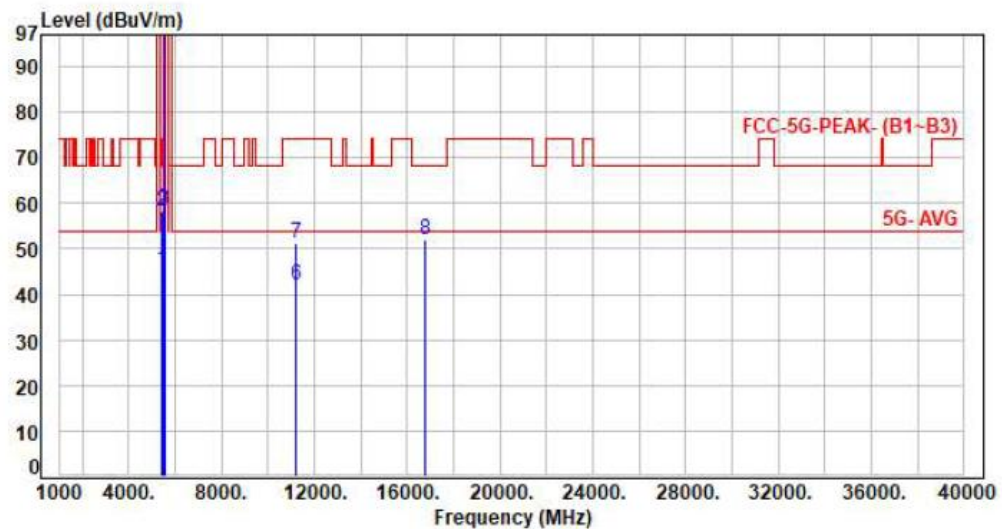

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.90	45.35	54.00	-8.65	Average	100	313	P
2	5460.00	-0.55	58.81	58.26	74.00	-15.74	Peak	100	313	P
3	5470.00	-0.51	59.29	58.78	68.20	-9.42	Peak	100	313	P
4	5600.00	0.01	95.65	95.66	200.00	-104.34	Average	100	313	P
5	5600.00	0.01	106.24	106.25	200.00	-93.75	Peak	100	313	P
6	11200.00	5.07	36.84	41.91	54.00	-12.09	Average	100	256	P
7	11200.00	5.07	46.06	51.13	74.00	-22.87	Peak	100	256	P
8	16800.00	5.89	46.11	52.00	68.20	-16.20	Peak	100	153	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH120 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

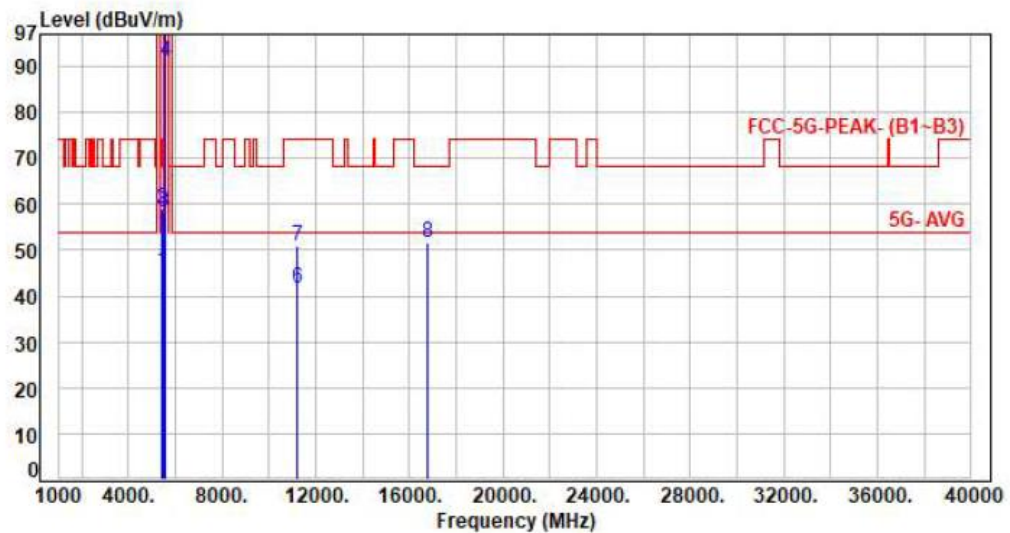

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.98	45.43	54.00	-8.57	Average	144	171	P
2	5460.00	-0.55	59.53	58.98	74.00	-15.02	Peak	144	171	P
3	5470.00	-0.51	58.88	58.37	68.20	-9.83	Peak	144	171	P
4	5600.00	0.01	91.18	91.19	200.00	-108.81	Average	144	171	P
5	5600.00	0.01	101.92	101.93	200.00	-98.07	Peak	144	171	P
6	11200.00	5.07	36.52	41.59	54.00	-12.41	Average	100	105	P
7	11200.00	5.07	45.74	50.81	74.00	-23.19	Peak	100	105	P
8	16800.00	5.89	45.84	51.73	68.20	-16.47	Peak	100	302	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH140 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

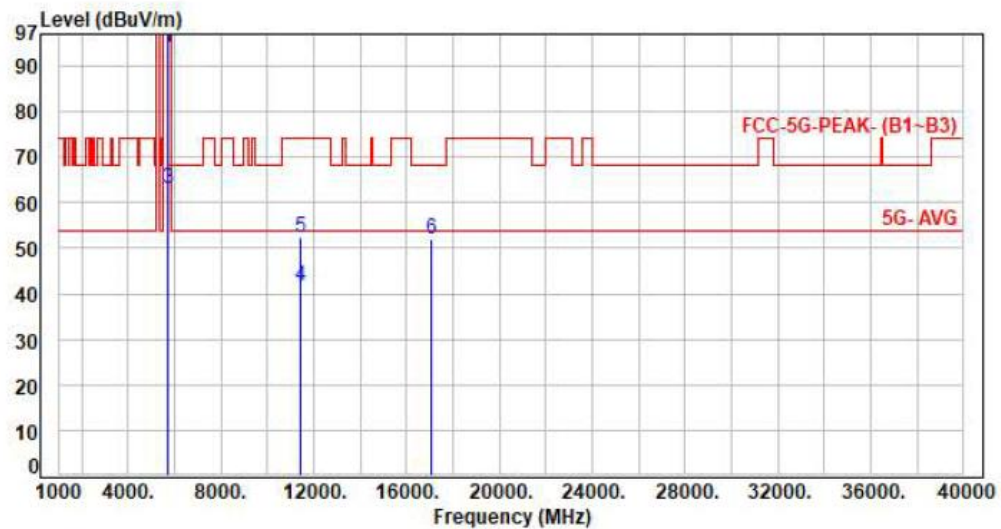

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	0.61	93.61	94.22	200.00	-105.78	Average	103	316	P
2	5700.00	0.61	104.01	104.62	200.00	-95.38	Peak	103	316	P
3	5725.00	0.66	62.57	63.23	68.20	-4.97	Peak	103	316	P
4	11400.00	5.31	36.34	41.65	54.00	-12.35	Average	100	253	P
5	11400.00	5.31	46.95	52.26	74.00	-21.74	Peak	100	253	P
6	17100.00	5.81	46.21	52.02	68.20	-16.18	Peak	100	156	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH140 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

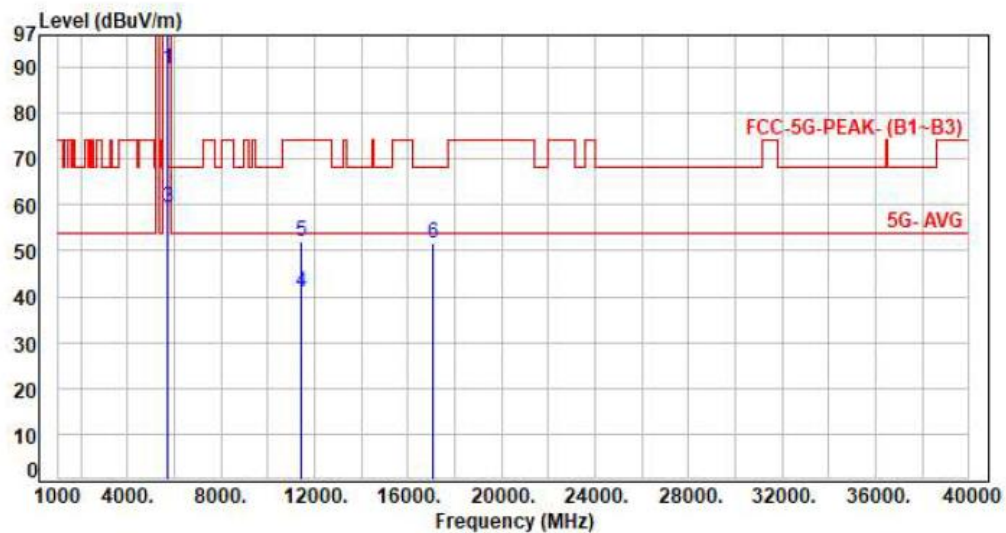

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	0.61	89.17	89.78	200.00	-110.22	Average	103	187	P
2	5700.00	0.61	99.18	99.79	200.00	-100.21	Peak	103	187	P
3	5725.00	0.66	58.68	59.34	68.20	-8.86	Peak	103	187	P
4	11400.00	5.31	35.80	41.11	54.00	-12.89	Average	100	106	P
5	11400.00	5.31	46.53	51.84	74.00	-22.16	Peak	100	106	P
6	17100.00	5.81	45.79	51.60	68.20	-16.60	Peak	100	301	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH102 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

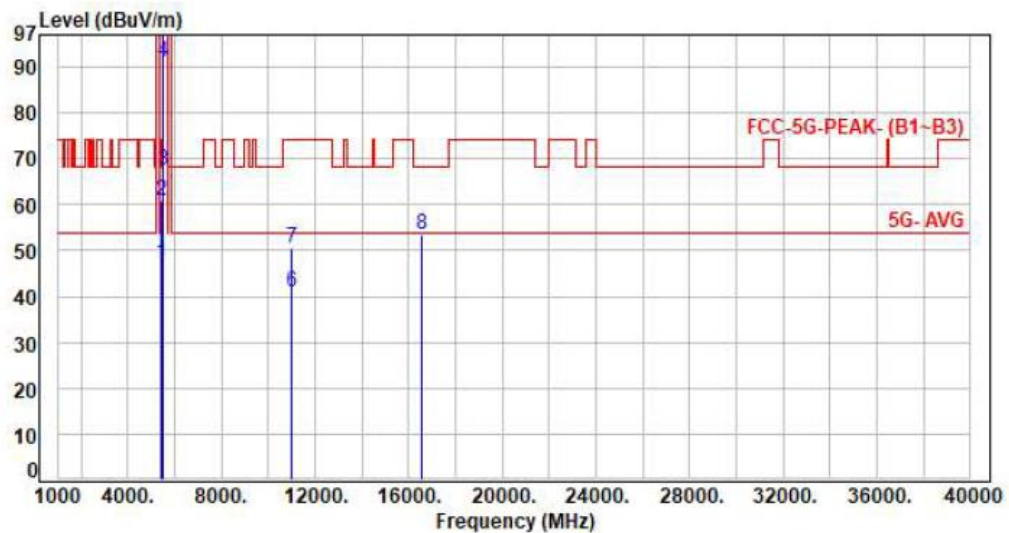

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	47.73	47.18	54.00	-6.82	Average	104	298	P
2	5460.00	-0.55	61.55	61.00	74.00	-13.00	Peak	104	298	P
3	5470.00	-0.51	67.92	67.41	68.20	-0.79	Peak	104	298	P
4	5510.00	-0.35	91.48	91.13	200.00	-108.87	Average	104	298	P
5	5510.00	-0.35	101.36	101.01	200.00	-98.99	Peak	104	298	P
6	11020.00	4.91	36.04	40.95	54.00	-13.05	Average	100	254	P
7	11020.00	4.91	45.62	50.53	74.00	-23.47	Peak	100	254	P
8	16530.00	6.82	46.54	53.36	68.20	-14.84	Peak	100	156	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH102 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

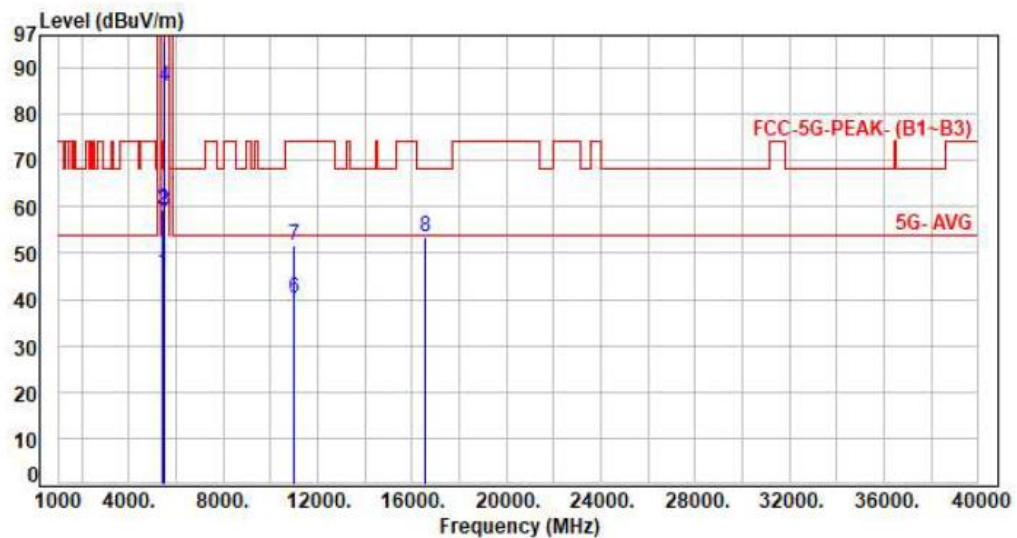

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	46.25	45.70	54.00	-8.30	Average	235	174	P
2	5460.00	-0.55	59.85	59.30	74.00	-14.70	Peak	235	174	P
3	5470.00	-0.51	59.49	58.98	68.20	-9.22	Peak	235	174	P
4	5510.00	-0.35	86.38	86.03	200.00	-113.97	Average	235	174	P
5	5510.00	-0.35	96.27	95.92	200.00	-104.08	Peak	235	174	P
6	11020.00	4.91	35.25	40.16	54.00	-13.84	Average	100	107	P
7	11020.00	4.91	46.57	51.48	74.00	-22.52	Peak	100	107	P
8	16530.00	6.82	46.50	53.32	68.20	-14.88	Peak	100	302	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH118 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

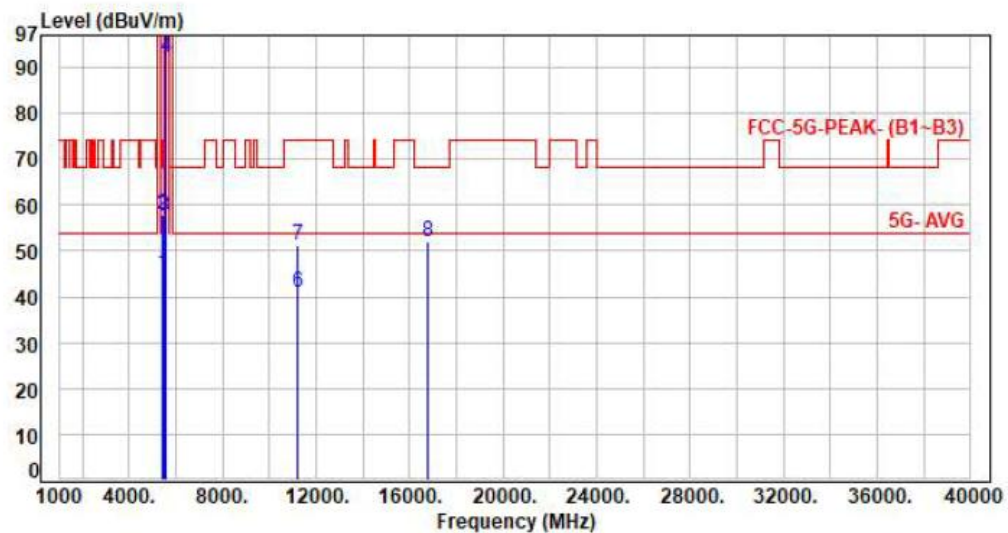

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.71	45.16	54.00	-8.84	Average	110	312	P
2	5460.00	-0.55	58.29	57.74	74.00	-16.26	Peak	110	312	P
3	5470.00	-0.51	58.07	57.56	68.20	-10.64	Peak	110	312	P
4	5590.00	-0.03	92.10	92.07	200.00	-107.93	Average	110	312	P
5	5590.00	-0.03	102.13	102.10	200.00	-97.90	Peak	110	312	P
6	11180.00	5.07	35.97	41.04	54.00	-12.96	Average	100	259	P
7	11180.00	5.07	46.34	51.41	74.00	-22.59	Peak	100	259	P
8	16770.00	6.00	45.83	51.83	68.20	-16.37	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH118 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

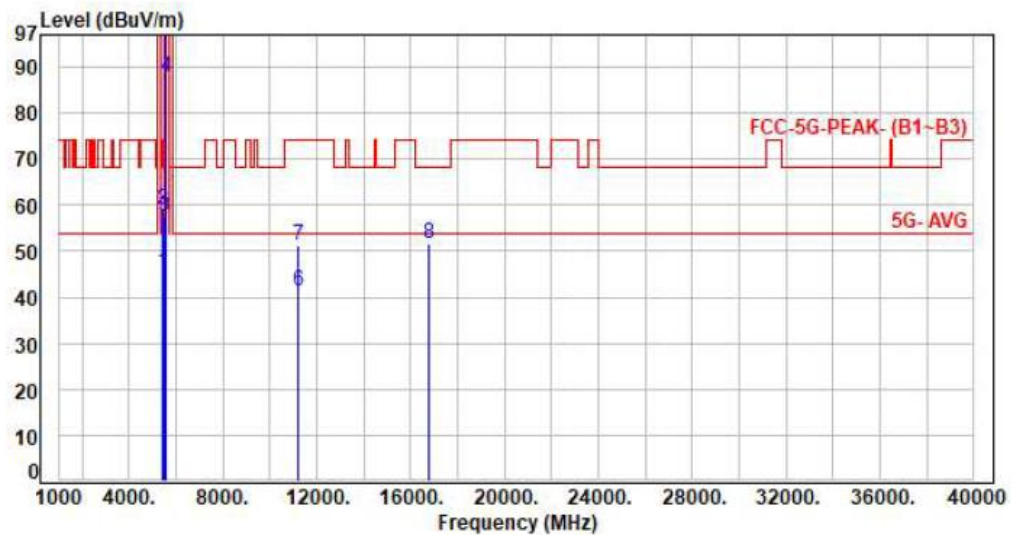

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.94	45.39	54.00	-8.61	Average	218	174	P
2	5460.00	-0.55	59.68	59.13	74.00	-14.87	Peak	218	174	P
3	5470.00	-0.51	58.14	57.63	68.20	-10.57	Peak	218	174	P
4	5590.00	-0.03	87.83	87.80	200.00	-112.20	Average	218	174	P
5	5590.00	-0.03	97.41	97.38	200.00	-102.62	Peak	218	174	P
6	11180.00	5.07	36.41	41.48	54.00	-12.52	Average	100	106	P
7	11180.00	5.07	46.37	51.44	74.00	-22.56	Peak	100	106	P
8	16770.00	6.00	45.61	51.61	68.20	-16.59	Peak	100	300	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH134 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

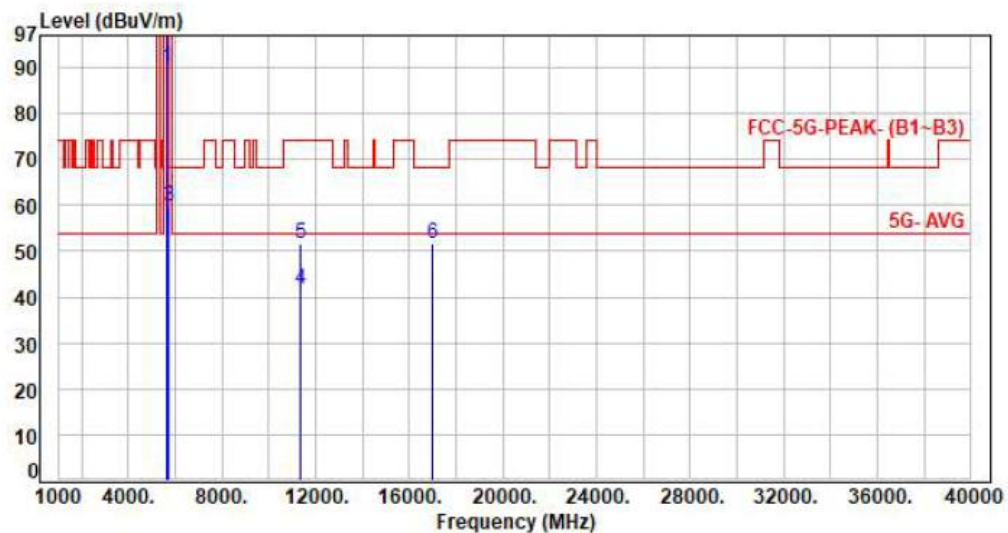

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	0.42	89.55	89.97	200.00	-110.03	Average	112	314	P
2	5670.00	0.42	99.71	100.13	200.00	-99.87	Peak	112	314	P
3	5725.00	0.66	59.08	59.74	68.20	-8.46	Peak	112	314	P
4	11340.00	5.26	36.46	41.72	54.00	-12.28	Average	100	251	P
5	11340.00	5.26	46.42	51.68	74.00	-22.32	Peak	100	251	P
6	17010.00	5.51	46.05	51.56	68.20	-16.64	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH134 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

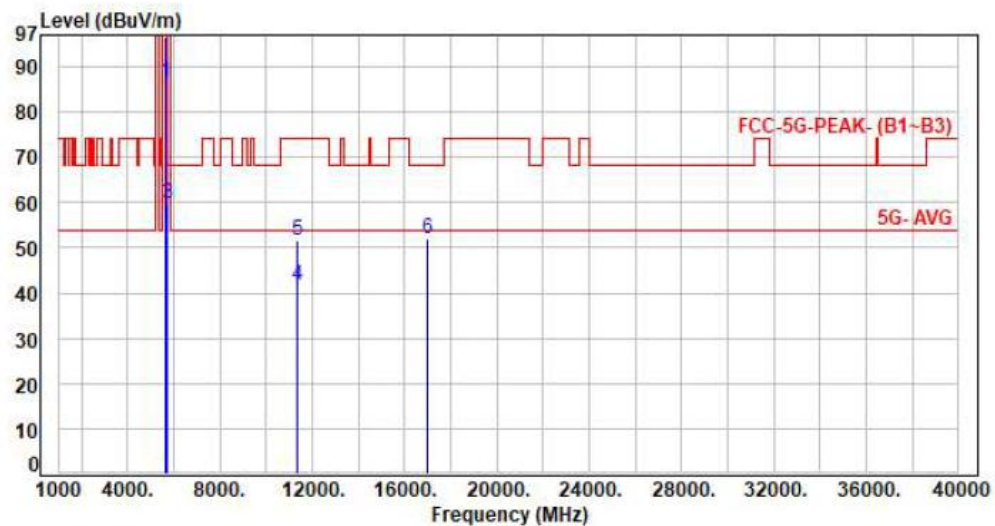

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	0.42	86.18	86.60	200.00	-113.40	Average	200	174	P
2	5670.00	0.42	96.07	96.49	200.00	-103.51	Peak	200	174	P
3	5725.00	0.66	59.14	59.80	68.20	-8.40	Peak	200	174	P
4	11340.00	5.26	36.46	41.72	54.00	-12.28	Average	100	108	P
5	11340.00	5.26	46.35	51.61	74.00	-22.39	Peak	100	108	P
6	17010.00	5.51	46.46	51.97	68.20	-16.23	Peak	100	302	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH106 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

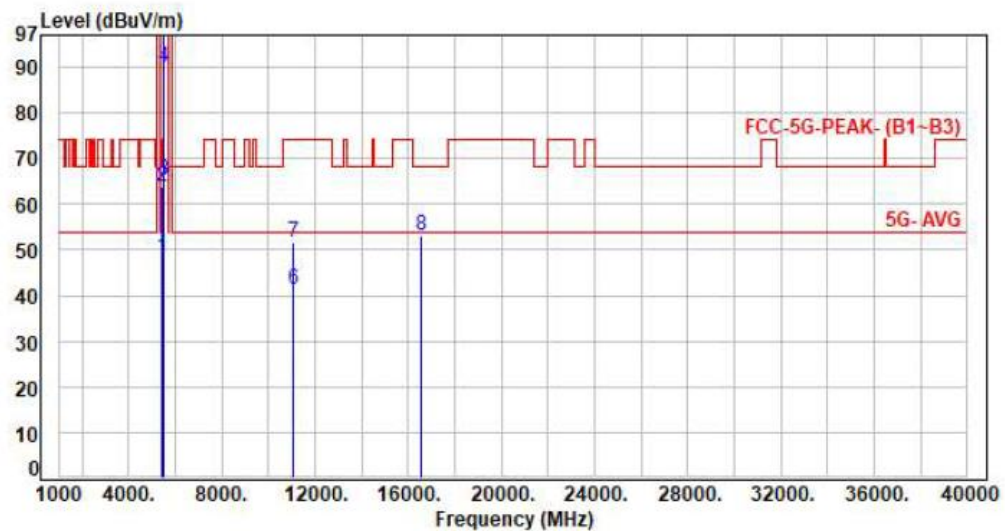

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	48.87	48.32	54.00	-5.68	Average	112	313	P
2	5460.00	-0.55	64.35	63.80	74.00	-10.20	Peak	112	313	P
3	5470.00	-0.51	65.65	65.14	68.20	-3.06	Peak	112	313	P
4	5530.00	-0.28	90.27	89.99	200.00	-110.01	Average	112	313	P
5	5530.00	-0.28	99.04	98.76	200.00	-101.24	Peak	112	313	P
6	11060.00	5.06	36.35	41.41	54.00	-12.59	Average	100	256	P
7	11060.00	5.06	46.45	51.51	74.00	-22.49	Peak	100	256	P
8	16590.00	6.74	46.27	53.01	68.20	-15.19	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH106 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

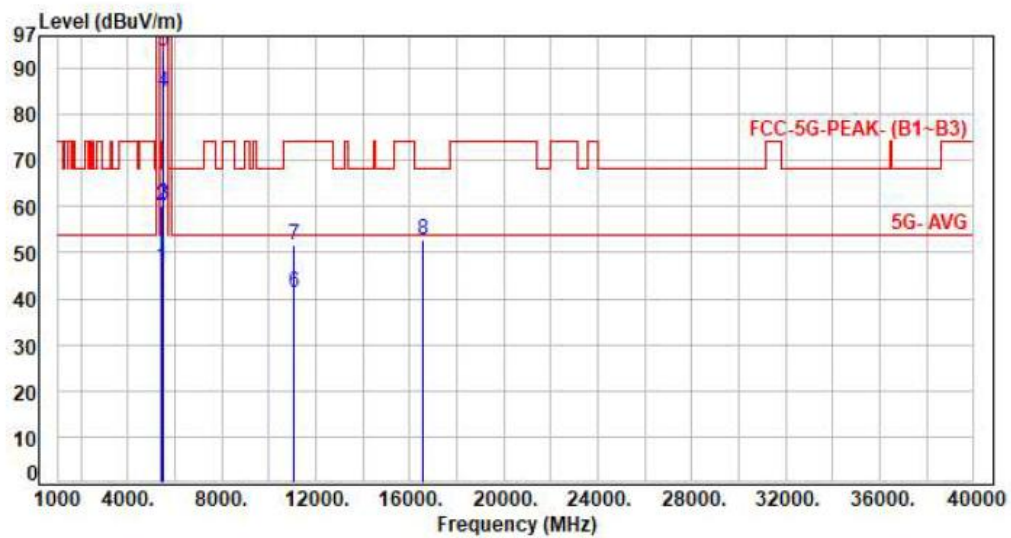


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	47.54	46.99	54.00	-7.01	Average	397	175	P
2	5460.00	-0.55	60.78	60.23	74.00	-13.77	Peak	397	175	P
3	5470.00	-0.51	61.07	60.56	68.20	-7.64	Peak	397	175	P
4	5530.00	-0.28	85.17	84.89	200.00	-115.11	Average	397	175	P
5	5530.00	-0.28	93.98	93.70	200.00	-106.30	Peak	397	175	P
6	11060.00	5.06	36.17	41.23	54.00	-12.77	Average	100	104	P
7	11060.00	5.06	46.73	51.79	74.00	-22.21	Peak	100	104	P
8	16590.00	6.74	45.99	52.73	68.20	-15.47	Peak	100	305	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH122 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

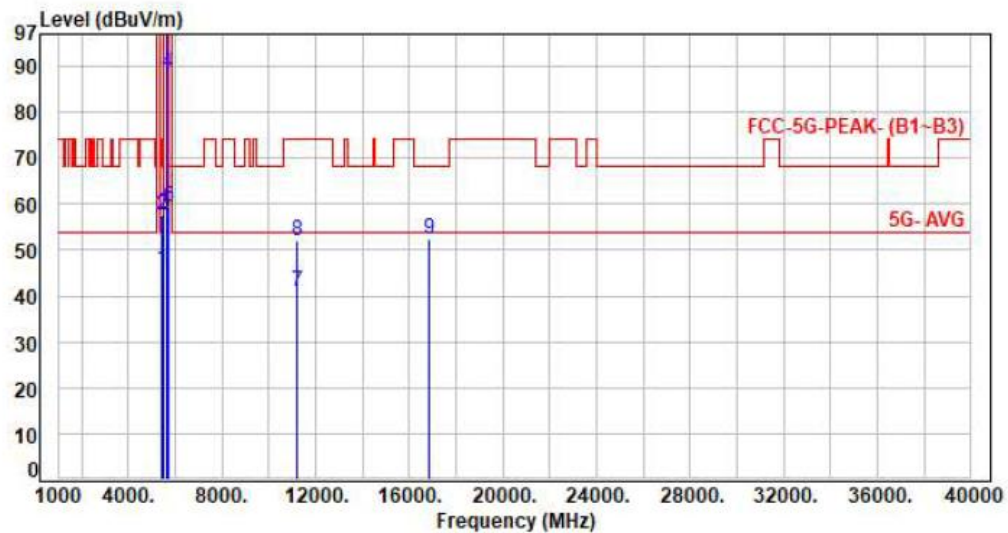

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	46.17	45.62	54.00	-8.38	Average	111	312	P
2	5460.00	-0.55	58.23	57.68	74.00	-16.32	Peak	111	312	P
3	5470.00	-0.51	58.40	57.89	68.20	-10.31	Peak	111	312	P
4	5610.00	0.07	88.54	88.61	200.00	-111.39	Average	111	312	P
5	5610.00	0.07	97.25	97.32	200.00	-102.68	Peak	111	312	P
6	5725.00	0.66	58.64	59.30	68.20	-8.90	Peak	111	312	P
7	11220.00	5.12	35.89	41.01	54.00	-12.99	Average	100	253	P
8	11220.00	5.12	46.80	51.92	74.00	-22.08	Peak	100	253	P
9	16830.00	6.03	46.44	52.47	68.20	-15.73	Peak	100	151	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH122 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

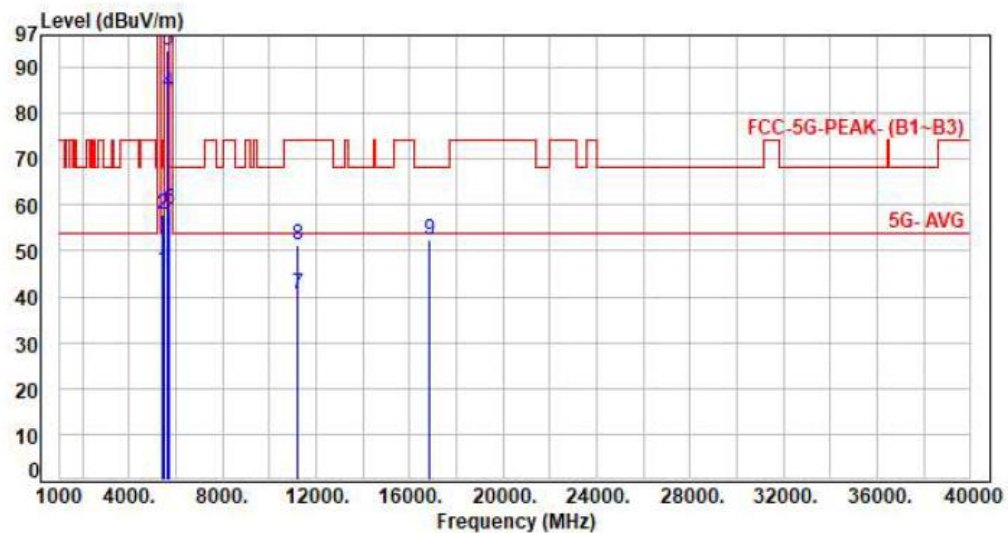

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	46.30	45.75	54.00	-8.25	Average	391	175	P
2	5460.00	-0.55	58.61	58.06	74.00	-15.94	Peak	391	175	P
3	5470.00	-0.51	58.36	57.85	68.20	-10.35	Peak	391	175	P
4	5610.00	0.07	84.47	84.54	200.00	-115.46	Average	391	175	P
5	5610.00	0.07	93.69	93.76	200.00	-106.24	Peak	391	175	P
6	5725.00	0.66	58.44	59.10	68.20	-9.10	Peak	391	175	P
7	11220.00	5.12	35.56	40.68	54.00	-13.32	Average	100	106	P
8	11220.00	5.12	46.16	51.28	74.00	-22.72	Peak	100	106	P
9	16830.00	6.03	46.47	52.50	68.20	-15.70	Peak	100	300	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3: Straddle Channel

Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

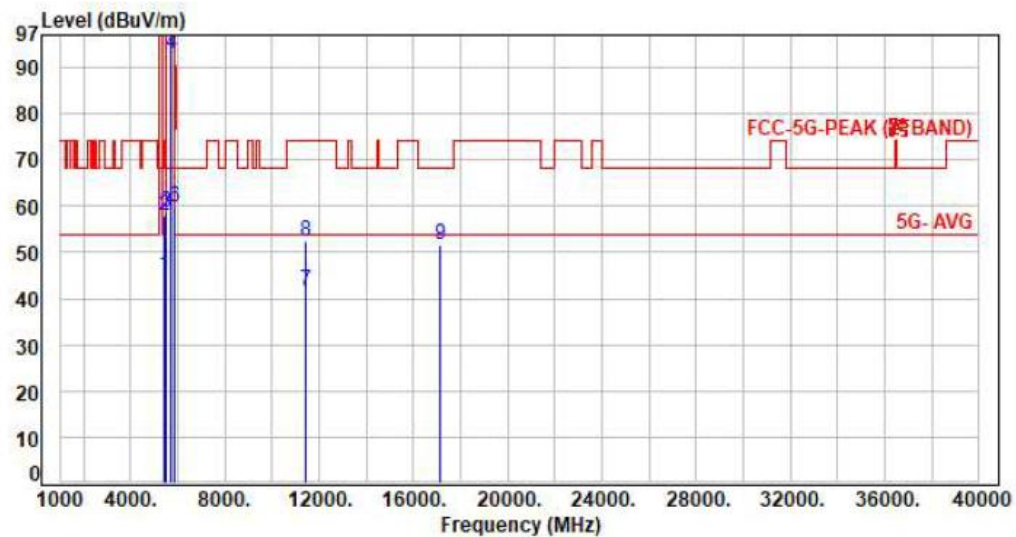

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.46	44.91	54.00	-9.09	Average	117	317	P
2	5460.00	-0.55	58.49	57.94	74.00	-16.06	Peak	117	317	P
3	5470.00	-0.51	59.33	58.82	68.20	-9.38	Peak	117	317	P
4	5720.00	0.64	92.25	92.89	200.00	-107.11	Average	117	317	P
5	5720.00	0.64	102.62	103.26	200.00	-96.74	Peak	117	317	P
6	5850.00	0.80	58.98	59.78	68.20	-8.42	Peak	117	317	P
7	11440.00	5.32	36.48	41.80	54.00	-12.20	Average	100	251	P
8	11440.00	5.32	46.99	52.31	74.00	-21.69	Peak	100	251	P
9	17160.00	5.40	46.10	51.50	68.20	-16.70	Peak	100	156	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3: Straddle Channel

Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

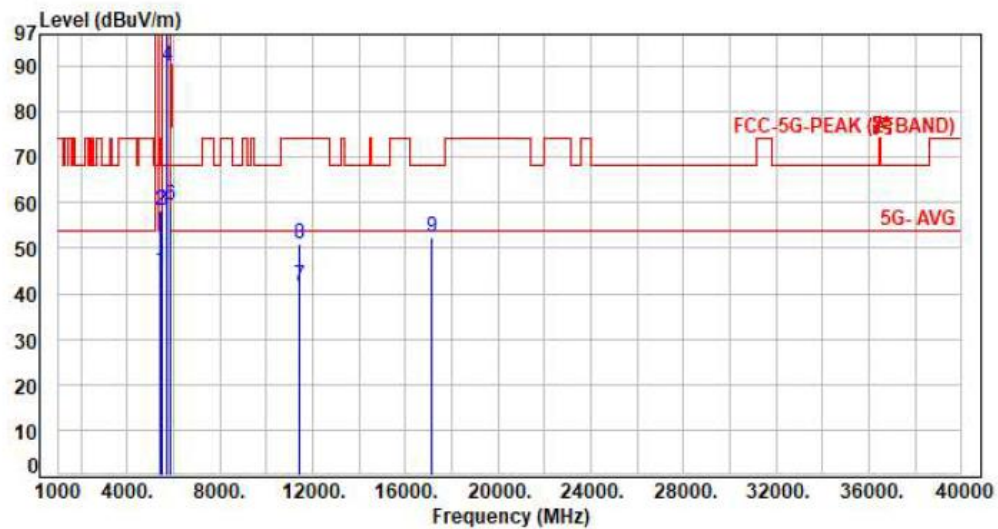


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.55	45.00	54.00	-9.00	Average	208	174	P
2	5460.00	-0.55	58.68	58.13	74.00	-15.87	Peak	208	174	P
3	5470.00	-0.51	58.66	58.15	68.20	-10.05	Peak	208	174	P
4	5720.00	0.64	89.21	89.85	200.00	-110.15	Average	208	174	P
5	5720.00	0.64	99.07	99.71	200.00	-100.29	Peak	208	174	P
6	5850.00	0.80	58.71	59.51	68.20	-8.69	Peak	208	174	P
7	11440.00	5.32	36.50	41.82	54.00	-12.18	Average	100	108	P
8	11440.00	5.32	45.66	50.98	74.00	-23.02	Peak	100	108	P
9	17160.00	5.40	46.98	52.38	68.20	-15.82	Peak	100	302	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3: Straddle Channel

Test Mode : 1TX 11ac20 CH144 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

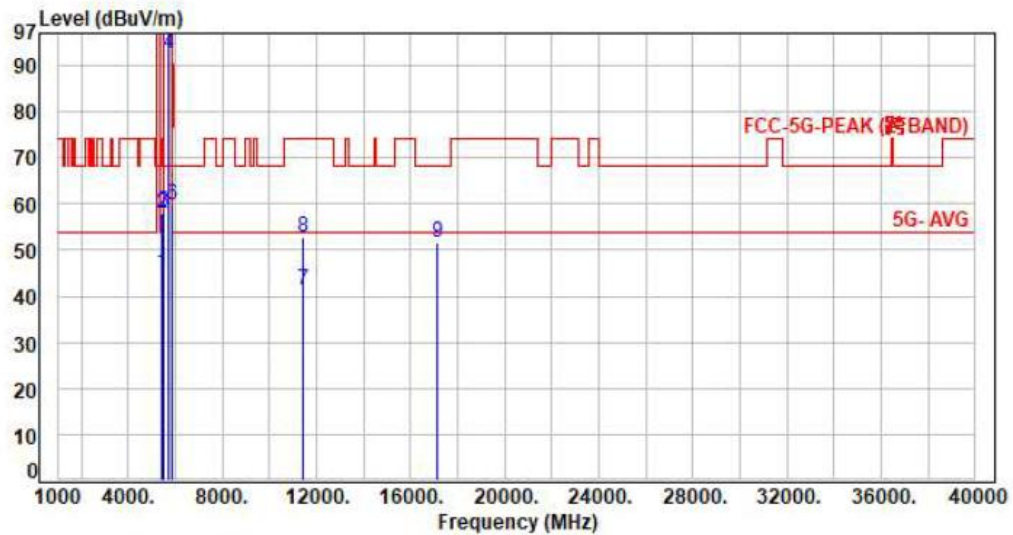


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.52	44.97	54.00	-9.03	Average	105	318	P
2	5460.00	-0.55	58.42	57.87	74.00	-16.13	Peak	105	318	P
3	5470.00	-0.51	58.64	58.13	68.20	-10.07	Peak	105	318	P
4	5720.00	0.64	92.02	92.66	200.00	-107.34	Average	105	318	P
5	5720.00	0.64	101.82	102.46	200.00	-97.54	Peak	105	318	P
6	5850.00	0.80	59.11	59.91	68.20	-8.29	Peak	105	318	P
7	11440.00	5.32	36.12	41.44	54.00	-12.56	Average	100	248	P
8	11440.00	5.32	47.38	52.70	74.00	-21.30	Peak	100	248	P
9	17160.00	5.40	46.11	51.51	68.20	-16.69	Peak	100	156	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3: Straddle Channel

Test Mode : 1TX 11ac20 CH144 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

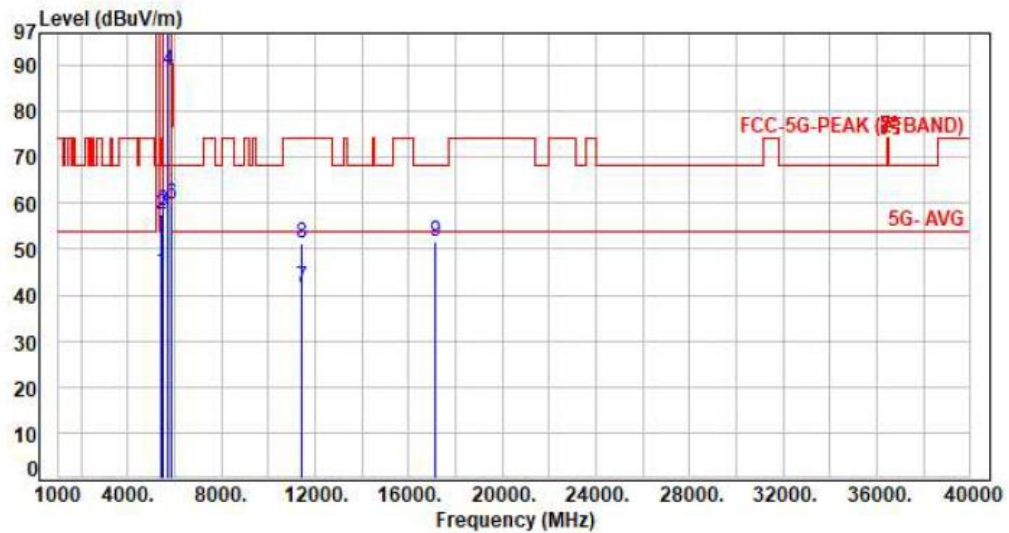

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.45	44.90	54.00	-9.10	Average	209	175	P
2	5460.00	-0.55	58.21	57.66	74.00	-16.34	Peak	209	175	P
3	5470.00	-0.51	58.91	58.40	68.20	-9.80	Peak	209	175	P
4	5720.00	0.64	88.33	88.97	200.00	-111.03	Average	209	175	P
5	5720.00	0.64	98.49	99.13	200.00	-100.87	Peak	209	175	P
6	5850.00	0.80	58.87	59.67	68.20	-8.53	Peak	209	175	P
7	11440.00	5.32	36.38	41.70	54.00	-12.30	Average	100	102	P
8	11440.00	5.32	45.87	51.19	74.00	-22.81	Peak	100	102	P
9	17160.00	5.40	46.22	51.62	68.20	-16.58	Peak	100	306	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3: Straddle Channel

Test Mode : 1TX 11ac40 CH142 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

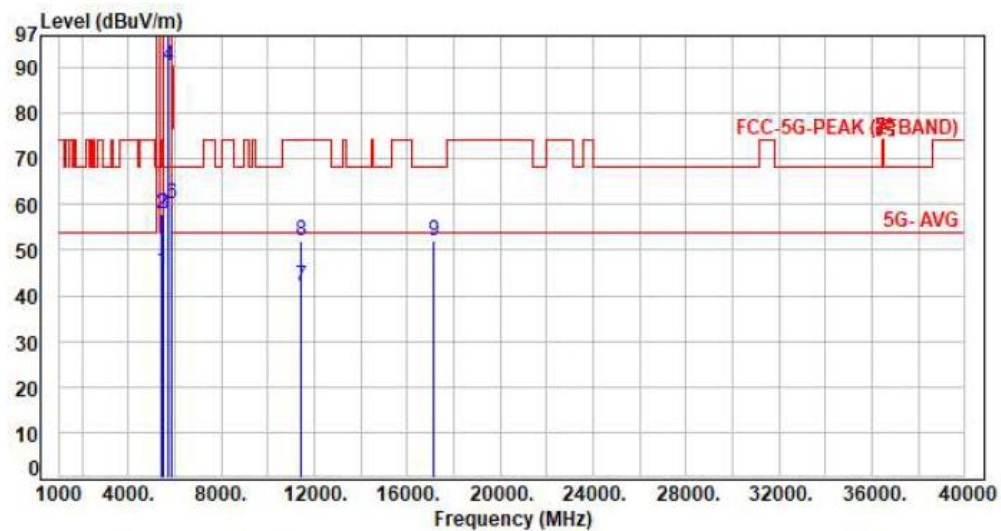

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	45.91	45.36	54.00	-8.64	Average	107	318	P
2	5460.00	-0.55	58.29	57.74	74.00	-16.26	Peak	107	318	P
3	5470.00	-0.51	58.49	57.98	68.20	-10.22	Peak	107	318	P
4	5710.00	0.62	89.59	90.21	200.00	-109.79	Average	107	318	P
5	5710.00	0.62	99.90	100.52	200.00	-99.48	Peak	107	318	P
6	5850.00	0.80	59.15	59.95	68.20	-8.25	Peak	107	318	P
7	11420.00	5.31	36.75	42.06	54.00	-11.94	Average	100	252	P
8	11420.00	5.31	46.63	51.94	74.00	-22.06	Peak	100	252	P
9	17130.00	5.59	46.27	51.86	68.20	-16.34	Peak	100	153	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3: Straddle Channel

Test Mode : 1TX 11ac40 CH142 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

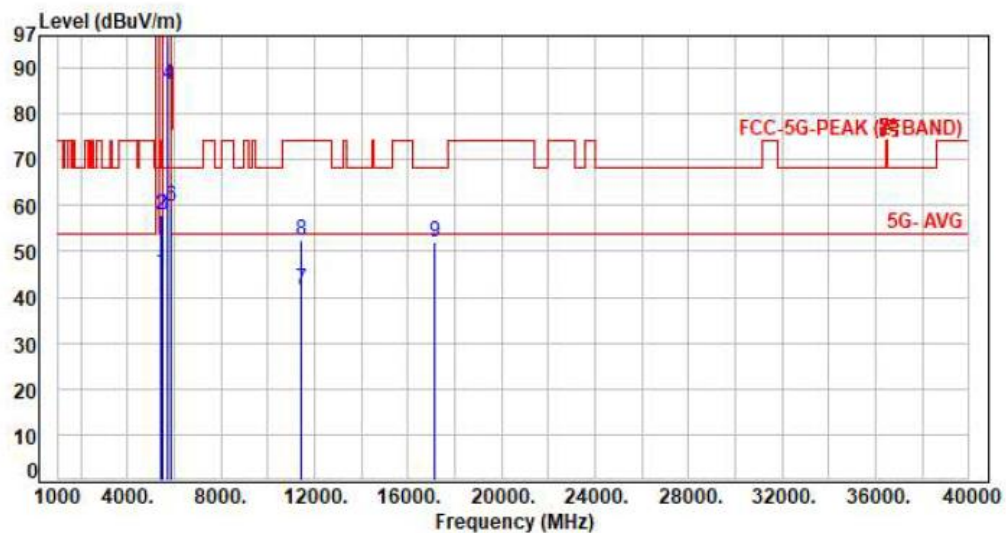

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	46.04	45.49	54.00	-8.51	Average	375	175	P
2	5460.00	-0.55	58.46	57.91	74.00	-16.09	Peak	375	175	P
3	5470.00	-0.51	58.29	57.78	68.20	-10.42	Peak	375	175	P
4	5710.00	0.62	85.58	86.20	200.00	-113.80	Average	375	175	P
5	5710.00	0.62	95.21	95.83	200.00	-104.17	Peak	375	175	P
6	5850.00	0.80	58.96	59.76	68.20	-8.44	Peak	375	175	P
7	11420.00	5.31	36.23	41.54	54.00	-12.46	Average	100	100	P
8	11420.00	5.31	47.18	52.49	74.00	-21.51	Peak	100	100	P
9	17130.00	5.59	46.42	52.01	68.20	-16.19	Peak	100	307	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3: Straddle Channel

Test Mode : 1TX 11ac80 CH138 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

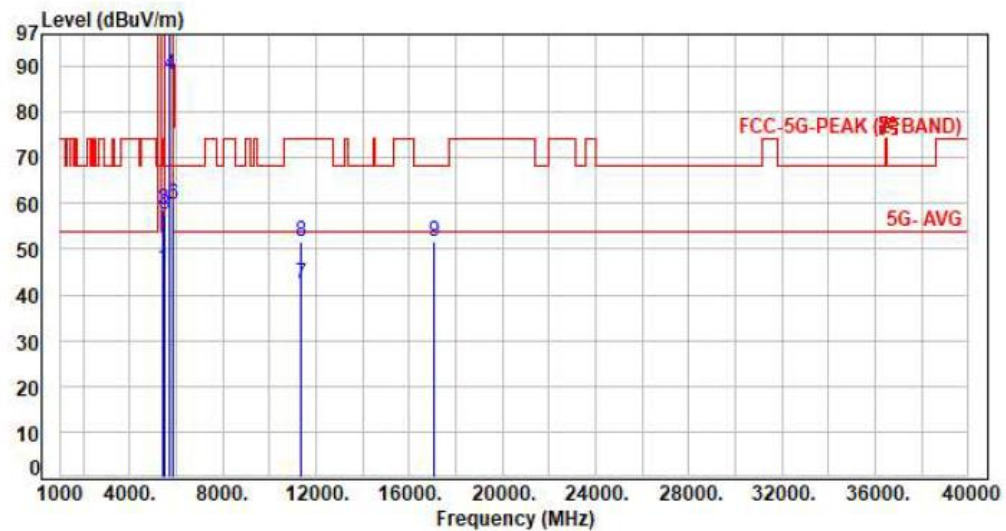

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	46.34	45.79	54.00	-8.21	Average	116	317	P
2	5460.00	-0.55	59.26	58.71	74.00	-15.29	Peak	116	317	P
3	5470.00	-0.51	58.07	57.56	68.20	-10.64	Peak	116	317	P
4	5690.00	0.54	87.51	88.05	200.00	-111.95	Average	116	317	P
5	5690.00	0.54	97.21	97.75	200.00	-102.25	Peak	116	317	P
6	5850.00	0.80	58.81	59.61	68.20	-8.59	Peak	116	317	P
7	11380.00	5.30	37.01	42.31	54.00	-11.69	Average	100	252	P
8	11380.00	5.30	46.51	51.81	74.00	-22.19	Peak	100	252	P
9	17070.00	5.71	46.06	51.77	68.20	-16.43	Peak	100	149	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3: Straddle Channel

Test Mode : 1TX 11ac80 CH138 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

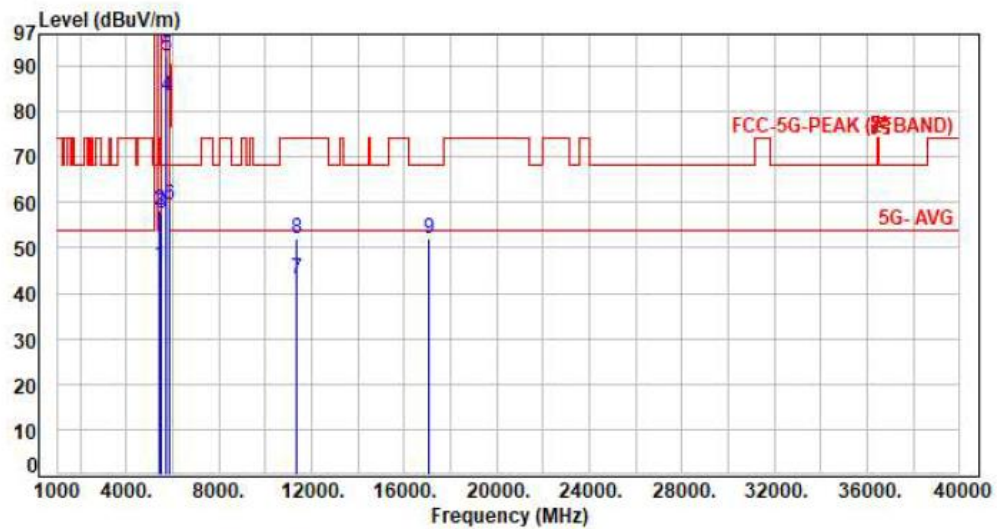

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.55	46.55	46.00	54.00	-8.00	Average	200	175	P
2	5460.00	-0.55	58.64	58.09	74.00	-15.91	Peak	200	175	P
3	5470.00	-0.51	58.18	57.67	68.20	-10.53	Peak	200	175	P
4	5690.00	0.54	82.71	83.25	200.00	-116.75	Average	200	175	P
5	5690.00	0.54	91.65	92.19	200.00	-107.81	Peak	200	175	P
6	5850.00	0.80	58.75	59.55	68.20	-8.65	Peak	200	175	P
7	11380.00	5.30	37.70	43.00	54.00	-11.00	Average	100	104	P
8	11380.00	5.30	46.54	51.84	74.00	-22.16	Peak	100	104	P
9	17070.00	5.71	46.41	52.12	68.20	-16.08	Peak	100	298	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH149 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

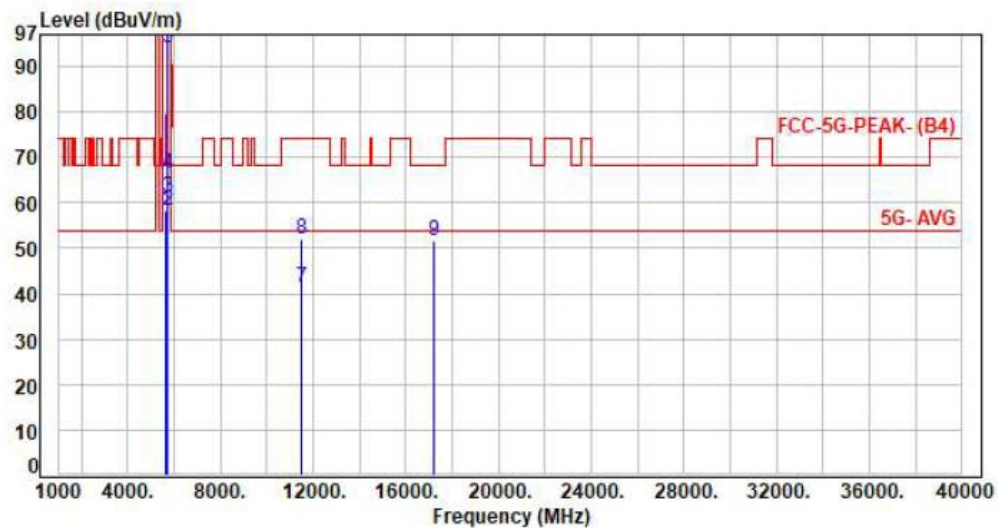

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.31	57.89	58.20	68.20	-10.00	Peak	124	316	P
2	5700.00	0.61	57.78	58.39	105.20	-46.81	Peak	124	316	P
3	5720.00	0.64	60.66	61.30	110.80	-49.50	Peak	124	316	P
4	5725.00	0.66	65.60	66.26	122.20	-55.94	Peak	124	316	P
5	5745.00	0.69	93.45	94.14	200.00	-105.86	Average	124	316	P
6	5745.00	0.69	103.28	103.97	200.00	-96.03	Peak	124	316	P
7	11490.00	5.32	36.05	41.37	54.00	-12.63	Average	100	257	P
8	11490.00	5.32	46.58	51.90	74.00	-22.10	Peak	100	257	P
9	17235.00	5.35	46.46	51.81	68.20	-16.39	Peak	100	148	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH149 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

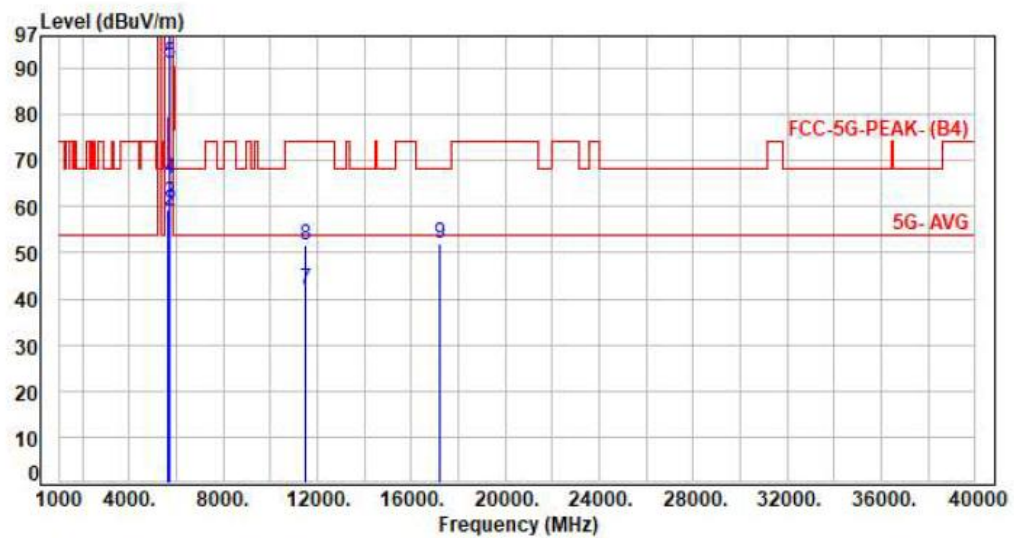


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.31	59.09	59.40	68.20	-8.80	Peak	198	173	P
2	5700.00	0.61	58.34	58.95	105.20	-46.25	Peak	198	173	P
3	5720.00	0.64	60.12	60.76	110.80	-50.04	Peak	198	173	P
4	5725.00	0.66	65.53	66.19	122.20	-56.01	Peak	198	173	P
5	5745.00	0.69	90.28	90.97	200.00	-109.03	Average	198	173	P
6	5745.00	0.69	100.42	101.11	200.00	-98.89	Peak	198	173	P
7	11490.00	5.32	36.57	41.89	54.00	-12.11	Average	100	108	P
8	11490.00	5.32	46.14	51.46	74.00	-22.54	Peak	100	108	P
9	17235.00	5.35	46.52	51.87	68.20	-16.33	Peak	100	302	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** | Mode 1, Band 4

Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

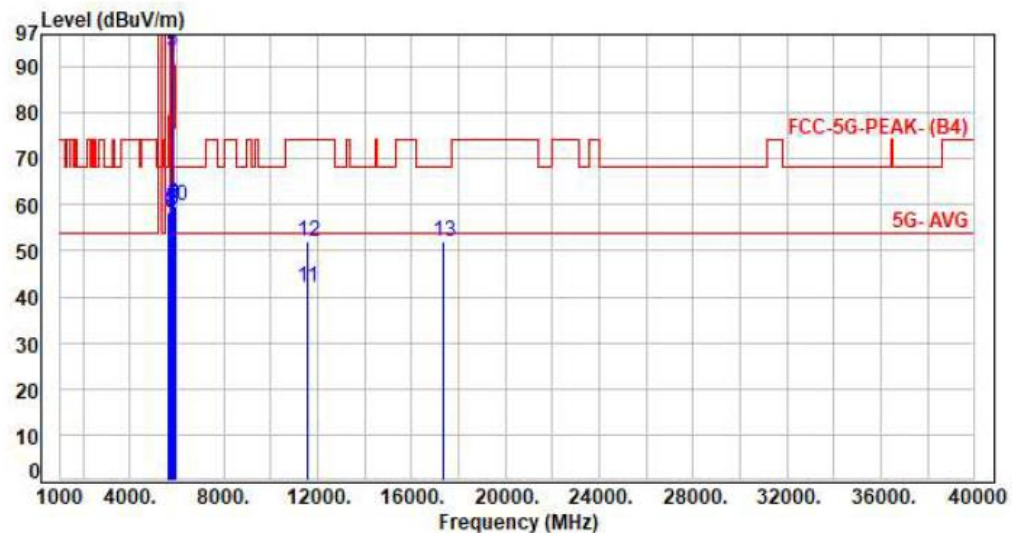

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.31	57.92	58.23	68.20	-9.97	Peak	114	317	P
2	5700.00	0.61	58.17	58.78	105.20	-46.42	Peak	114	317	P
3	5720.00	0.64	57.64	58.28	110.80	-52.52	Peak	114	317	P
4	5725.00	0.66	57.81	58.47	122.20	-63.73	Peak	114	317	P
5	5785.00	0.70	92.71	93.41	200.00	-106.59	Average	114	317	P
6	5785.00	0.70	103.33	104.03	200.00	-95.97	Peak	114	317	P
7	5850.00	0.80	59.06	59.86	122.20	-62.34	Peak	114	317	P
8	5855.00	0.79	58.39	59.18	110.80	-51.62	Peak	114	317	P
9	5875.00	0.80	59.29	60.09	105.20	-45.11	Peak	114	317	P
10	5925.00	0.80	58.77	59.57	68.20	-8.63	Peak	114	317	P
11	11570.00	5.45	36.50	41.95	54.00	-12.05	Average	100	252	P
12	11570.00	5.45	46.39	51.84	74.00	-22.16	Peak	100	252	P
13	17355.00	5.46	46.64	52.10	68.20	-16.10	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

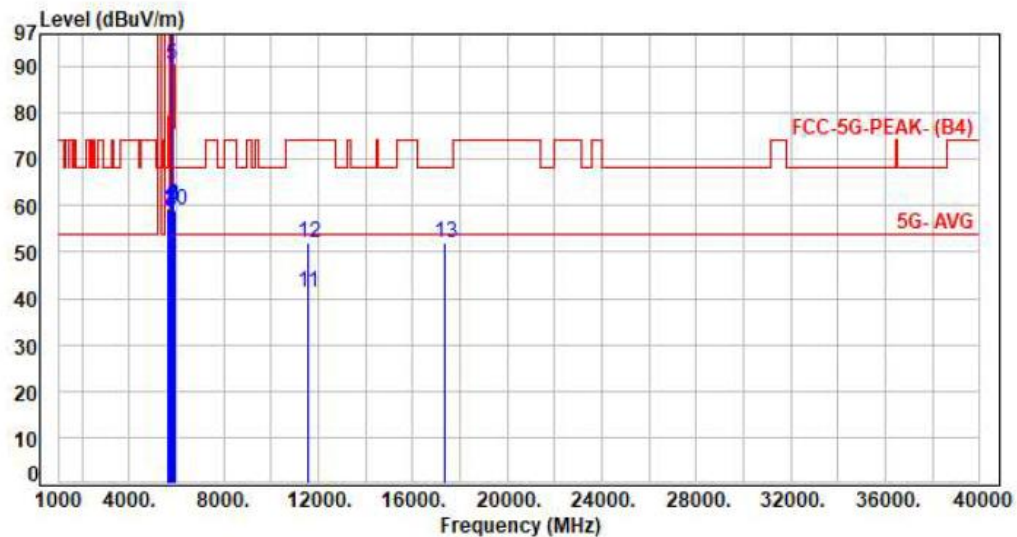


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.31	58.89	59.20	68.20	-9.00	Peak	382	175	P
2	5700.00	0.61	58.53	59.14	105.20	-46.06	Peak	382	175	P
3	5720.00	0.64	57.89	58.53	110.80	-52.27	Peak	382	175	P
4	5725.00	0.66	58.08	58.74	122.20	-63.46	Peak	382	175	P
5	5785.00	0.70	89.58	90.28	200.00	-109.72	Average	382	175	P
6	5785.00	0.70	100.47	101.17	200.00	-98.83	Peak	382	175	P
7	5850.00	0.80	58.97	59.77	122.20	-62.43	Peak	382	175	P
8	5855.00	0.79	59.38	60.17	110.80	-50.63	Peak	382	175	P
9	5875.00	0.80	58.62	59.42	105.20	-45.78	Peak	382	175	P
10	5925.00	0.80	58.38	59.18	68.20	-9.02	Peak	382	175	P
11	11570.00	5.45	36.03	41.48	54.00	-12.52	Average	100	101	P
12	11570.00	5.45	46.41	51.86	74.00	-22.14	Peak	100	101	P
13	17355.00	5.46	46.36	51.82	68.20	-16.38	Peak	100	305	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** | Mode 1, Band 4

Test Mode : 1TX 11a CH165 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

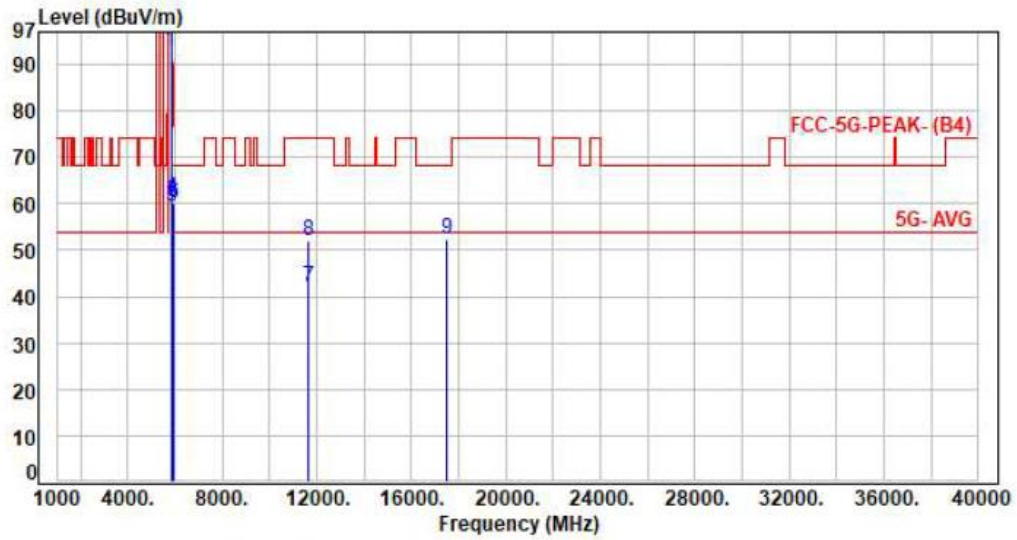


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	0.75	92.14	92.89	200.00	-107.11	Average	100	316	P
2	5825.00	0.75	101.87	102.62	200.00	-97.38	Peak	100	316	P
3	5850.00	0.80	59.87	60.67	122.20	-61.53	Peak	100	316	P
4	5855.00	0.79	60.47	61.26	110.80	-49.54	Peak	100	316	P
5	5875.00	0.80	58.59	59.39	105.20	-45.81	Peak	100	316	P
6	5925.00	0.80	59.22	60.02	68.20	-8.18	Peak	100	316	P
7	11650.00	5.42	36.70	42.12	54.00	-11.88	Average	100	254	P
8	11650.00	5.42	46.48	51.90	74.00	-22.10	Peak	100	254	P
9	17475.00	5.50	46.74	52.24	68.20	-15.96	Peak	100	151	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH165 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

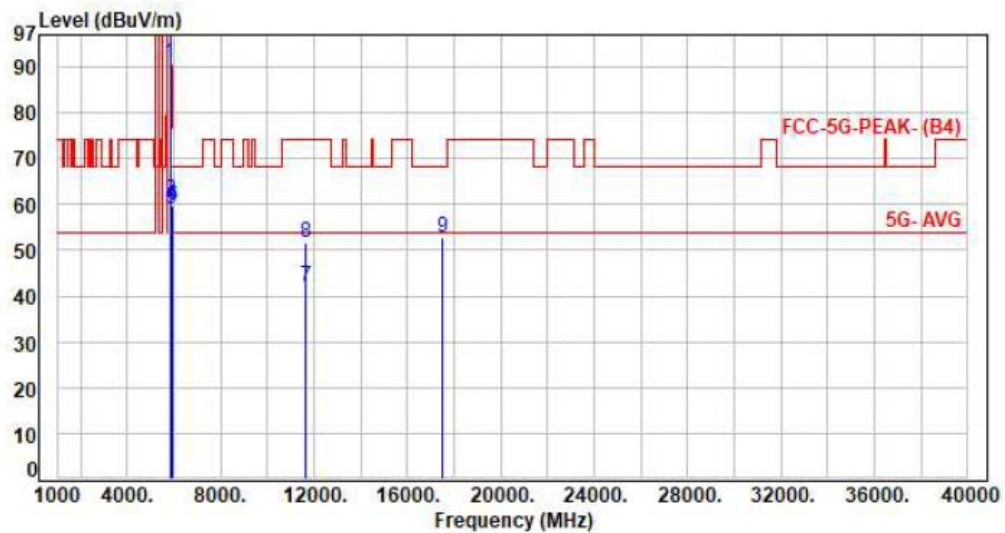

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	0.75	90.13	90.88	200.00	-109.12	Average	200	173	P
2	5825.00	0.75	99.65	100.40	200.00	-99.60	Peak	200	173	P
3	5850.00	0.80	59.96	60.76	122.20	-61.44	Peak	200	173	P
4	5855.00	0.79	58.96	59.75	110.80	-51.05	Peak	200	173	P
5	5875.00	0.80	58.13	58.93	105.20	-46.27	Peak	200	173	P
6	5925.00	0.80	58.79	59.59	68.20	-8.61	Peak	200	173	P
7	11650.00	5.42	36.51	41.93	54.00	-12.07	Average	100	102	P
8	11650.00	5.42	46.17	51.59	74.00	-22.41	Peak	100	102	P
9	17475.00	5.50	47.16	52.66	68.20	-15.54	Peak	100	302	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 1TX 11ac20 CH149 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

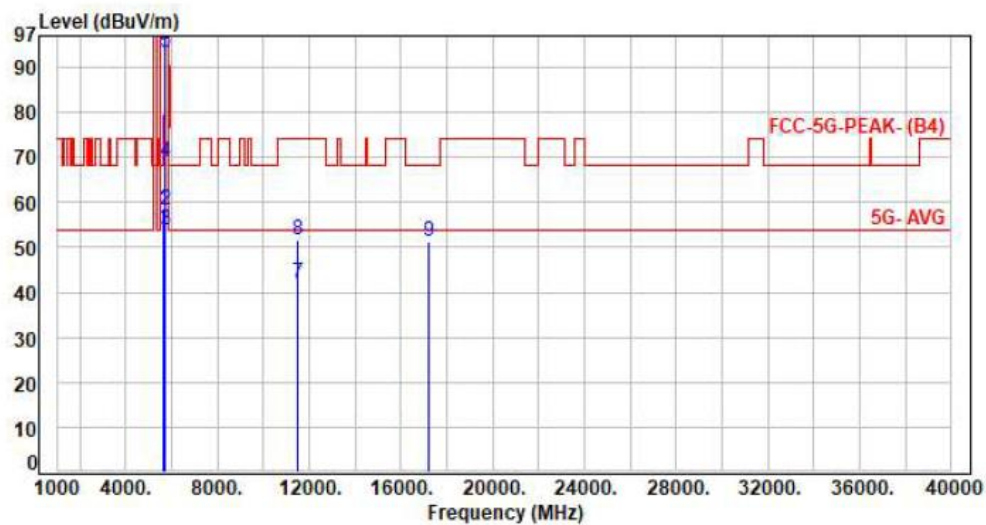

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.31	57.78	58.09	68.20	-10.11	Peak	145	318	P
2	5700.00	0.61	57.56	58.17	105.20	-47.03	Peak	145	318	P
3	5720.00	0.64	53.10	53.74	110.80	-57.06	Peak	145	318	P
4	5725.00	0.66	68.42	69.08	122.20	-53.12	Peak	145	318	P
5	5745.00	0.69	92.76	93.45	200.00	-106.55	Average	145	318	P
6	5745.00	0.69	103.28	103.97	200.00	-96.03	Peak	145	318	P
7	11490.00	5.32	36.86	42.18	54.00	-11.82	Average	100	254	P
8	11490.00	5.32	46.35	51.67	74.00	-22.33	Peak	100	254	P
9	17235.00	5.35	45.74	51.09	68.20	-17.11	Peak	100	153	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor