


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	2.4GHz + 5GHz in Y-axis

Horizontal

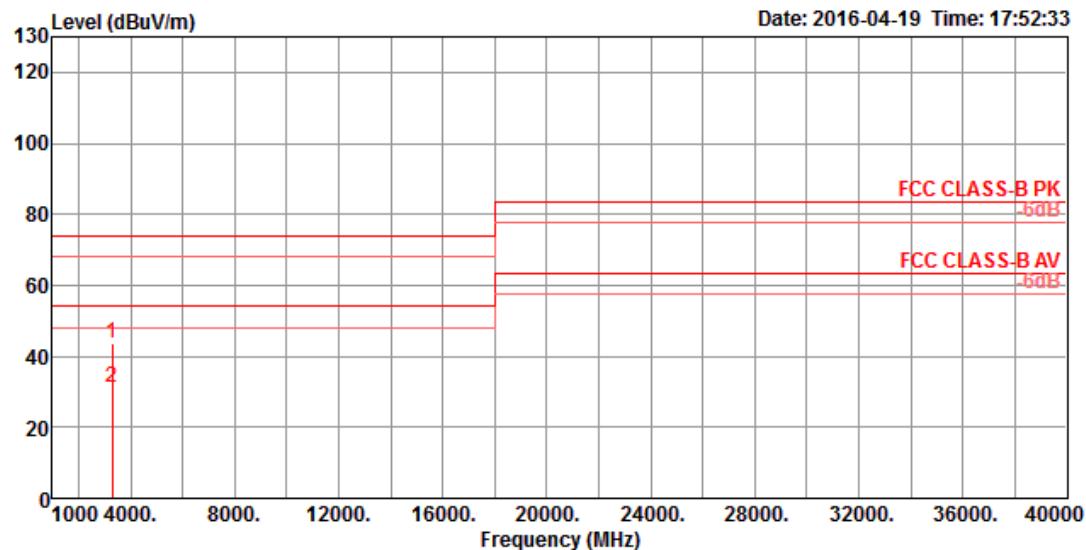

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3312.18	43.72	74.00	-30.28	41.88	5.97	28.66	32.79	121	341	Peak HORIZONTAL
2	3312.63	31.30	54.00	-22.70	29.46	5.97	28.66	32.79	121	341	Average HORIZONTAL

Vertical

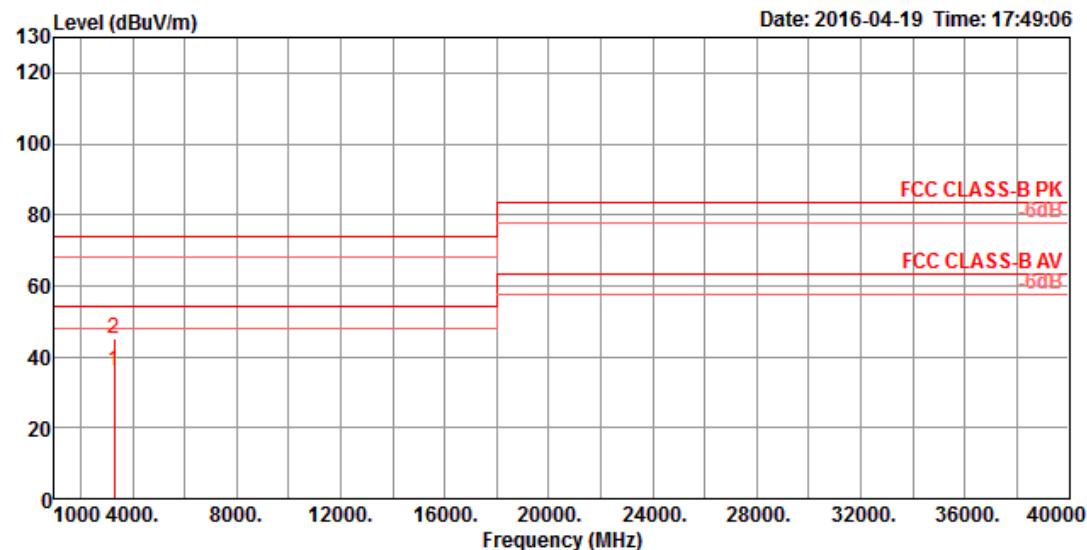

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	dB	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3312.50	36.10	54.00	-17.90	34.26	5.97	28.66	32.79	106	337 Average	VERTICAL
2	3312.79	45.12	74.00	-28.88	43.28	5.97	28.66	32.79	106	337 Peak	VERTICAL