

PRODUCT SPECIFICATION

Wi-Fi (11a/b/g/n/ac 2Tx2R)+BT (V4.1LE) USB Combo Module

WCBN4507R

MediaTek MT7662U

Version 1.1

Change History

Revision	Date	Author	Change List
Version 1.0	2015/04/10	Ben J Chen	Preliminary
Version 1.1	2015/05/20	Ben J Chen	Update Mechanical Update Label Drawing

** This document contains confidential proprietary information and is property of LTC. The contents of this document should not be disclosed to unauthorized persons without the written consent of LTC.*

PRODUCT SPECIFICATION

Wi-Fi (11a/b/g/n/ac 2Tx2R)+BT (V4.1LE) USB Combo Module

WCBN4507R

MediaTek MT7662U

Version 1.1

**Networking B.U.
Lite-on Technology Corporation
4F, No. 90, Chien 1 Rd.,
Chung Ho, New Taipei City 235, Taiwan, R.O.C.**

Customer Approval: _____ (Signature)

_____ (Title)

_____ (Company)

_____ (Date)

(Please Sign Back by FAX. For Confirming the Spec Only, not an Official Agreement for OEM/ODM Business)

CONTENT

PRODUCT FEATURES	4
BT FEATURE:.....	4
WI-FI FEATURE:.....	4
COMMON FEATURE:.....	4
PRODUCT SPECIFICATIONS.....	5
MAIN CHIPSET	5
FUNCTIONAL SPECIFICATIONS	5
PIN ASSIGNMENT.....	8
USB CONNECTOR SPEC.....	8
MECHANICAL	9
U.FL CONNECTOR SPEC	10
LABEL DRAWING.....	10
EEPROM INFORMATION	11
BT.....	11
WI-FI	11
ENVIRONMENTAL	11
OPERATING	11
STORAGE.....	11

PRODUCT FEATURES

BT FEATURE:

- Bluetooth V4.1 LE system
Backwards compatible with BT version of 1.1, 1.2, 2.0, 2.1 and 3.0+HS
- Bluetooth Class 1 transmission power
- Best-in-class BT/Wi-Fi coexistence performance
- Support for Simple Pairing (SP) and Enhanced Inquiry Response (EIR) function
- Support for SCATTERNET and up to piconets simultaneously with background inquiry/page scan
- Support wide-band speech and hardware accelerated SBC codec for A2DP streaming
- Support Wake On Bluetooth

WI-FI FEATURE:

- Operate at ISM frequency Band (2.4/5GHz)
- IEEE Standards Support, 802.11a ,802.11b, 802.11g, 802.11n and 802.11ac
- Support for both 20 MHz/40 MHz channel width in 2.4GHz and 20 MHz/40 MHz/80MHz channel width in 5GHz
- Enterprise level security supporting: WPS2.0,WAPI, WPA, WPA2
- Dual-stream IEEE 802.11ac support for 80MHz channels provides PHY layer rates up to 867Mbps
- QoS support of WFA WMM, WMMPS
- Support for WI-Fi Direct
- Support Wake On WLAN

COMMON FEATURE:

- MT7662U is a single chip integrated IEEE 802.11 a/b/g/n/ac and Bluetooth 4.1LE with a single USB interface
- PA, LNA, and T/R switch integration for Wi-Fi and Bluetooth
- Best-in-class active and idle power consumption performance
- Fully compliance with USB v2.0 specification
- Support OS: Linux based
- RoHS compliance
- Low Halogen compliance

PRODUCT SPECIFICATIONS

MAIN CHIPSET

MediaTek MT7662U

FUNCTIONAL SPECIFICATIONS

BT Function	
Standard	Bluetooth V4.0LE
Bus Interface	USB2.0
Data Rate	1 Mbps, 2Mbps and Up to 3Mbps
Modulation Scheme	GFSK, $\pi/4$ -DQPSK and 8-DPSK
Frequency Range	2.402~2.480 GHz
Transmit Output Power	$+4 \leq$ Output Power $\leq +10$ dBm; Class 1 Device
Receiver Sensitivity	< 0.1% BER at -80dBm
Wi-Fi Function	
Standard	IEEE802.11a; IEEE802.11b; IEEE 802.11g; IEEE 802.11n; IEEE802.11ac
Bus Interface	USB2.0
802.11a: 54, 48, 36, 24, 18, 12, 9, 6 Mbps	
802.11b: 11, 5.5, 2, 1 Mbps	
802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps	
Data Rate	802.11n: MCS 0 to 15 for HT20MHz MCS 0 to 15 for HT40MHz
802.11ac: MCS 0 to 8 for HT20MHz MCS 0 to 9 for HT40MHz MCS 0 to 9 for HT80MHz	
Media Access Control	CSMA/CA with ACK
802.11a: 64QAM, 16QAM, QPSK, BPSK	
802.11b: CCK, DQPSK, DBPSK	
802.11g: 64QAM, 16QAM, QPSK, BPSK	
802.11n: 64QAM, 16QAM, QPSK, BPSK	
802.11ac: 256QAM, 64QAM, 16QAM, QPSK, BPSK	

Network Architecture	Ad-hoc mode (Peer-to-Peer) Infrastructure mode
Operation Channel	<p>2.4GHz</p> 11: (Ch. 1-11) – United States 13: (Ch. 1-13) – Europe 14: (Ch. 1-14) – Japan
Frequency Range	<p>802.11bg 2.400 ~ 2.4835 GHz</p> <p>802.11a/ac 5.15 ~ 5.85 GHz</p>
Transmit Output Power – 2x2 (Tolerance: ±1.5dBm)	<p>802.11a: 13 dBm@6Mbps 13 dBm@54Mbps</p> <p>802.11b: 15 dBm@1Mbps 15 dBm@11Mbps</p> <p>802.11g: 14 dBm@6Mbps 14 dBm@54Mbps</p> <p>802.11n(2.4G): 20MHz: 14 dBm@MCS0 14 dBm@MCS7 40MHz: 12 dBm@MCS0 12 dBm@MCS7 </p> <p>802.11n(5G): 20MHz: 13 dBm@MCS0 13 dBm@MCS7 40MHz: 11 dBm@MCS0 11 dBm@MCS7 </p> <p>802.11ac: 20MHz: 11 dBm@MCS0 11 dBm@MCS8 40MHz: 11 dBm@MCS0 11 dBm@MCS8 11 dBm@MCS9 80MHz: 11 dBm@MCS0 11 dBm@MCS8 11 dBm@MCS9 </p>
Receiver Sensitivity	<p>802.11a: -86 dBm@6Mbps -70 dBm@54Mbps</p> <p>802.11b: -88 dBm@1Mbps -82 dBm@11Mbps</p> <p>802.11g: -86 dBm@6Mbps</p>

	-71 dBm@54Mbps 802.11n: 2.4G/5G 20MHz -86 dBm@MCS0 -70 dBm@MCS7 -68 dBm@MCS15 40MHz -83 dBm@MCS0 -67 dBm@MCS7 -65 dBm@MCS15 802.11ac: 20MHz -64 dBm@MCS8 40MHz -62 dBm@MCS8 -59 dBm@MCS9 80MHz -59 dBm@MCS8 -56 dBm@MCS9
--	---


Security	WPS, WPA, WPA2, WEP 64bit & 128bit, IEEE 802.1X, IEEE 802.11i
-----------------	---

Common Function	
Operating Voltage	5 V ±5% I/O supply voltage
Power Consumption	TX Mode: TBD mA RX Mode: TBD mA Standby Mode: WiFi+BT: TBD mA WiFi only: TBD mA BT only: TBD mA Disable Model: TBD mA
Antenna Type	Triple U.FL connectors for plugging WiFi&BT external antenna


PIN ASSIGNMENT




Pin.	Pin Define	Pin.	Pin Define
1	GND	2	GND
3	D-	4	WOW
5	D+	6	RESET#
7	GND	8	VCC
9	WOB	10	VCC
11	GND	12	GND

Top View

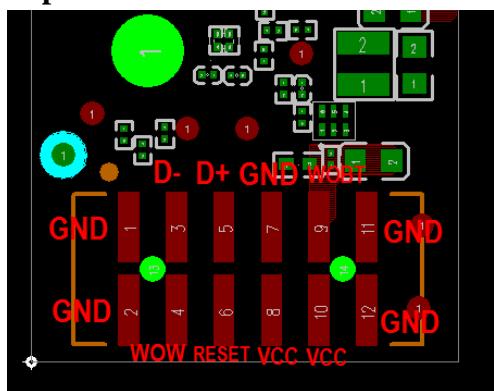

USB CONNECTOR SPEC


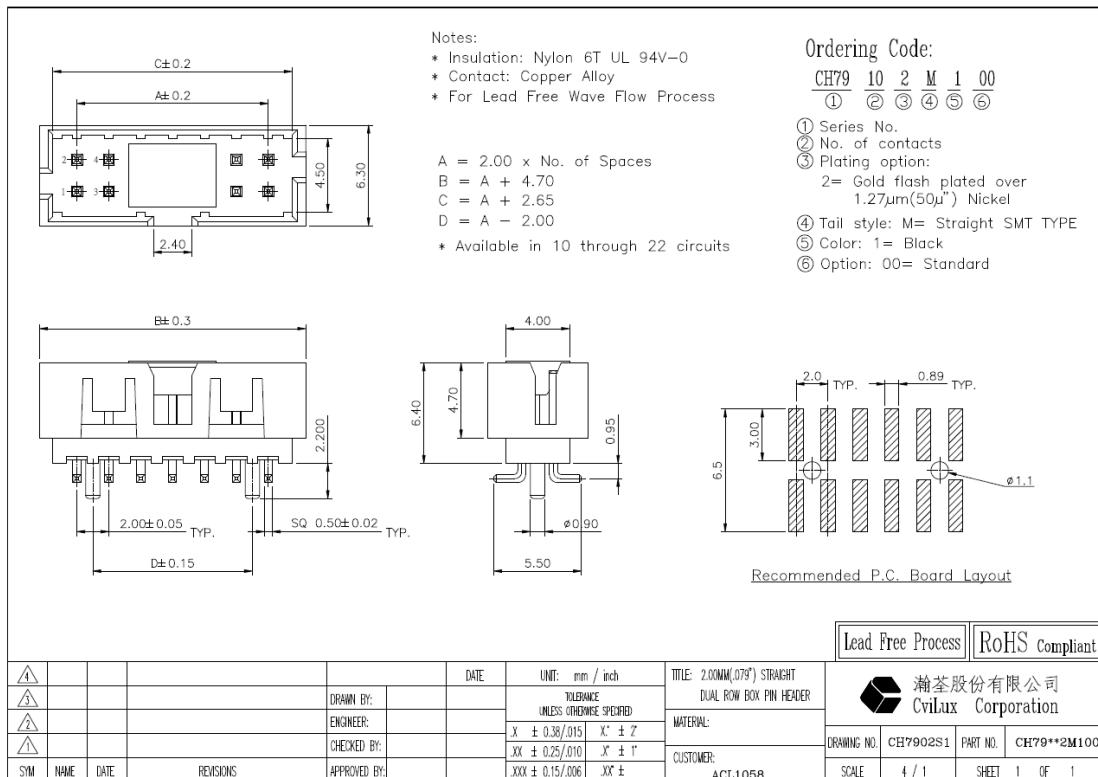


MECHANICAL**Unit: mm****Tolerance:**



DIM	DEG				ANGLE
	A	B	C	D	
0-5	±0.05	±0.05	±0.10		0°-30° ±0.1°
5-10	±0.05	±0.10	±0.15		31°-60° ±0.3°
10-50	±0.10	±0.15	±0.20		61°-90° ±0.5°
50-100	±0.15	±0.20	±0.25		
100-	±0.15%	±0.20%	±0.25%		

U.FL CONNECTOR SPEC


PART NO.	Packing reel	QTY
20279-001E-01	Corrugated paper reel	2500
20279-001E-02	Plastic reel	2500
20279-001E-03	Plastic reel	5000



RECOMMENDED FOOTPRINT PATTERN



GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°

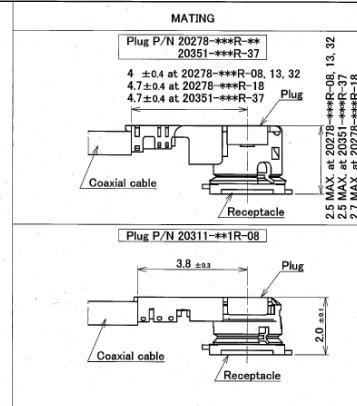

Notes.


- Material
 - (1) Housing : LOP, UL94V-0, white
 - (2) Contact : brass
Au 0.1 μ m MIN. over Ni 1.27 μ m MIN.
 - (3) Ground Contact : phosphor bronze
Au 0.05 μ m MIN. over Ni 1.27 μ m MIN.
- Coplanarity : 0.1mm MAX.
- Packing : emboss tape
- Mating partner Part No. : 20278-***R-08
20311-**1R-08
- This is "Pb-free" connector.
- RoHS compliant.

Notes.

1. 材料
 - (1) ハウジング : LOP, UL94V-0, 白色
 - (2) ボルト : 黄銅
金めっき 0.1 μ m MIN. 下地 ニッケルめっき 1.27 μ m MIN.
 - (3) グラウンドコネクタ : りん青銅
金めっき 0.05 μ m MIN. 下地 ニッケルめっき 1.27 μ m MIN.
2. コラライズ : 0.1mm MAX.
3. 稲荷 : エラスチック
4. 鉄合相手 Part No. : 20278-***R-08
20311-**1R-08
5. 本コネクタは "Pb-free" である
6. RoHS指令を満足している

I-PEX		Intemet and Packaging Electronics	TMK JAPAN
MHF series micro coaxial connector receptacle vertical		DATE	
TITLE		APP'D BY	
S/N:098001400920YYMXXXXXX Amtran PN:098001400920 FCC ID:PPQ-WCBN4507R IC:4491A-WCBN4507R Model:WCBN4507R MAC:006B9EXXXXXX		DATE	
CUSTOMER COPY		PROJECTION	SCALE 10:1 UNIT mm DWS No. 20279
		REV 10	SET 1 REV 10

LABEL DRAWING

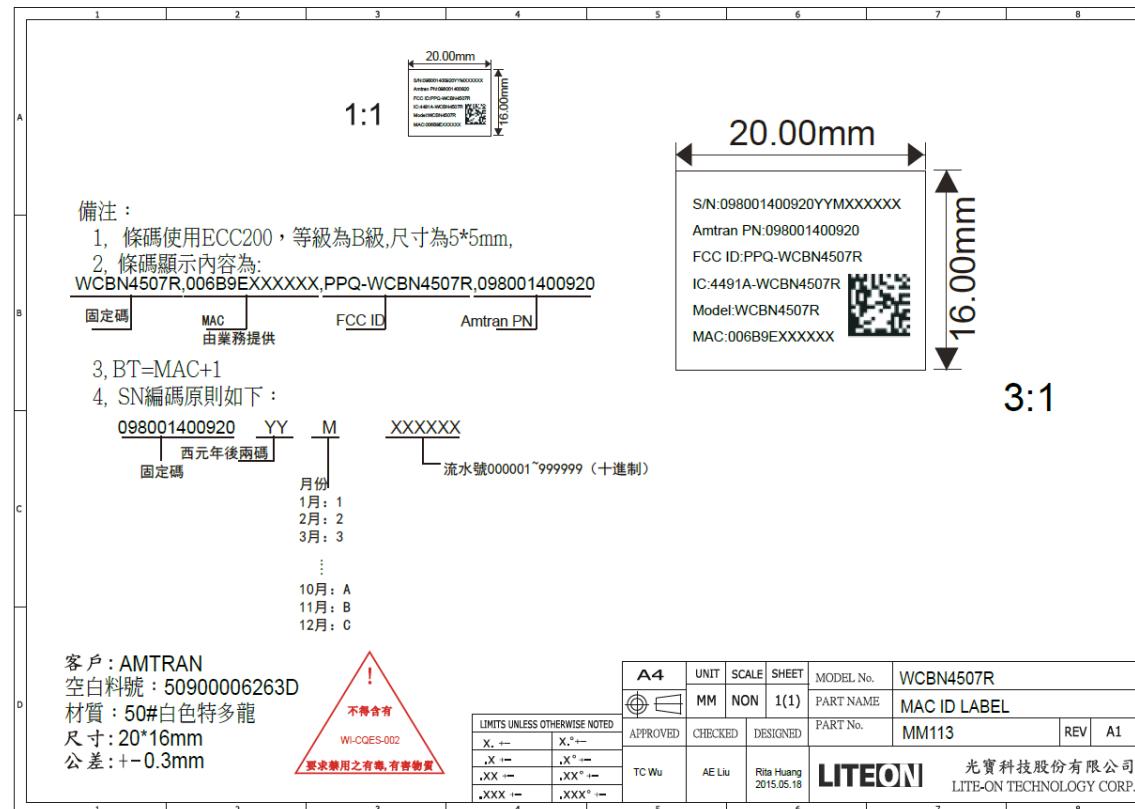

EEPROM INFORMATION

BT

Vendor ID	0x0E8D
Product ID	0x7662

WI-FI

Reg Domain	World Wide
	2.4G/5G Read from registry; Control by driver
	Offset 0x38 for 5G: 0xFF Offset 0x39 for 2.4G: 0xFF
Vendor ID	0x0E8D
Device ID	0x7662

ENVIRONMENTAL

OPERATING

Operating Temperature: 0 to 70 °C (32 to 158 °F)

Relative Humidity: 5-90% (non-condensing)

STORAGE

Temperature: -40 to 80 °C (-40 to 176 °F)

Relative Humidity: 5-95% (non-condensing)

FCC WARING STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF Radiation Exposure Statement:

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

According to FCC 15.407(e), the device is intended to operate in the frequency band of 5.15GHz to 5.25GHz under all conditions of normal operation. Normal operation of this device is restricted to indoor used only to reduce any potential for harmful interference to co-channel MSS operations.

Information to OEM integrator

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user manual of the end product. The user manual which is provided by OEM integrators for end users must include the following information in a prominent location.

1. To comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter, except in accordance with FCC multi-transmitter product transmitter product procedures.
2. Only those antennas with same type and lesser gain filed under this FCC ID number can be used with this device.
3. The regulatory label on the final system must include the statement: "Contains FCC ID: PPQ-WCBN4507R".
4. The final system integrator must ensure there is no instruction provided in the user manual or customer documentation indicating how to install or remove the transmitter module except such device has implemented two ways authentication between module and the host system.
5. If the end product integrating this module is going to be operated in 5.15 ~5.25GHz frequency range, the warning statement in the user manual of the end product should include the restriction of operating this device in indoor could void the user's authority to operate the equipment.

IC WARING STATEMENT**Canada, Industry Canada (IC) Notices**

This Class B digital apparatus complies with Canadian ICES-003 and RSS-247.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Canada, avis d'Industry Canada (IC)

Cet appareil numerique de classe B est conforme aux normes canadiennes ICES-003 et RSS-247.

IC Son fonctionnement est soumis aux deux conditions suivantes : (1) cet appareil ne doit pas causer d'interference et (2) cet appareil doit accepter toute interference, notamment les interferences qui peuvent affecter son fonctionnement.

Radio Frequency (RF) Exposure Information

The radiated output power of the Wireless Device is below the Industry Canada (IC) radio frequency exposure limits. The Wireless Device should be used in such a manner such that the potential for human contact during normal operation is minimized.

This device has also been evaluated and shown compliant with the IC RF Exposure limits under mobile exposure conditions. (antennas are greater than 20cm from a person's body).

Informations concernant l'exposition aux frequences radio (RF)

La puissance de sortie emise par l'appareil de sans fil est inferieure a la limite d'exposition aux frequences radio d'Industry Canada (IC).

Utilisez l'appareil de sans fil de facon a minimiser les contacts humains lors du fonctionnement normal.

Ce peripherique a egalement ete evaluer et demonstre conforme aux limites d'exposition aux RF d'IC dans des conditions d'exposition a des appareils mobiles (les antennes se situent a moins de 20 cm du corps d'une personne).

Host device labeling requirement in accordance with RSP-100 Section 7.2:

The host device shall be properly labeled to identify the modules within the host device.

The Industry Canada certification label of a module shall be clearly visible at all times when installed in the host device; otherwise, the host device must be labeled to display the Industry Canada certification number for the module, preceded by the words "Contains transmitter module", or the word "Contains", or similar wording expressing the same meaning, as follows:

Contains transmitter module IC: 4491A-WCBN4507R

where 4491A-WCBN4507R is the module's certification number

IC WARING STATEMENT

- i. the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
- iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate; and
- iv. the worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in Section 6.2.2(3) shall be clearly indicated.

High power radars are allocated as primary users (meaning they have priority) of 5250-5350 MHz and 5650-5850 MHz bands and these radars could cause interference and/or damage to LE-LAN (Licence-Exempt Local Area Network) devices.