

**FCC 47 CFR PART 15 SUBPART E &
INDUSTRY CANADA RSS-247****TEST REPORT****For**

Product	Model
Wi-Fi (11a/b/g/n/ac 2Tx2R)+BT (V4.1LE) USB Combo Module	WCBN4510R
	WCBN4510R(2M)
	WCBN4512R
Wi-Fi (11a/b/g/n 2Tx2R)+BT (V4.1LE) USB Combo Module	WCBN4510R(32U)
	WCBN4510R(32U2M)

Trade Name: LITE-ON*Issued to*

Lite-On Technology Cop.
Bldg. C, 90, Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C

Issued by

Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: January 6, 2016



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 6, 2016	Initial Issue	ALL	Kelly Cheng

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	7
3.1 EUT CONFIGURATION	7
3.2 EUT EXERCISE	7
3.3 GENERAL TEST PROCEDURES	7
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	8
3.5 DESCRIPTION OF TEST MODES	9
4. INSTRUMENT CALIBRATION	10
4.1 MEASURING INSTRUMENT CALIBRATION.....	10
4.2 MEASUREMENT EQUIPMENT USED.....	10
4.3 MEASUREMENT UNCERTAINTY	11
5 FACILITIES AND ACCREDITATIONS	12
5.1 FACILITIES	12
5.2 LABORATORY ACCREDITATIONS AND LISTING	12
5.3 TABLE OF ACCREDITATIONS AND LISTINGS	13
6 SETUP OF EQUIPMENT UNDER TEST	14
6.1 SETUP CONFIGURATION OF EUT.....	14
6.2 SUPPORT EQUIPMENT	14
7 RSS-247 REQUIREMENTS	15
7.1 99%BANDWIDTH.....	15
7.2 6DB BANDWIDTH	26
7.3 MAXIMUM CONDUCTED OUTPUT POWER	37
7.4 BAND EDGES MEASUREMENT	39
7.5 PEAK POWER SPECTRAL DENSITY	49
7.6 RADIATED EMISSIONS.....	60
7.7 POWERLINE CONDUCTED EMISSIONS	156
APPENDIX I PHOTOGRAPHS OF TEST SETUP	159

1. TEST RESULT CERTIFICATION

Applicant: Lite-On Technology Cop.
Bldg. C, 90, Chien 1 Road, Chung Ho, New Taipei City
23585, Taiwan, R.O.C

Manufacturer: LITE-ON TECHNOLOGY (Changzhou) CO., LTD
A9 Building, No.88 Yanghu Road, Wujin Hi-Tech Industrial
Development Zone, Changzhou City, Jiangsu Province
213100 China

Equipment Under Test / Model Number:

Product	Model
Wi-Fi (11a/b/g/n/ac 2Tx2R)+BT (V4.1LE) USB Combo Module	WCBN4510R
	WCBN4510R(2M)
	WCBN4512R
Wi-Fi (11a/b/g/n 2Tx2R)+BT (V4.1LE) USB Combo Module	WCBN4510R(32U)
	WCBN4510R(32U2M)

Trade Name: LITE-ON

Date of Test: December 8, 2015 ~ January 20, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E & Industry Canada RSS-247 Issue 1	No non-compliance noted

We hereby certify that:

Compliance Certification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The test results of this report relate only to the tested sample identified in this report.

Approved by



Miller Lee
Manager
Compliance Certification Services Inc.

Reviewed by



Angel Cheng
Section Manager
Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product / Model Number	Product	Model
	Wi-Fi (11a/b/g/n/ac 2Tx2R)+BT (V4.1LE) USB Combo Module	WCBN4510R
		WCBN4510R(2M)
		WCBN4512R
Frequency Range	Wi-Fi (11a/b/g/n 2Tx2R)+BT (V4.1LE) USB Combo Module	WCBN4510R(32U)
		WCBN4510R(32U2M)
Trade Name	LITE-ON	
Power Supply	Powered from host device	
Received Date	November 23, 2015	
Transmit Power	IEEE 802.11a mode: 14.51 dBm IEEE 802.11n HT 20 MHz mode: 17.18 dBm IEEE 802.11n HT 40 MHz mode: 17.26 dBm IEEE 802.11ac VHT 80 MHz mode: 14.08 dBm	
Modulation Technique & Transmit Data Rate	IEEE 802.11a: OFDM (54, 48, 36, 24, 18, 12, 9, 6 Mbps) IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) IEEE 802.11n HT 40 MHz mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps) IEEE 802.11ac VHT 80 Mode: OFDM (2x2 80MHz, up to 866.6Mbps)	
Number of Channels	IEEE 802.11a mode: 5 Channels IEEE 802.11n HT 20 MHz mode: 5 Channels IEEE 802.11n HT 40 MHz mode: 2 Channels IEEE 802.11ac VHT 80 mode: 1 Channel	
Antenna Specification	1. Walsin / PIFA Antenna RFMTA401029IMLB701 / 3.77dBi 2. Walsin / Dipole Antenna SOUND BAR / 6.11dBi 3. Walsin / PIFA Antenna Integral Antenna1 / 1.74dBi Integral Antenna2 / 1.74dBi For PIFA Antenna MIMO: $10 \times \log((10^{(3.77/20)} + 10^{(3.77/20)})^2)/2 = 6.78 \text{ dBi}$ For Dipole Antenna MIMO: $10 \times \log((10^{(6.11/20)} + 10^{(6.11/20)})^2)/2 = 9.12 \text{ dBi}$	

Model Discrepancy :

Model	Main Chipset	Function	Antenna Mode
WCBN4510R	Media Tek MT7662U	Wi-Fi (11a/b/g/n/ac) + Bluetooth	Triple External Antennas for WiFi&BT
WCBN4510R(2M)	Media Tek MT7662U	Wi-Fi (11a/b/g/n/ac) + Bluetooth	Two Metal Antenna for WiFi Single External Antenna for BT
WCBN4512R	Media Tek MT7662U	Wi-Fi (11a/b/g/n/ac) + Bluetooth	Two Metal Antenna for WiFi Single External Antenna for BT
WCBN4510R(32U)	Media Tek MT7632U	Wi-Fi (11a/b/g/n) + Bluetooth	Triple External Antennas for WiFi&BT
WCBN4510R(32U2M)	Media Tek MT7632U	Wi-Fi (11a/b/g/n) + Bluetooth	Two Metal Antenna for WiFi Single External Antenna for BT

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.407 and KDB 789033 D02 General UNII Test Procedures New Rules v01r01.

The tests documented in this report were performed in accordance with IC RSS-247, IC RSS-Gen and ANSI C63.10:2013.

This submittal(s) (test report) is intended for IC Certification with Industry Canada RSS-247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

According to the requirements in ANSI C63.10: 2013, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 1.5 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2013.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: WCBN4507R) had been tested under operating condition.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

IEEE 802.11a mode / 5745 ~ 5825MHz

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel Low(5745MHz), Channel Mid(5785MHz) and Channel High(5825MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel Low(5755MHz) and Channel High(5795MHz) with 13.5Mbps data rate were chosen for full testing.

IEEE 802.11ac VHT 80 MHz mode for 5775MHz:

Channel (5775MHz) with 6.5Mbps data rate were chosen for full testing.

For PIFA Antenna

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.

For Dipole Antenna

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Y axis) and the worst case was recorded.

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	12/07/2016
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	10/07/2016
AC Power Source	EXTECH	6205	1140845	N.C.R
DC Power Supply	ABM	8301HD	D011531	N.C.R
Power Meter	Anritsu	ML2495A	1012009	07/07/2016
Power Sensor	Anritsu	MA2411A	0917072	07/07/2016
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/19/2016

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	01/24/2017
EMI Test Receiver	R&S	ESCI	100064	06/03/2016
Bilog Antenna	Sunol Sciences	JB3	A030105	08/05/2016
Horn Antenna	EMCO	3117	00055165	01/25/2017
Horn Antenna	EMCO	3116	26370	12/24/2016
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Pre-Amplifier	MITEQ	1652-3000	1490939	08/09/2016
Pre-Amplifier	EMC	EMC 012635	980151	06/04/2016
Pre-Amplifier	MITEQ	AMF-6F-260400-40-8P	985646	12/24/2016
Coaxial Cable	Huber+Suhner	102	29212/2	12/24/2016
Coaxial Cable	Huber+Suhner	102	29406/2	12/24/2016
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission Room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101073	09/08/2016
LISN	R&S	ENV216	101054	06/06/2016
LISN	SCHWARZBECK	NSLK 8127	8127-541	11/22/2016
Capacitive Voltage Probe	FCC	F-CVP-1	100185	03/12/2016
Test S/W	CCS-3A1-CE			

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 248, Taiwan (R.O.C.)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, IC 2324G-2 for 3M Semi Anechoic Chamber B.

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-247, RSS-310 IDATE SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

6 SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	ASUS	M5200AE	5BN0AG019631	PD9WM3B2100	N/A	AC I/P: Unshielded, 1.8m with a core DC O/P: Unshielded, 1.8m


Remark:

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

7 RSS-247 REQUIREMENTS

7.1 99%BANDWIDTH

Test Configuration



TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold.

TEST RESULTS

No non-compliance noted.

Test Data**Test mode: IEEE 802.11a mode / 5745 ~ 5825MHz**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.644
Mid	5785	17.500
High	5825	17.307

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz / Chain 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.980
Mid	5785	18.076
High	5825	18.076

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz / Chain 1

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	18.173
Mid	5785	18.509
High	5825	18.221

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5815MHz / Chain 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5755	37.692
High	5795	36.025

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5815MHz / Chain 1

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5755	37.564
High	5795	37.307

Test mode: IEEE 802.11ac VHT 80 MHz mode / 5775MHz / Chain 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5775	76.009

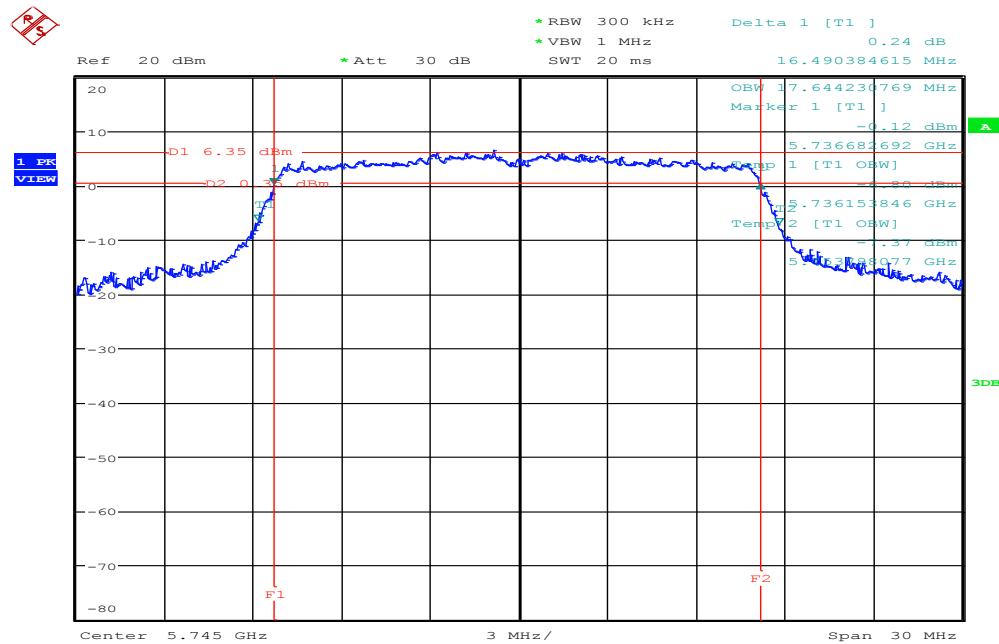
Test mode: IEEE 802.11ac VHT 80 MHz mode / 5775MHz / Chain 1

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5775	75.865

Test Plot

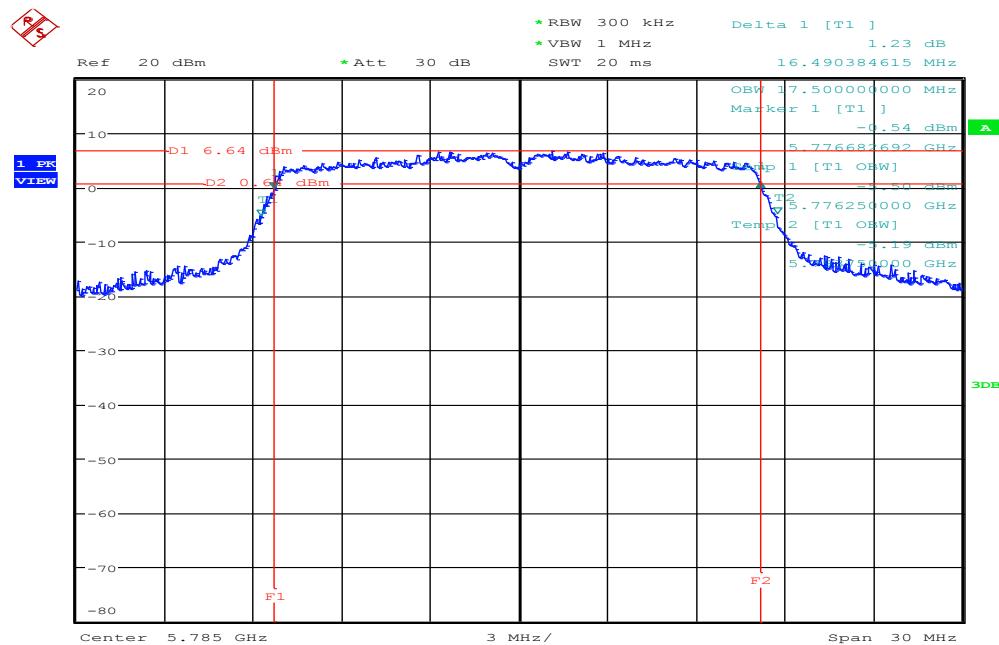
IEEE 802.11a mode / 5745 ~ 5825MHz

99% Bandwidth (CH Low)

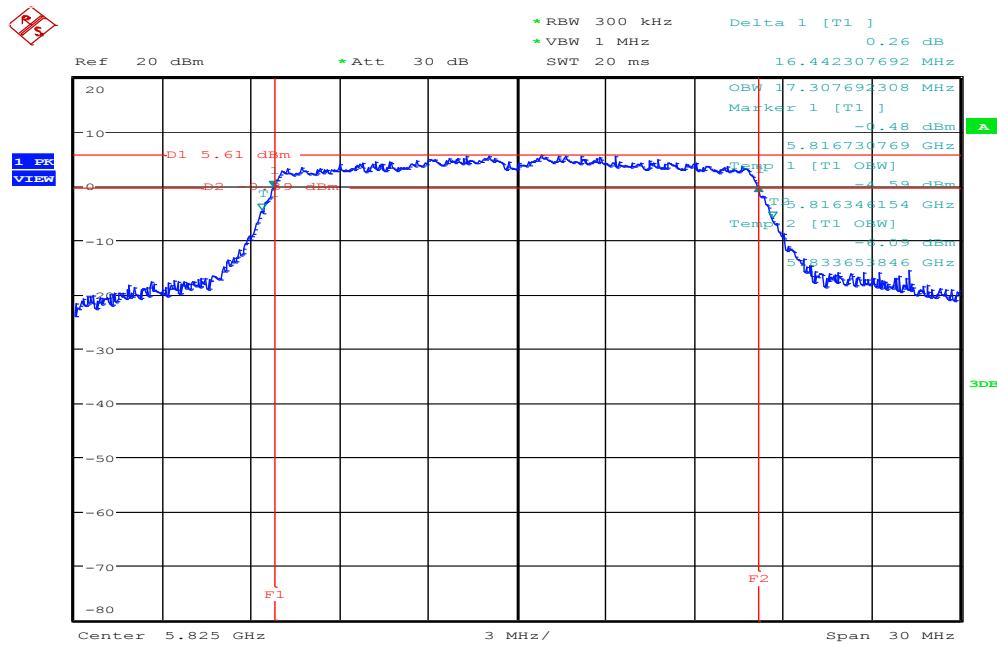


Date: 6.JAN.2016 14:35:22

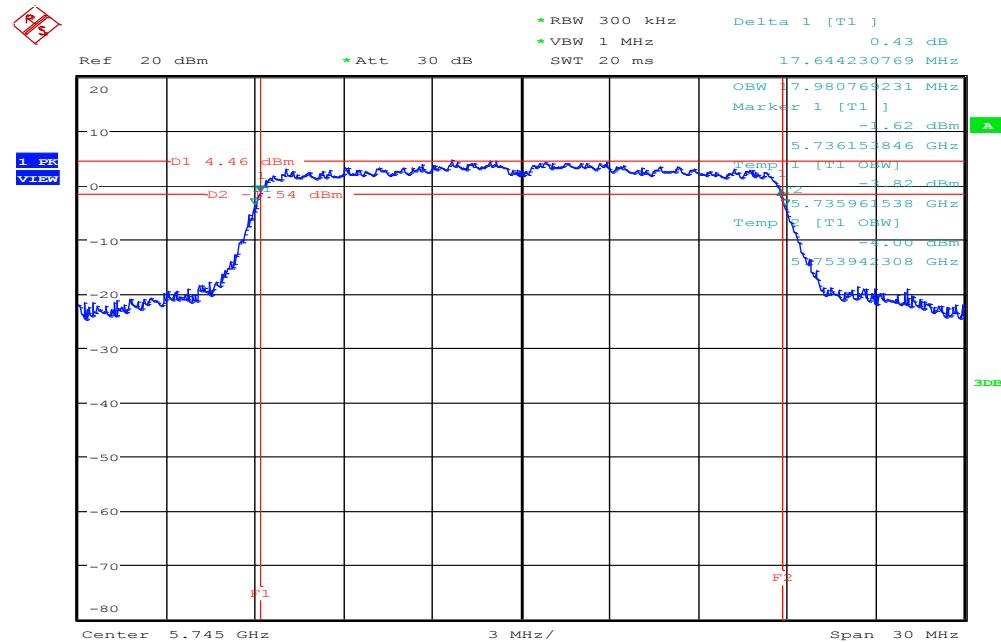
99% Bandwidth (CH Mid)



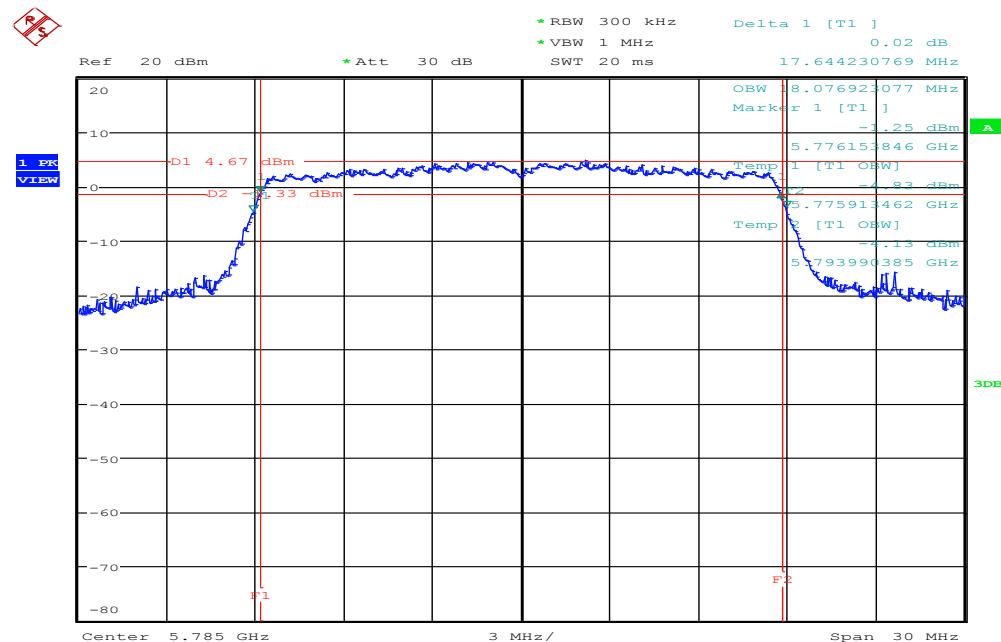
Date: 6.JAN.2016 14:36:33

99% Bandwidth (CH High)

Date: 6.JAN.2016 14:37:42

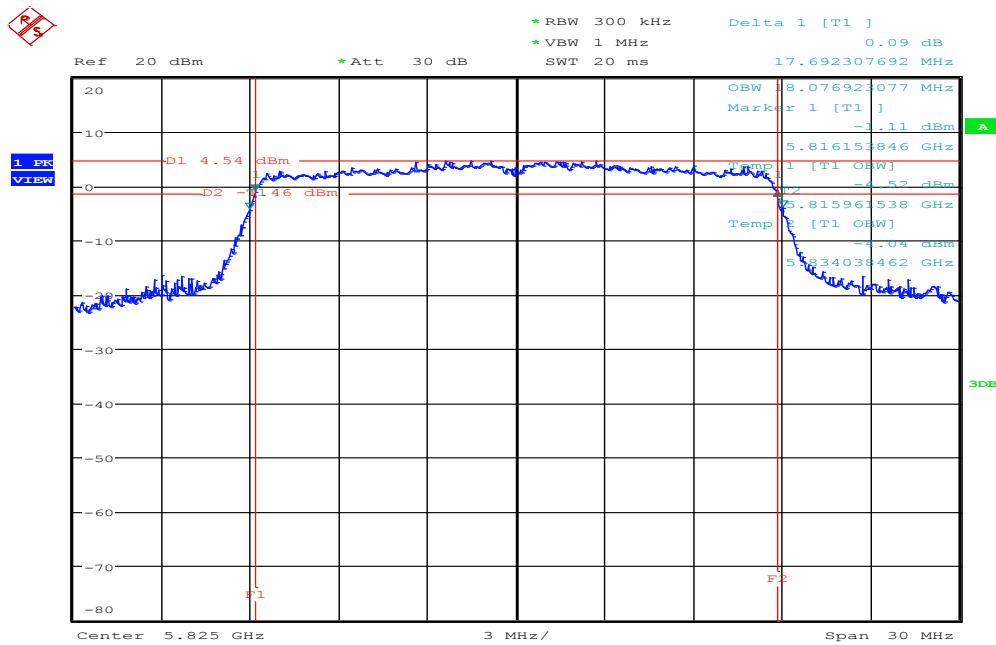
Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz / Chain 0**99% Bandwidth (CH Low)**

Date: 6.JAN.2016 14:42:09

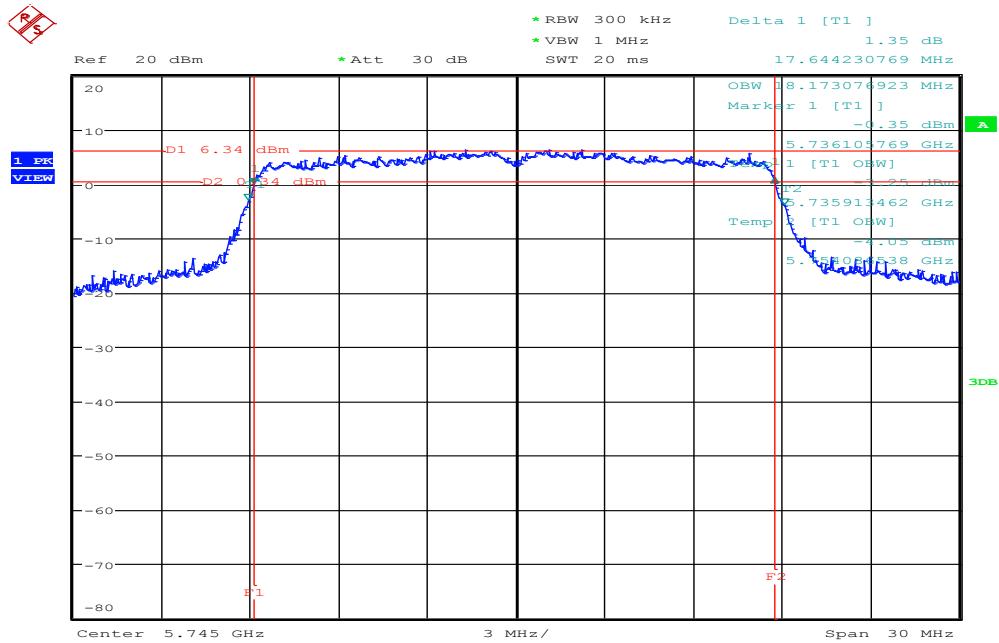
99% Bandwidth (CH Mid)

Date: 6.JAN.2016 14:43:44

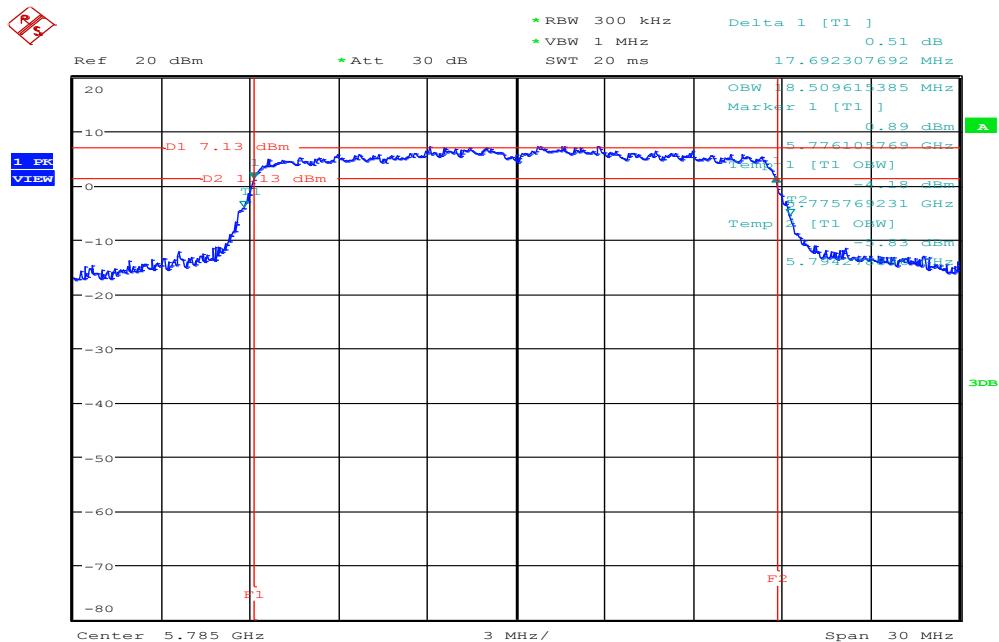
99% Bandwidth (CH High)



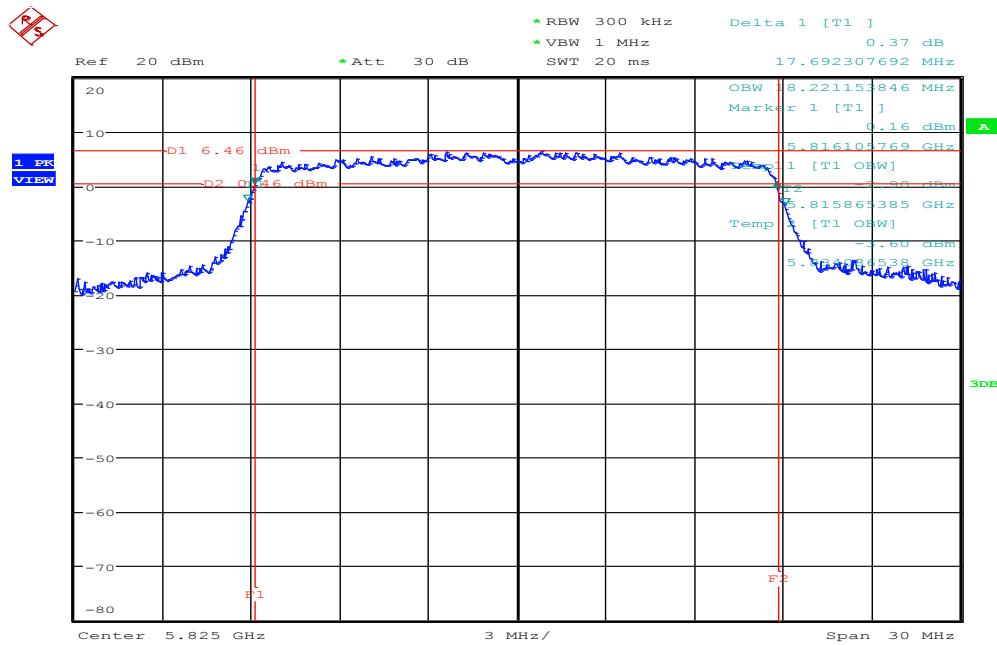
Date: 6.JAN.2016 14:45:21

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz / Chain 1**99% Bandwidth (CH Low)**

Date: 6.JAN.2016 15:42:29

99% Bandwidth (CH Mid)

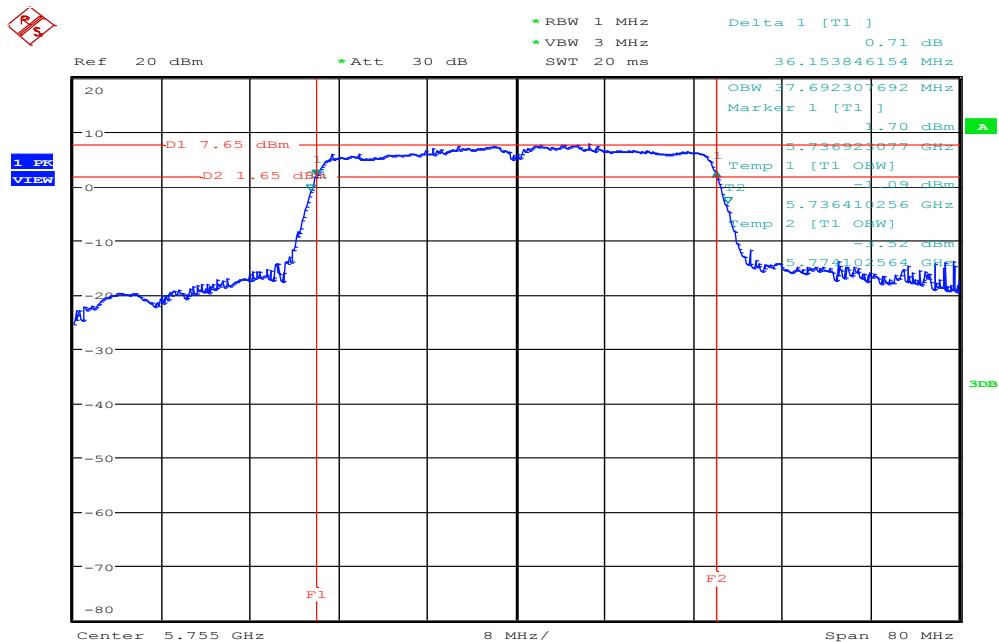
Date: 6.JAN.2016 15:44:17

99% Bandwidth (CH High)

Date: 6.JAN.2016 15:45:54

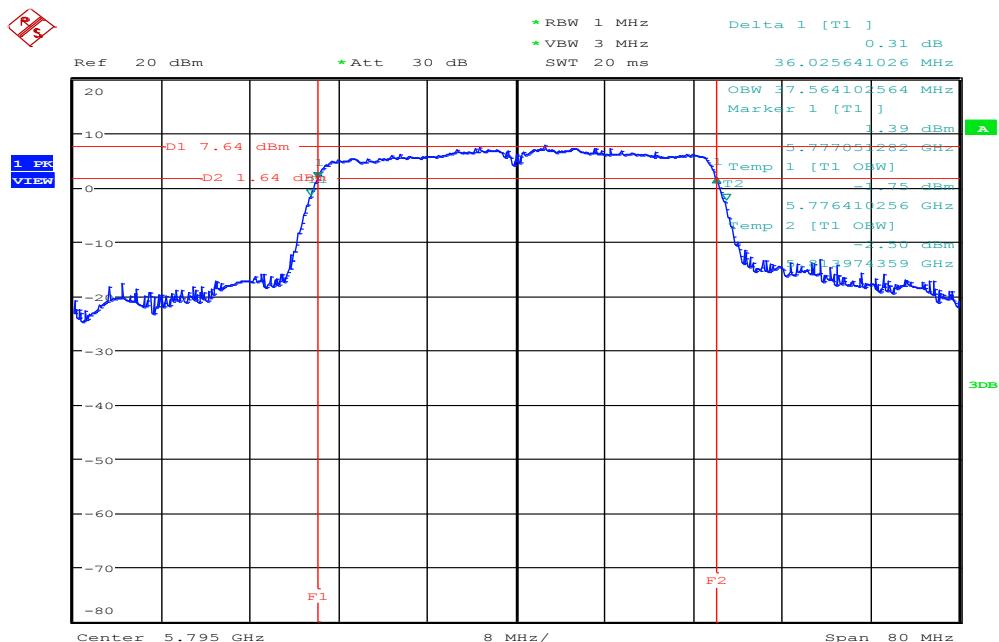
Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz / Chain 0

99% Bandwidth (CH Low)



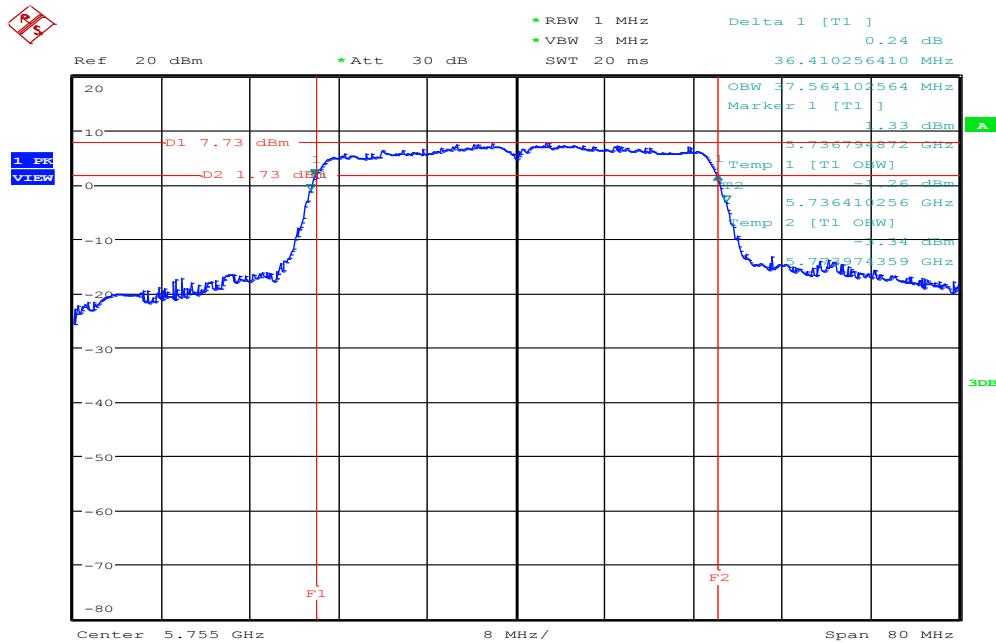
Date: 6.JAN.2016 15:26:55

99% Bandwidth (CH High)



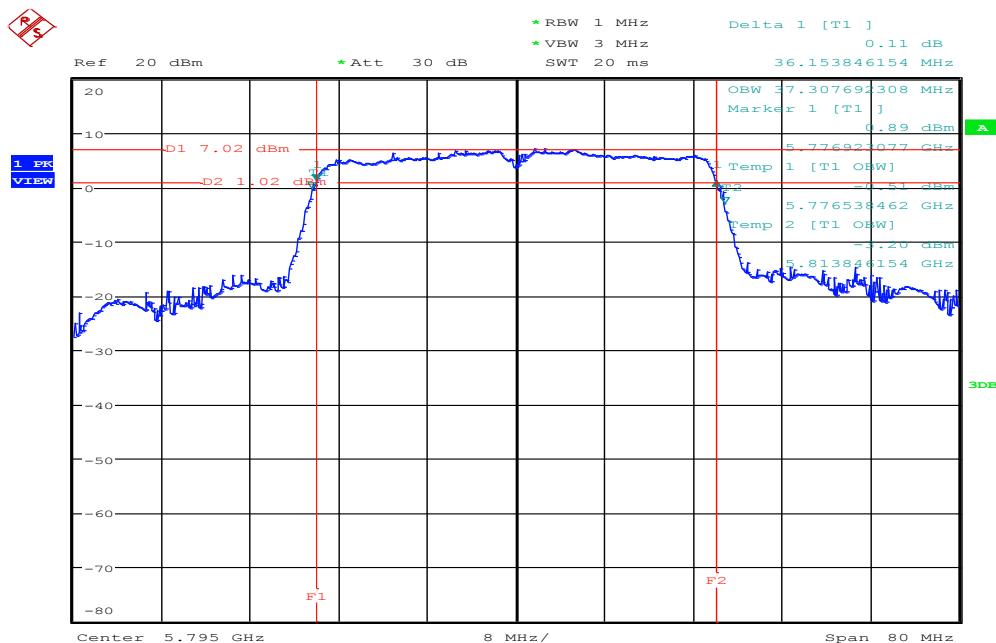
Date: 6.JAN.2016 15:28:19

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz / Chain 1
99% Bandwidth (CH Low)



Date: 6.JAN.2016 15:49:46

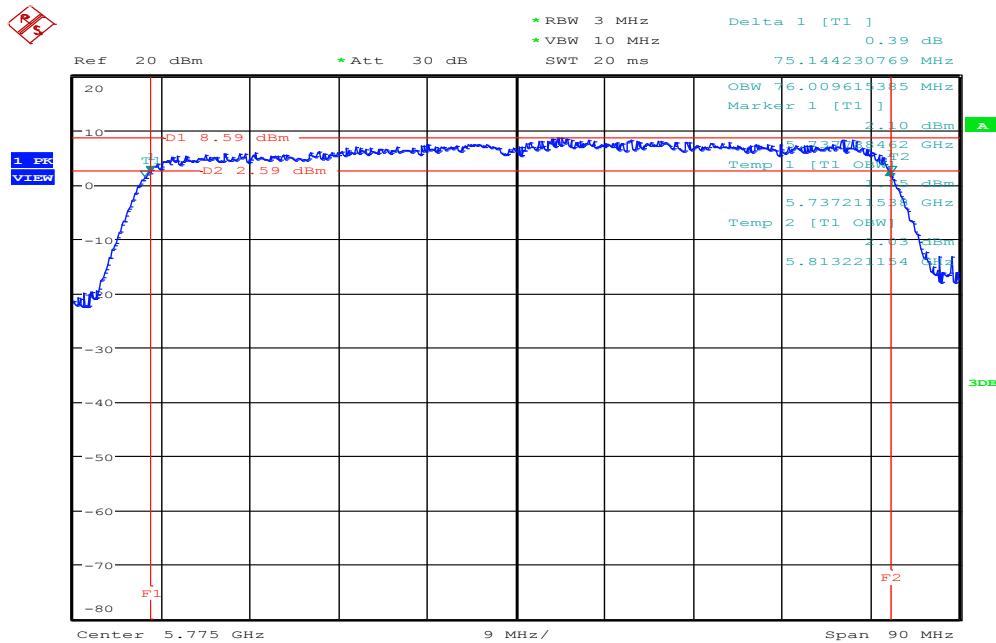
99% Bandwidth (CH High)



Date: 6.JAN.2016 15:50:48

Test mode: IEEE 802.11ac VHT 80 MHz mode / 5775MHz / Chain 0

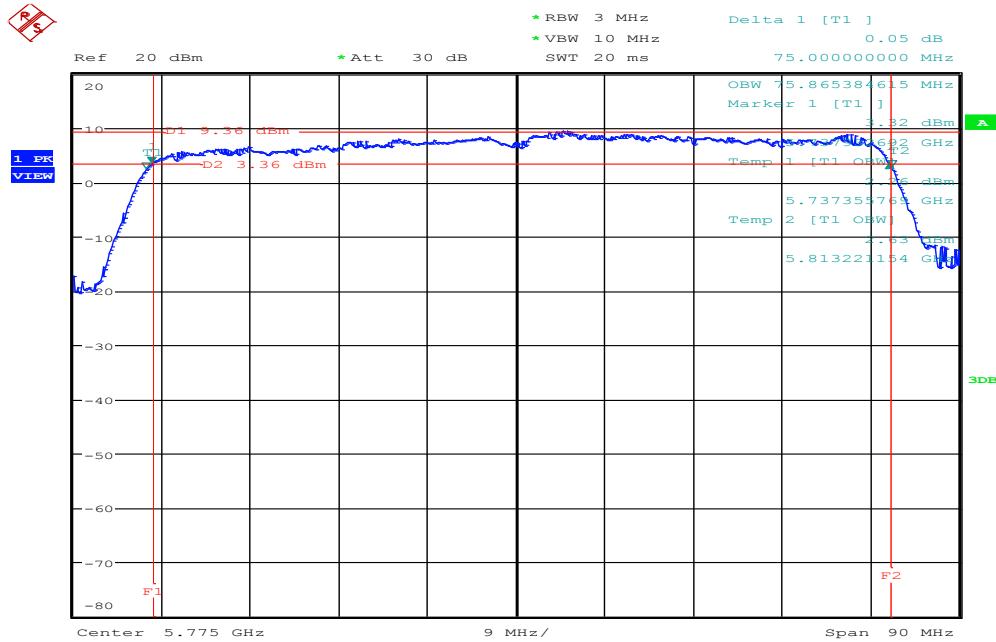
99% Bandwidth (CH Mid)



Date: 6.JAN.2016 15:58:15

Test mode: IEEE 802.11ac VHT 80 MHz mode / 5775MHz / Chain 1

99% Bandwidth (CH Mid)




Date: 6.JAN.2016 15:54:51

7.2 6DB BANDWIDTH

LIMIT

According to §15.407 & RSS-247§, systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = VBW = 100kHz, Span = 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	16.298	>500	PASS
Mid	5785	16.298		PASS
High	5825	16.346		PASS

Test mode: IEEE 802.11n HT 20 MHz mode / Chain 0

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	17.307	>500	PASS
Mid	5785	17.115		PASS
High	5825	16.971		PASS

Test mode: IEEE 802.11n HT 20 MHz mode / Chain 1

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	17.163	>500	PASS
Mid	5785	17.115		PASS
High	5825	17.115		PASS

Test mode: IEEE 802.11n HT 40 MHz mode / Chain 0

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5755	36.384	>500	PASS
High	5795	36.153		PASS

Test mode: IEEE 802.11n HT 40 MHz mode / Chain 1

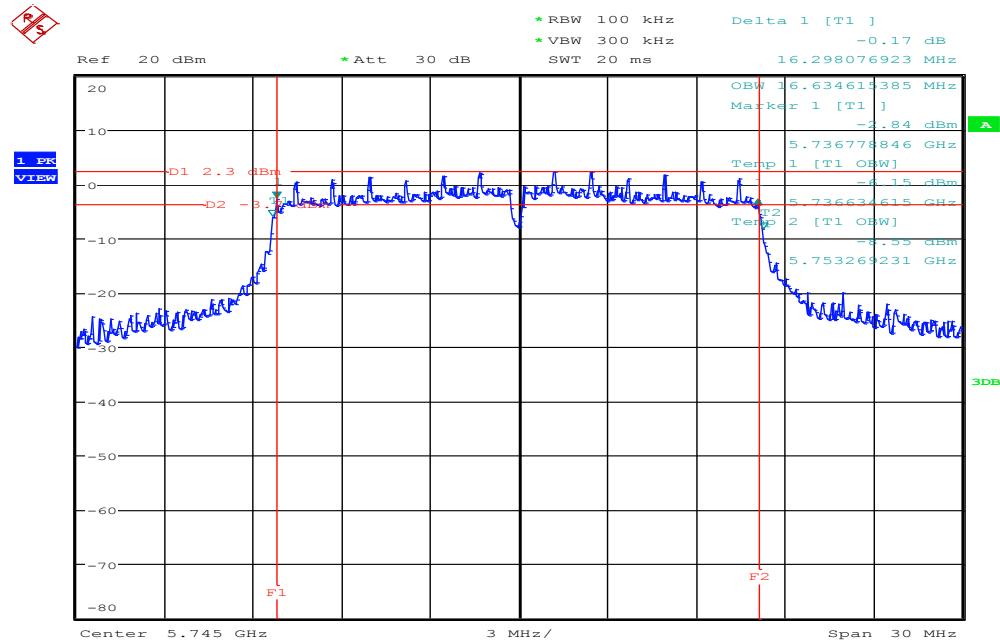
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5755	35.384	>500	PASS
High	5795	35.256		PASS

Test mode: IEEE 802.11ac VHT 80 MHz mode / 5775MHz / Chain 0

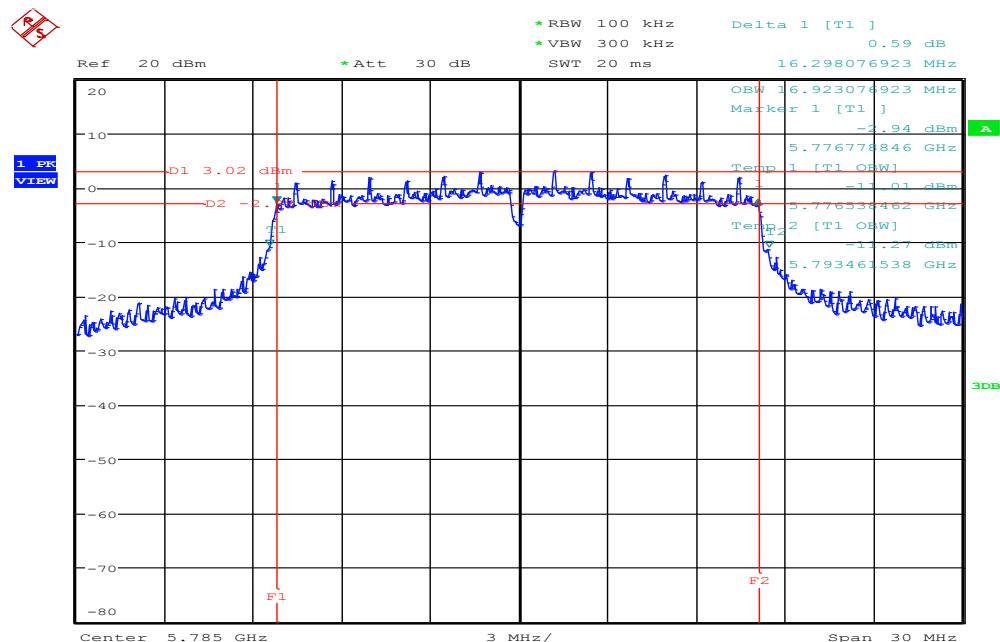
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Mid	5755	75.144	>500	PASS

Test mode: IEEE 802.11ac VHT 80 MHz mode / 5775MHz / Chain 1

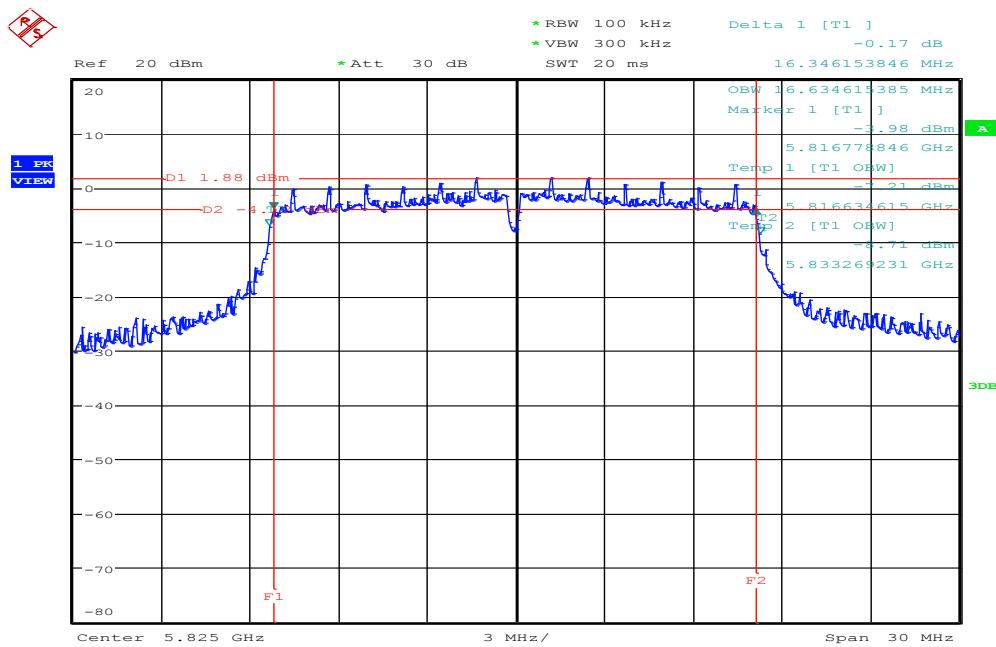
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Mid	5755	75.144	>500	PASS

Test Plot**IEEE 802.11a mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)**

Date: 5.JAN.2016 20:59:42

6dB Bandwidth (CH Mid)

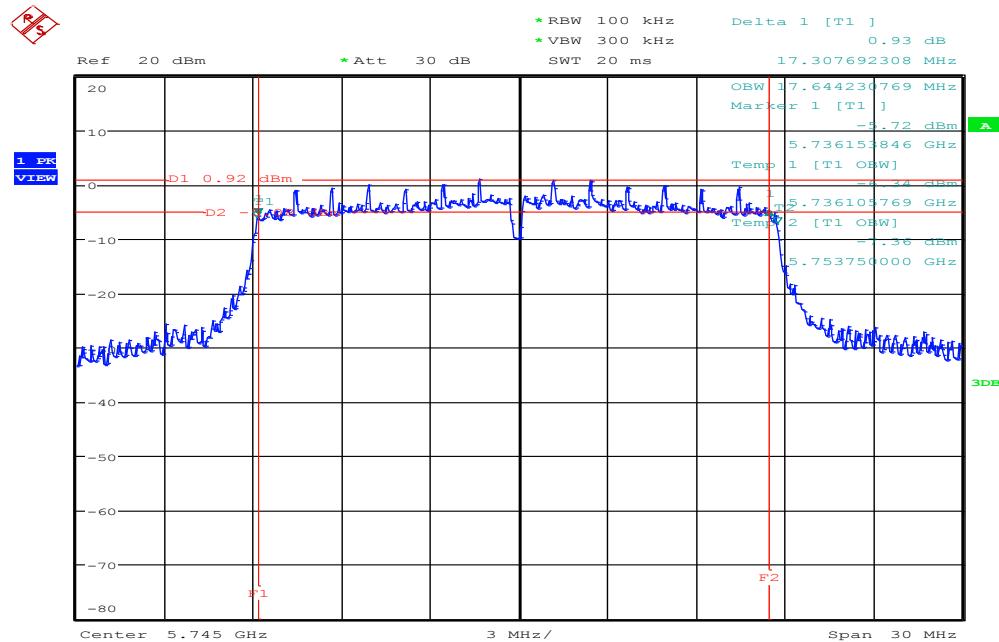
Date: 5.JAN.2016 21:01:21

6dB Bandwidth (CH High)

Date: 5.JAN.2016 21:03:02

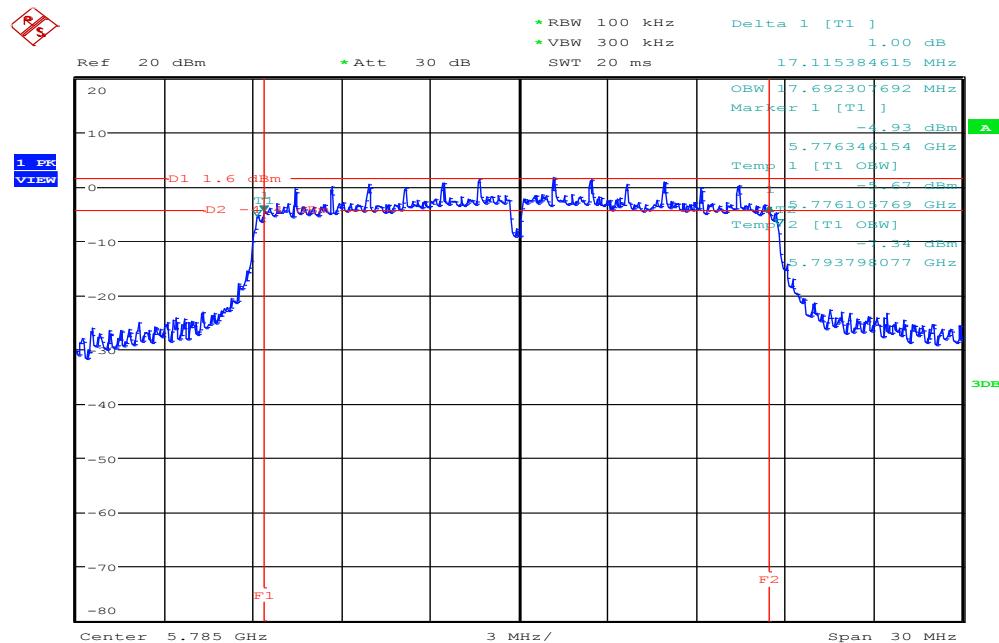
IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz / Chain 0

6dB Bandwidth (CH Low)

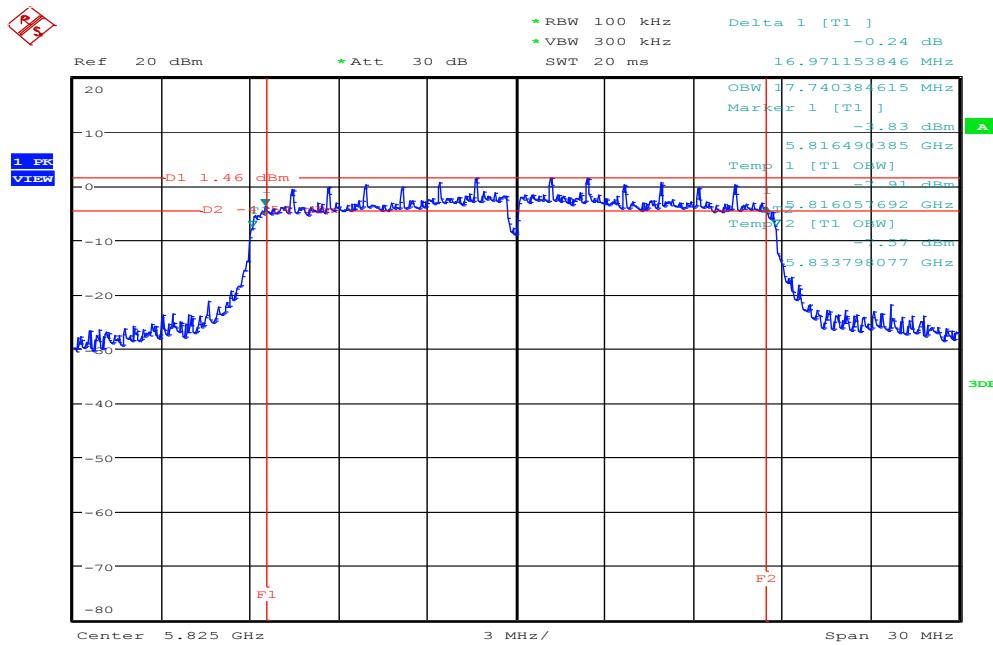


Date: 5.JAN.2016 21:51:50

6dB Bandwidth (CH Mid)



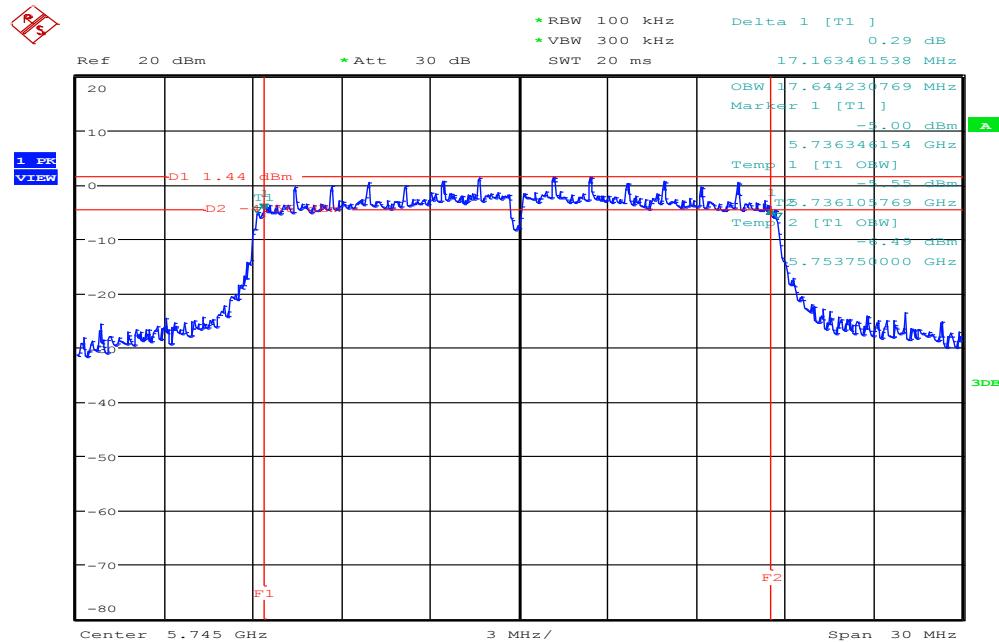
Date: 5.JAN.2016 21:53:13

6dB Bandwidth (CH High)

Date: 5.JAN.2016 21:54:54

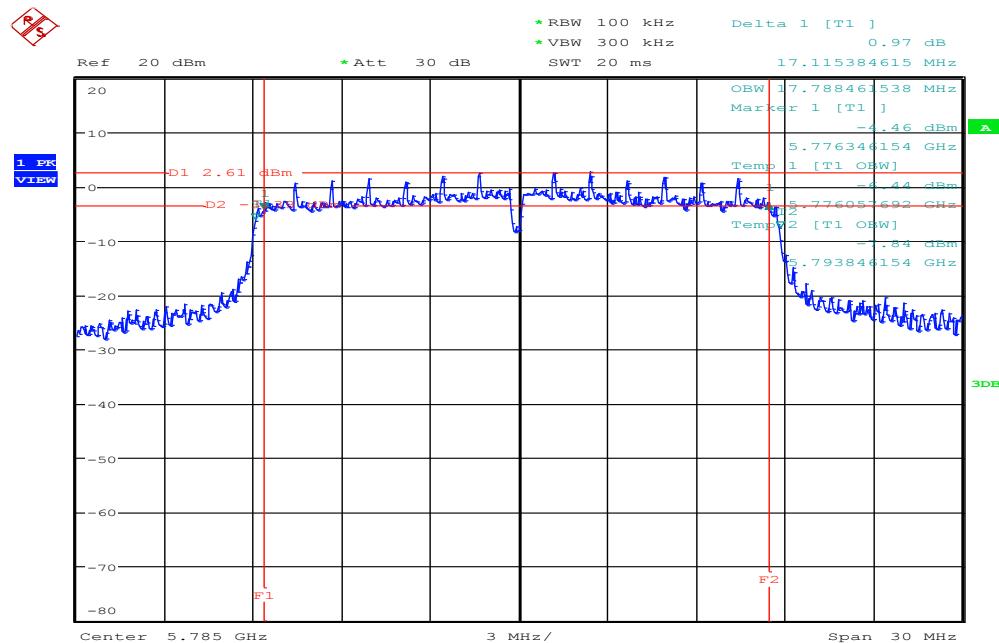
IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz / Chain 1

6dB Bandwidth (CH Low)

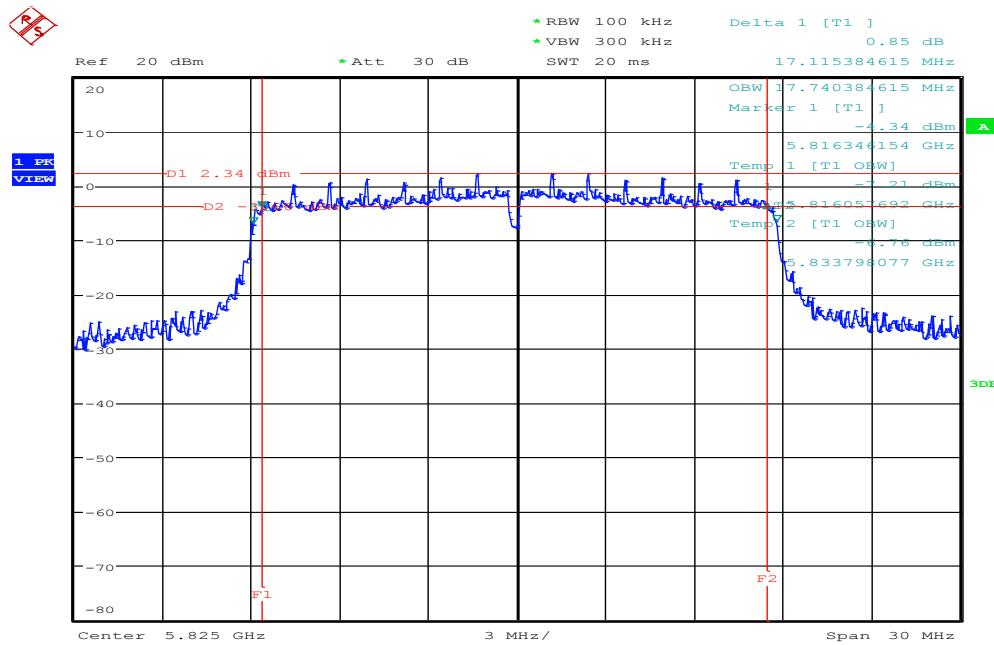


Date: 5.JAN.2016 22:30:54

6dB Bandwidth (CH Mid)



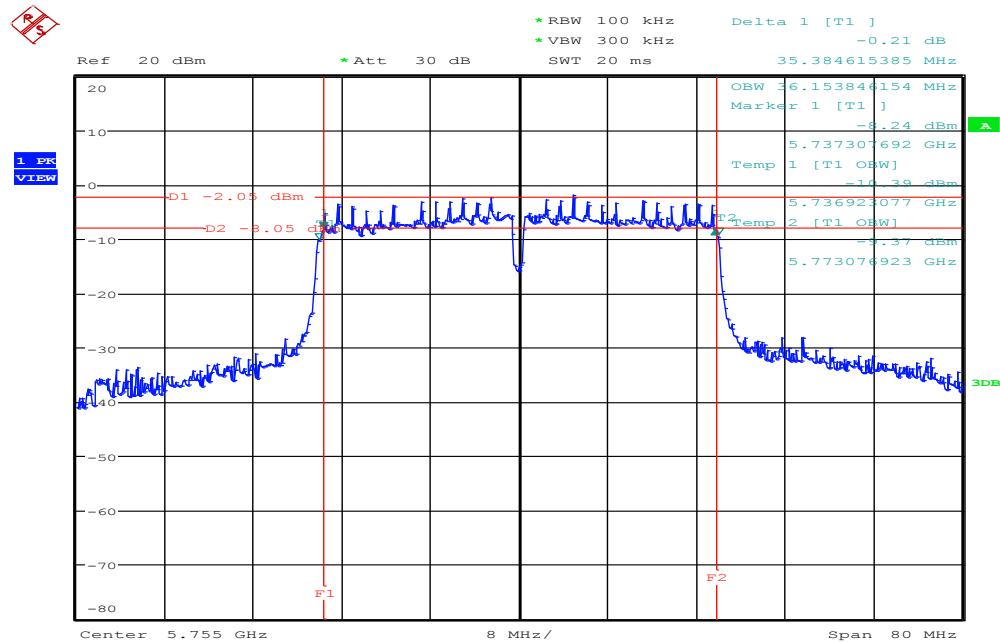
Date: 5.JAN.2016 22:32:22

6dB Bandwidth (CH High)

Date: 5.JAN.2016 22:34:07

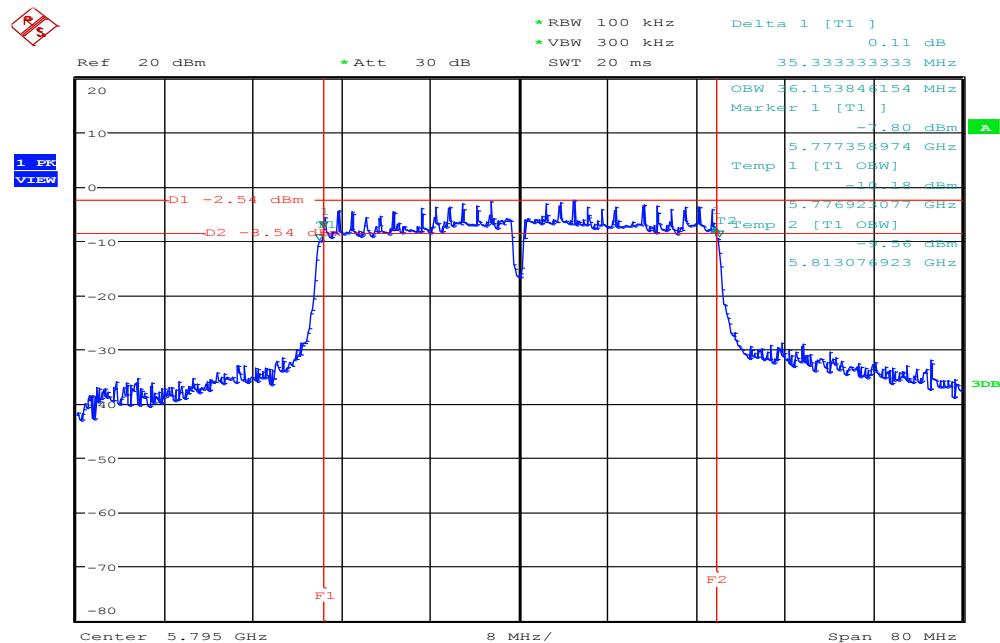
IEEE 802.11n HT 40 MHz mode / 5755 ~ 5815MHz / Chain 0

6dB Bandwidth (CH Low)



Date: 6.JAN.2016 10:31:39

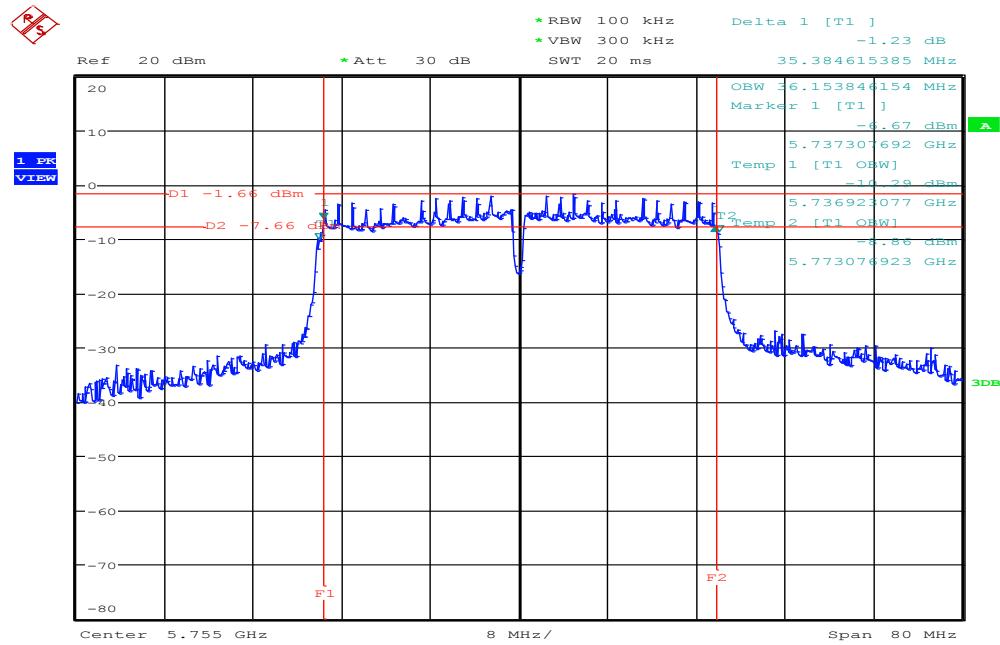
6dB Bandwidth (CH High)



Date: 6.JAN.2016 10:33:02

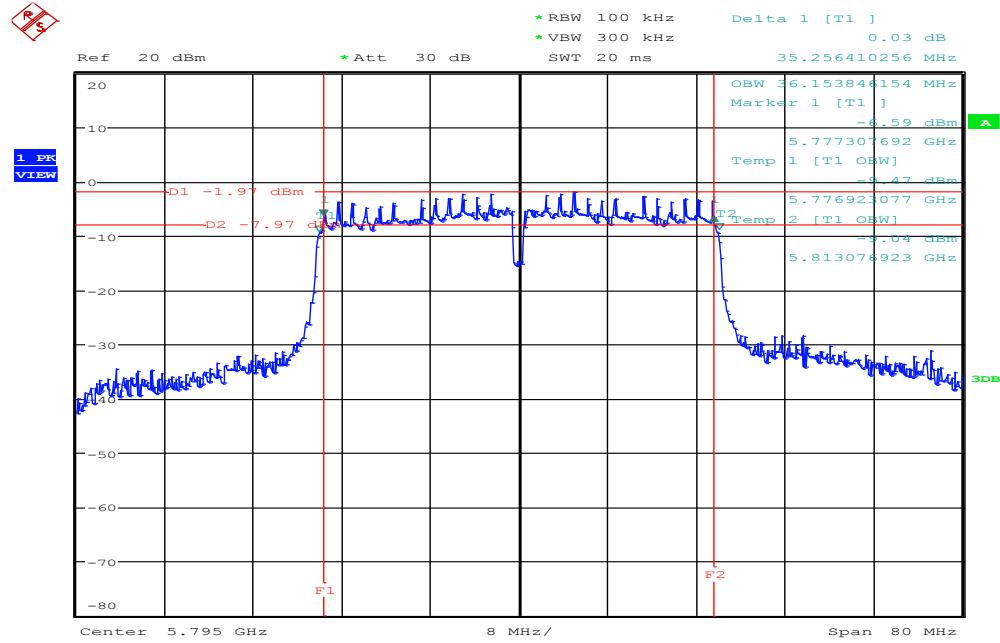
IEEE 802.11n HT 40 MHz mode / 5755 ~ 5815MHz / Chain 1

6dB Bandwidth (CH Low)



Date: 6.JAN.2016 11:35:46

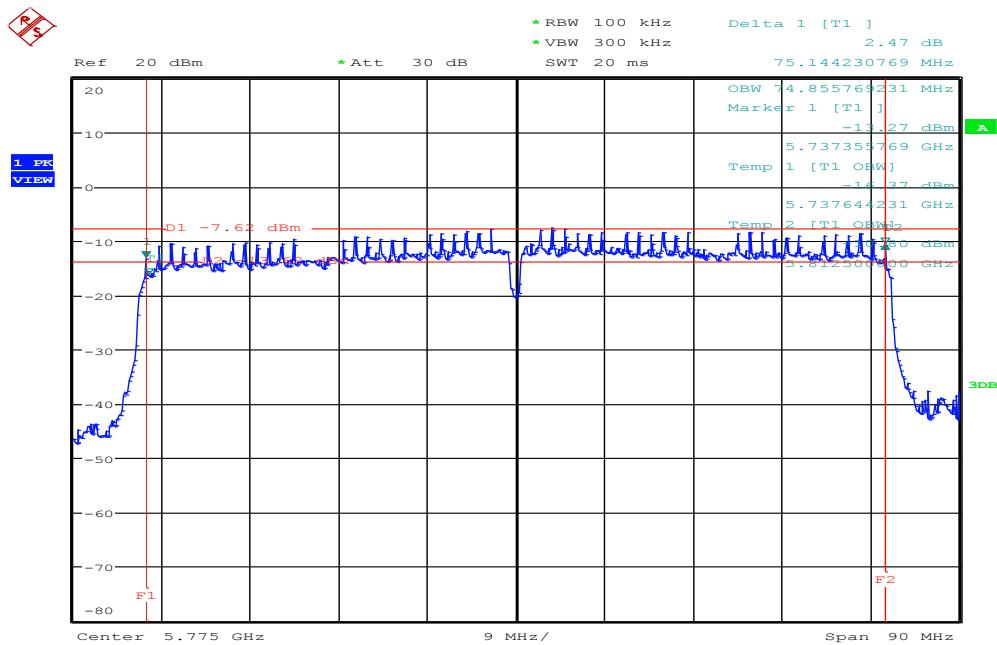
6dB Bandwidth (CH High)



Date: 6.JAN.2016 11:37:00

IEEE 802.11ac VHT 80 MHz mode / 5775MHz / Chain 0

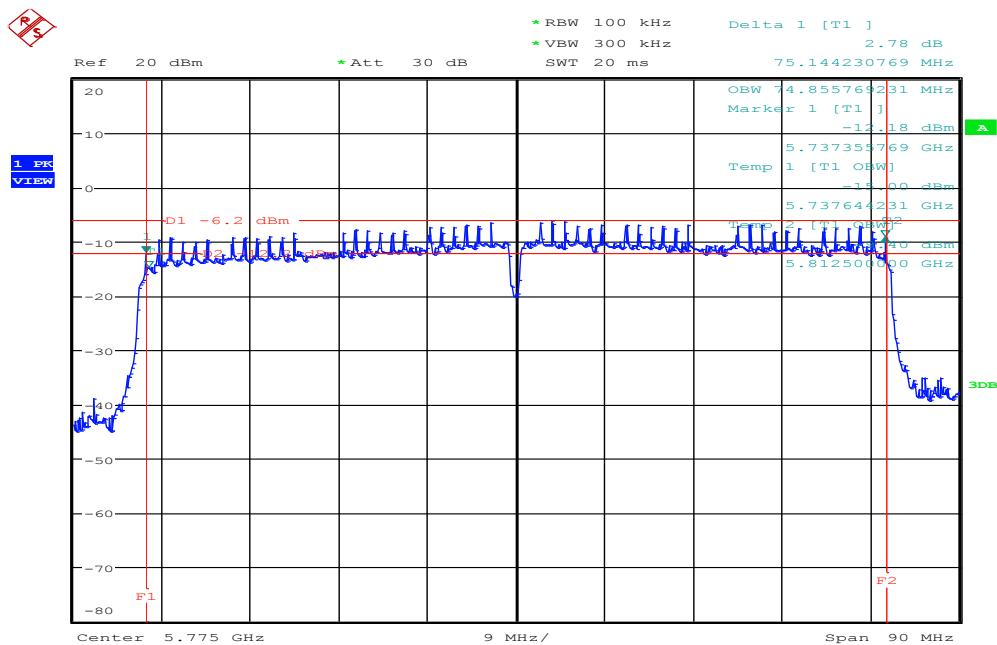
6dB Bandwidth (CH Mid)



Date: 6.JAN.2016 14:02:21

IEEE 802.11ac VHT 80 MHz mode / 5775MHz / Chain 1

6dB Bandwidth (CH Mid)



Date: 6.JAN.2016 14:16:23


7.3 MAXIMUM CONDUCTED OUTPUT POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.407, for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to RSS-247 §, for systems employing digital modulation techniques operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11a mode / 5745 ~ 5825MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)
Low	5745	14.44	0.0278	24
Mid	5785	14.27	0.0267	24
High	5825	*14.51	0.0282	24

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (dBm)
Low	5745	13.95	14.24	17.11	0.0514	20.88
Mid	5785	13.94	14.38	*17.18	0.0522	20.88
High	5825	14.08	13.86	16.98	0.0499	20.88

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (dBm)
Low	5755	14.24	14.26	*17.26	0.0532	20.88
High	5795	13.33	13.04	16.20	0.0417	20.88

Test mode: IEEE 802.11ac VHT 80 MHz mode / 5775MHz

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (dBm)
Mid	5775	11.13	11.01	*14.08	0.0256	20.88

Remark:

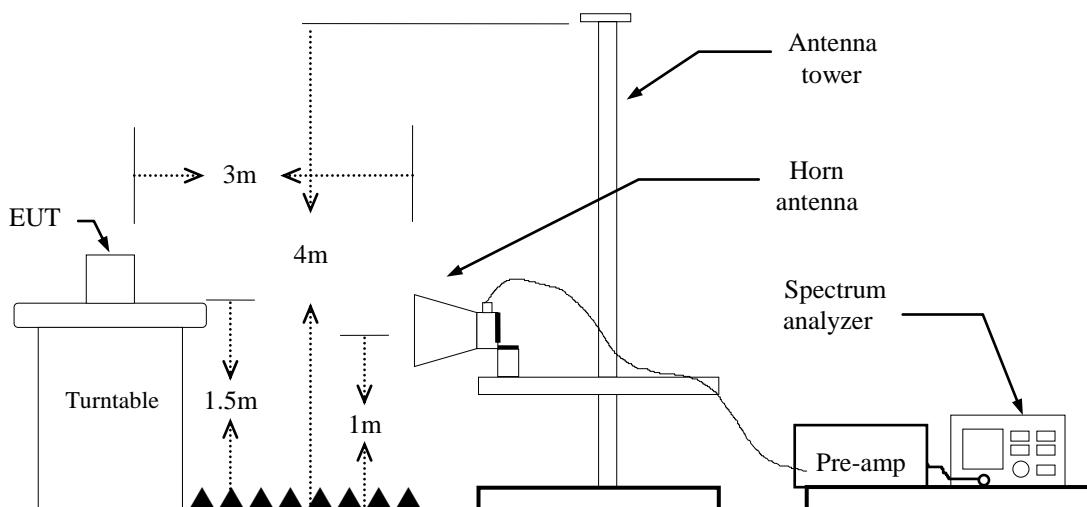
1. Total Output Power (w) = Chain 0 (10^(Output Power /10)/1000)+ Chain 1 (10^(Output Power /10)/1000)
2. The maximum antenna gain is 9.12dBi; therefore the reduction due to antenna gain is 3.12dBi, so the limit is 20.88 dBm.

7.4 BAND EDGES MEASUREMENT


LIMIT

According to §15.407 & RSS-247 §, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



For Conducted



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz,
if duty cycle \geq 98%, VBW=10Hz.
if duty cycle < 98% VBW=1/T.

For PIFA Antenna

IEEE 802.11a mode: = 89%, VBW= 680Hz

IEEE 802.11n HT 20 MHz mode: = 90%, VBW= 750Hz

IEEE 802.11n HT 40 MHz mode: = 80%, VBW= 1.5KHz

IEEE 802.11ac VHT 80 MHz mode: = 66%, VBW= 3KHz

For Dipole Antenna

IEEE 802.11a mode: = 89%, VBW= 680Hz

IEEE 802.11n HT 20 MHz mode: = 89%, VBW= 680Hz

IEEE 802.11n HT 40 MHz mode: = 82%, VBW= 1.5KHz

IEEE 802.11ac VHT 80 MHz mode: = 69%, VBW= 2.7KHz

5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.
6. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

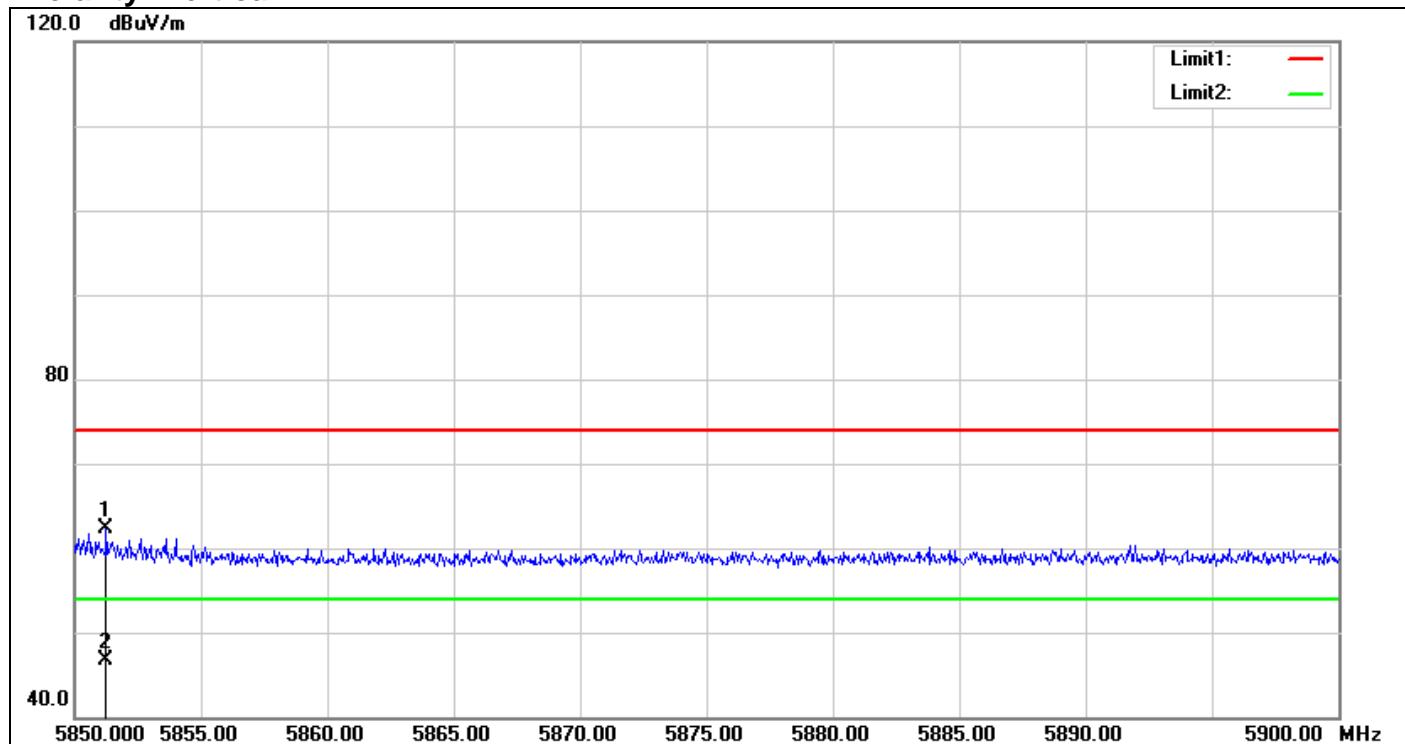
For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

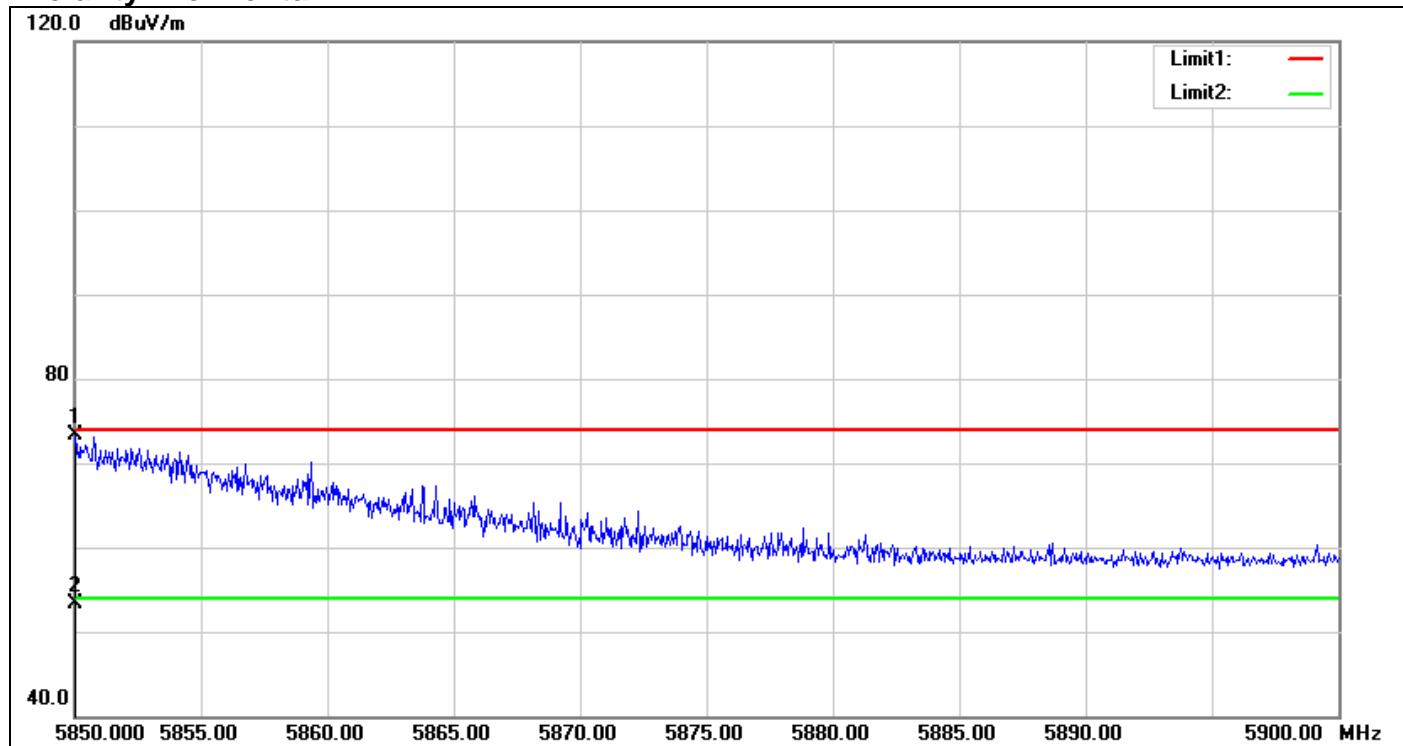
The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

TEST RESULTS

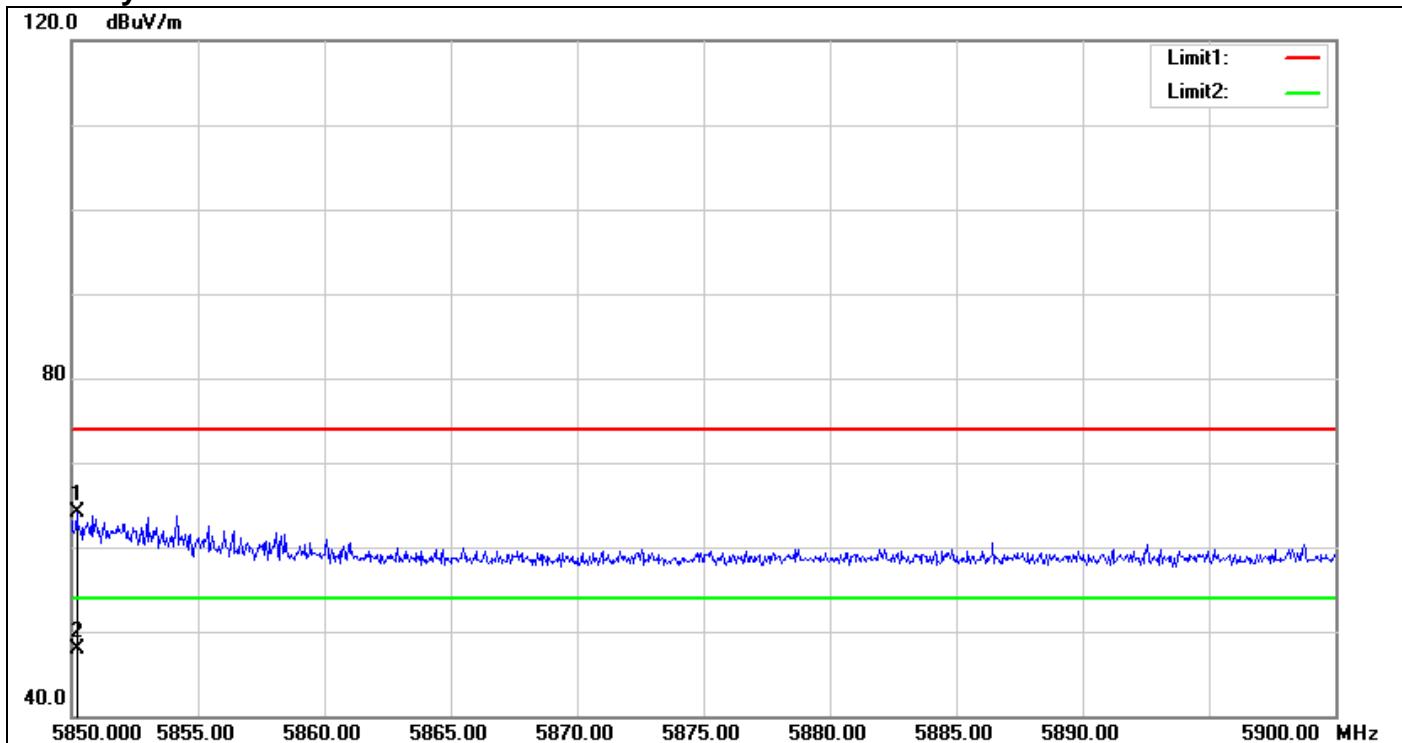
Refer to attach spectrum analyzer data chart.

Band Edges (IEEE 802.11a mode / CH 5825 MHz)**Polarity: Vertical**

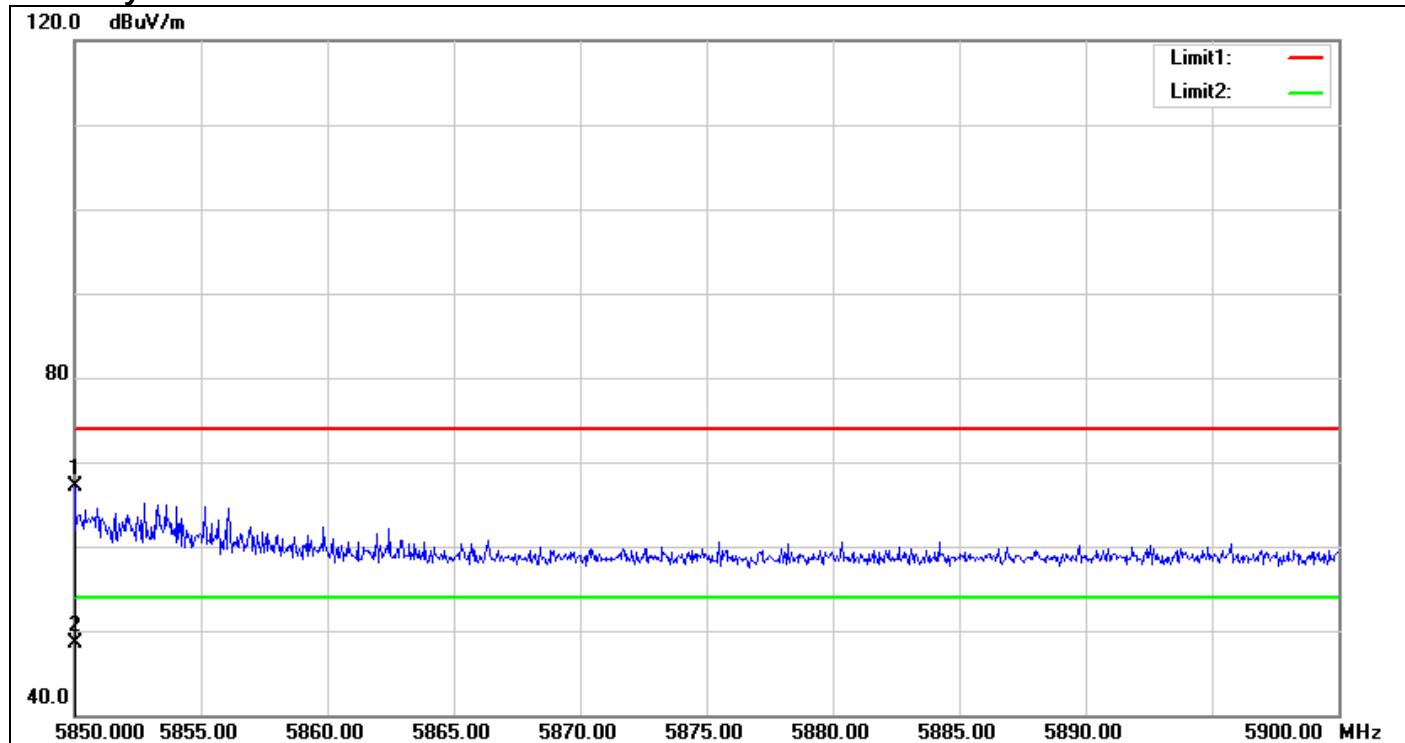
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	5851.250	55.51	6.75	62.26	74.00	-11.74	150	69	peak
2	5851.250	40.05	6.75	46.80	54.00	-7.20	150	69	AVG

Polarity: Horizontal

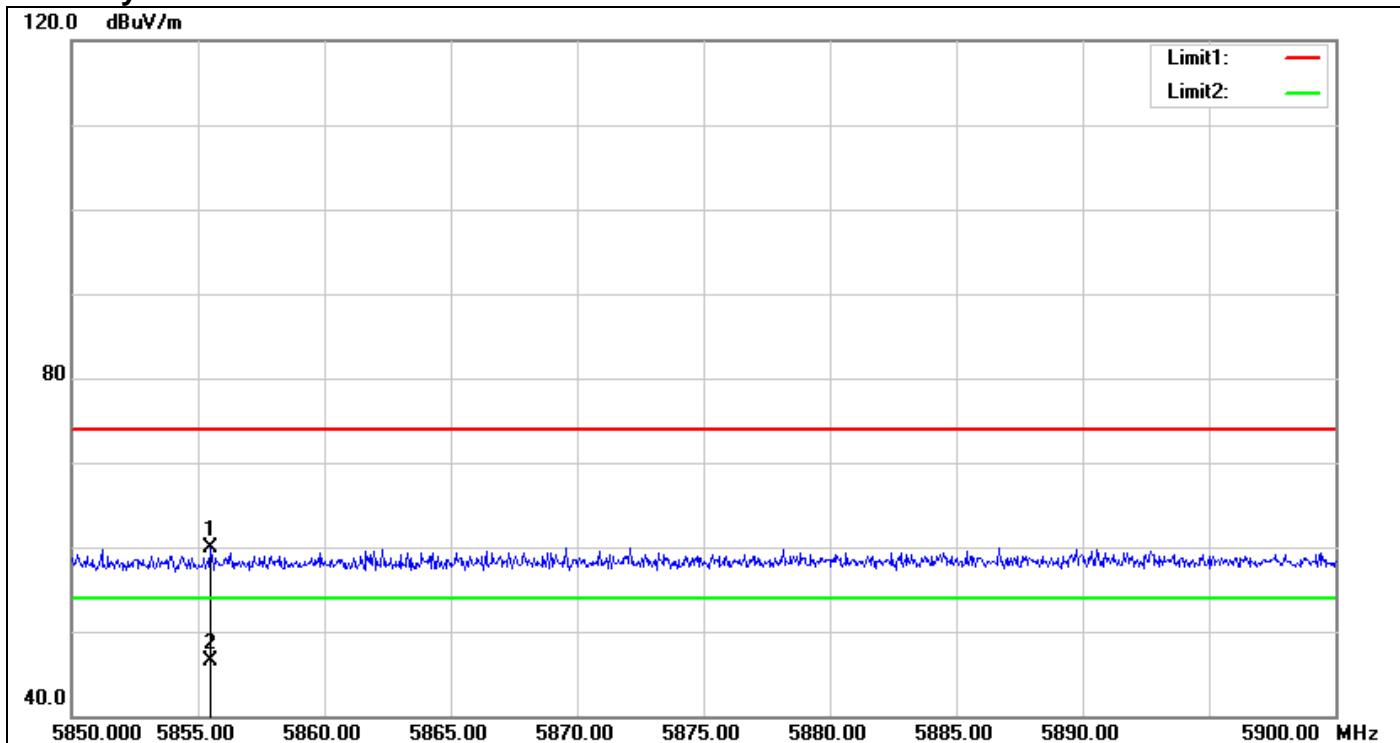
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	5850.050	66.52	6.74	73.26	74.00	-0.74	150	278	peak
2	5850.050	46.49	6.74	53.23	54.00	-0.77	150	278	AVG

Band Edges (IEEE 802.11n HT 20 MHz mode / CH 5825 MHz)**Polarity: Vertical**

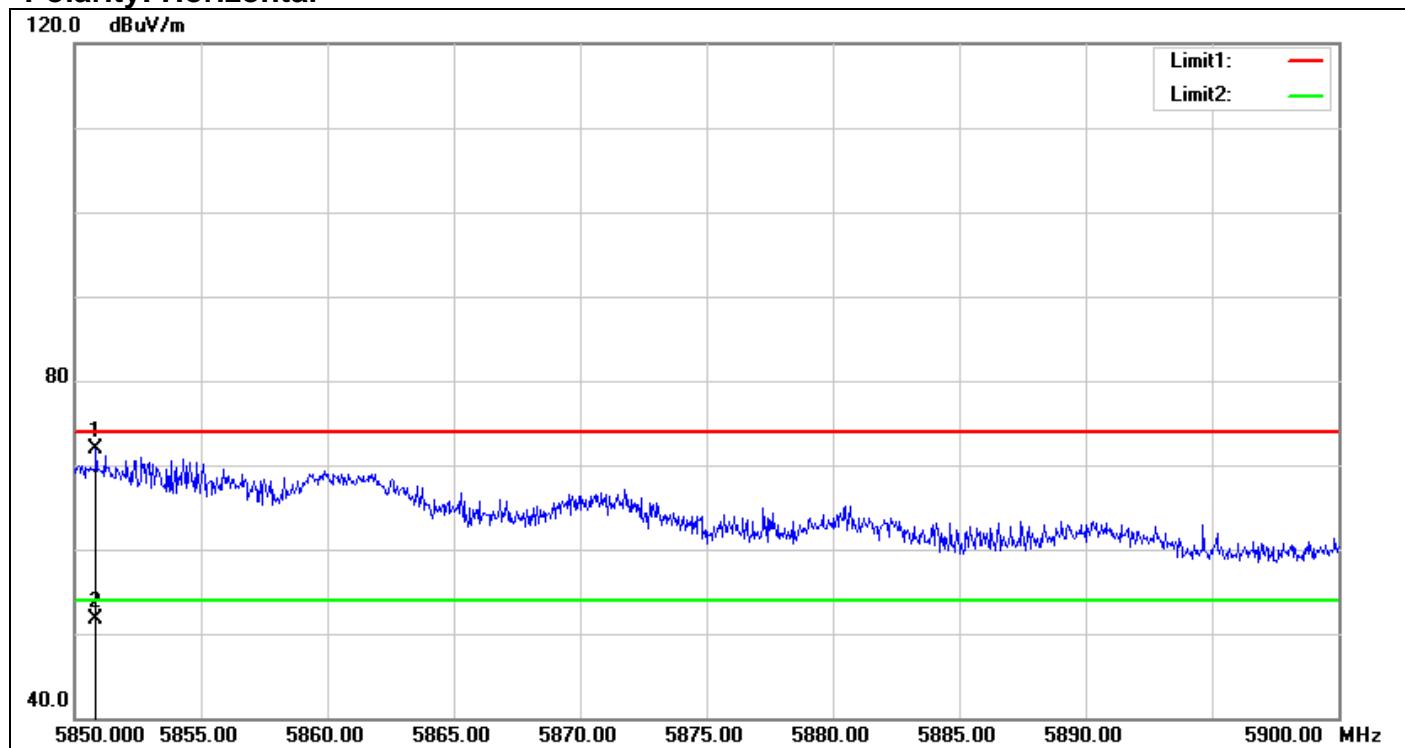
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	5850.200	57.28	6.74	64.02	74.00	-9.98	150	269	peak
2	5850.200	41.08	6.74	47.82	54.00	-6.18	150	269	AVG

Polarity: Horizontal

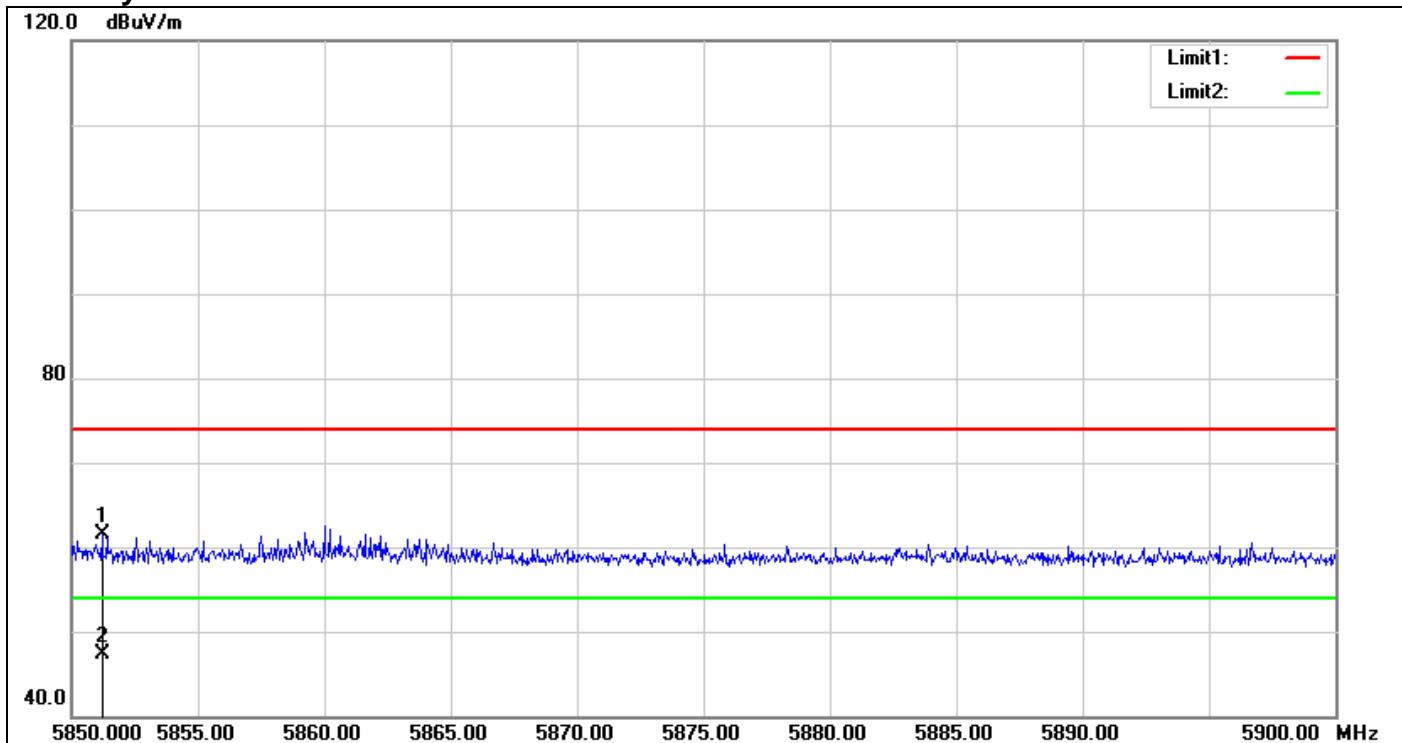
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	5850.000	60.35	6.74	67.09	74.00	-6.91	150	257	peak
2	5850.000	41.83	6.74	48.57	54.00	-5.43	150	257	AVG

Band Edges (IEEE 802.11n HT 40 MHz mode / CH 5795 MHz)**Polarity: Vertical**

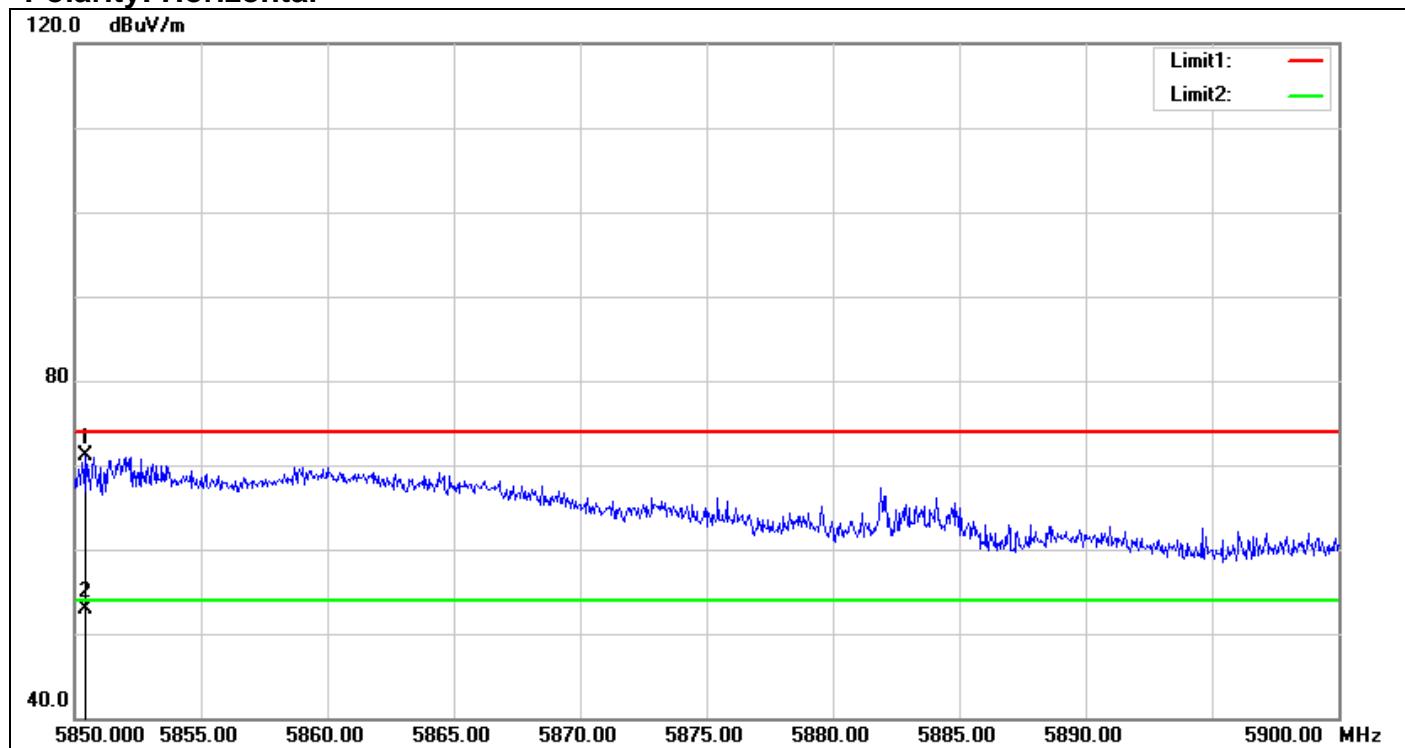
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	5855.500	53.18	6.76	59.94	74.00	-14.06	150	359	peak
2	5855.500	39.68	6.76	46.44	54.00	-7.56	150	359	AVG

Polarity: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	5850.850	65.21	6.74	71.95	74.00	-2.05	150	299	peak
2	5850.850	45.04	6.74	51.78	54.00	-2.22	150	299	AVG

Band Edges (IEEE 802.11ac VHT 80 MHz mode / CH 5775 MHz)**Polarity: Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	5851.200	54.68	6.75	61.43	74.00	-12.57	150	58	peak
2	5851.200	40.45	6.75	47.20	54.00	-6.80	150	58	AVG

Polarity: Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	5850.400	64.42	6.74	71.16	74.00	-2.84	150	343	peak
2	5850.400	46.12	6.74	52.86	54.00	-1.14	150	343	AVG

7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.407 & RSS-247 §, for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 30 dBm in any 500 kHz band during any time interval of continuous transmission.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11a mode/ 5745 ~ 5825MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	0.20	11.00	PASS
Mid	5785	0.16		PASS
High	5825	0.57		PASS

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	-0.14	0.21	3.05	7.88	PASS
Mid	5785	-0.28	0.18	2.97		PASS
High	5825	0.19	0.53	3.37		PASS

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	5755	-3.70	-3.74	-0.71	7.88	PASS
High	5795	-4.59	-4.26	-1.41		PASS

Test mode: IEEE 802.11ac VHT 80 MHz mode / 5775MHz

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Mid	5775	-10.50	-9.96	-7.21	7.88	PASS

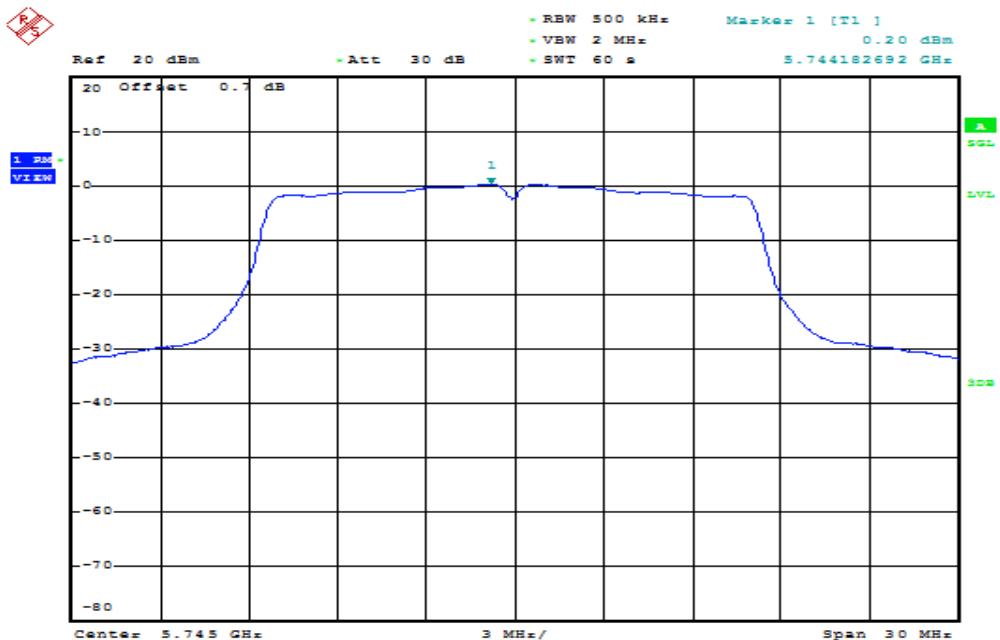
Remark:

1. Total PPSD (dBm) = $10 * \log(10 * (\text{Chain 0 PPSD} / 10) + 10 * (\text{Chain 1 PPSD} / 10))$
2. The maximum antenna gain is 9.12dBi; therefore the reduction due to antenna gain is 3.12dBi, so the limit is 7.88 dBm.

Test Plot

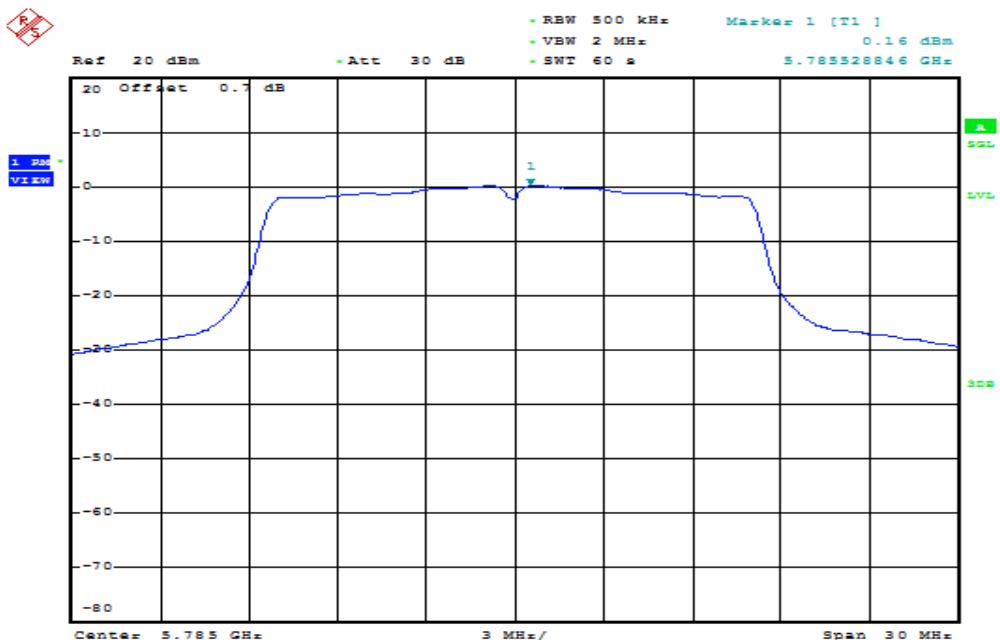
IEEE 802.11a MHz mode / 5745 ~ 5825MHz

PPSD (CH Low)

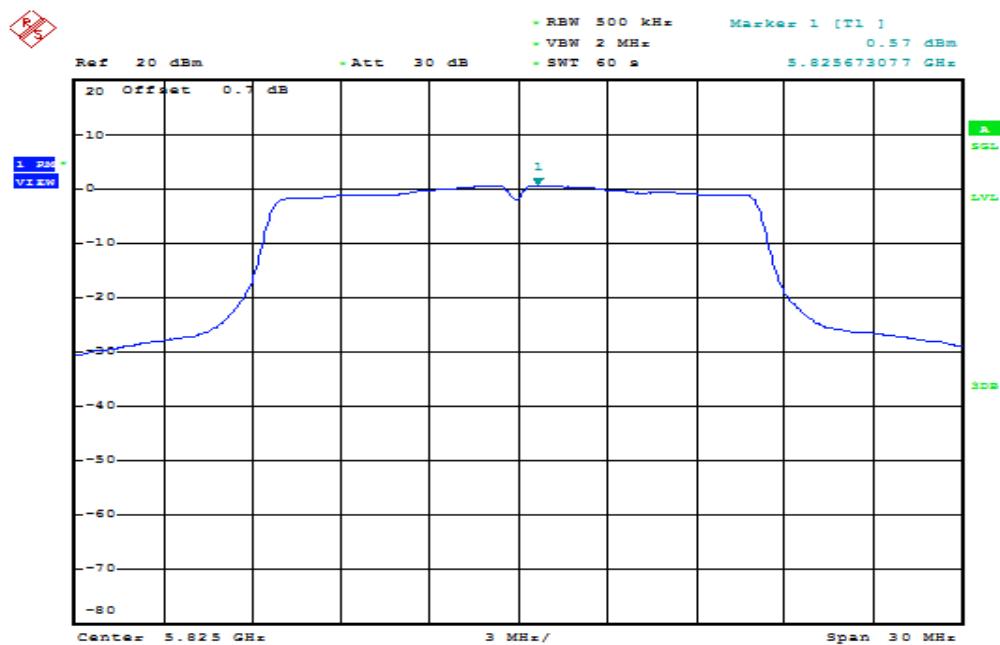


Date: 19.JAN.2016 21:02:17

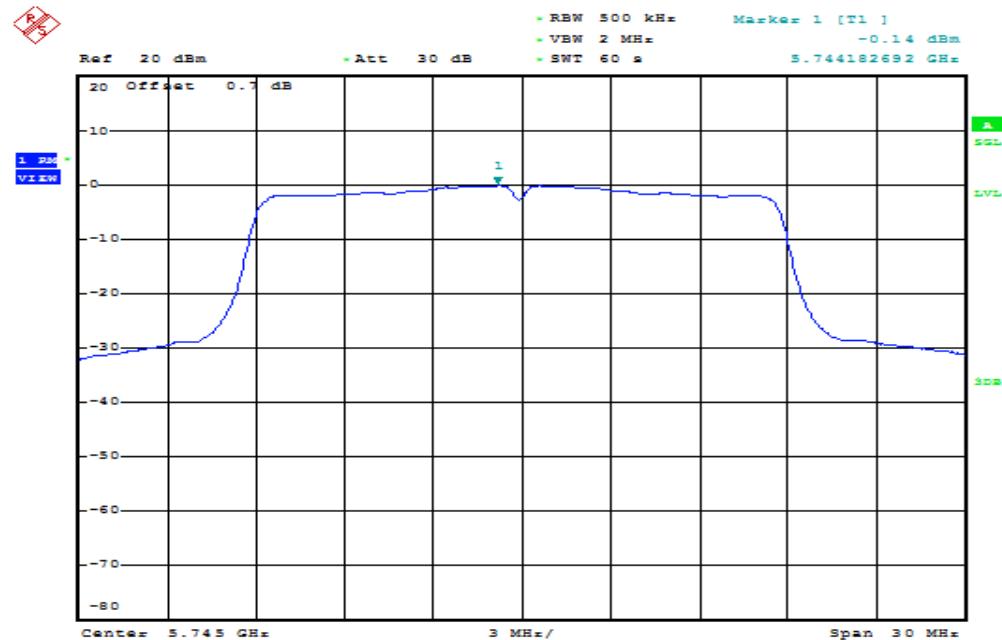
PPSD (CH Mid)



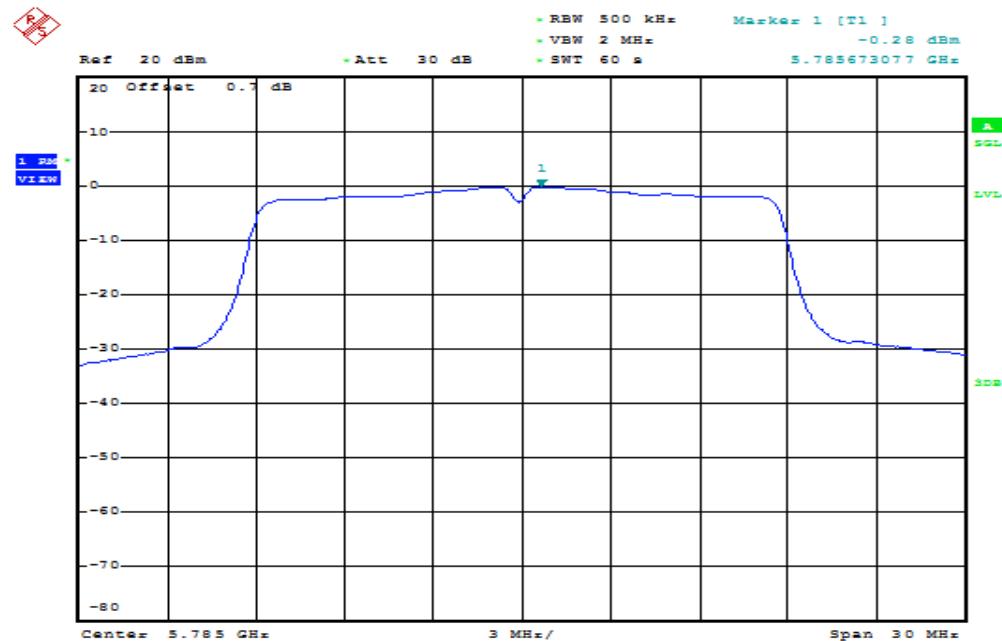
Date: 19.JAN.2016 21:06:48

PPSD (CH High)

Date: 19.JAN.2016 21:00:19

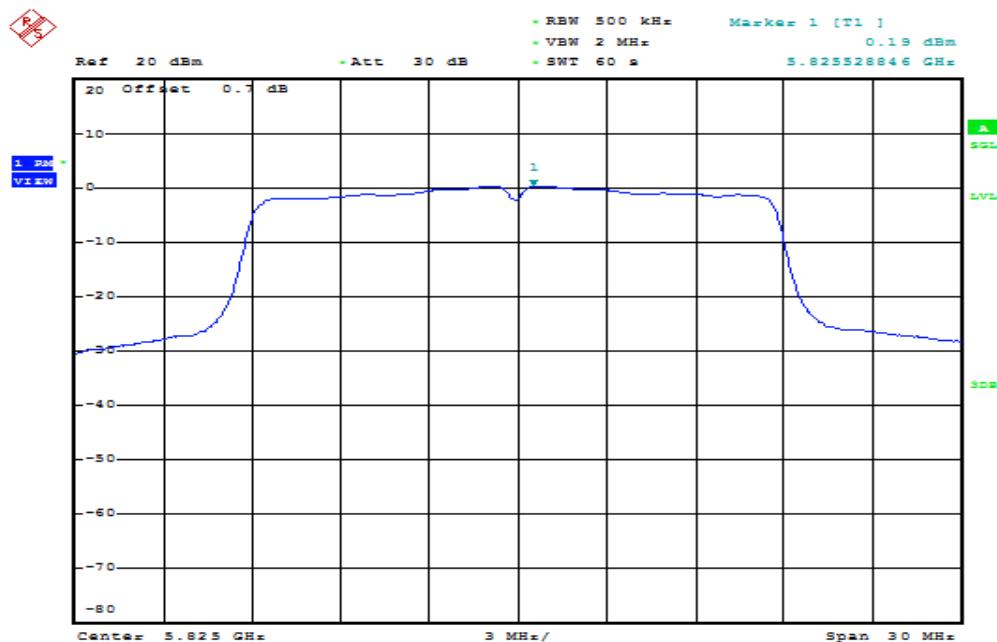
IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz / Chain 0**PPSD (CH Low)**

Date: 19.JAN.2016 21:10:24

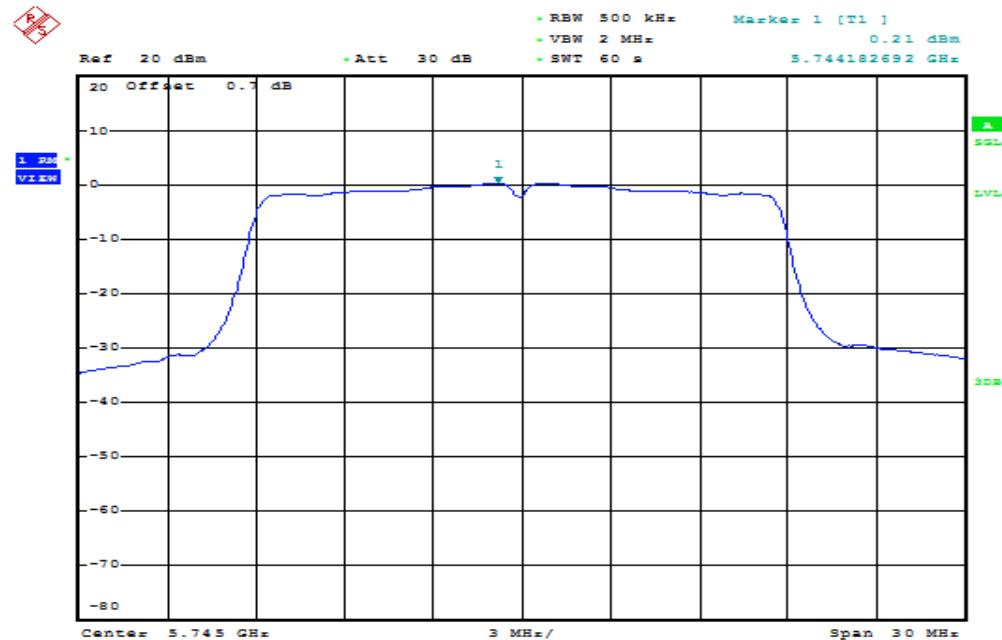
PPSD (CH Mid)

Date: 19.JAN.2016 20:52:08

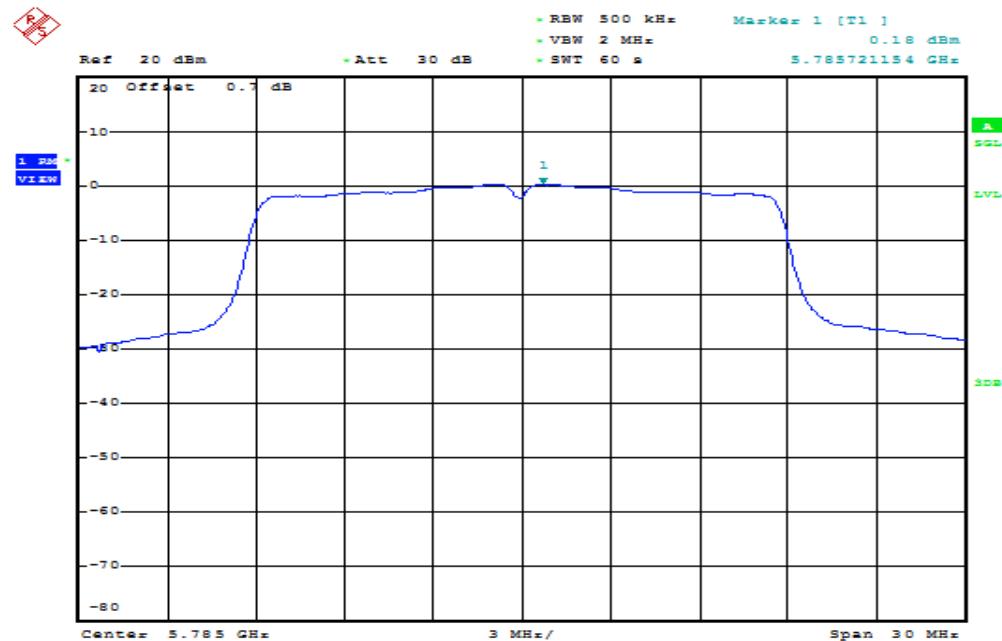
PPSD (CH High)



Date: 19.JAN.2016 20:58:30

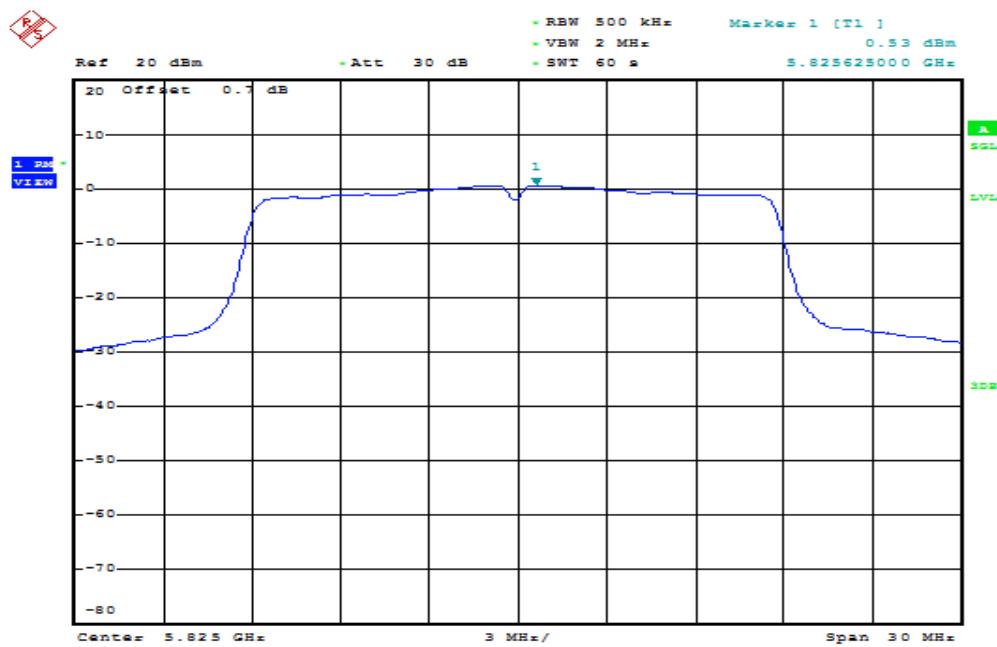
IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz / Chain 1**PPSD (CH Low)**

Date: 19.JAN.2016 21:13:51

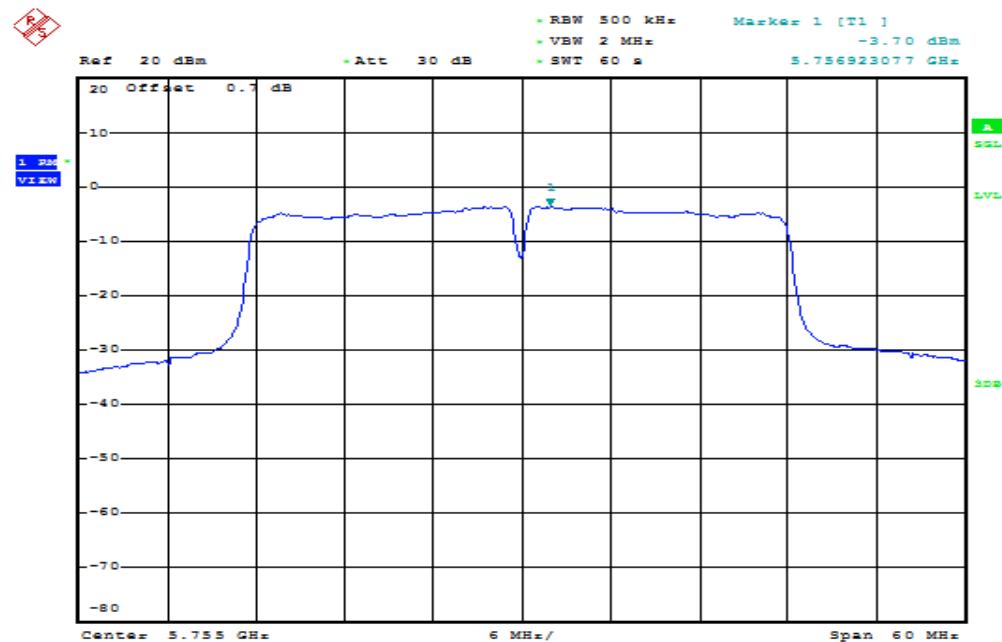
PPSD (CH Mid)

Date: 19.JAN.2016 20:54:04

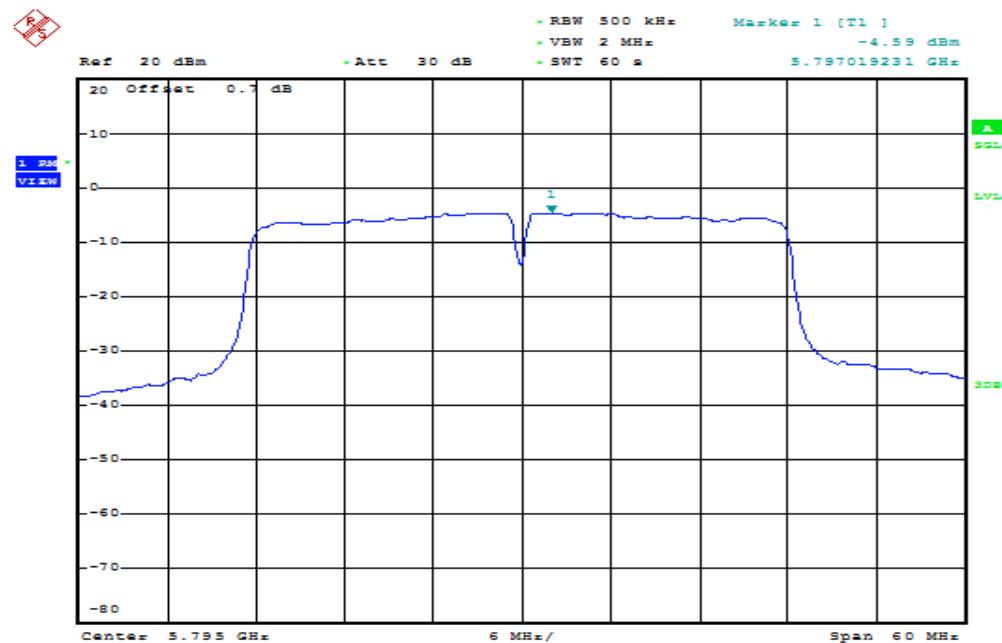
PPSD (CH High)



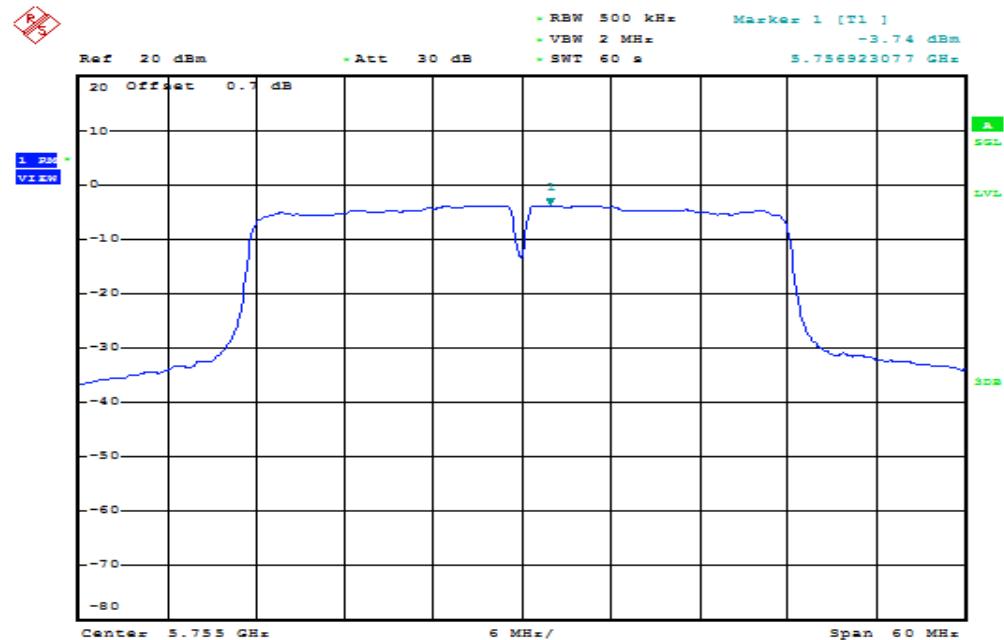
Date: 19.JAN.2016 20:56:30

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz / Chain 0**PPSD (CH Low)**

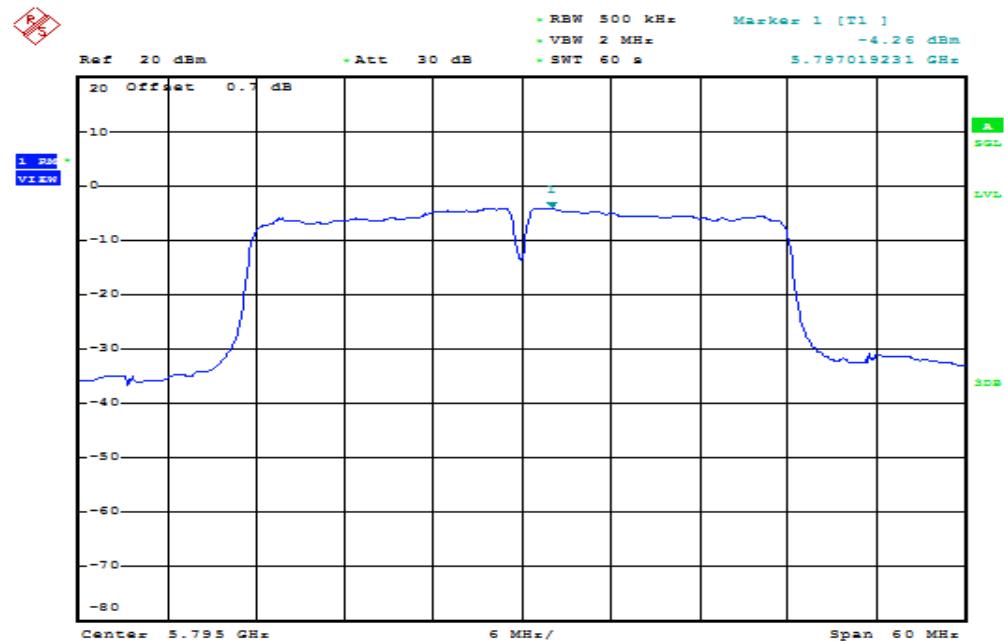
Date: 19.JAN.2016 21:19:15

PPSD (CH High)

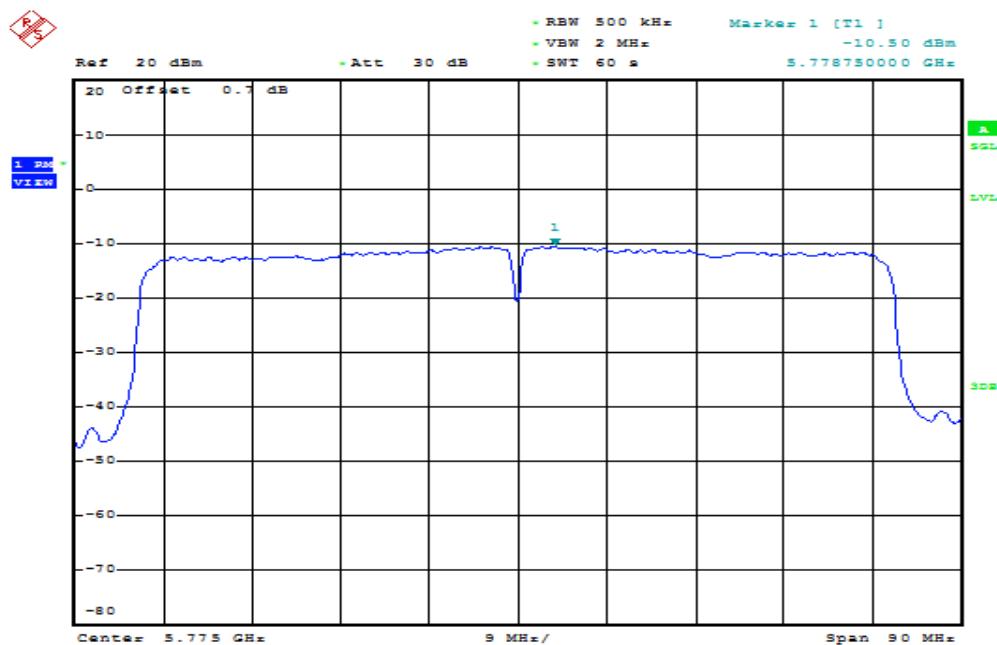
Date: 19.JAN.2016 21:22:03

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz / Chain 1**PPSD (CH Low)**

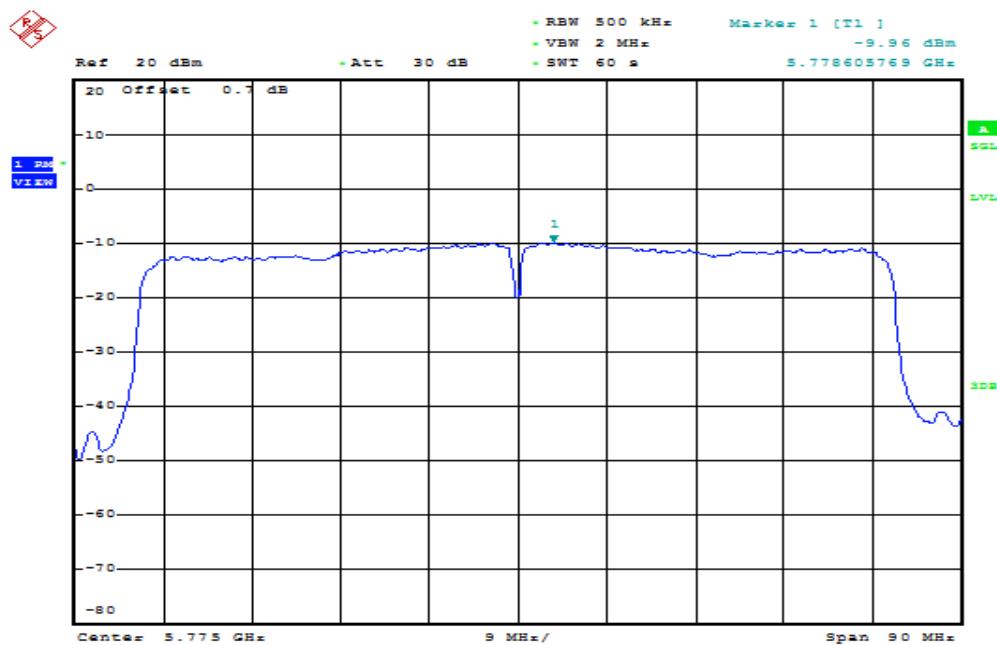
Date: 19.JAN.2016 21:17:10

PPSD (CH High)

Date: 19.JAN.2016 21:24:11

IEEE 802.11ac VHT 80 MHz mode / 5775MHz / Chain 0**PPSD (CH Mid)**

Date: 19.JAN.2016 21:42:20

IEEE 802.11ac VHT 80 MHz mode / 5775MHz / Chain 1**PPSD (CH Mid)**

Date: 19.JAN.2016 21:39:27

7.6 RADIATED EMISSIONS

LIMIT

All spurious emissions shall comply with the limits of §15.209(a) and RSS-Gen Table 2 & Table 5.

RSS-Gen Table 2 & Table 5: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz (Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Note: *Measurements for compliance with limits in the above table may be performed at distances other than 3 metres, in accordance with Section 7.2.7.

Transmitting devices are not permitted in Table 1 bands or, unless stated otherwise, in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz).

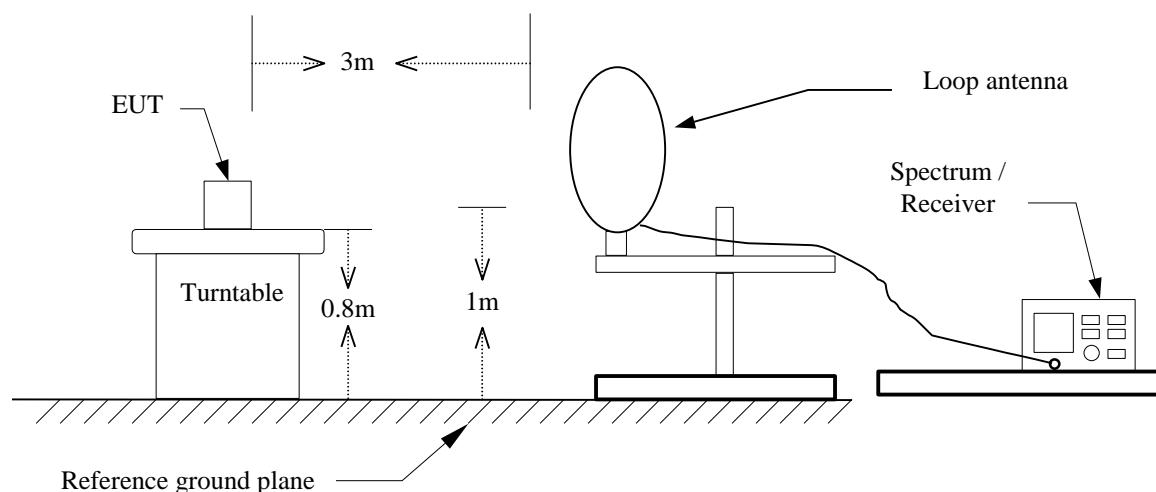
RSS-Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	3000
490-1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30

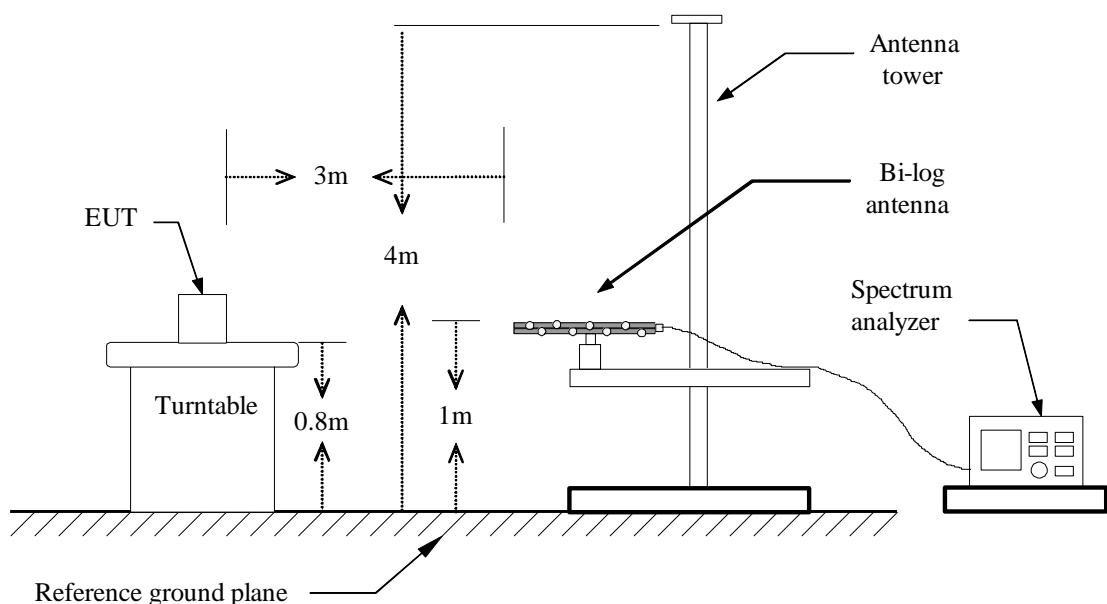
Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.

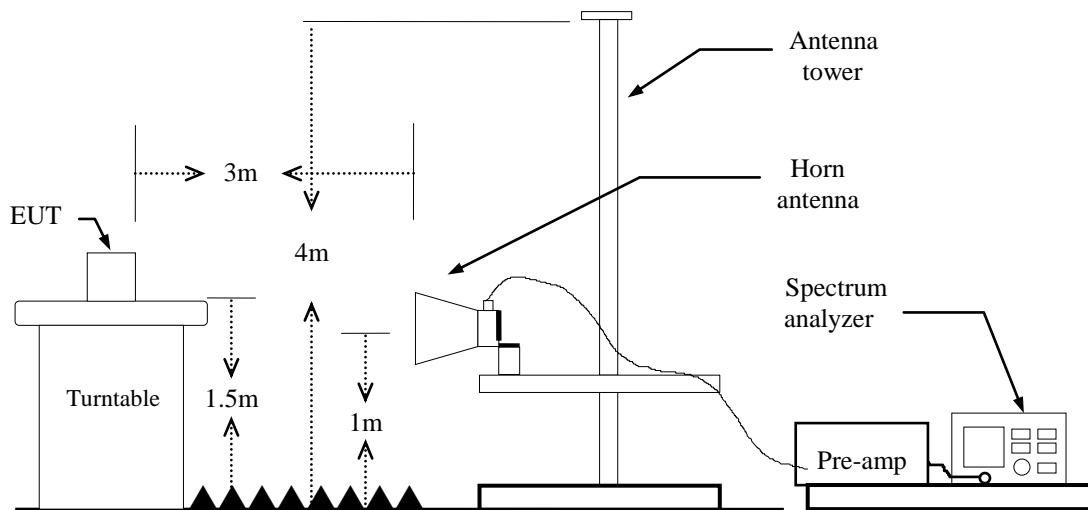
Test Configuration

9kHz ~ 30MHz



30MHz ~ 1GHz



Above 1 GHz

TEST PROCEDURE

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m high and below 1 GHz is 0.8m high above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz,
if duty cycle $\geq 98\%$, VBW=10Hz.
if duty cycle $< 98\%$ VBW=1/T.

For PIFA Antenna

IEEE 802.11a mode: = 89%, VBW= 680Hz

IEEE 802.11n HT 20 MHz mode: = 90%, VBW= 750Hz

IEEE 802.11n HT 40 MHz mode: = 80%, VBW= 1.5KHz

IEEE 802.11ac VHT 80 MHz mode: = 66%, VBW= 3KHz

For Dipole Antenna

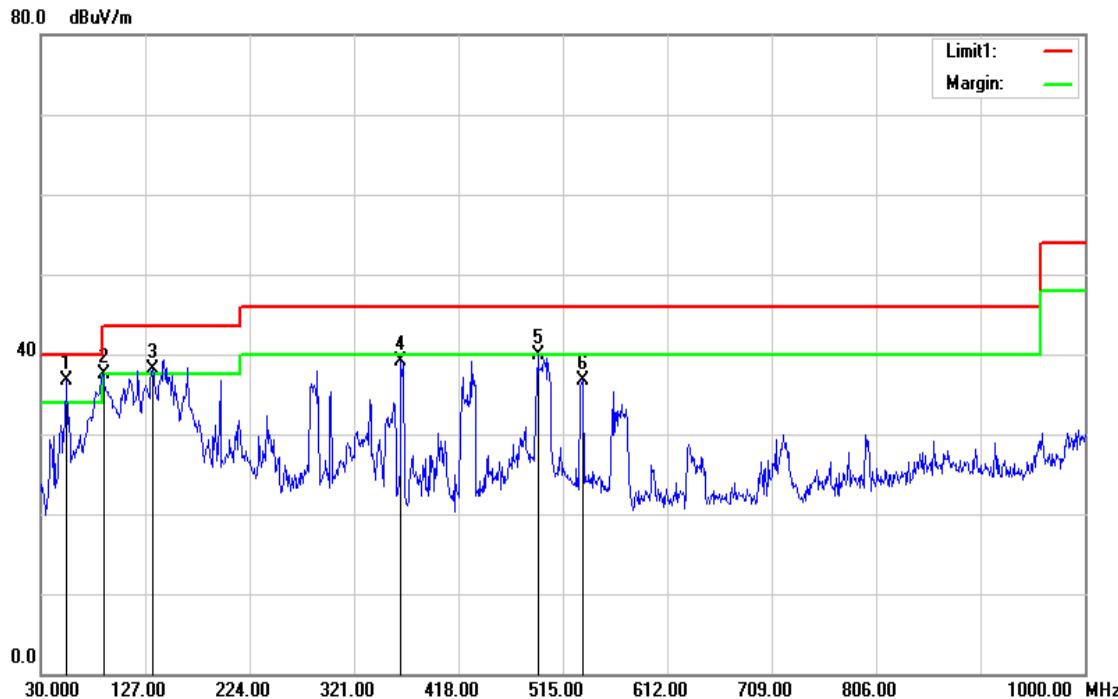
IEEE 802.11a mode: = 89%, VBW= 680Hz

IEEE 802.11n HT 20 MHz mode: = 89%, VBW= 680Hz

IEEE 802.11n HT 40 MHz mode: = 82%, VBW= 1.5KHz

IEEE 802.11ac VHT 80 MHz mode: = 69%, VBW= 2.7KHz

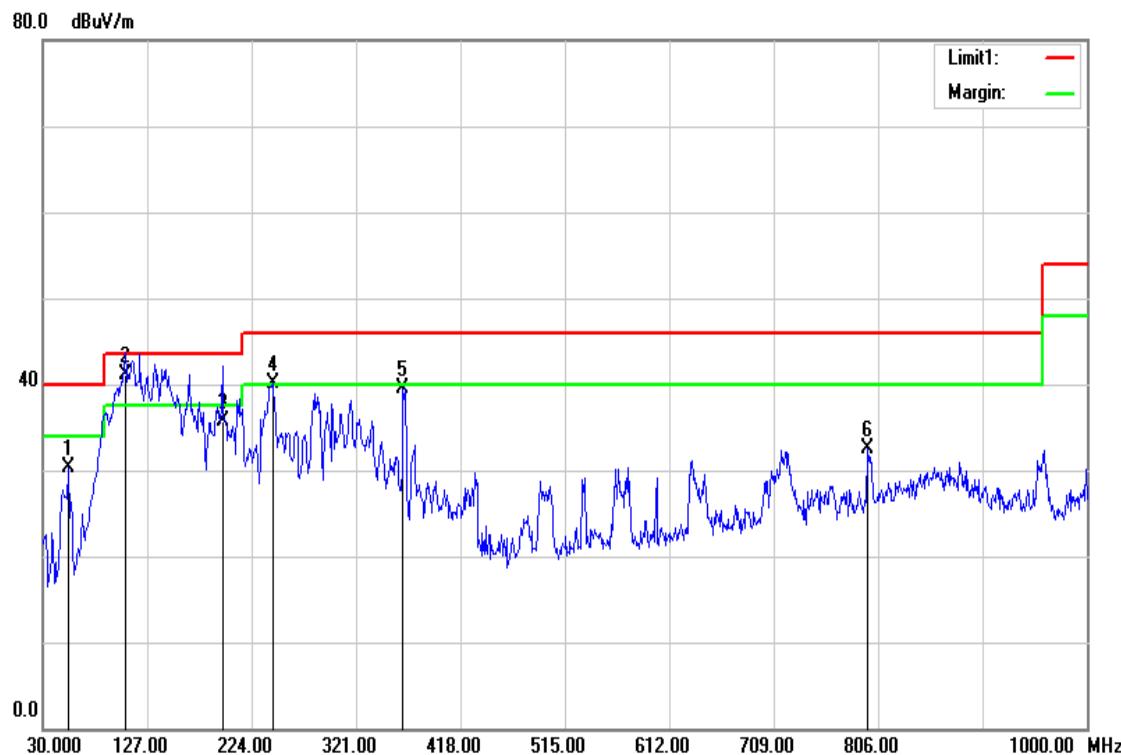
7. Repeat above procedures until the measurements for all frequencies are complete.
8. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

For PIFA Antenna**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** December 22, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
54.2500	58.28	-21.51	36.77	40.00	-3.23	peak	V
88.2000	58.92	-21.45	37.47	43.50	-6.03	peak	V
133.7900	53.85	-15.69	38.16	43.50	-5.34	peak	V
364.6500	51.59	-12.54	39.05	46.00	-6.95	peak	V
491.7200	49.23	-9.40	39.83	46.00	-6.17	peak	V
533.4300	45.40	-8.74	36.66	46.00	-9.34	peak	V

Remark:

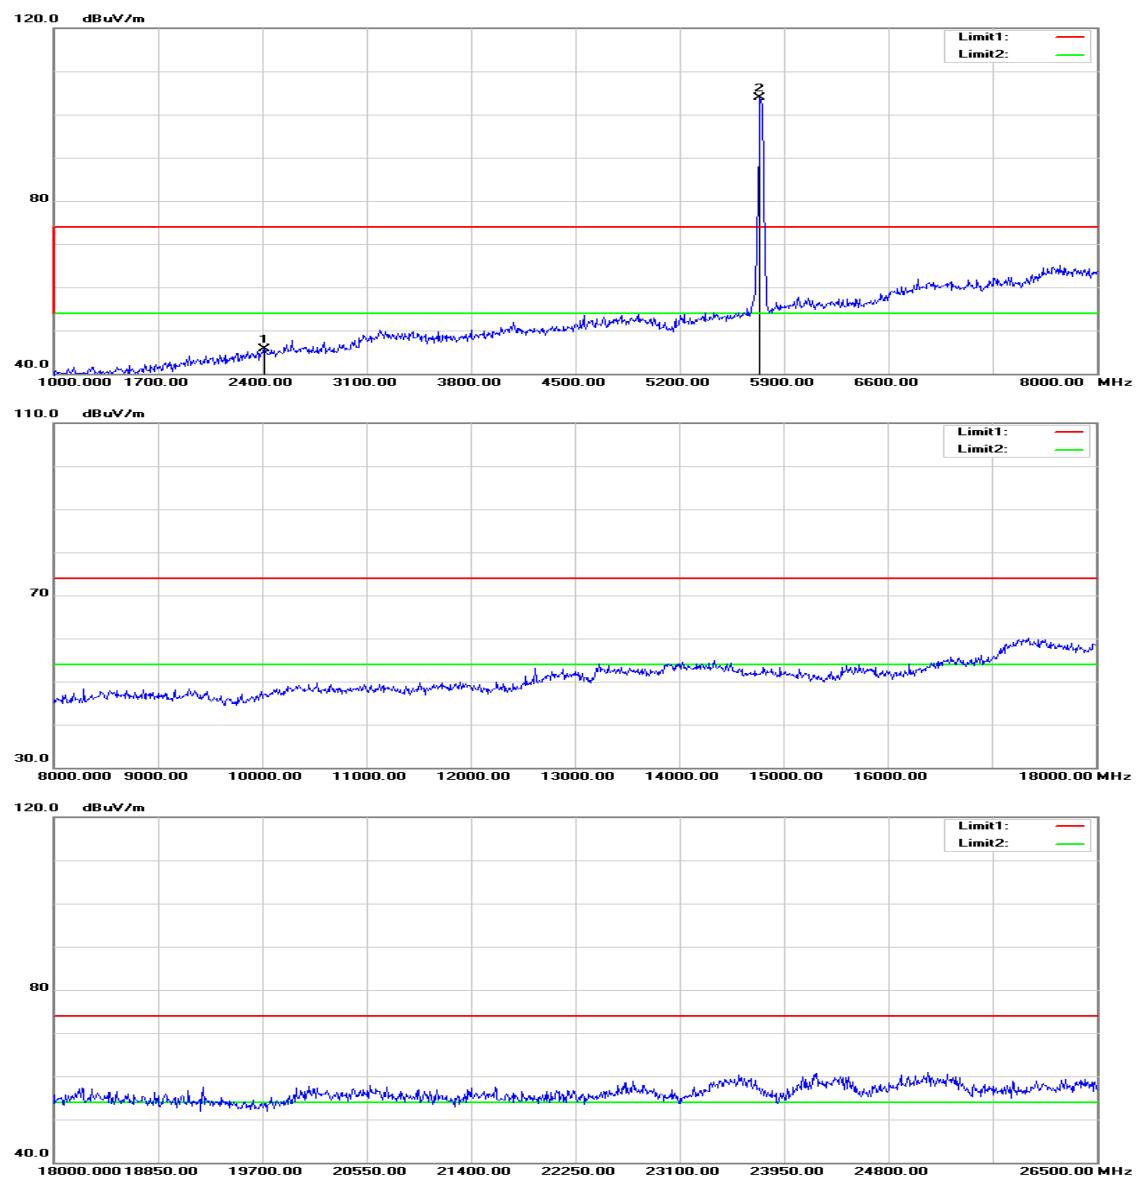
1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

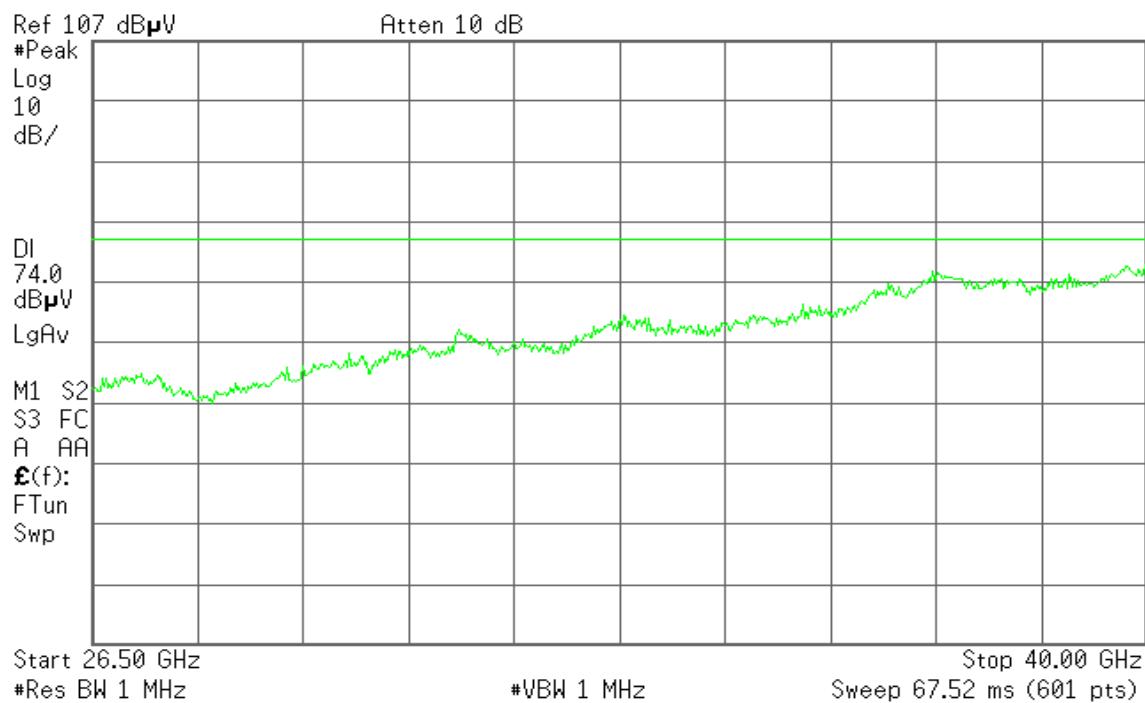
Operation Mode: Normal Link**Test Date:** December 22, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Hor.

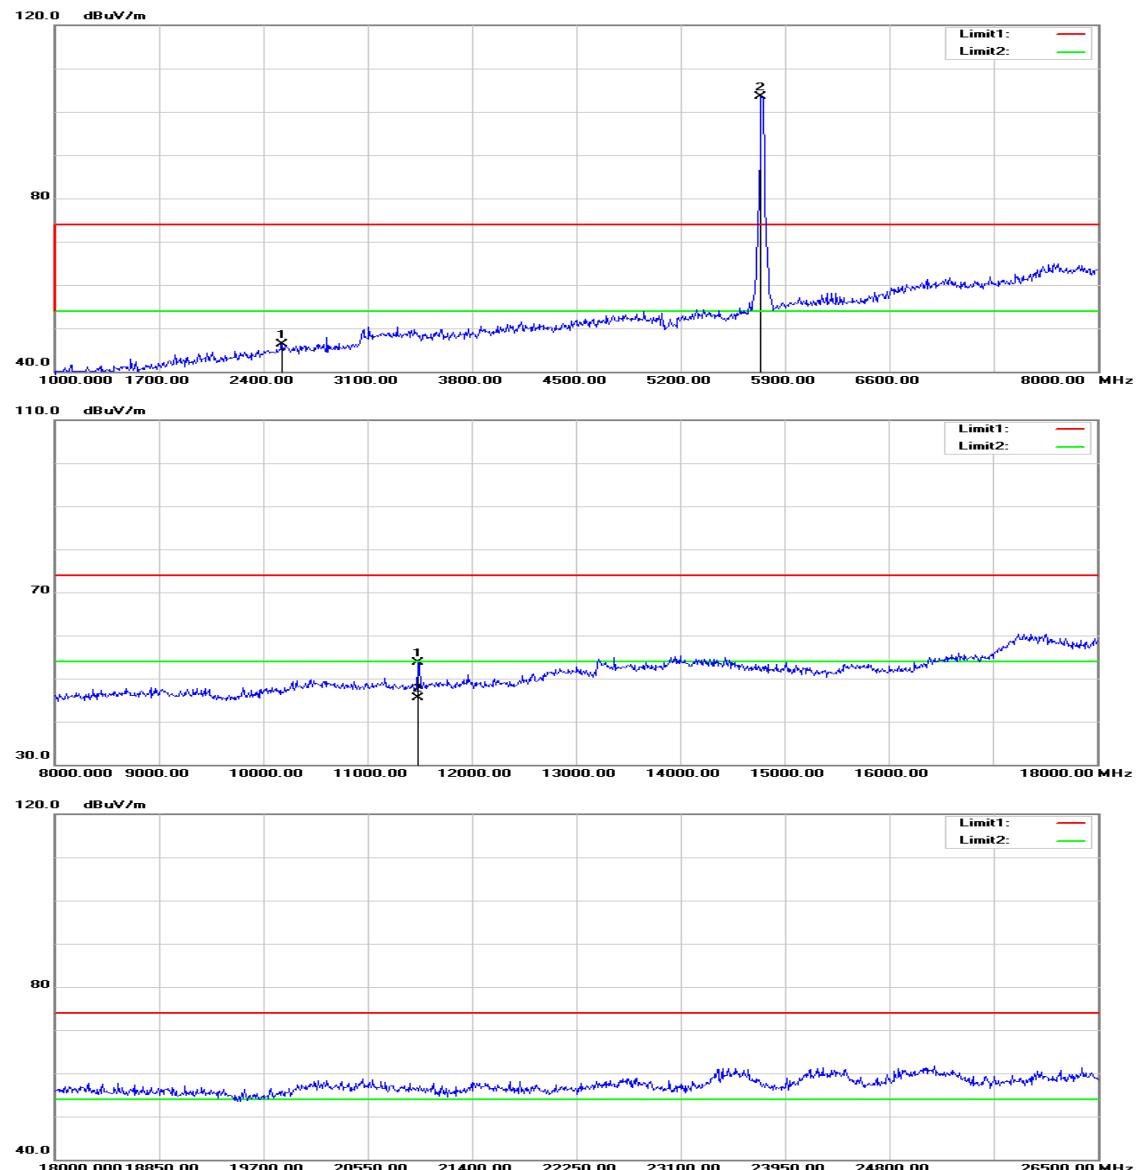
Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
54.2500	51.74	-21.51	30.23	40.00	-9.77	peak	H
106.6300	59.06	-17.86	41.20	43.50	-2.30	QP	H
196.8400	51.59	-15.83	35.76	43.50	-7.74	QP	H
243.4000	56.60	-16.43	40.17	46.00	-5.83	peak	H
364.6500	52.09	-12.54	39.55	46.00	-6.45	peak	H
796.3000	37.09	-4.53	32.56	46.00	-13.44	peak	H

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

Above 1 GHz**TX / IEEE 802.11a mode / CH Low****Polarity: Vertical**

Agilent**R L**

Polarity: Horizontal

Operation Mode:

TX / IEEE 802.11a mode / CH Low

Test Date: December 8, 2015

Temperature: 27°C

Tested by: Jason Lu

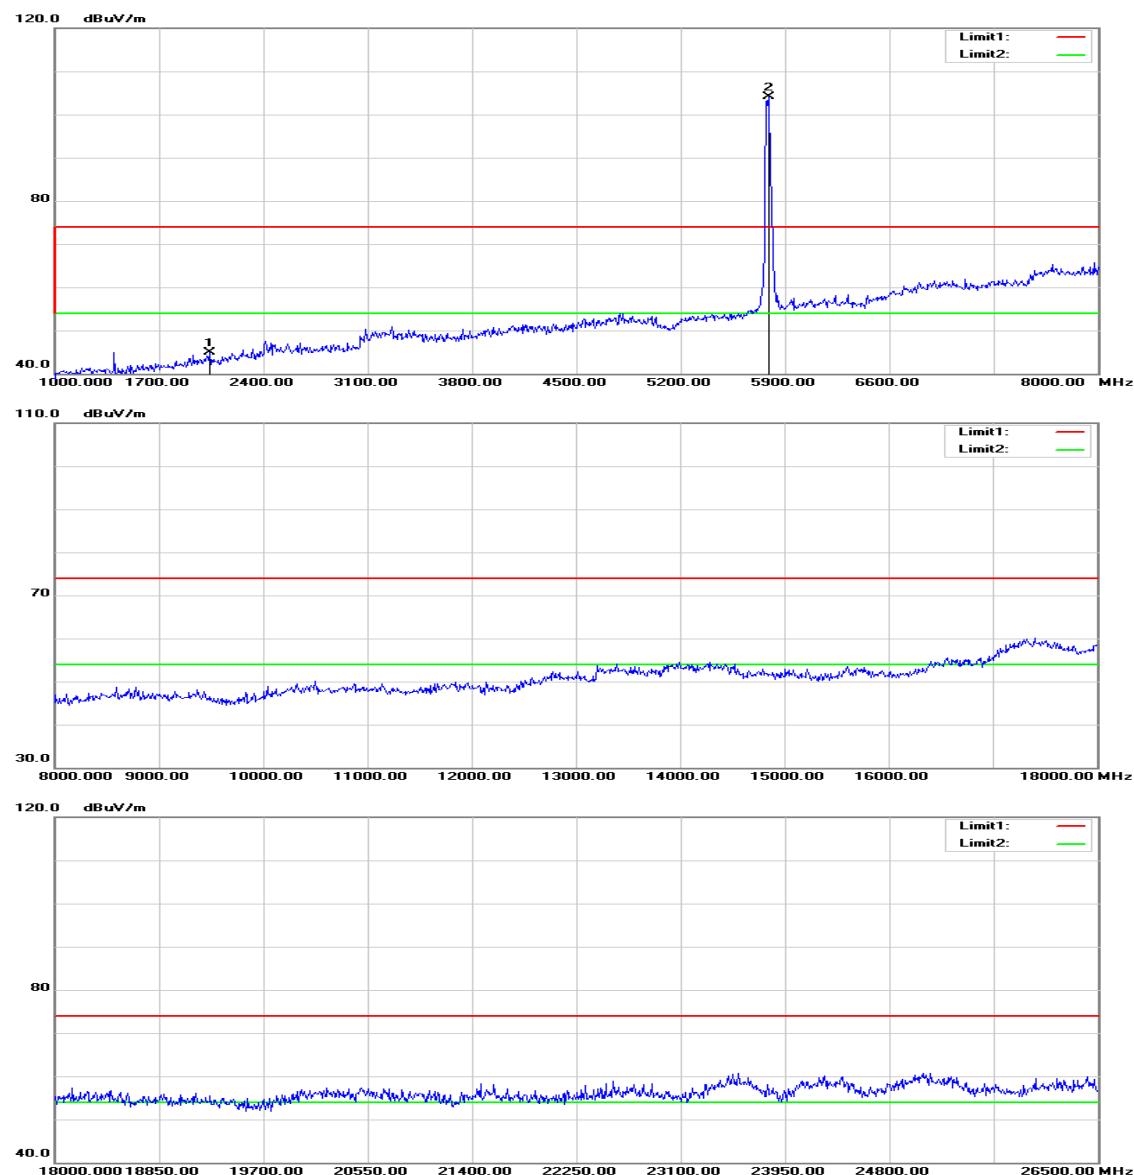
Humidity: 53% RH

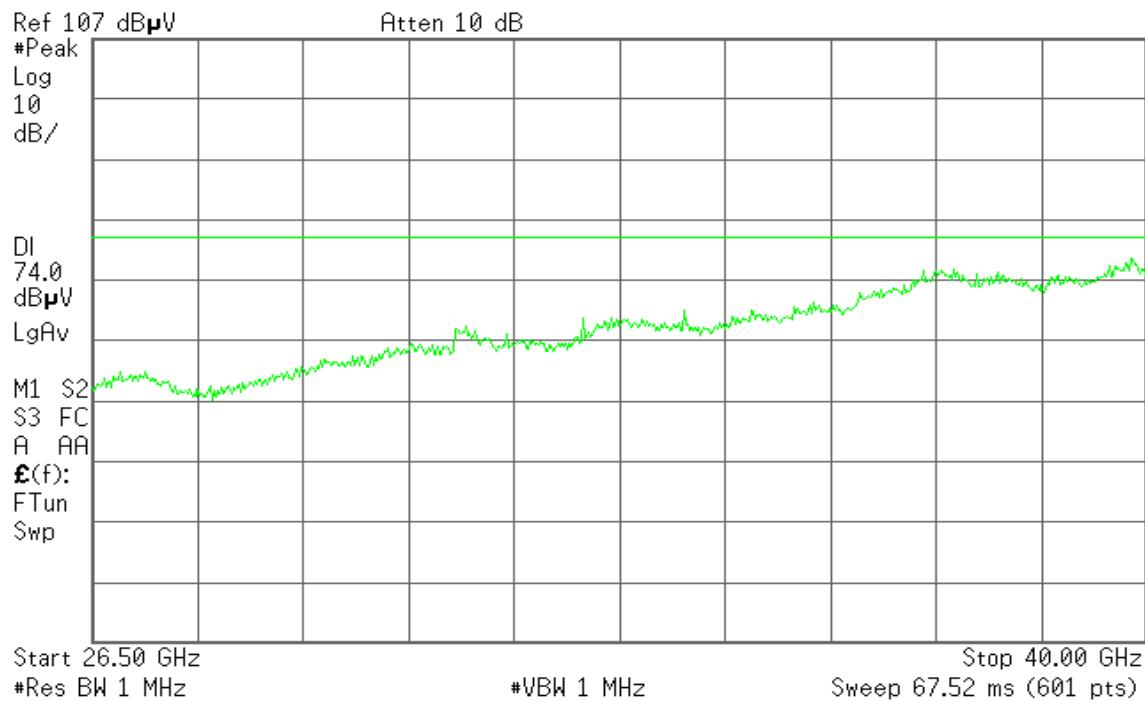
Polarity: Ver. / Hor.

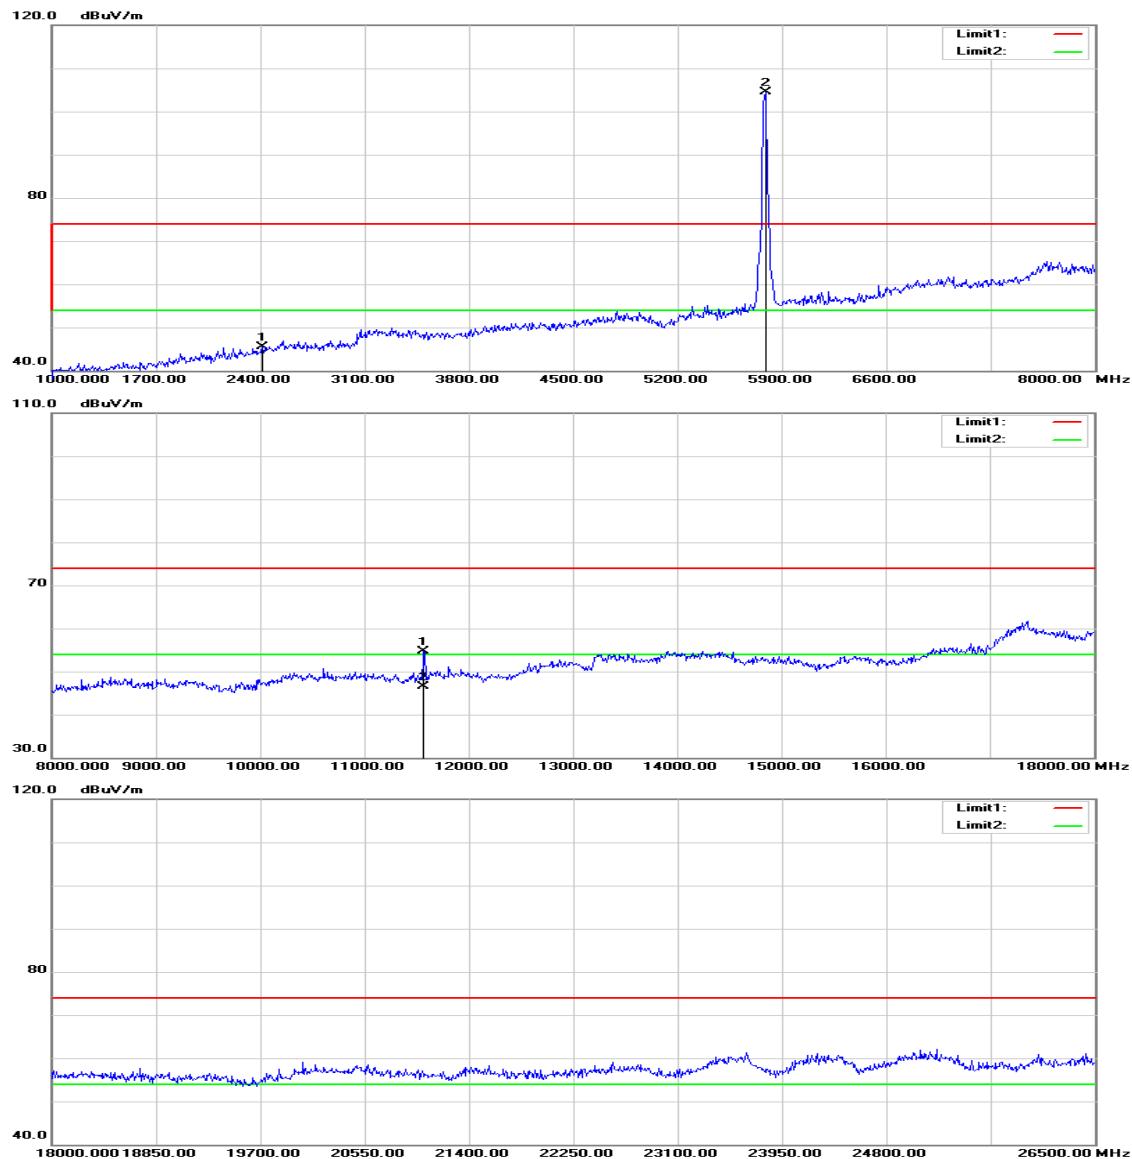
Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2414.000	49.33	-3.68	45.65	74.00	-28.35	peak	V
N/A							
2526.000	49.38	-3.07	46.31	74.00	-27.69	peak	H
11490.000	36.89	16.78	53.67	74.00	-20.33	peak	H
11490.000	28.64	16.78	45.42	54.00	-8.58	AVG	H
N/A							

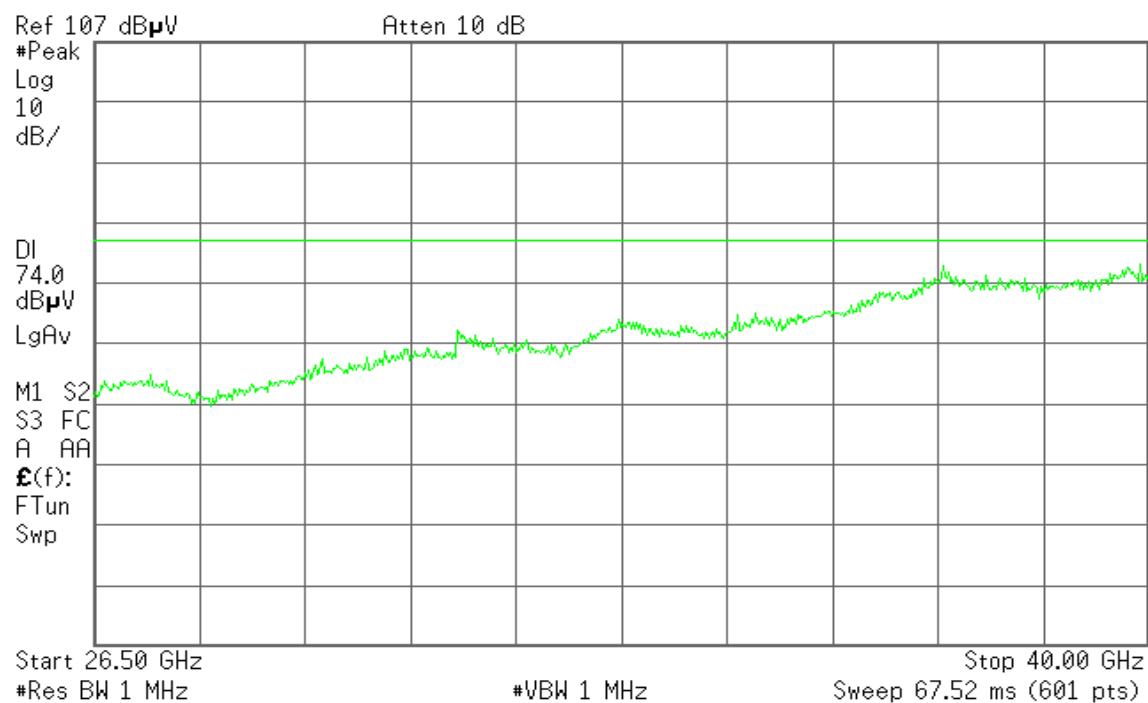
Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11a mode / CH Mid**Polarity: Vertical**

Agilent**R L**

Polarity: Horizontal

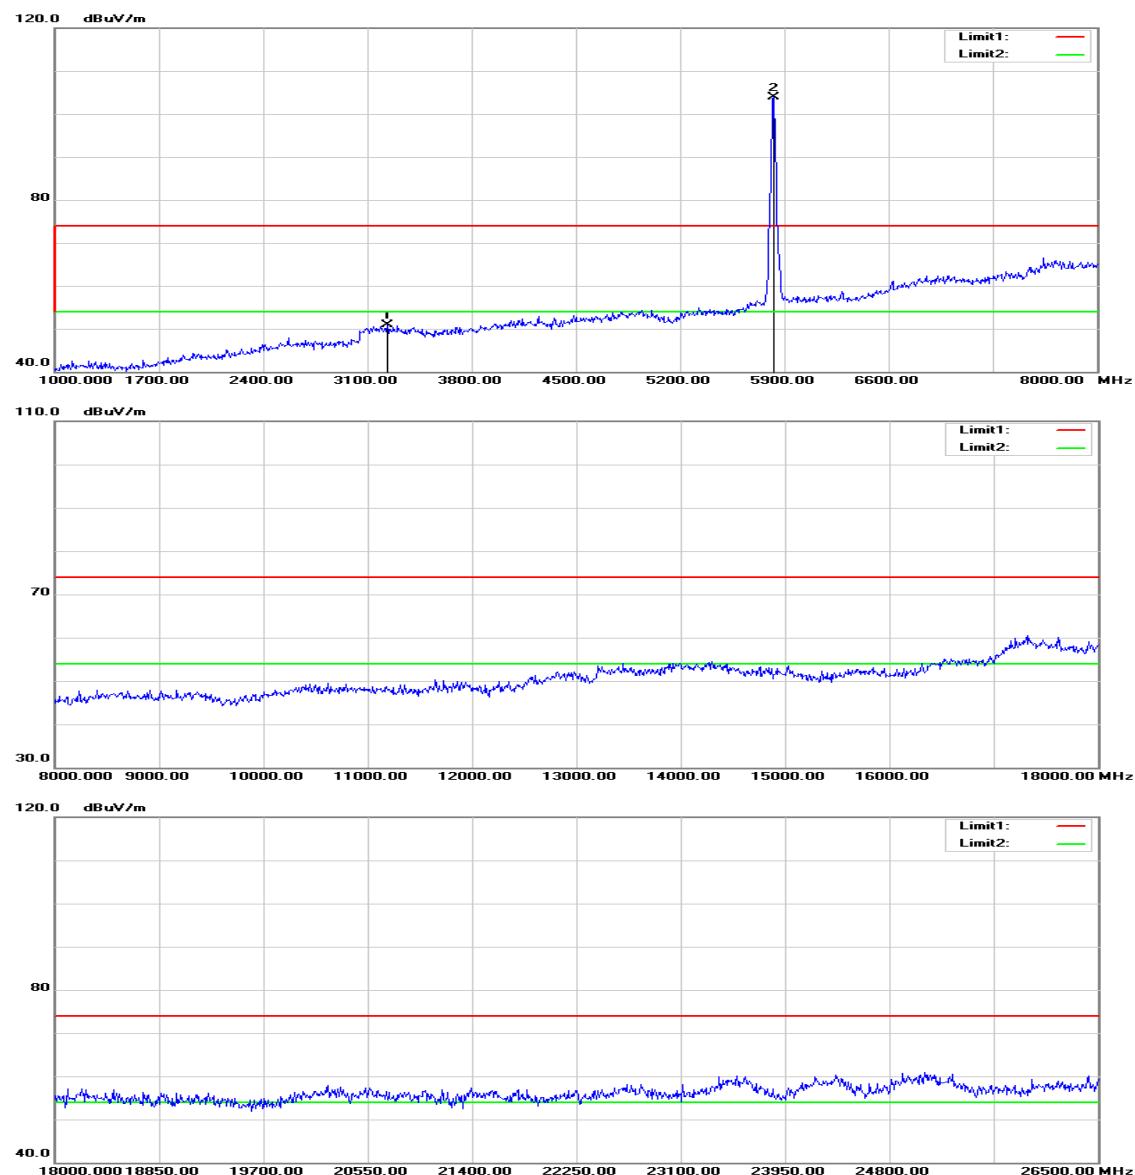
*** Agilent****R L**

Operation Mode:	TX / IEEE 802.11a mode / CH Mid	Test Date: December 8, 2015
Temperature:	27°C	Tested by: Jason Lu
Humidity:	53% RH	Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2036.000	49.86	-4.92	44.94	74.00	-29.06	peak	V
N/A							
2414.000	49.19	-3.68	45.51	74.00	-28.49	peak	H
11570.000	37.92	16.84	54.76	74.00	-19.24	peak	H
11570.000	29.73	16.84	46.57	54.00	-7.43	AVG	H
N/A							

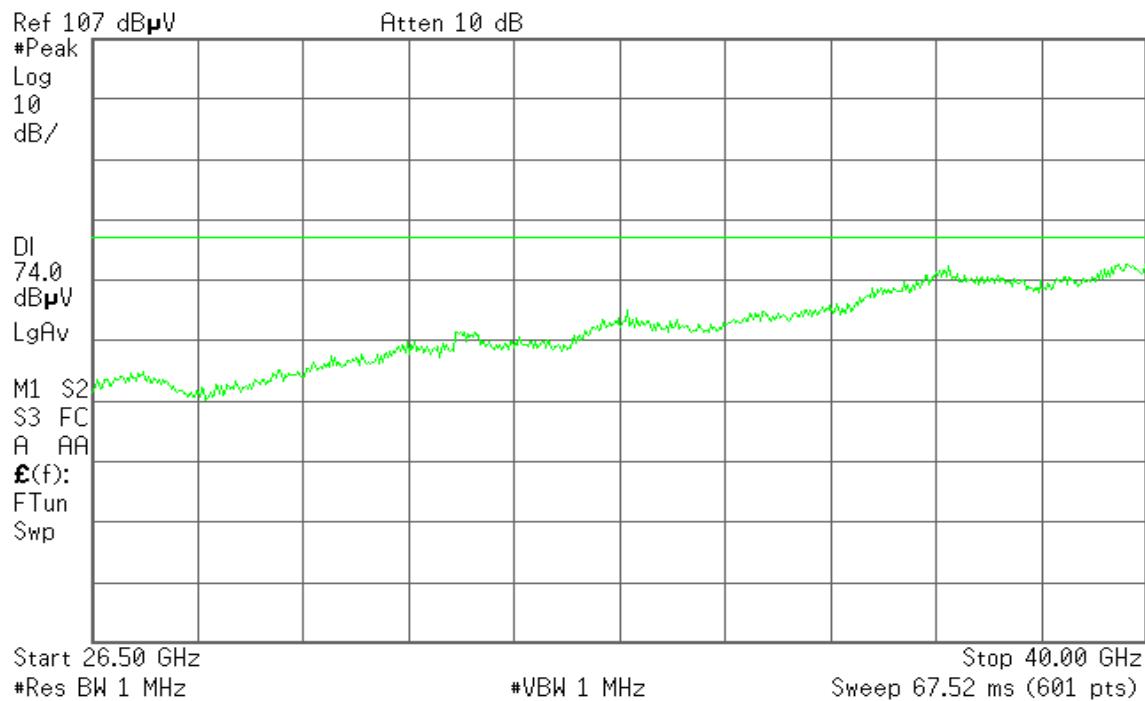
Remark:

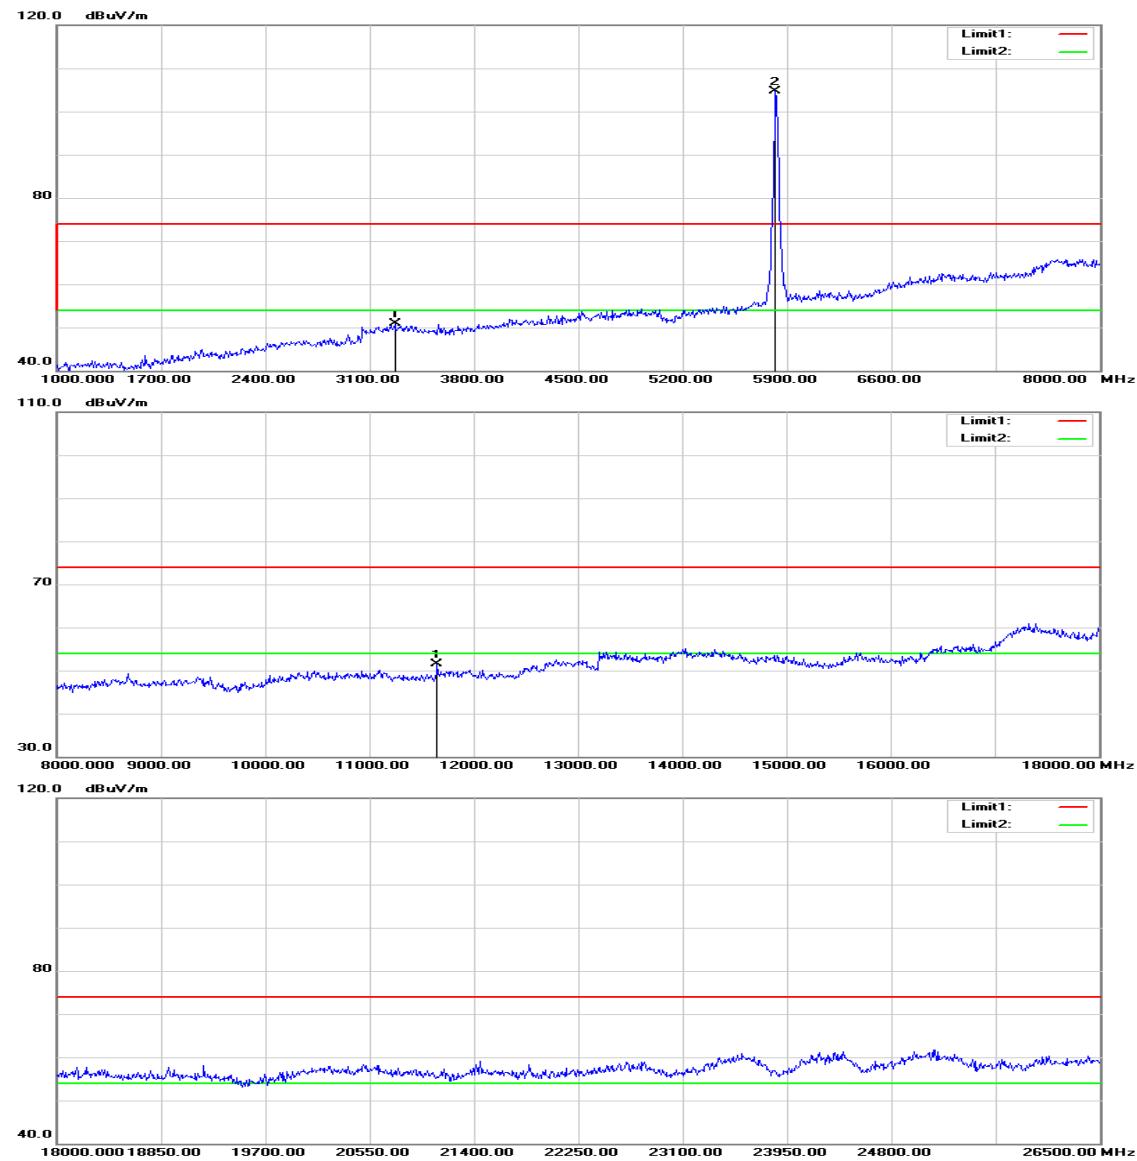
1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

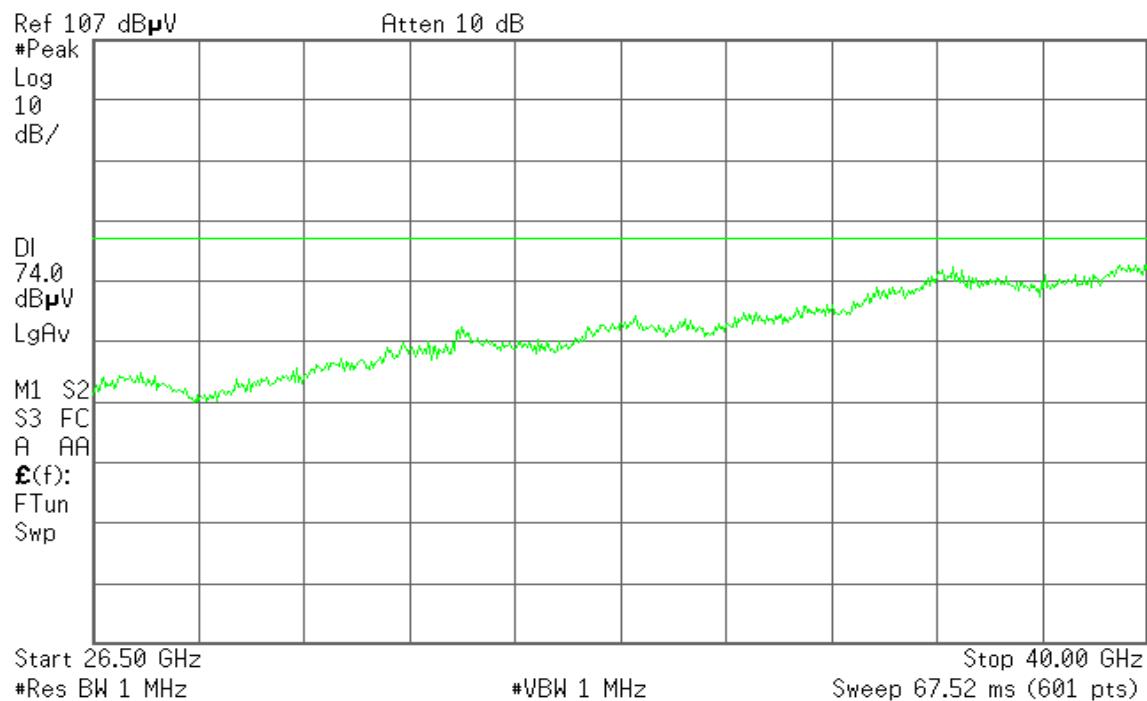
TX / IEEE 802.11a mode / CH High**Polarity: Vertical**

Agilent

R L



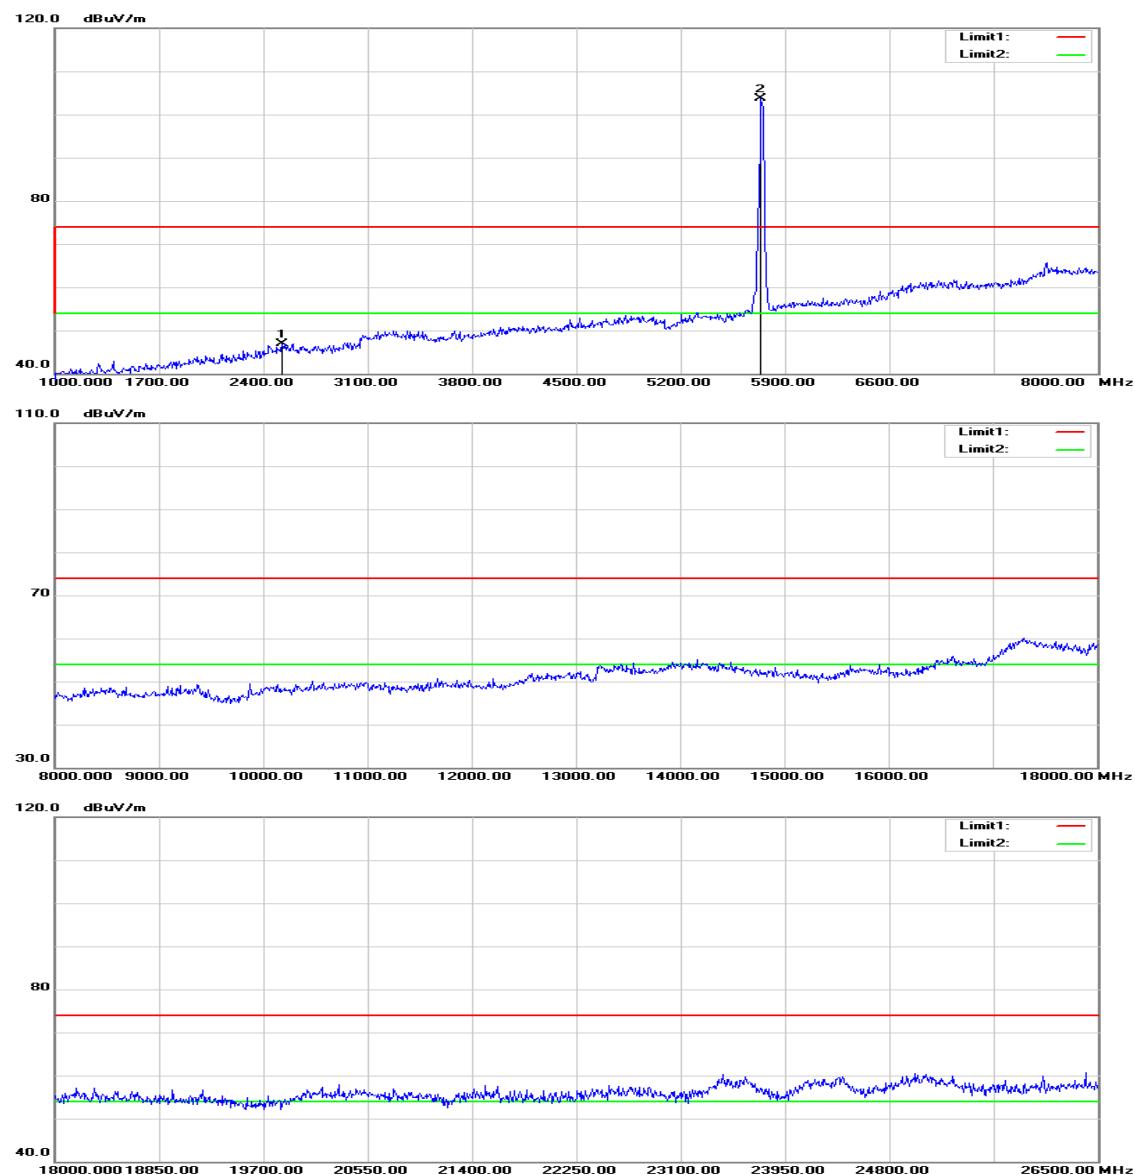
Polarity: Horizontal

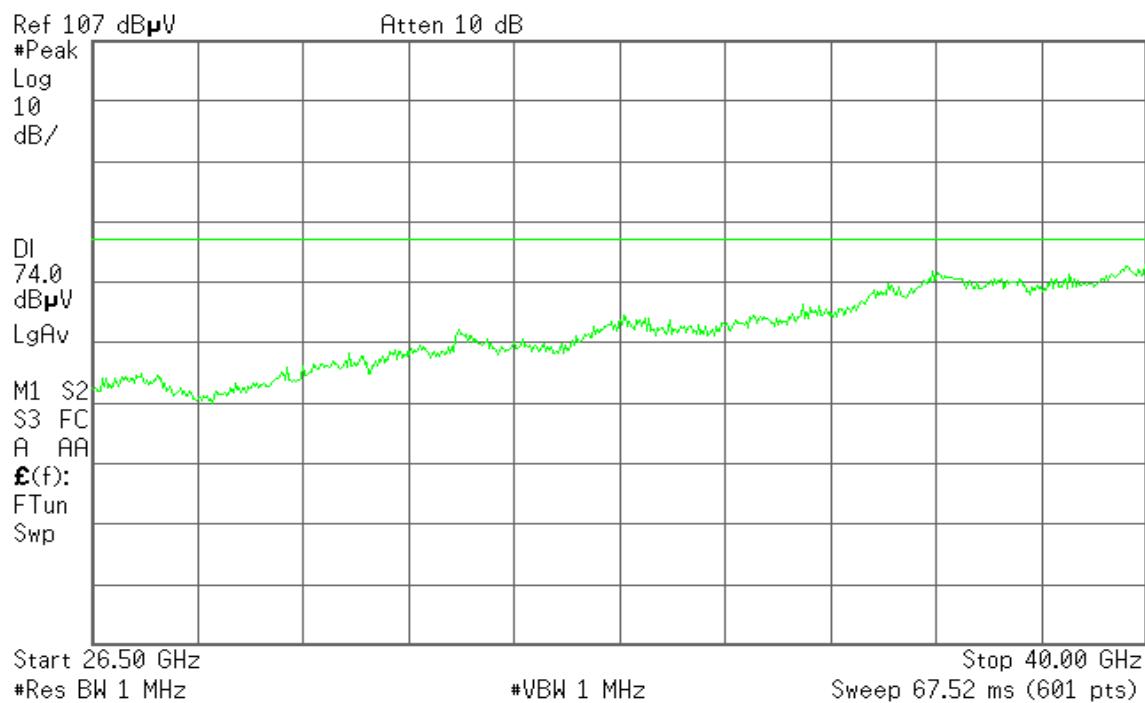
*** Agilent****R L**

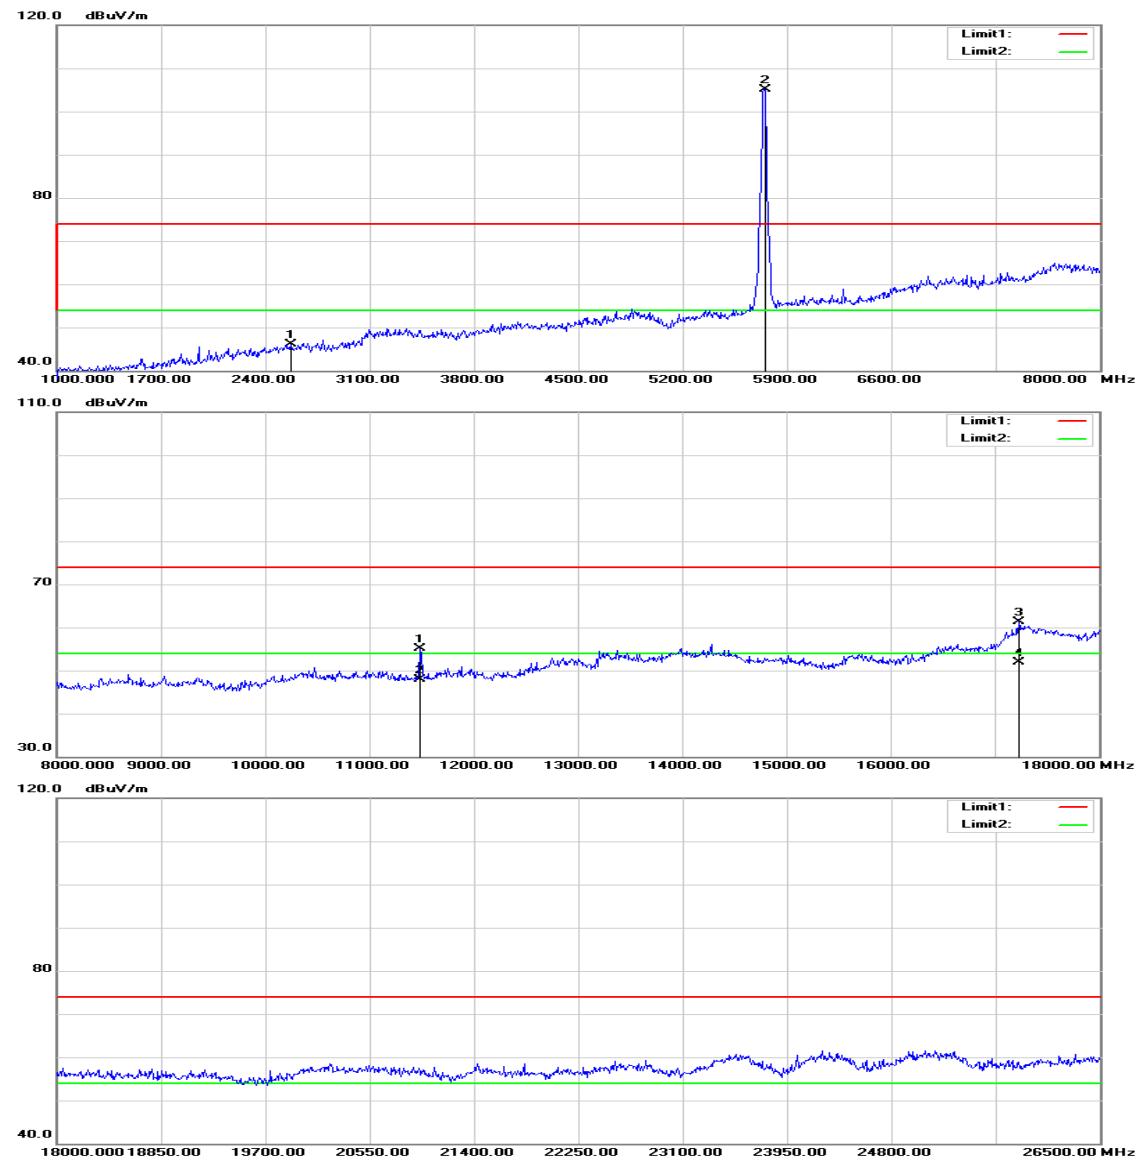
Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3233.000	52.43	-1.55	50.88	74.00	-23.12	peak	V
N/A							
3268.000	52.40	-1.47	50.93	74.00	-23.07	peak	H
11650.000	34.59	16.91	51.50	74.00	-22.50	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

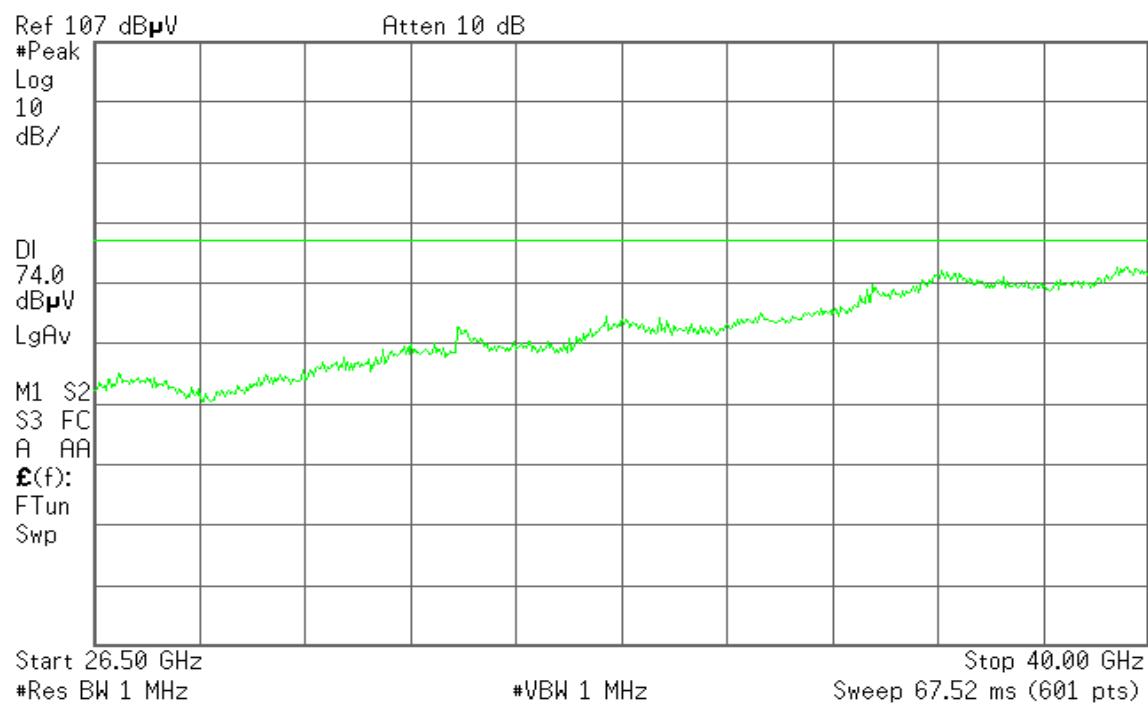
TX / IEEE 802.11n HT 20 MHz mode / CH Low**Polarity: Vertical**

Agilent**R L**

Polarity: Horizontal

Agilent

R L



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low

Test Date: December 8, 2015

Temperature: 27°C

Tested by: Jason Lu

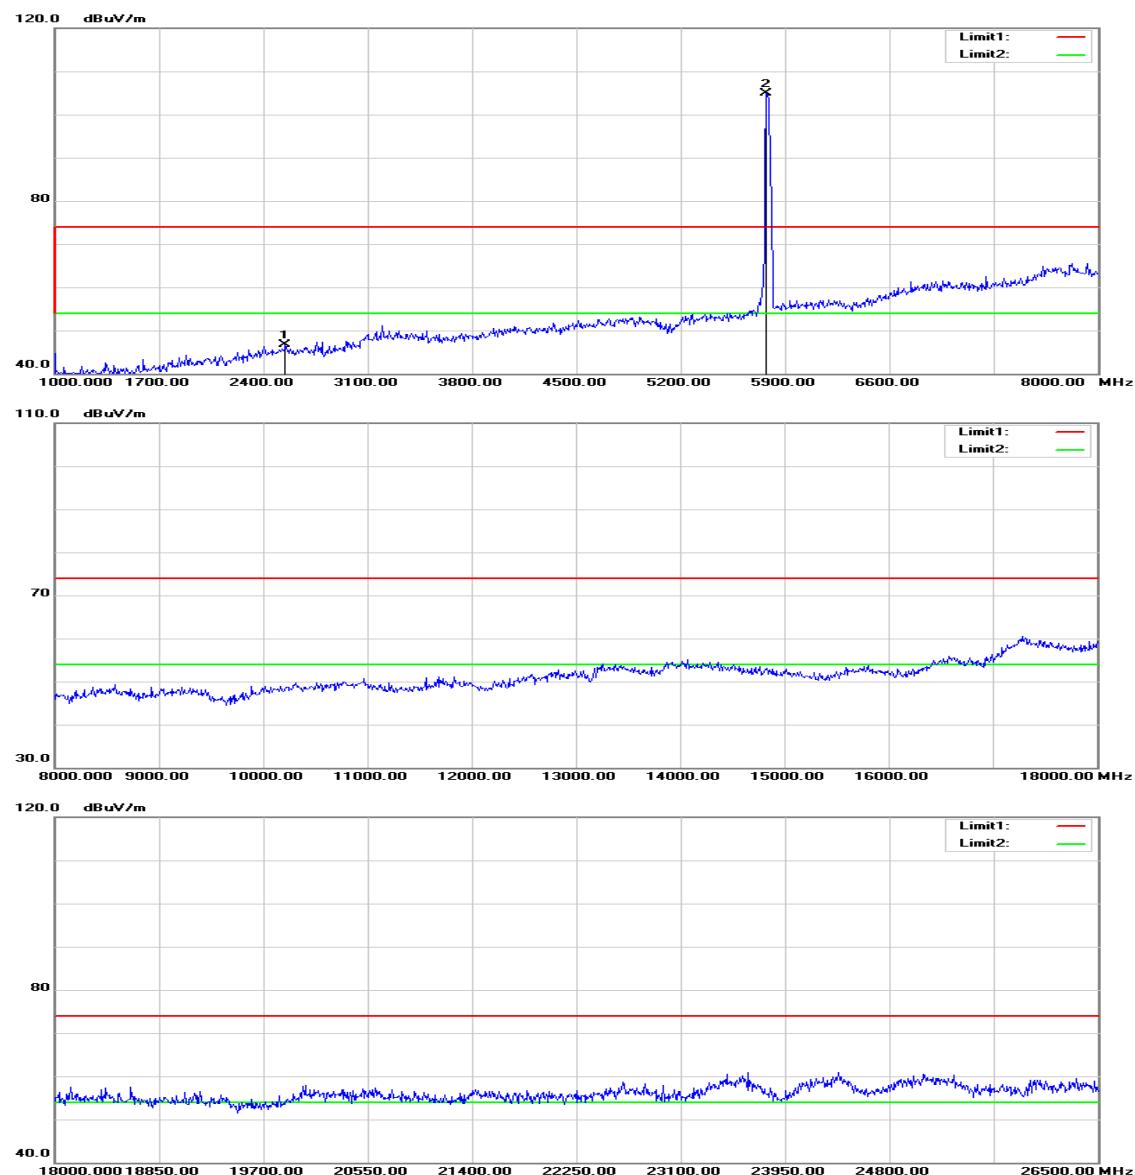
Humidity: 53% RH

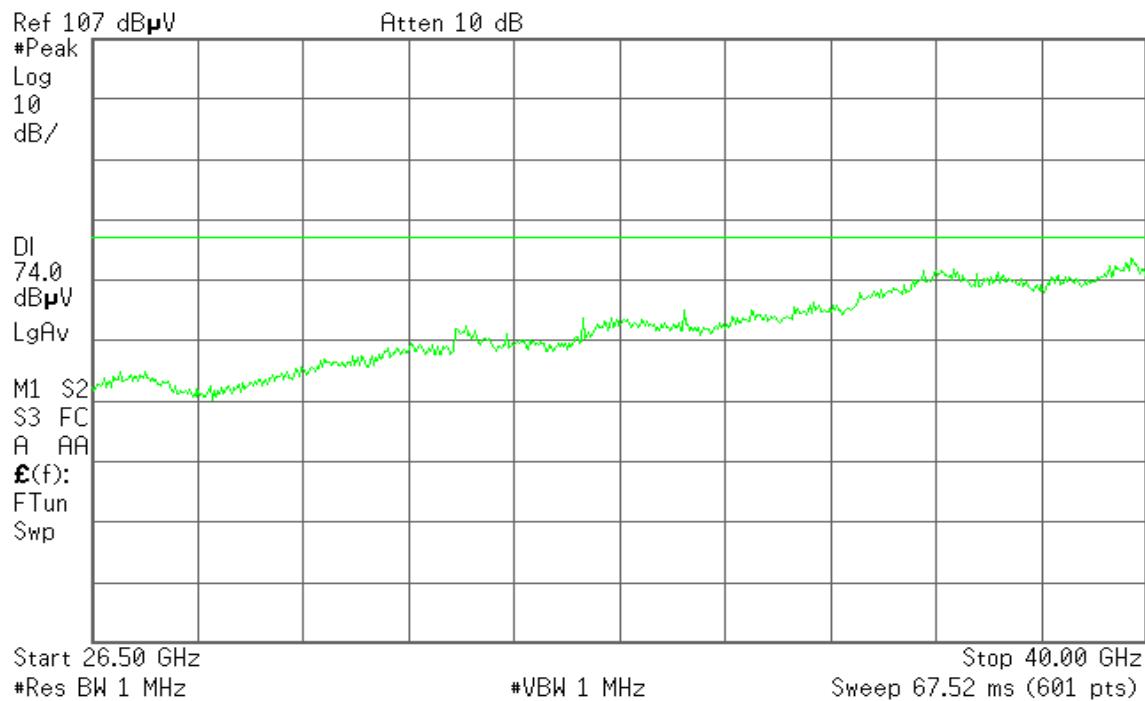
Polarity: Ver. / Hor.

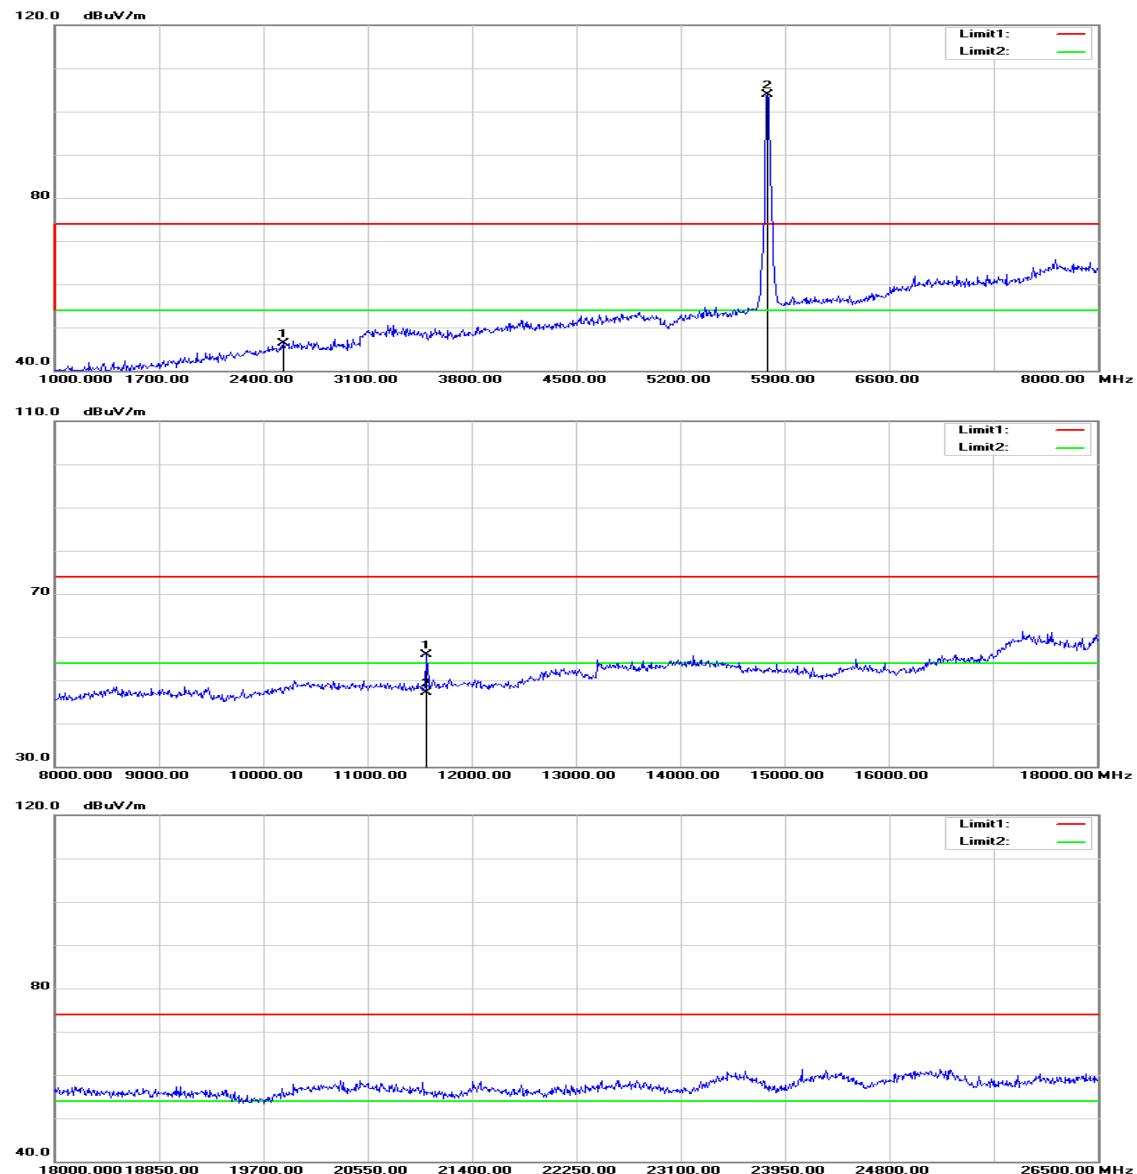
Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2526.000	49.95	-3.07	46.88	74.00	-27.12	peak	V
N/A							
2568.000	49.12	-2.98	46.14	74.00	-27.86	peak	H
11490.000	38.34	16.78	55.12	74.00	-18.88	peak	H
11490.000	31.07	16.78	47.85	54.00	-6.15	AVG	H
17230.000	36.08	25.26	61.34	74.00	-12.66	peak	H
17230.000	26.63	25.26	51.89	54.00	-2.11	AVG	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

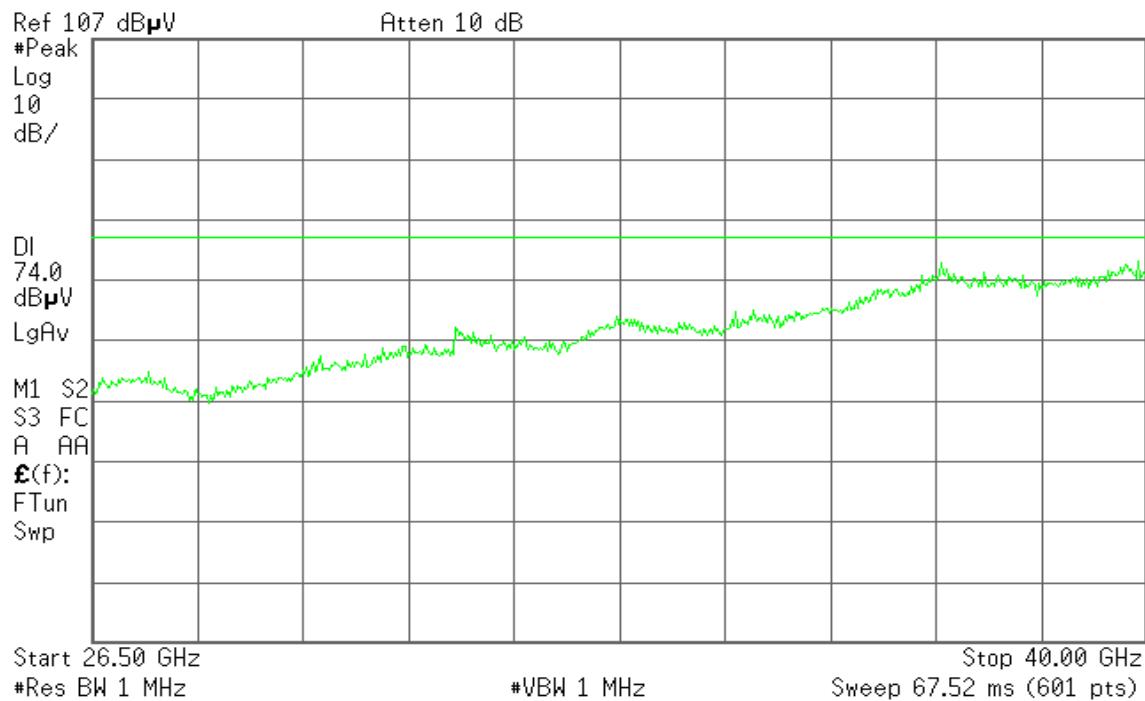
TX / IEEE 802.11n HT 20 MHz mode / CH Mid**Polarity: Vertical**

 **Agilent****R L**

Polarity: Horizontal

Agilent

R L



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode /
CH Mid

Test Date: December 8, 2015

Temperature: 27°C

Tested by: Jason Lu

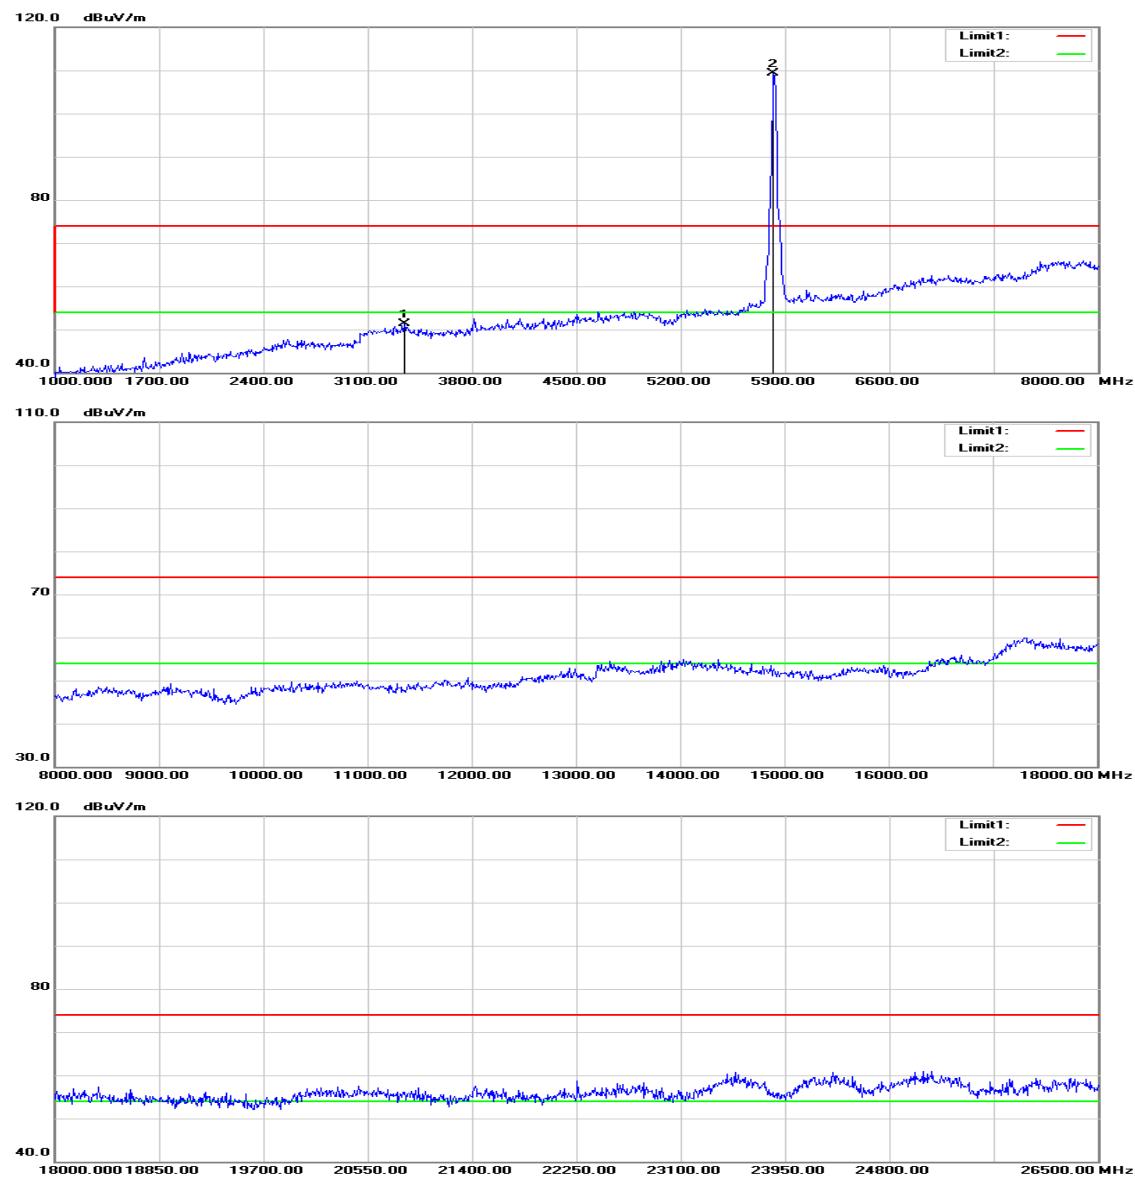
Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2547.000	49.65	-3.03	46.62	74.00	-27.38	peak	V
N/A							
2533.000	49.39	-3.05	46.34	74.00	-27.66	peak	H
11560.000	39.04	16.83	55.87	74.00	-18.13	peak	H
11560.000	30.18	16.83	47.01	54.00	-6.99	AVG	H
N/A							

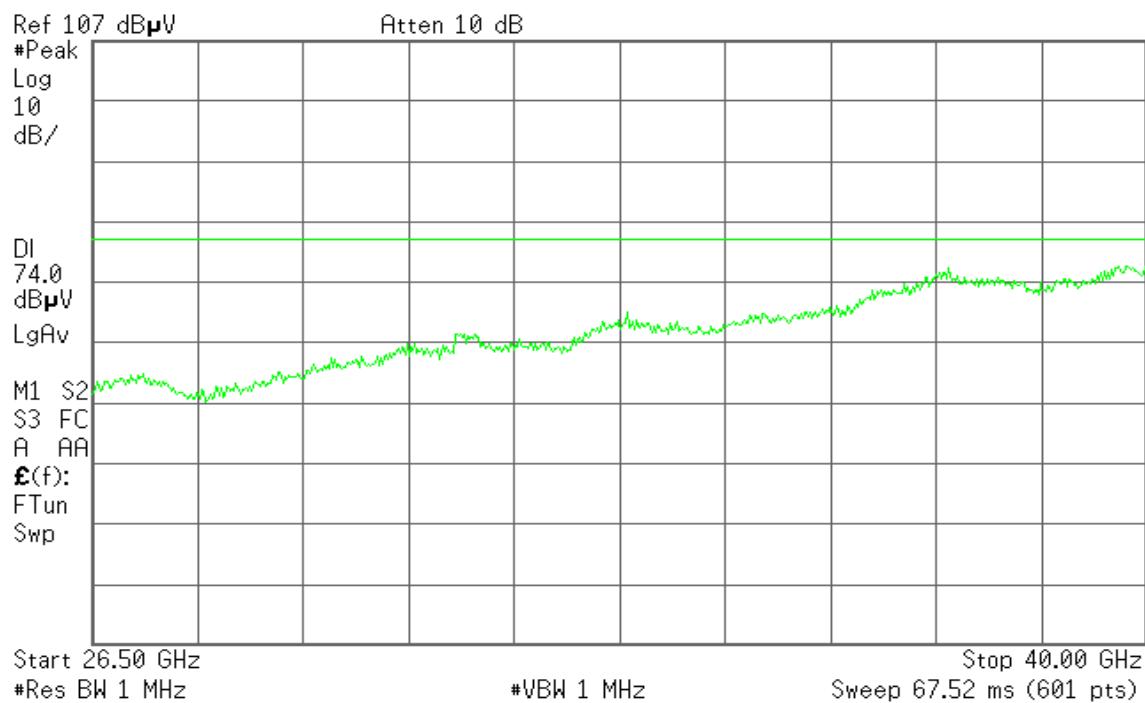
Remark:

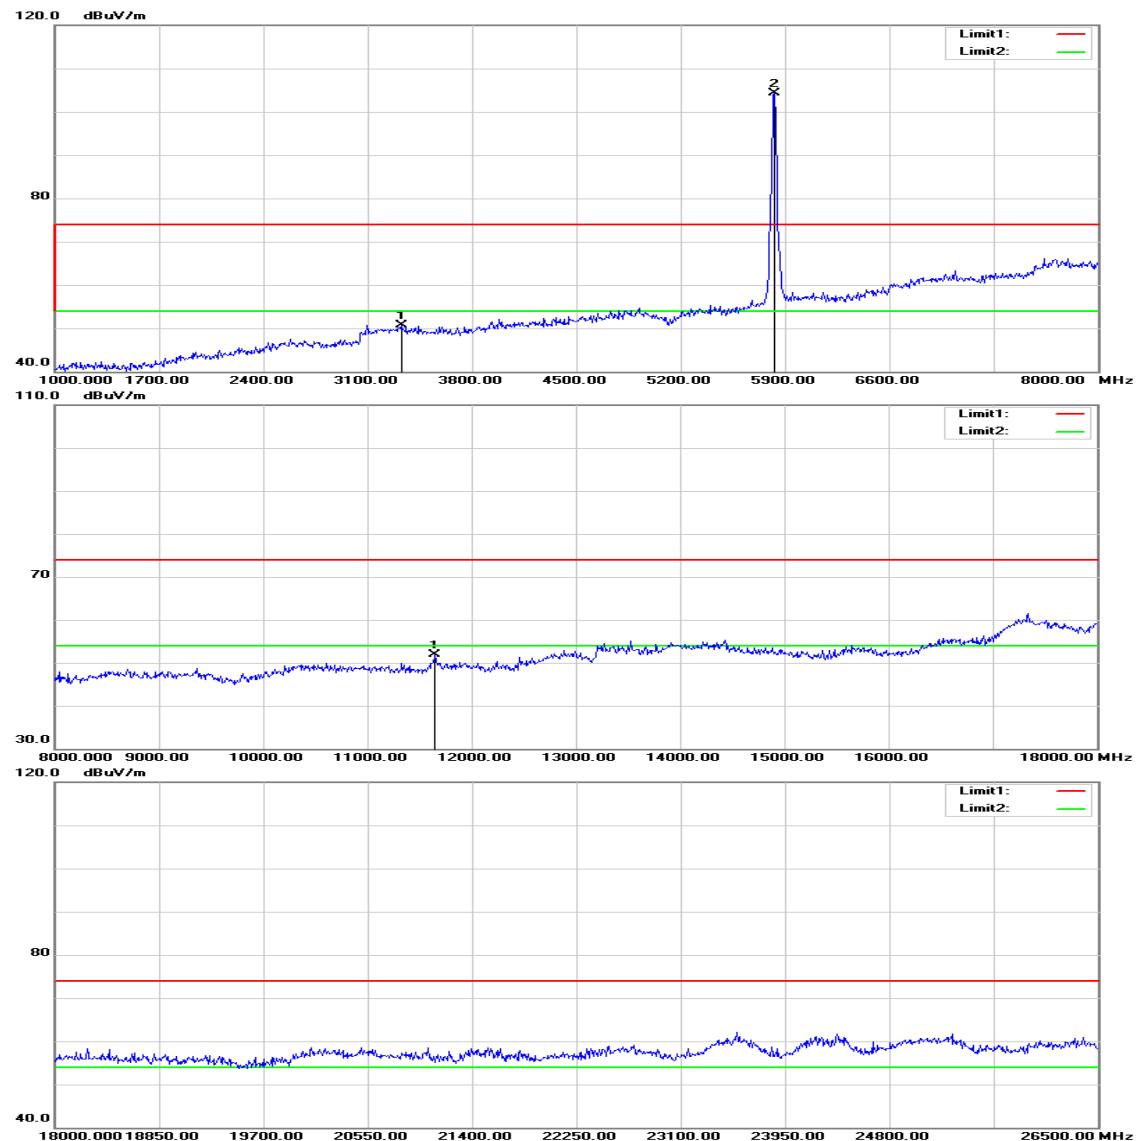
1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

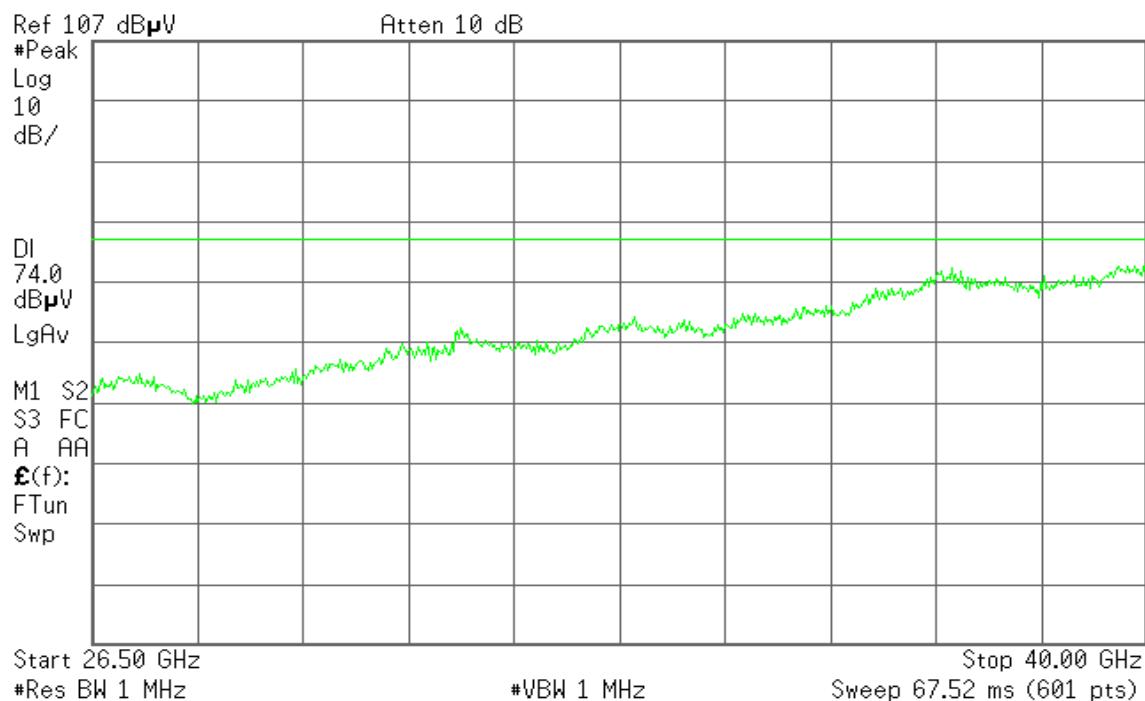
TX / IEEE 802.11n HT 20 MHz mode / CH High**Polarity: Vertical**

Agilent

R L



Polarity: Horizontal

Agilent**R L**

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH High

Test Date: December 8, 2015

Temperature: 27°C

Tested by: Jason Lu

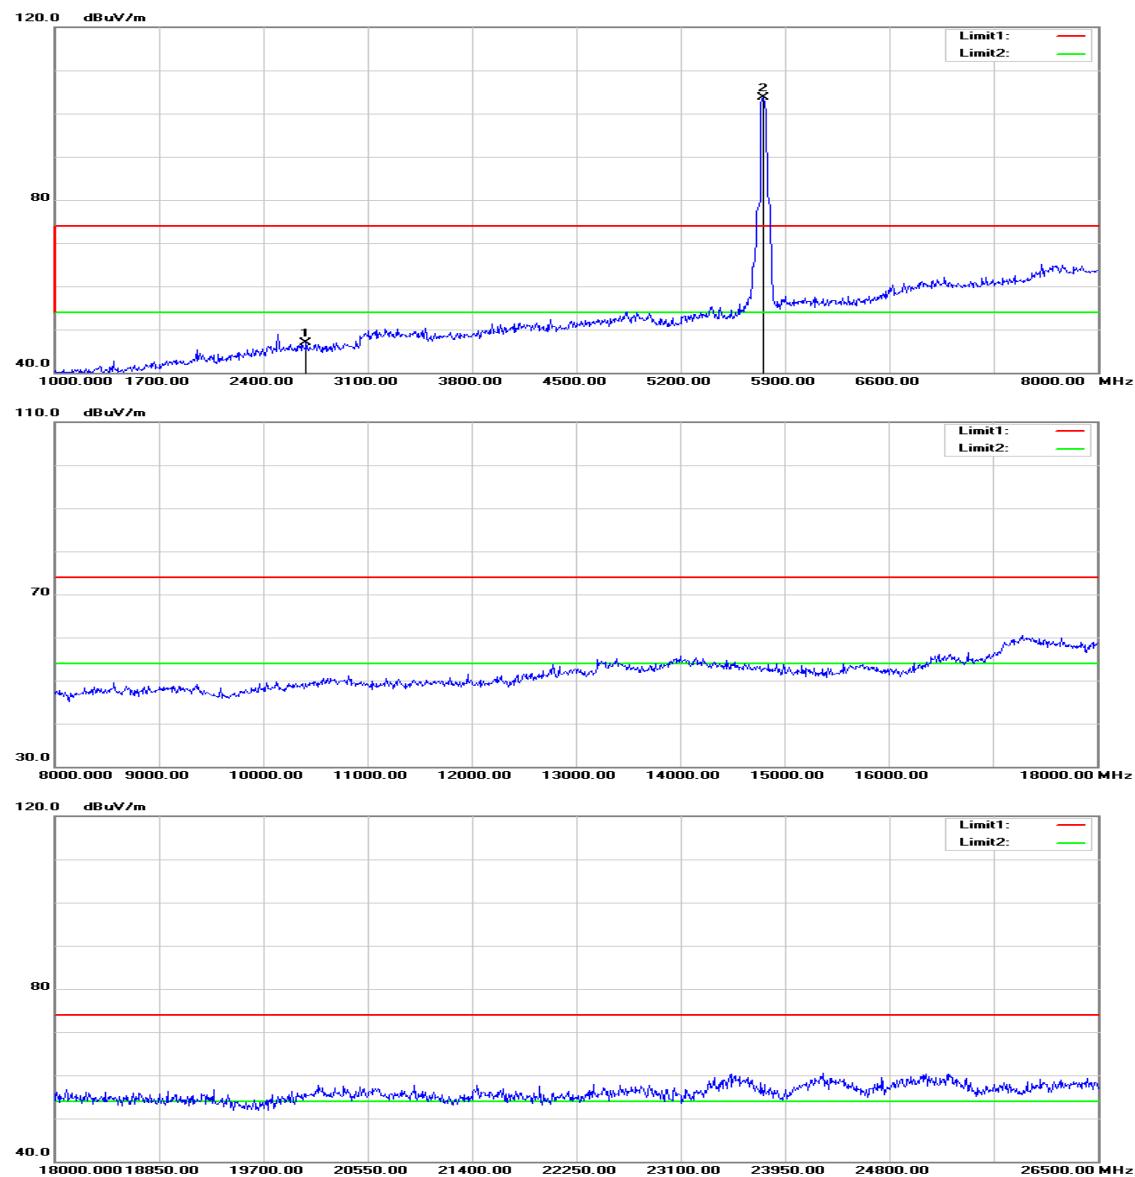
Humidity: 53% RH

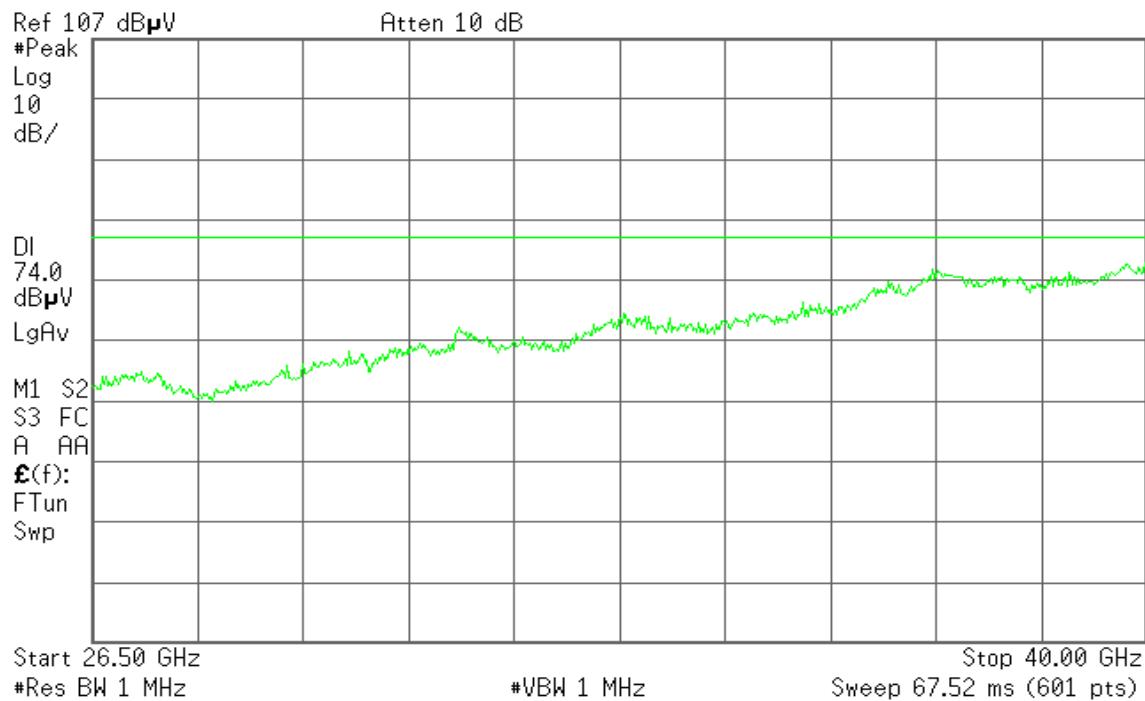
Polarity: Ver. / Hor.

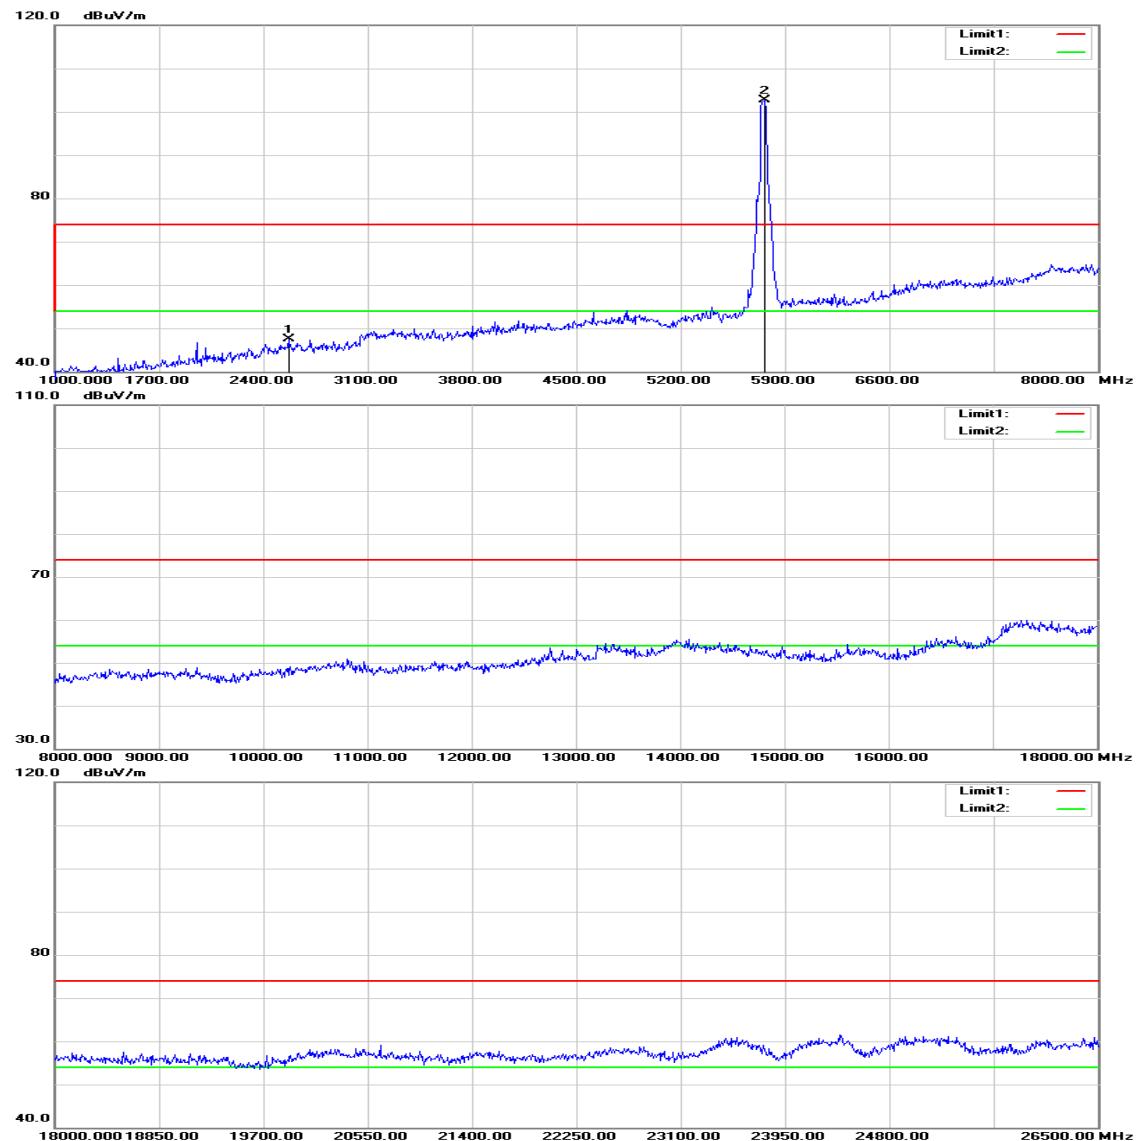
Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3345.000	52.51	-1.28	51.23	74.00	-22.77	peak	V
N/A							
3324.000	51.95	-1.33	50.62	74.00	-23.38	peak	H
11650.000	35.03	16.91	51.94	74.00	-22.06	peak	H
N/A							

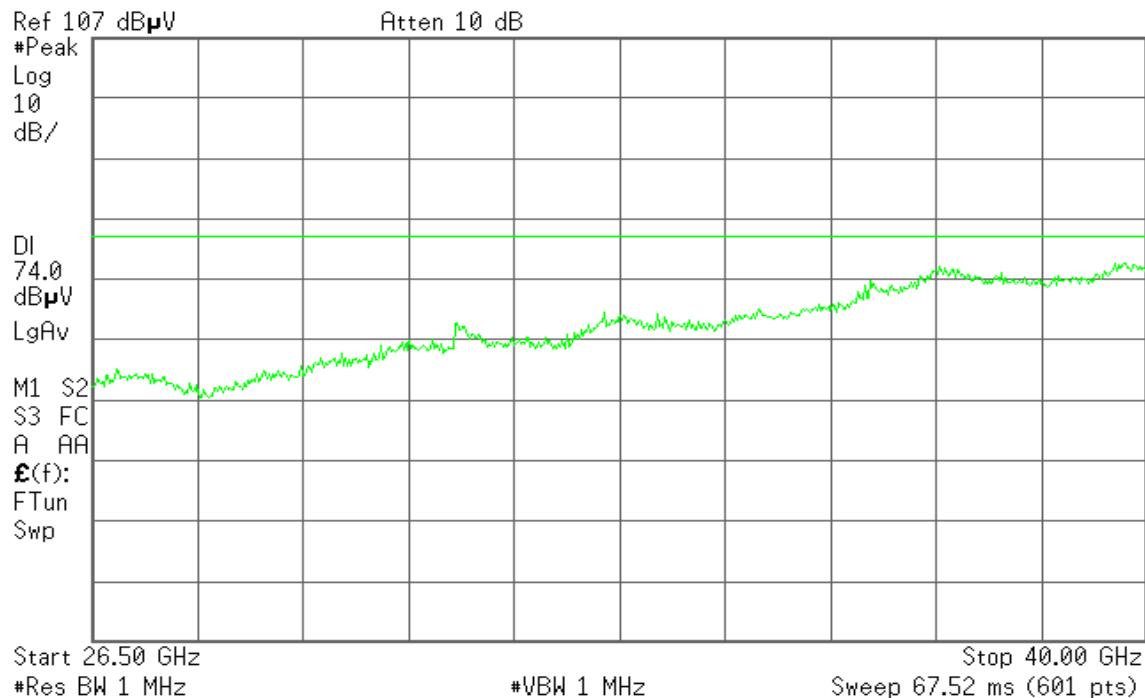
Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 40 MHz mode / CH Low**Polarity: Vertical**

 **Agilent****R L**

Polarity: Horizontal

Agilent**R L**

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Low

Test Date: December 8, 2015

Temperature: 27°C

Tested by: Jason Lu

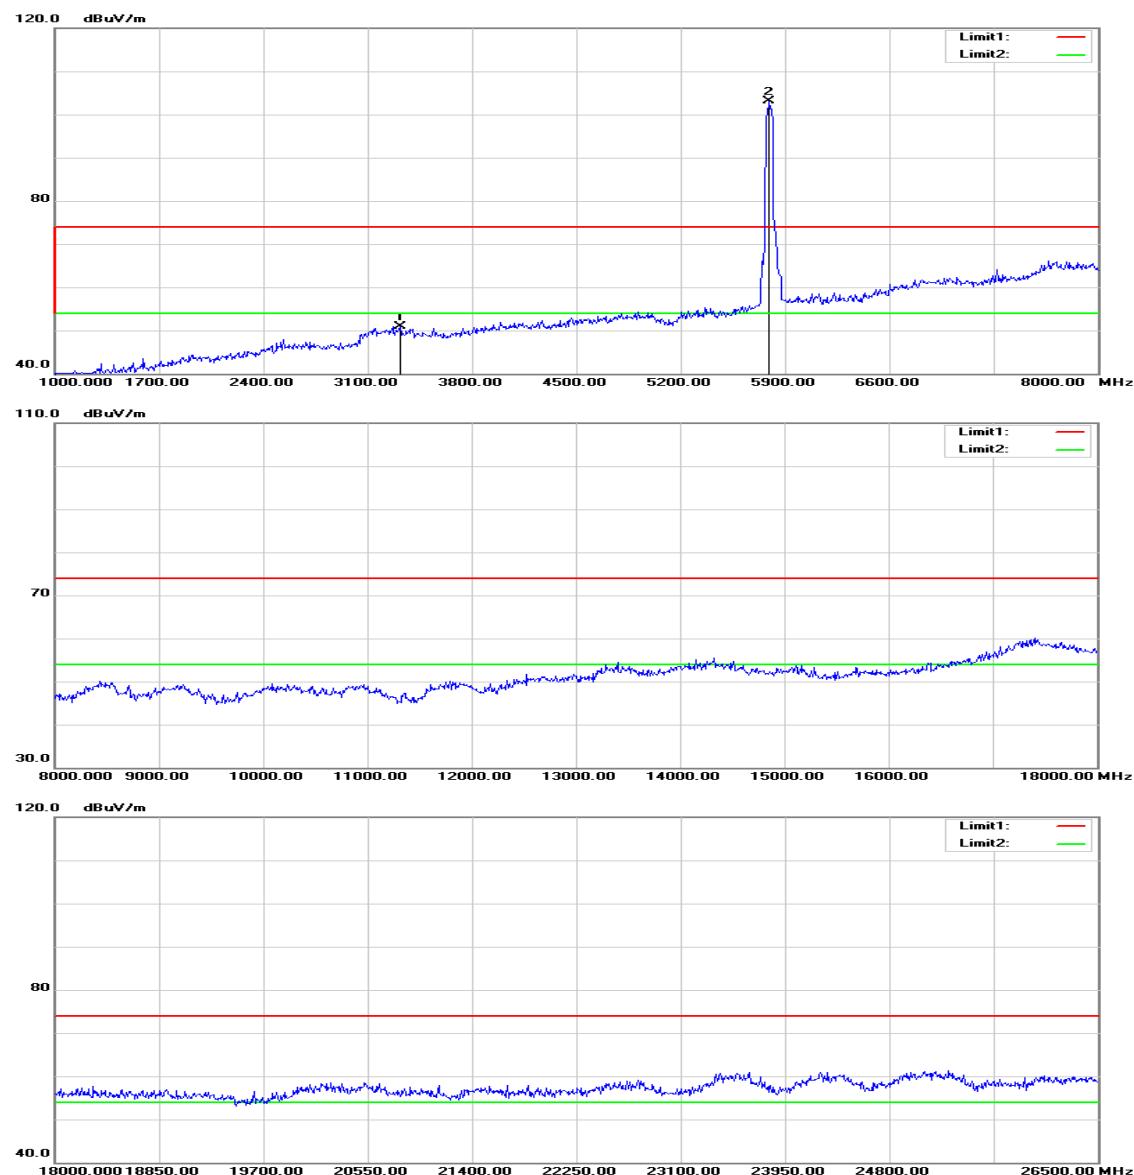
Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2687.000	49.74	-2.74	47.00	74.00	-27.00	peak	V
N/A							
2568.000	50.41	-2.98	47.43	74.00	-26.57	peak	H
N/A							

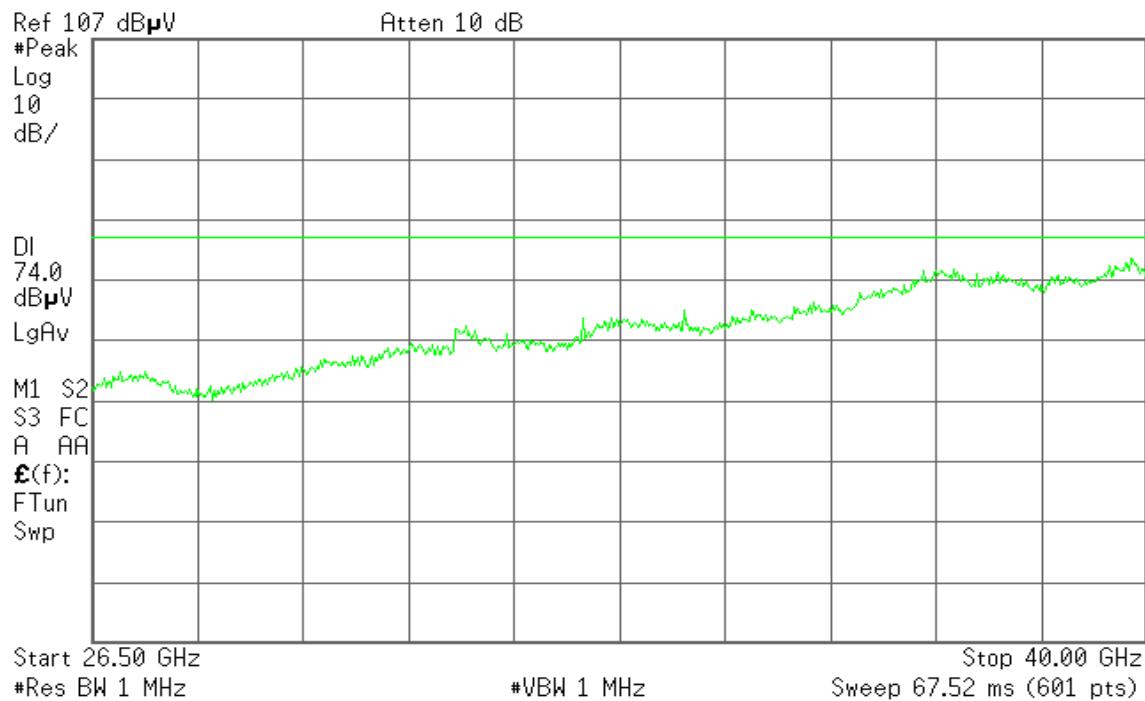
Remark:

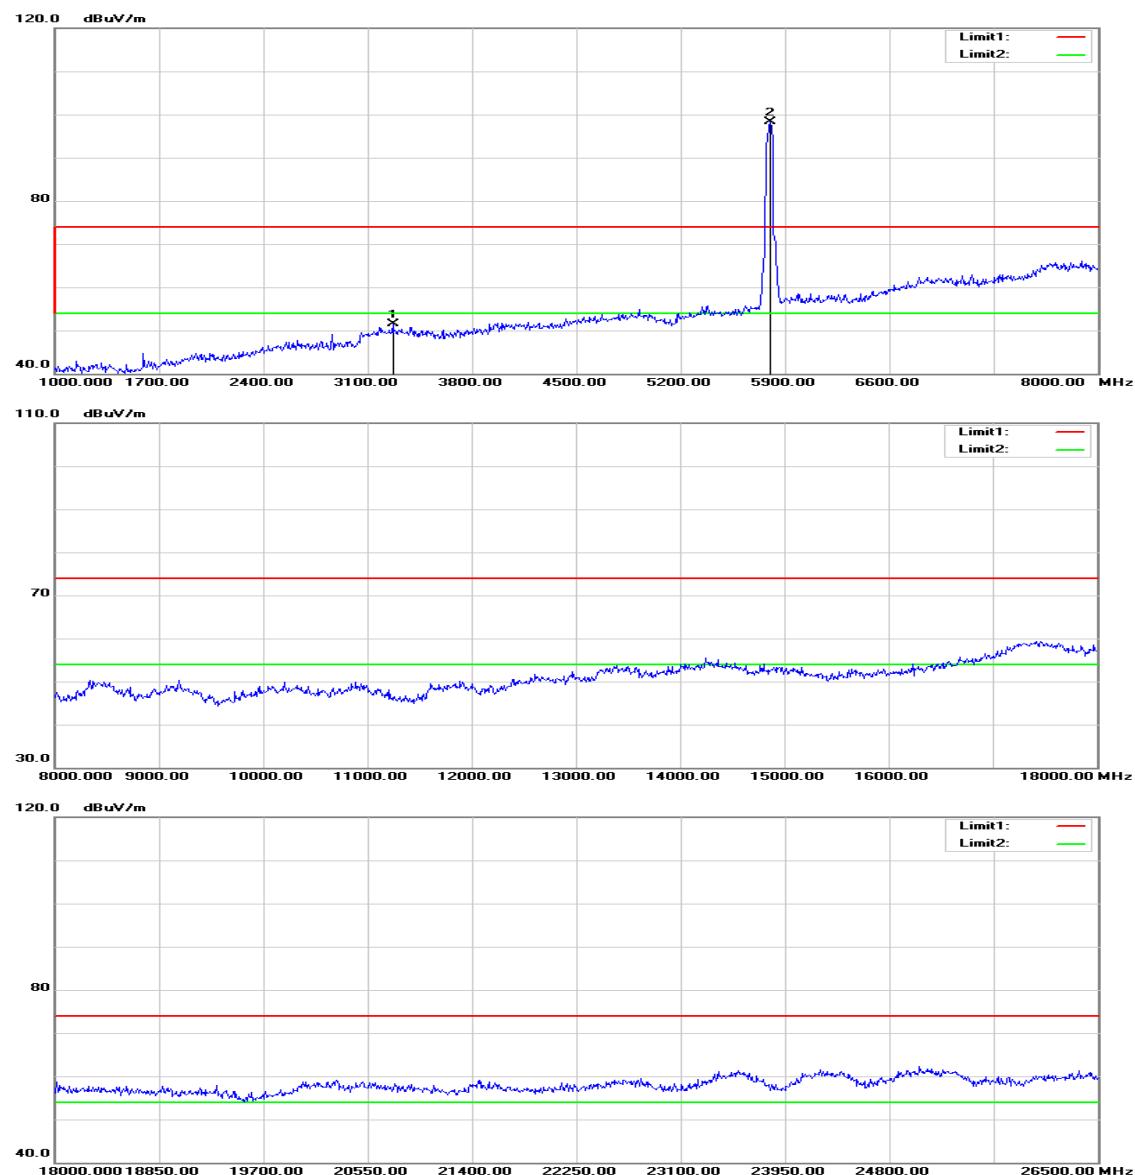
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 40 MHz mode / CH High**Polarity: Vertical**

Agilent

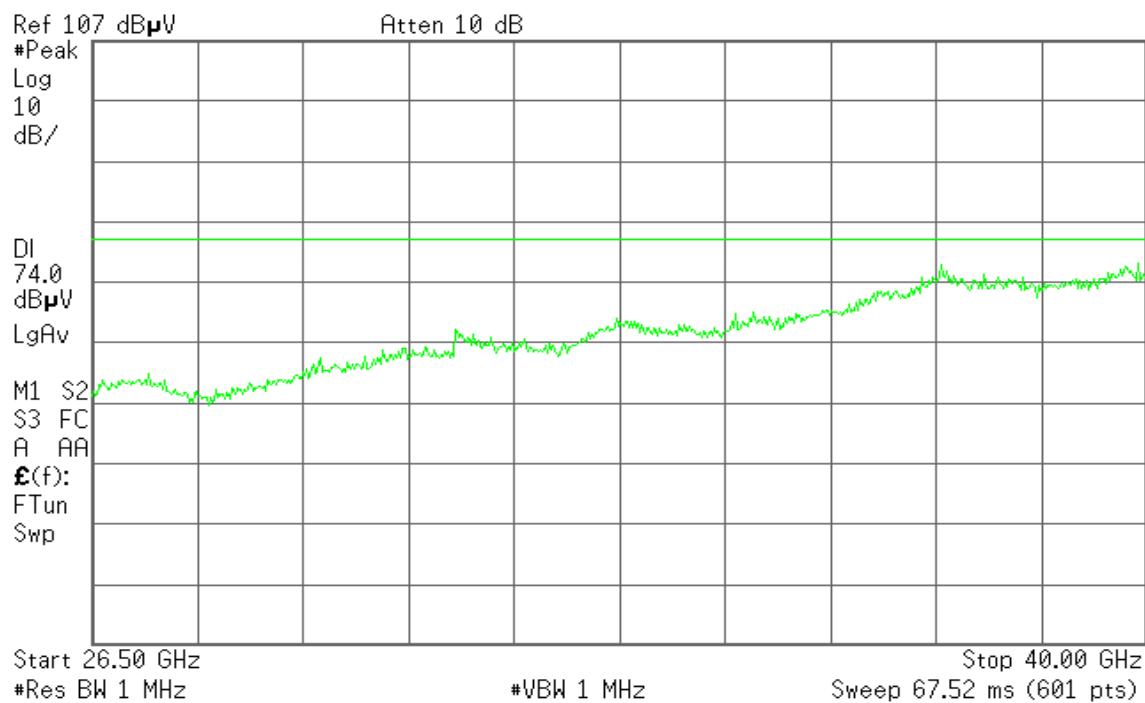
R L



Polarity: Horizontal

Agilent

R L



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / CH High

Test Date: December 8, 2015

Temperature: 27°C

Tested by: Jason Lu

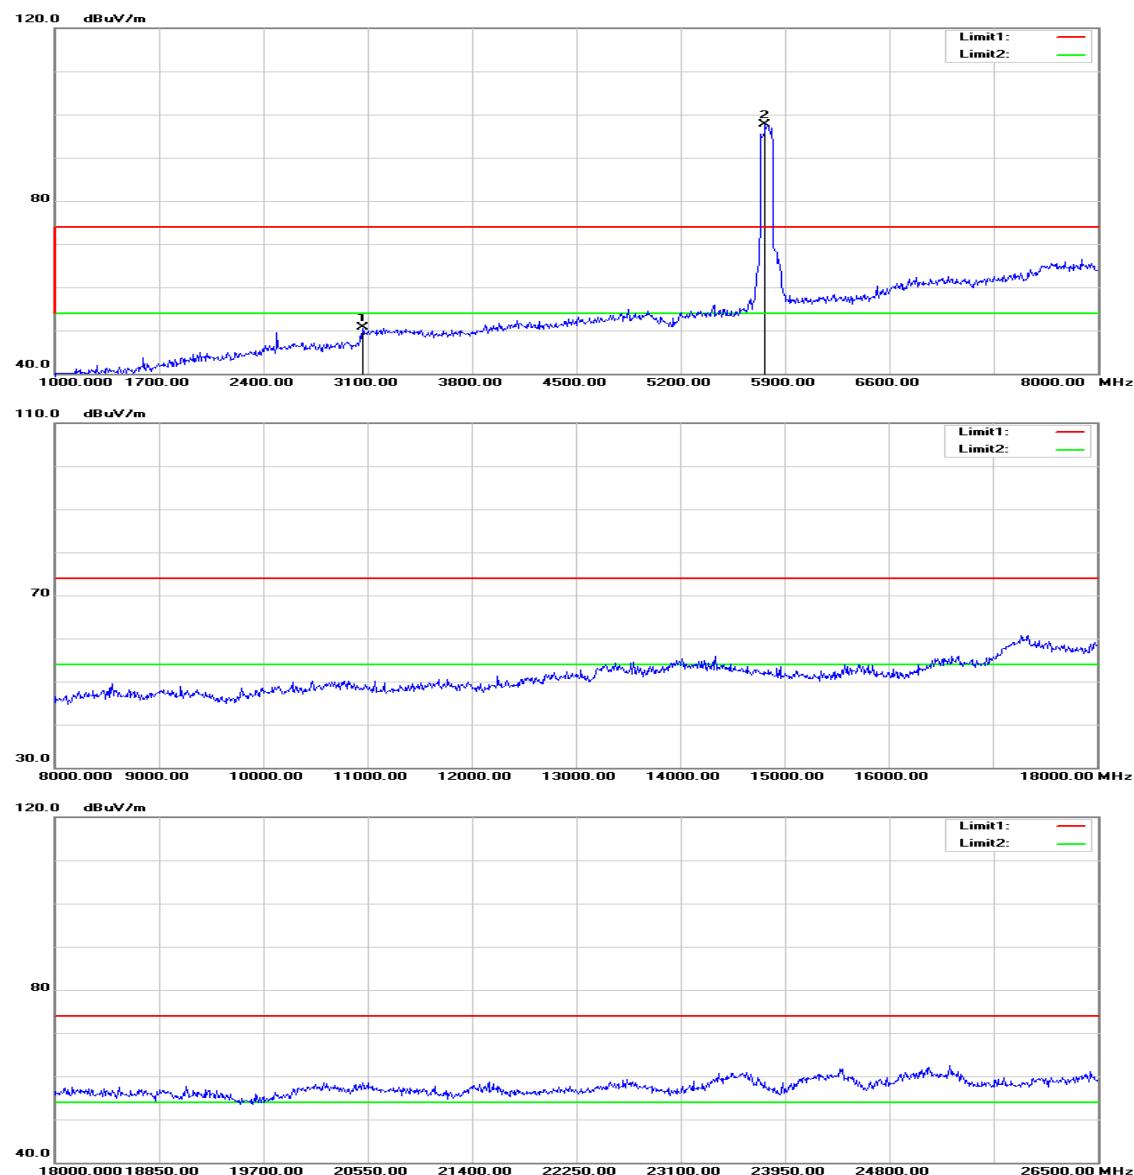
Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3317.000	52.17	-1.35	50.82	74.00	-23.18	peak	V
N/A							
3268.000	52.89	-1.47	51.42	74.00	-22.58	peak	H
N/A							

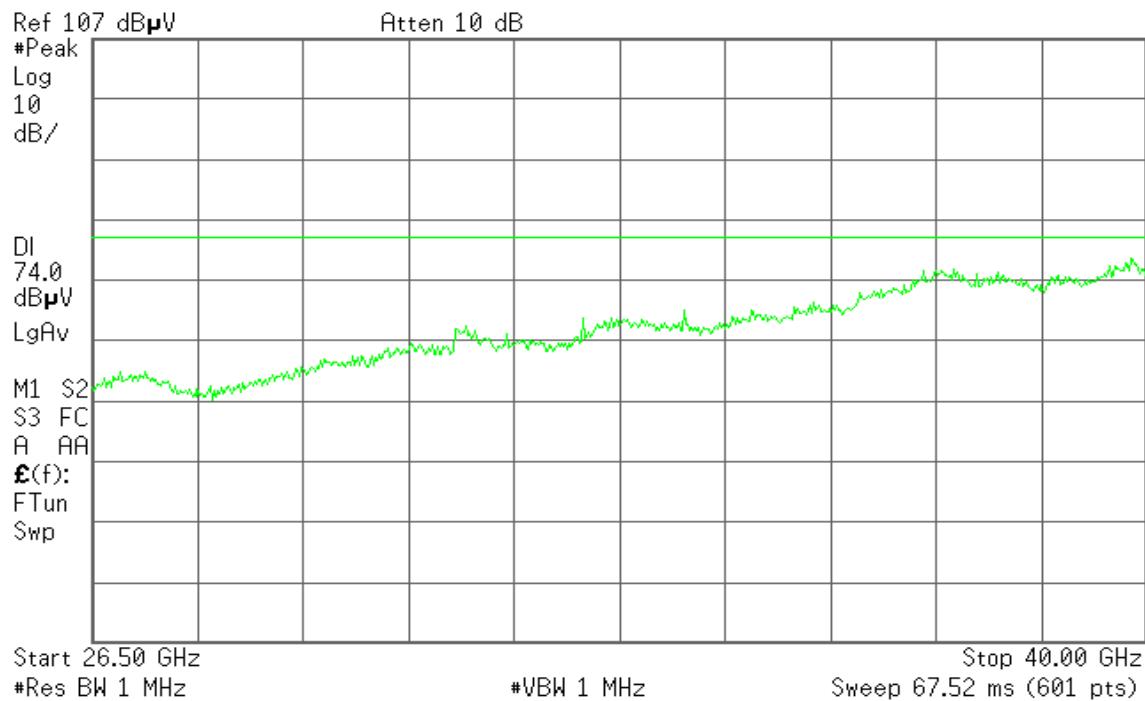
Remark:

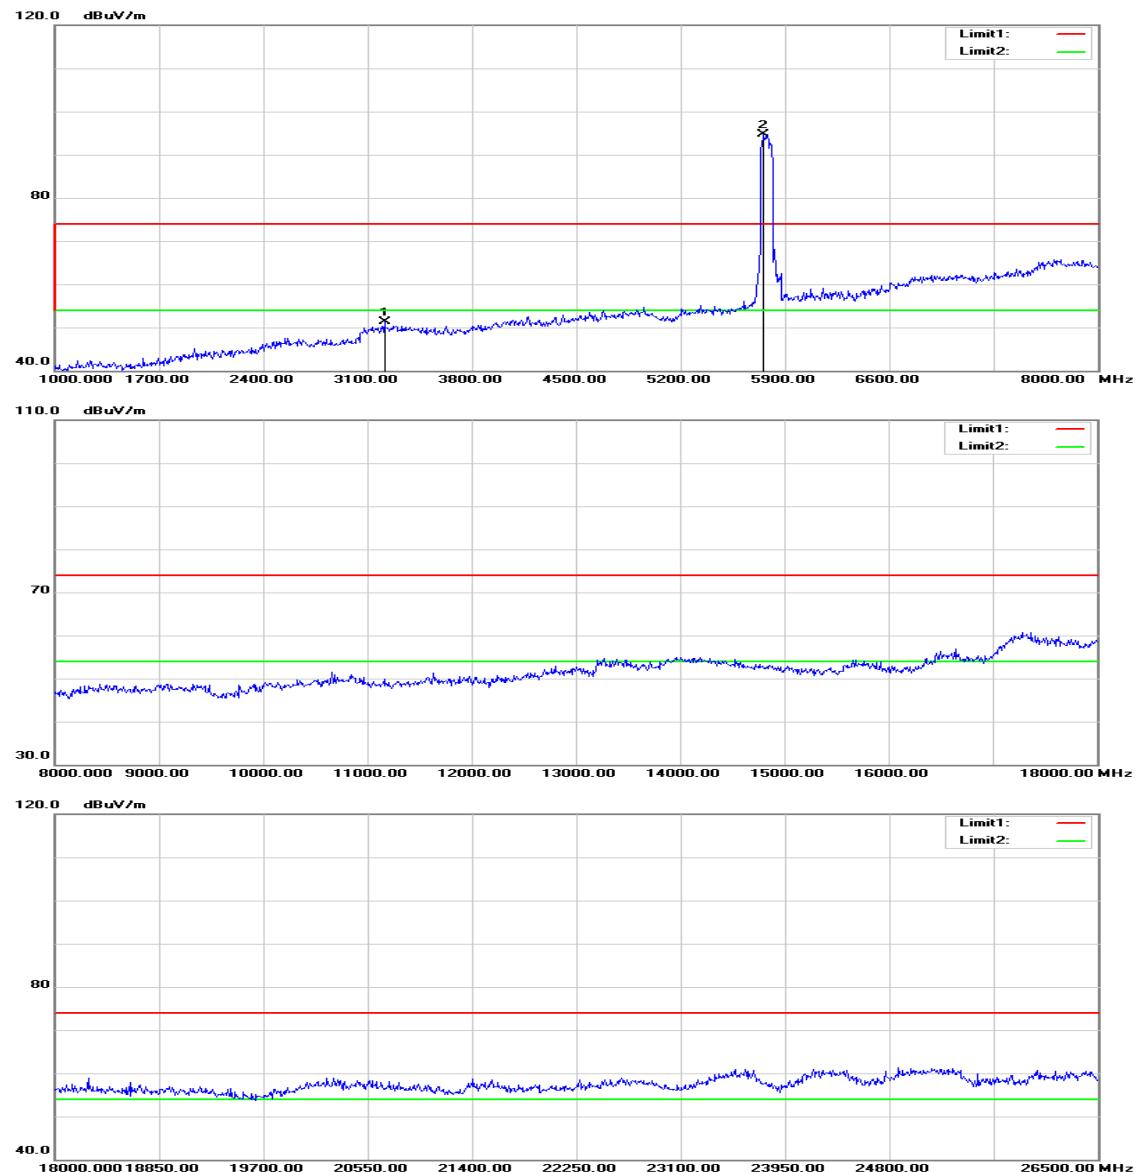
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Tx / IEEE 802.11ac VHT 80 MHz mode / CH Mid**Polarity: Vertical**

Agilent

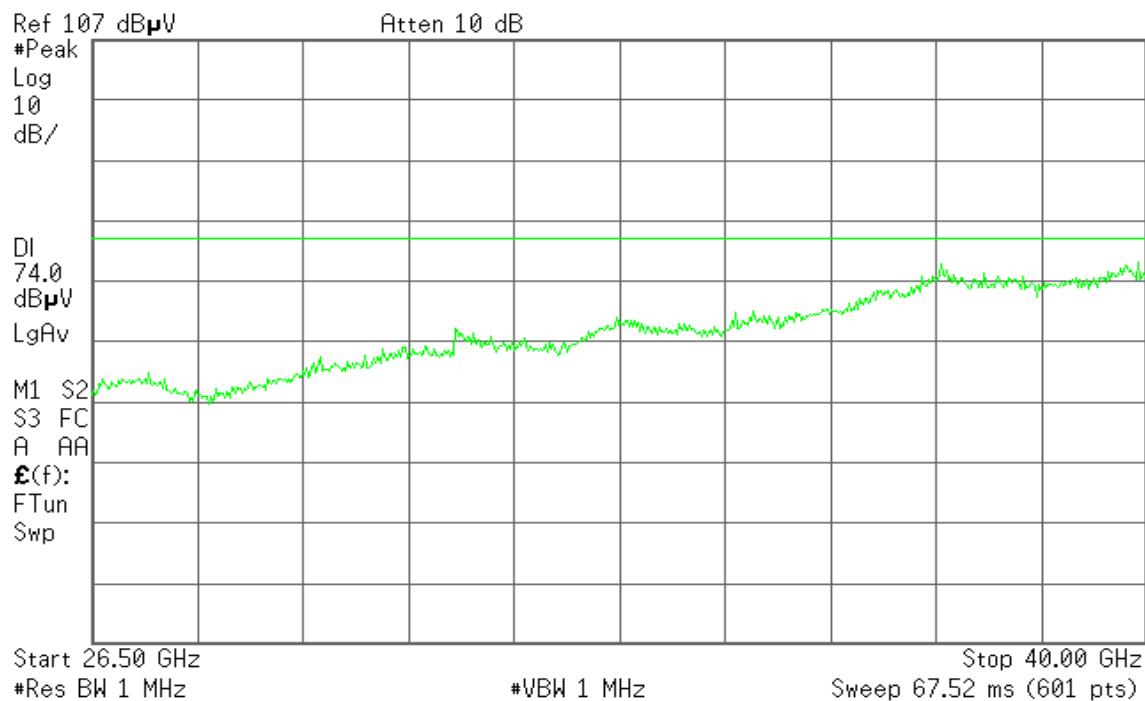
R L



Polarity: Horizontal

Agilent

R L



Operation Mode: Tx / IEEE 802.11ac VHT 80 MHz mode / CH Mid **Test Date:** December 8, 2015

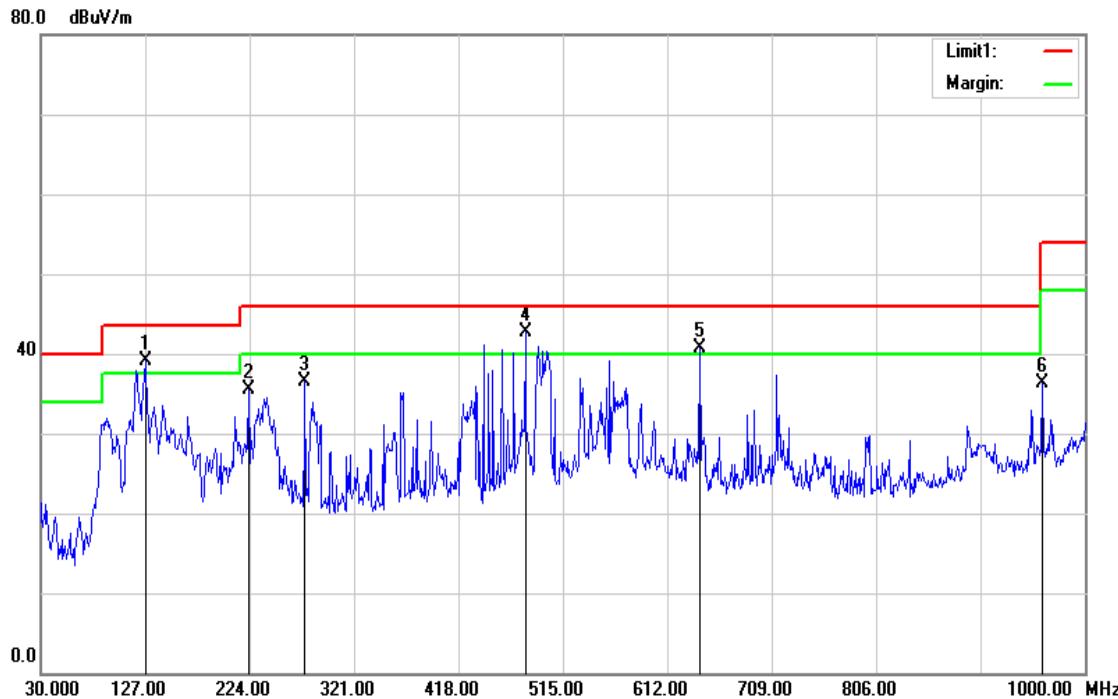
Temperature: 27°C **Tested by:** Jason Lu

Humidity: 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3065.000	52.55	-1.95	50.60	74.00	-23.40	peak	V
N/A							
3212.000	52.82	-1.60	51.22	74.00	-22.78	peak	H
N/A							

Remark:

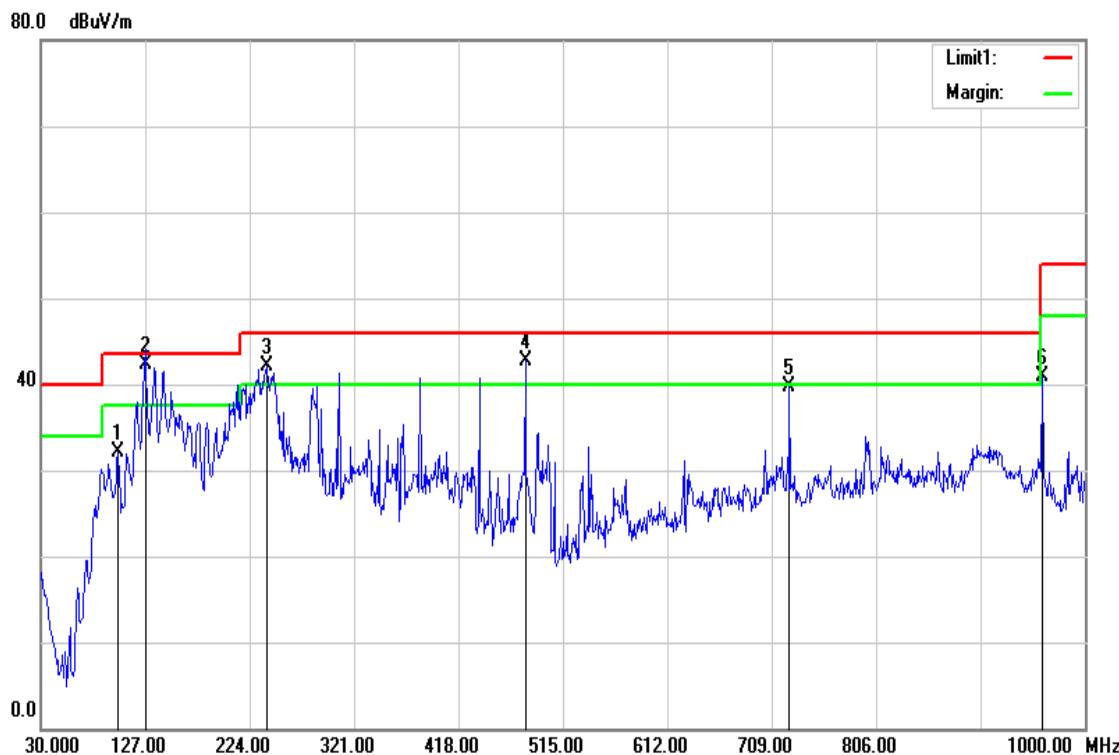
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

For Dipole Antenna**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** January 20, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
127.0000	54.71	-15.60	39.11	43.50	-4.39	peak	V
223.0300	52.45	-16.89	35.56	46.00	-10.44	peak	V
275.4100	51.27	-14.70	36.57	46.00	-9.43	peak	V
480.0800	52.39	-9.62	42.77	46.00	-3.23	peak	V
642.0700	47.54	-6.76	40.78	46.00	-5.22	peak	V
960.2300	38.45	-2.23	36.22	54.00	-17.78	peak	V

Remark:

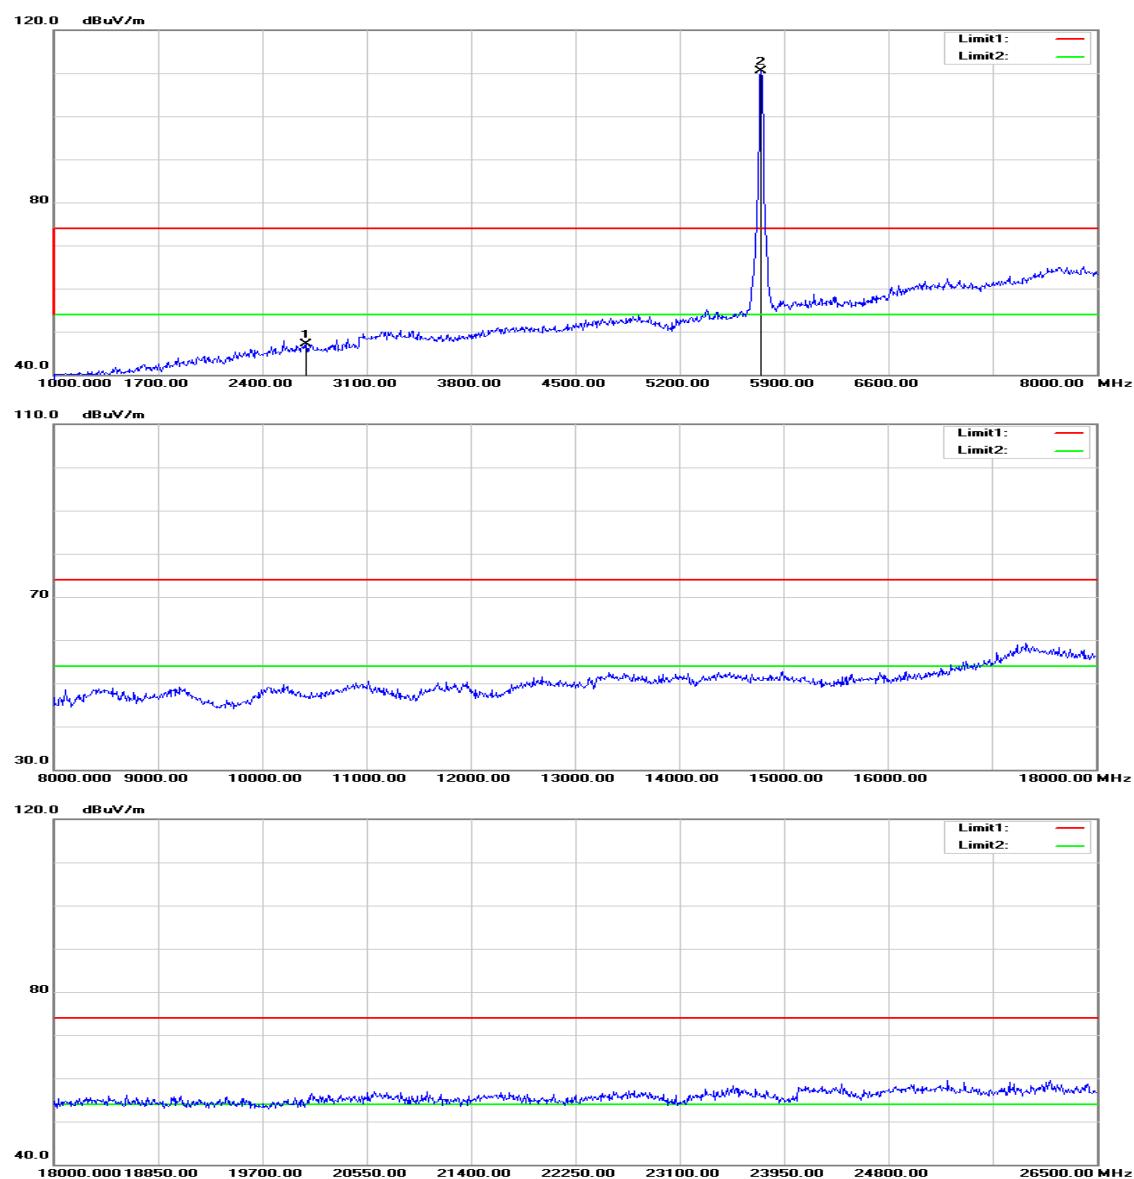
1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

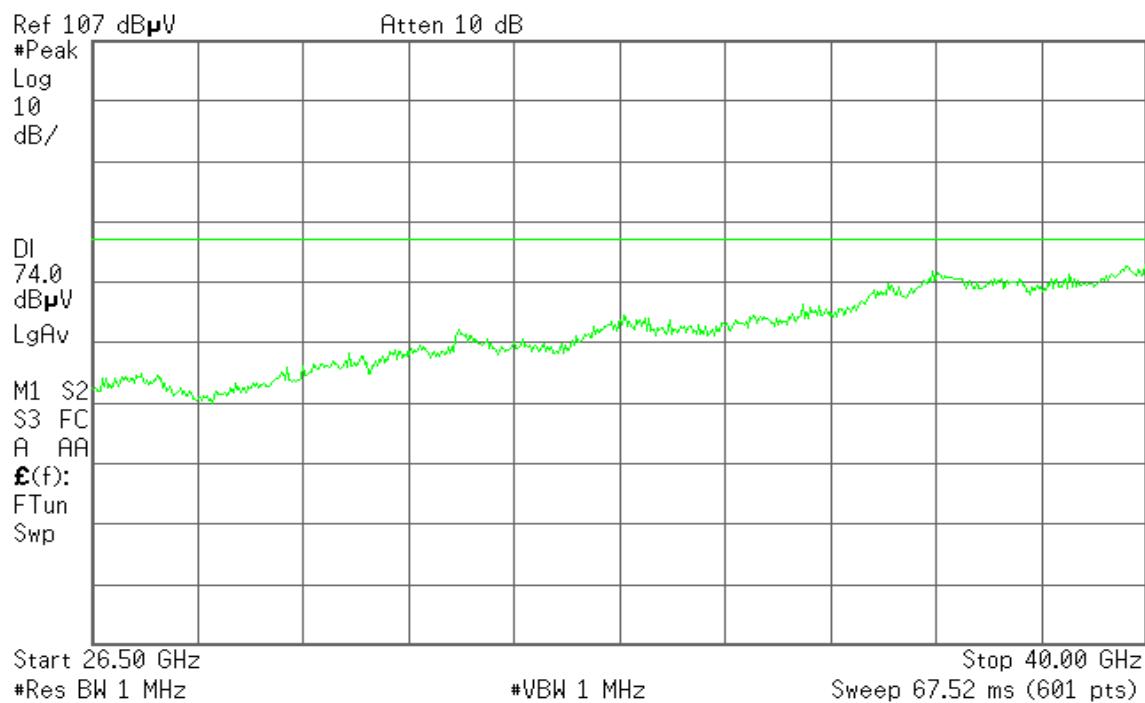
Operation Mode: Normal Link**Test Date:** January 20, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Hor.

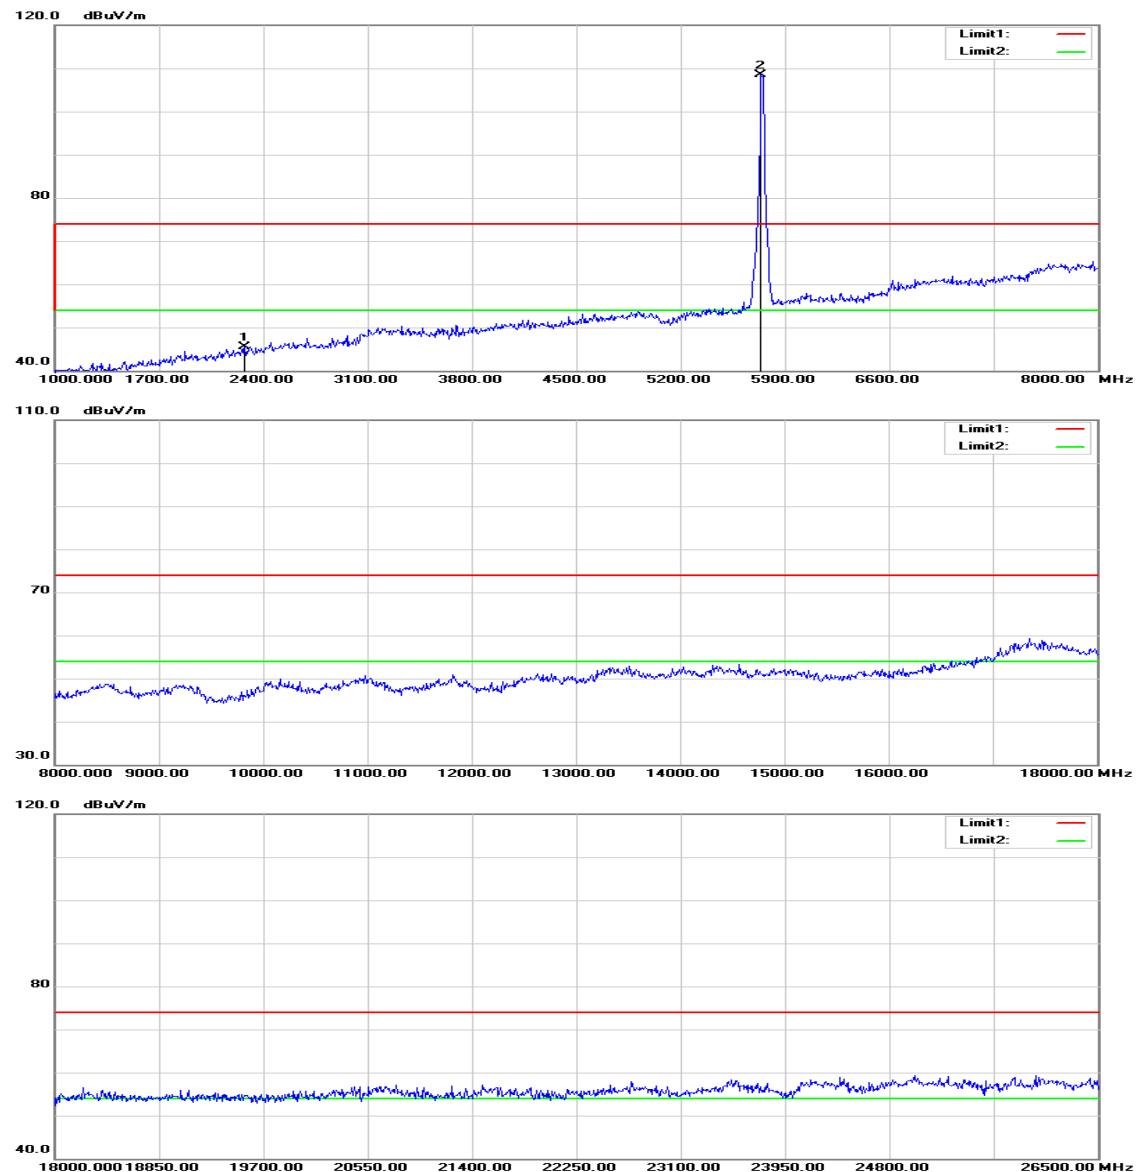
Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
101.7800	50.88	-18.72	32.16	43.50	-11.34	peak	H
127.0000	57.98	-15.60	42.38	43.50	-1.12	QP	H
240.4900	58.69	-16.50	42.19	46.00	-3.81	peak	H
480.0800	52.27	-9.62	42.65	46.00	-3.35	peak	H
725.4900	45.21	-5.48	39.73	46.00	-6.27	peak	H
960.2300	43.17	-2.23	40.94	54.00	-13.06	peak	H

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

Above 1 GHz**TX / IEEE 802.11a mode / CH Low****Polarity: Vertical**

Agilent**R L**

Polarity: Horizontal

Operation Mode: TX / IEEE 802.11a mode / CH Low **Test Date:** January 18, 2016

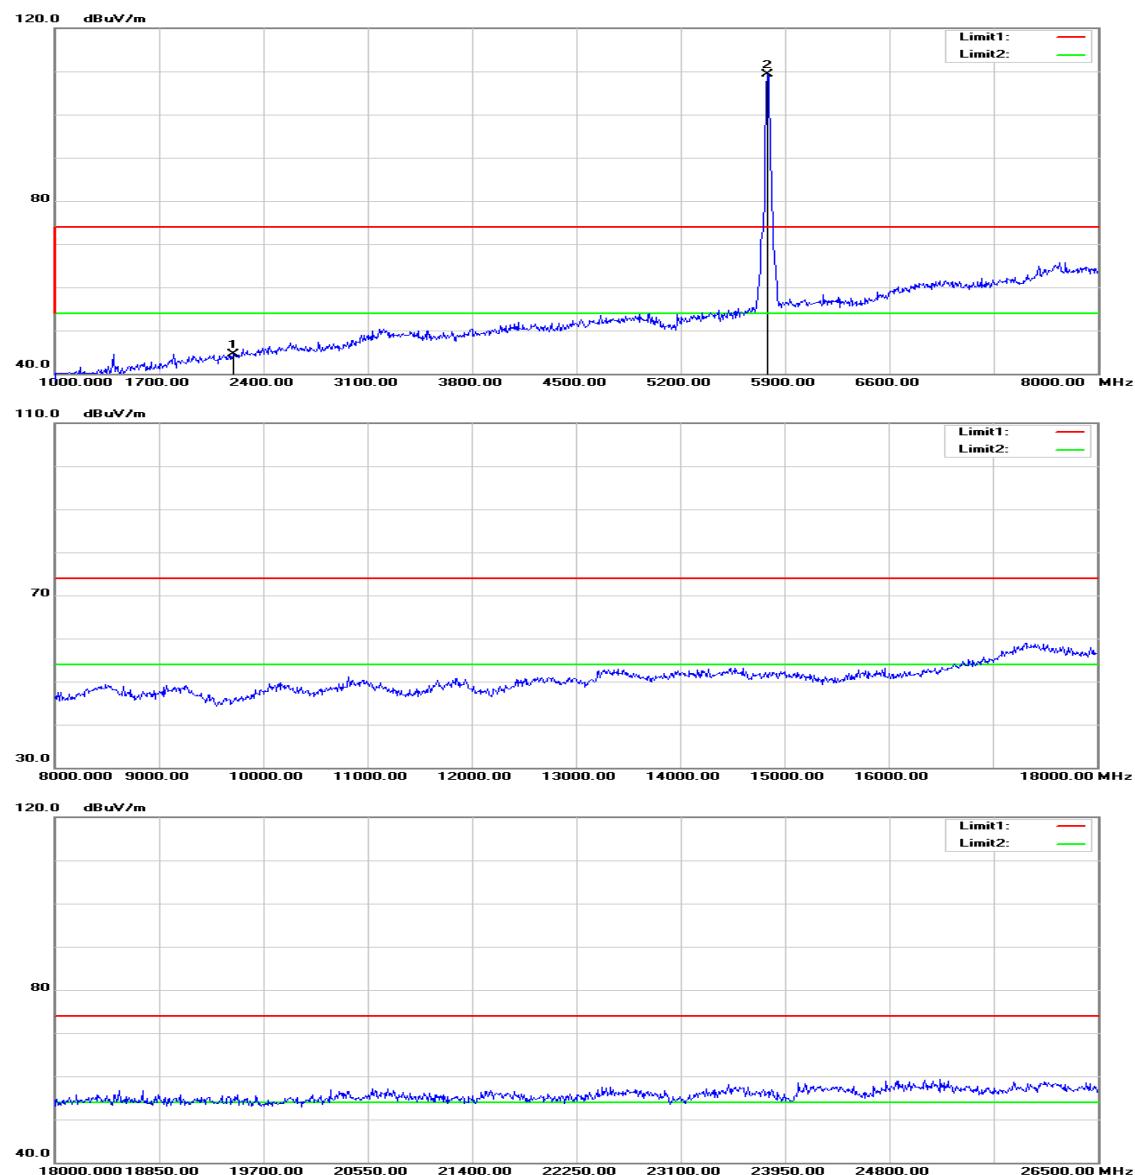
Temperature: 27°C **Tested by:** Jason Lu

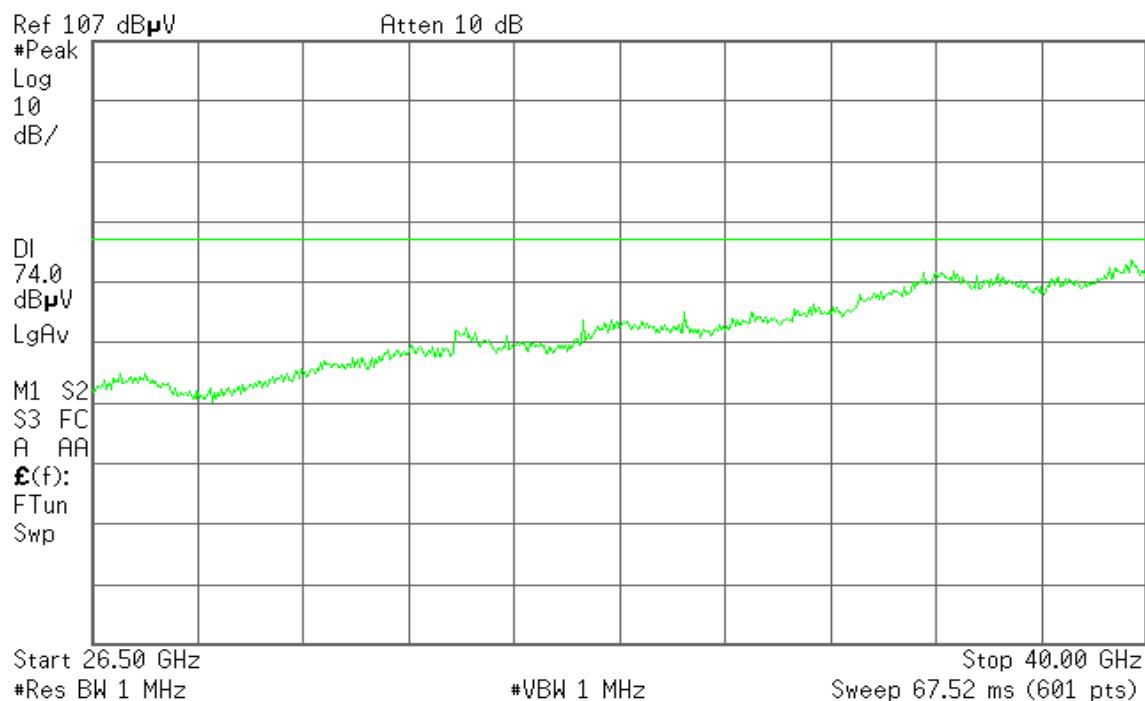
Humidity: 53% RH **Polarity:** Ver. / Hor.

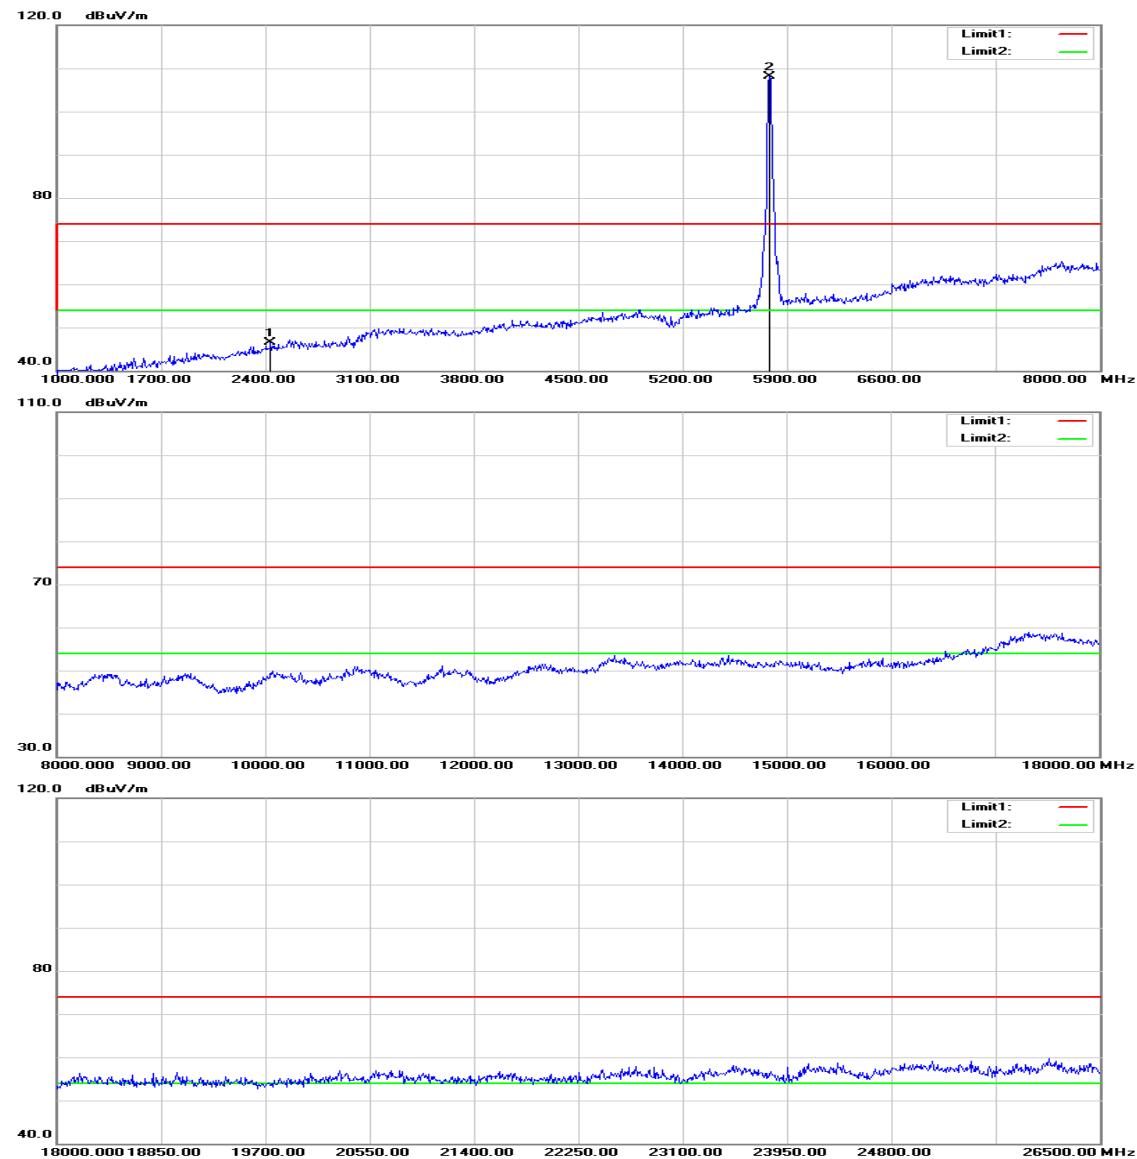
Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2694.000	49.74	-2.73	47.01	74.00	-26.99	peak	V
N/A							
2274.000	49.81	-4.33	45.48	74.00	-28.52	peak	H
N/A							

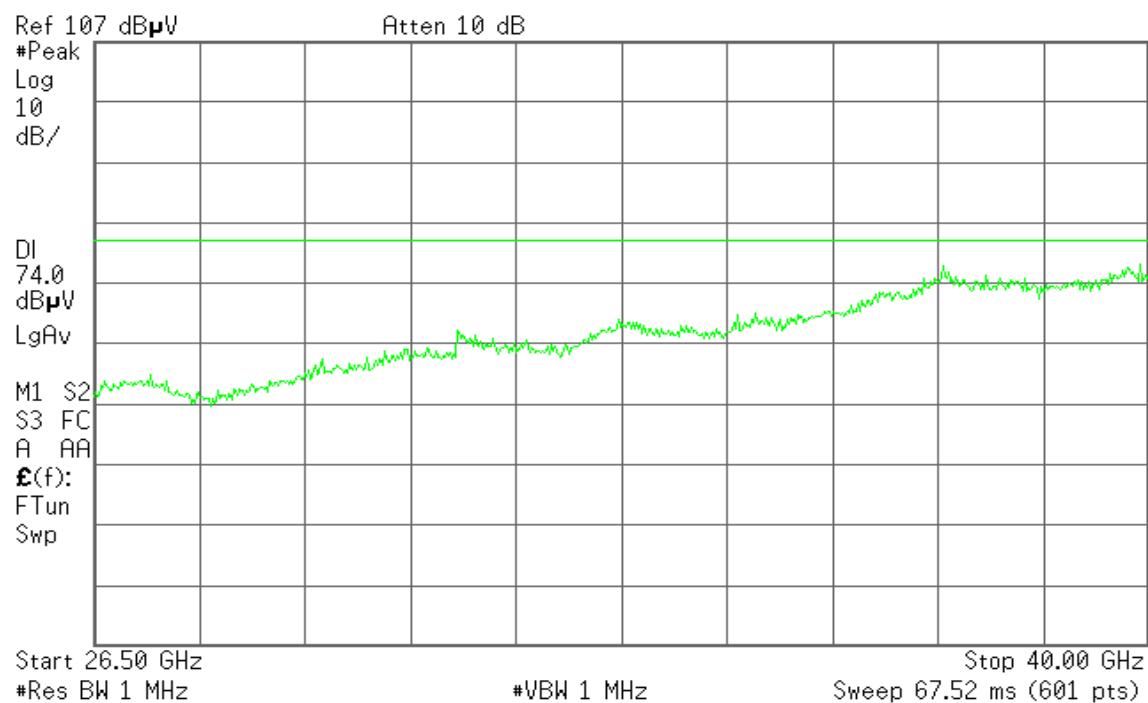
Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11a mode / CH Mid**Polarity: Vertical**

Agilent**R L**

Polarity: Horizontal

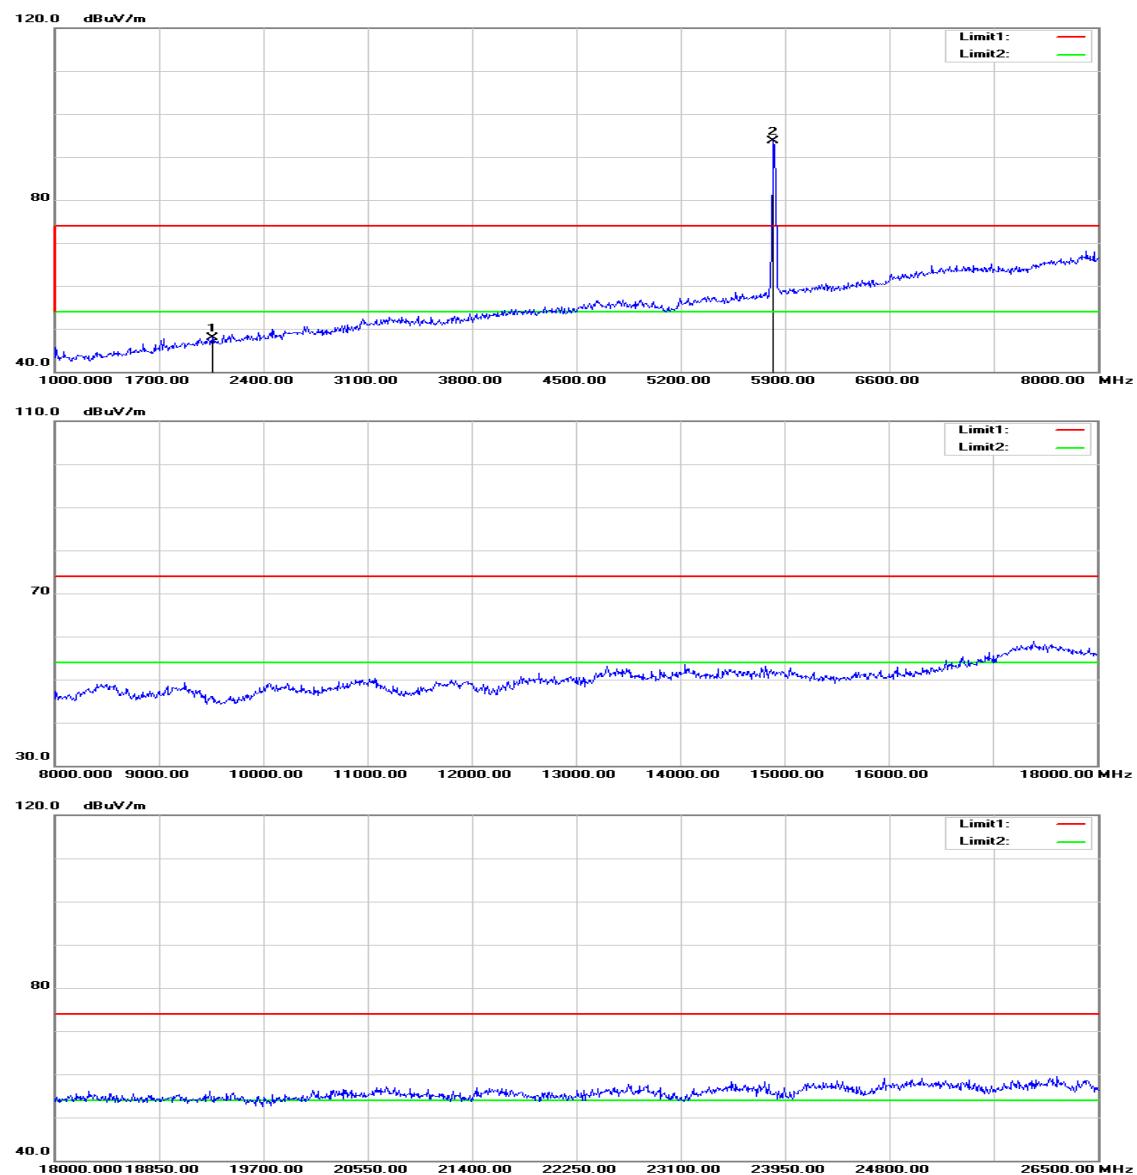
Agilent**R L**

Operation Mode:	TX / IEEE 802.11a mode / CH Mid	Test Date: January 18, 2016
Temperature:	27°C	Tested by: Jason Lu
Humidity:	53% RH	Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2197.000	48.95	-4.45	44.50	74.00	-29.50	peak	V
N/A							
2435.000	49.98	-3.53	46.45	74.00	-27.55	peak	H
N/A							

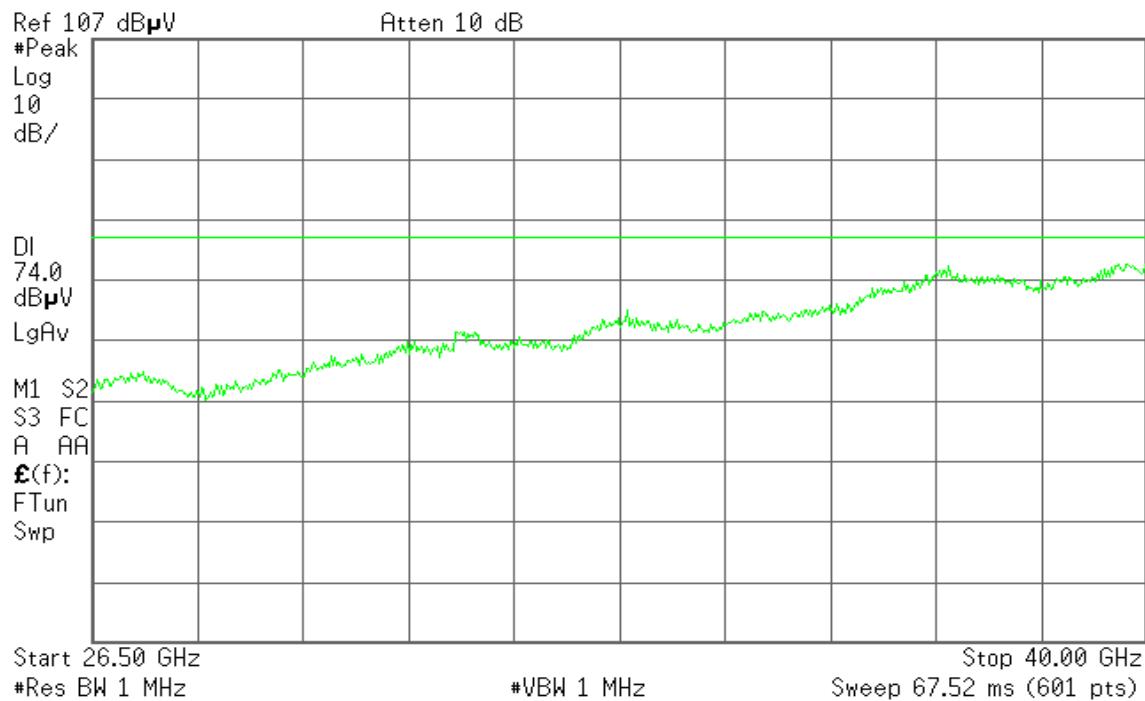
Remark:

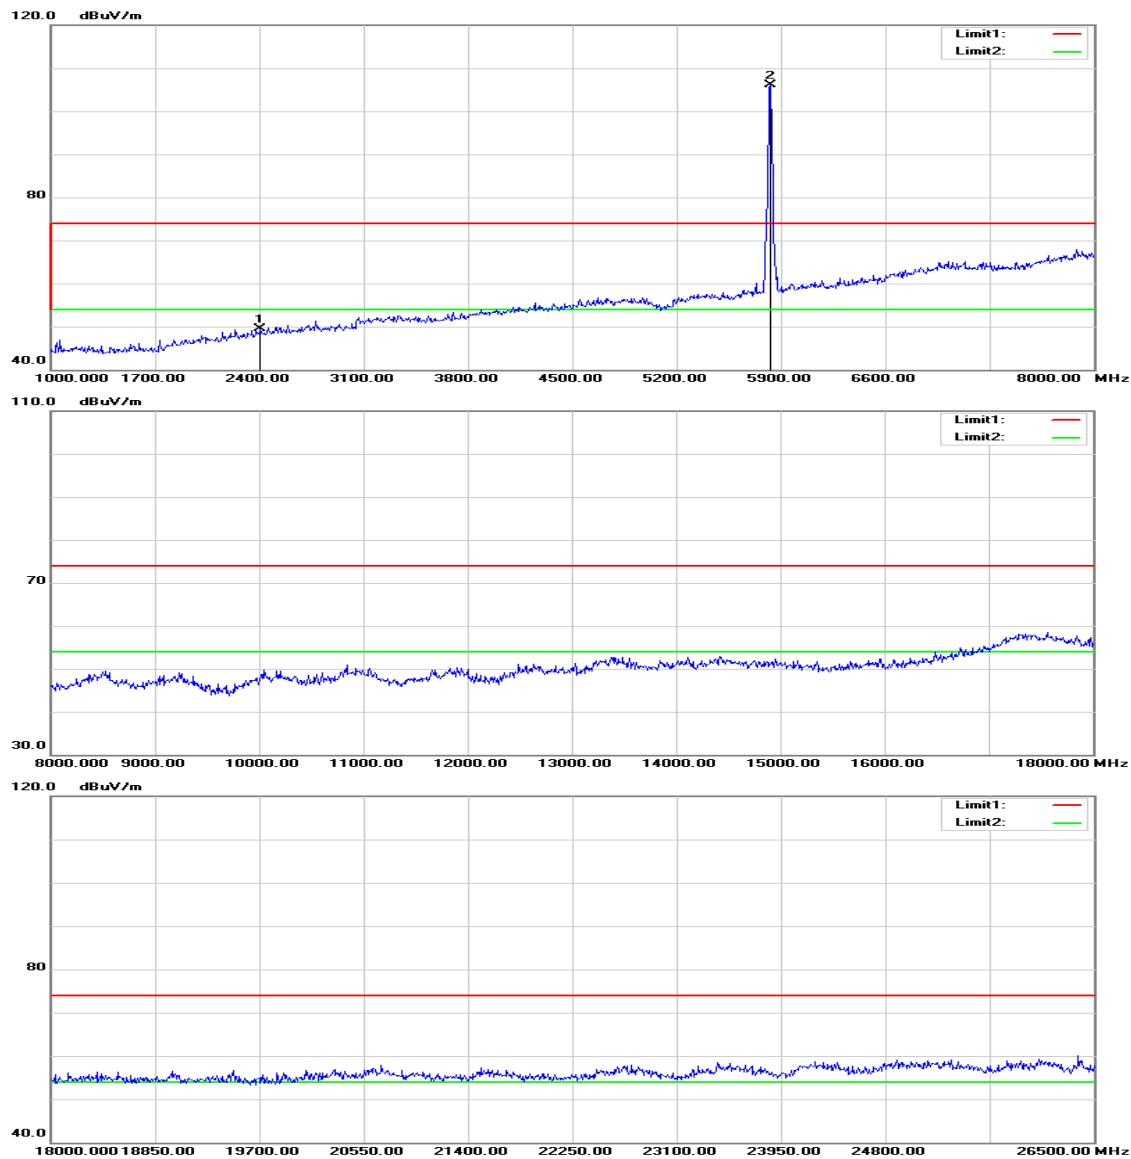
1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

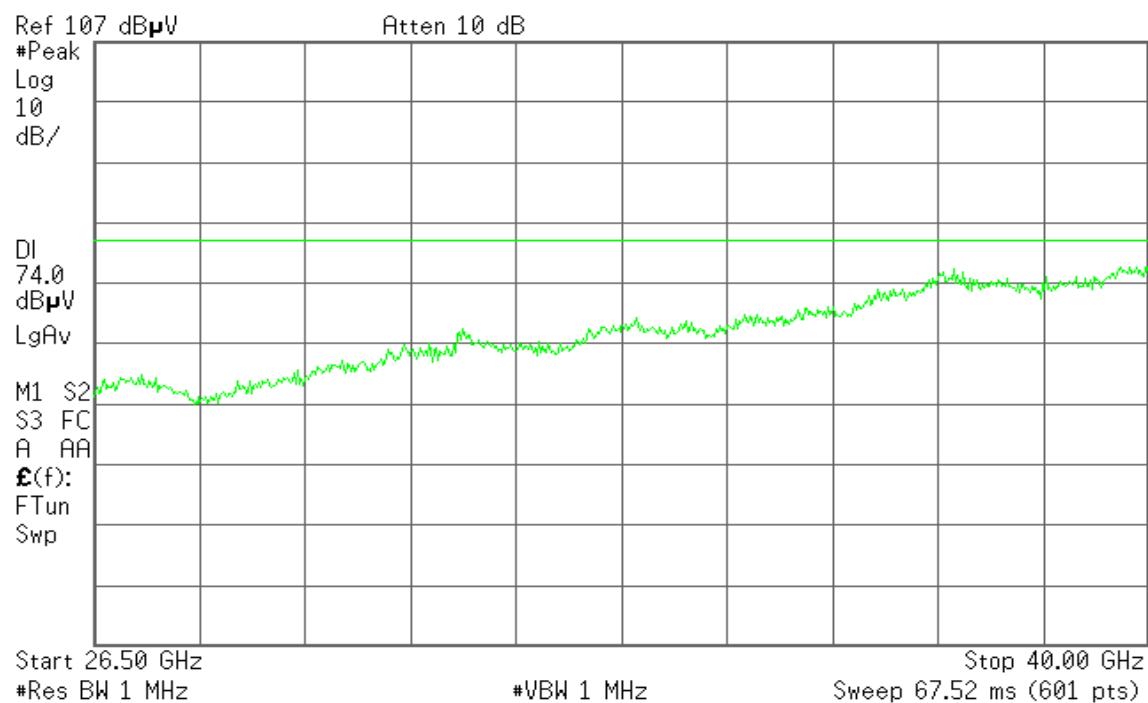
TX / IEEE 802.11a mode / CH High**Polarity: Vertical**

Agilent

R L



Polarity: Horizontal

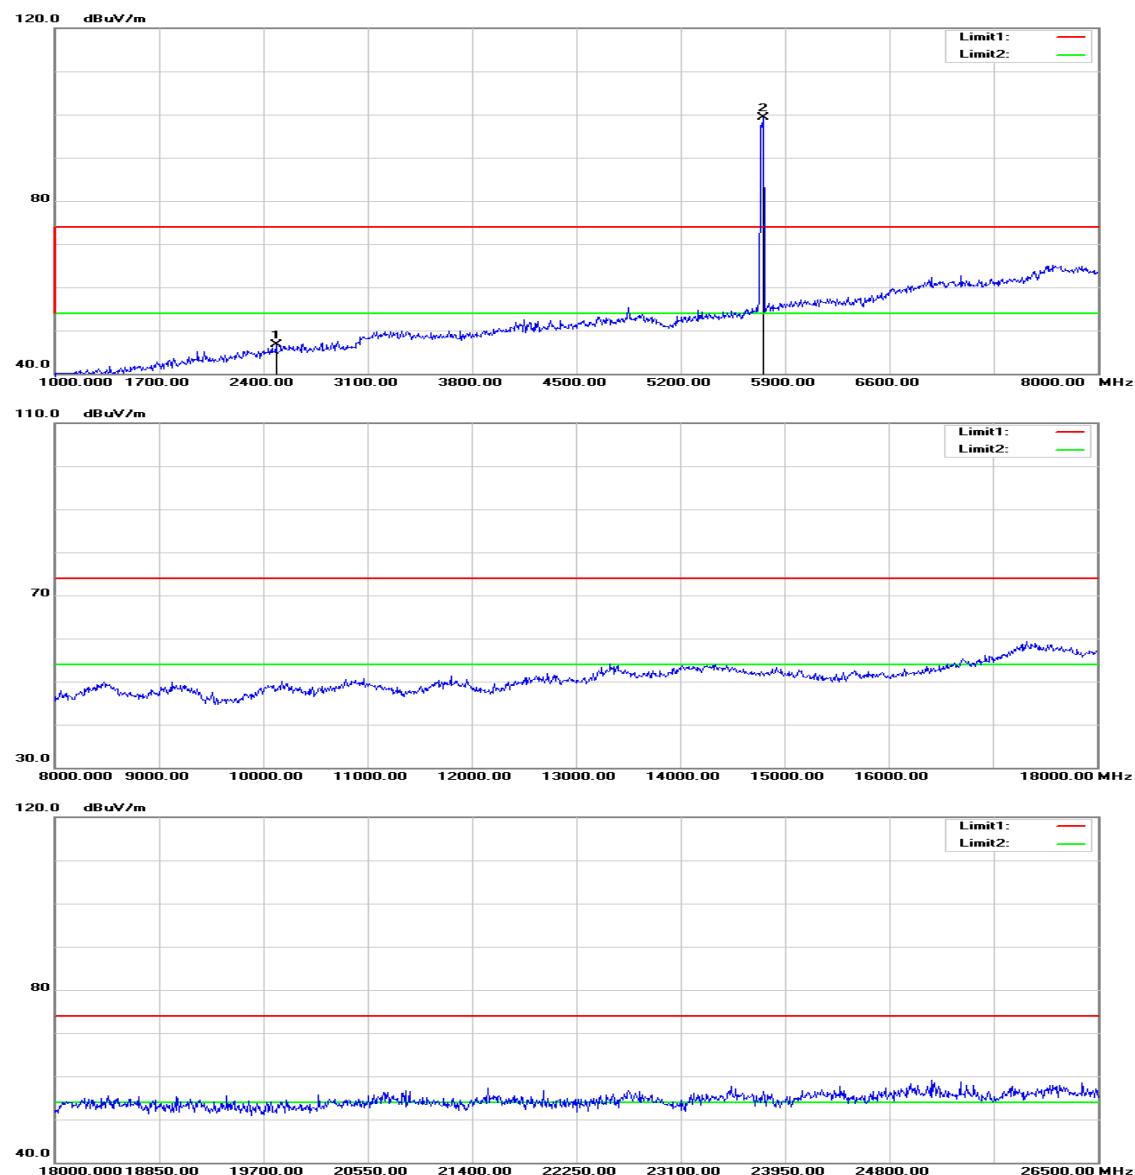
Agilent**R L**

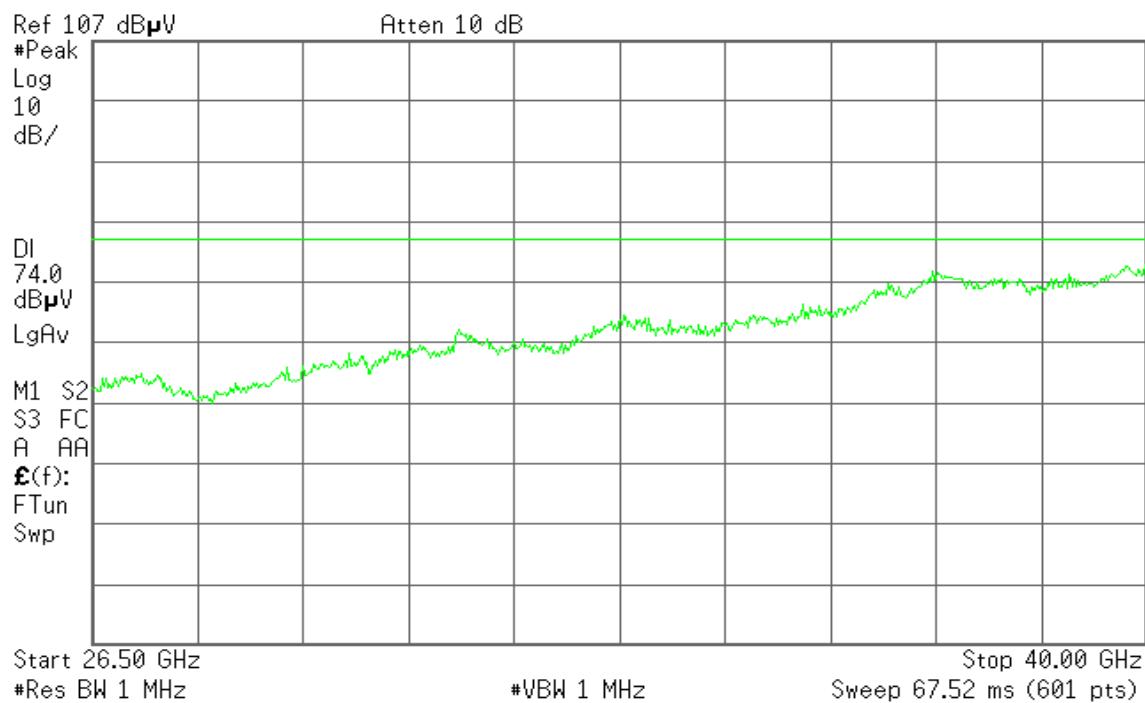
Operation Mode:	TX / IEEE 802.11a mode / CH High	Test Date:	January 18, 2016
Temperature:	27°C	Tested by:	Jason Lu
Humidity:	53% RH	Polarity:	Ver. / Hor.

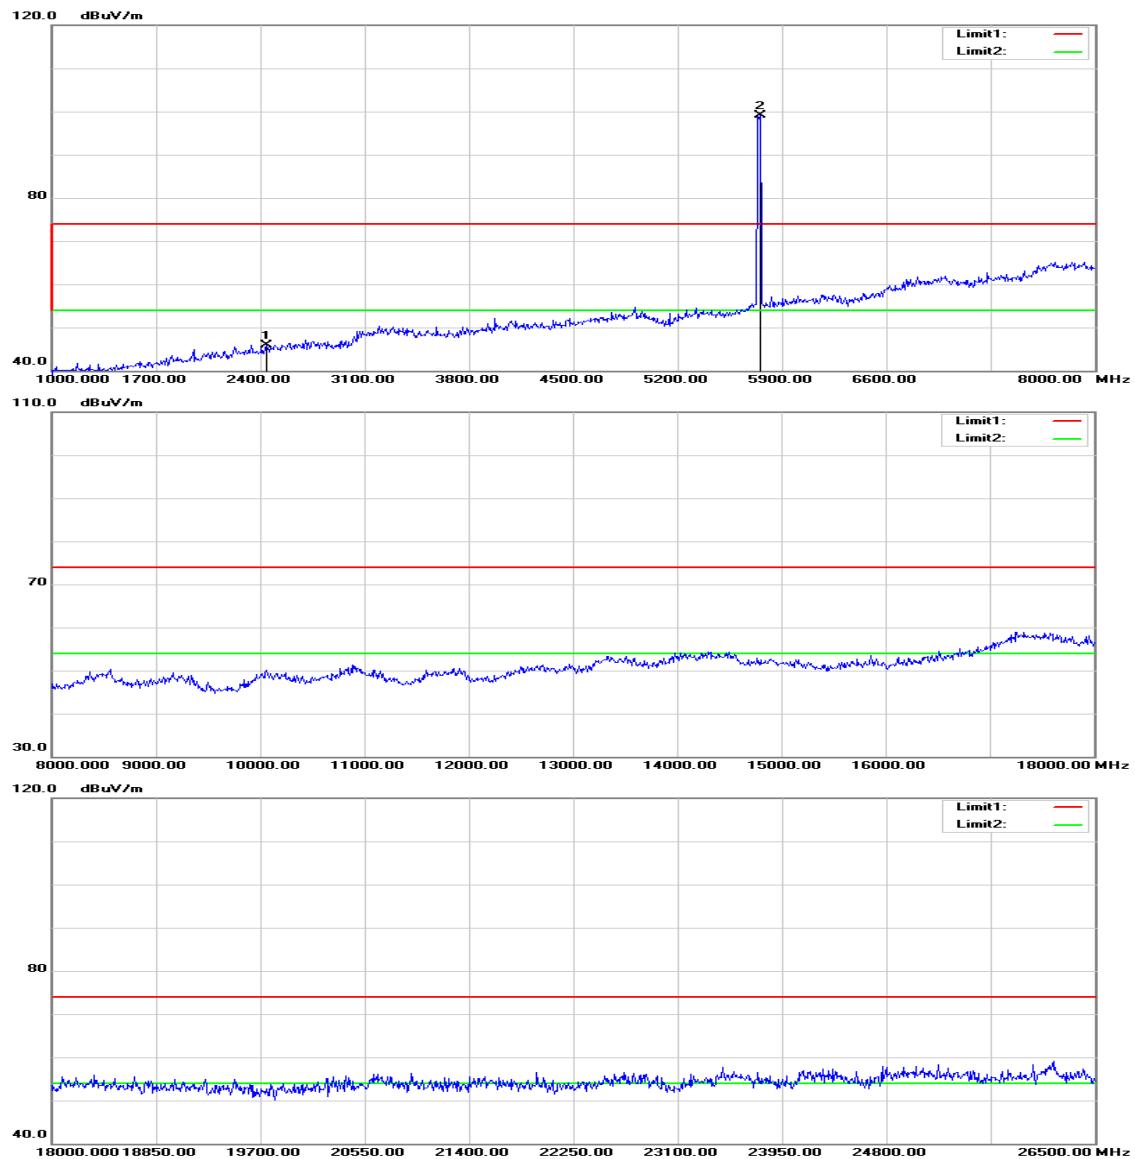
Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2057.000	52.83	-4.94	47.89	74.00	-26.11	peak	V
N/A							
2407.000	53.28	-3.70	49.58	74.00	-24.42	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

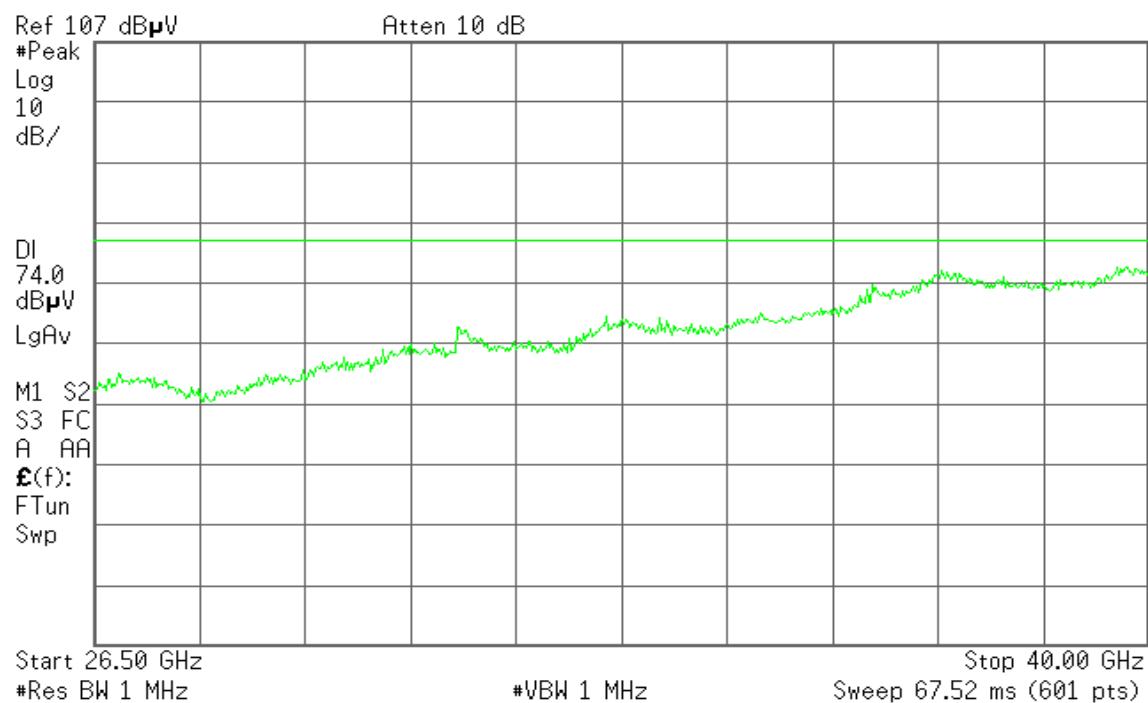
TX / IEEE 802.11n HT 20 MHz mode / CH Low**Polarity: Vertical**

Agilent**R L**

Polarity: Horizontal

Agilent

R L



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low

Test Date: January 18, 2016

Temperature: 27°C

Tested by: Jason Lu

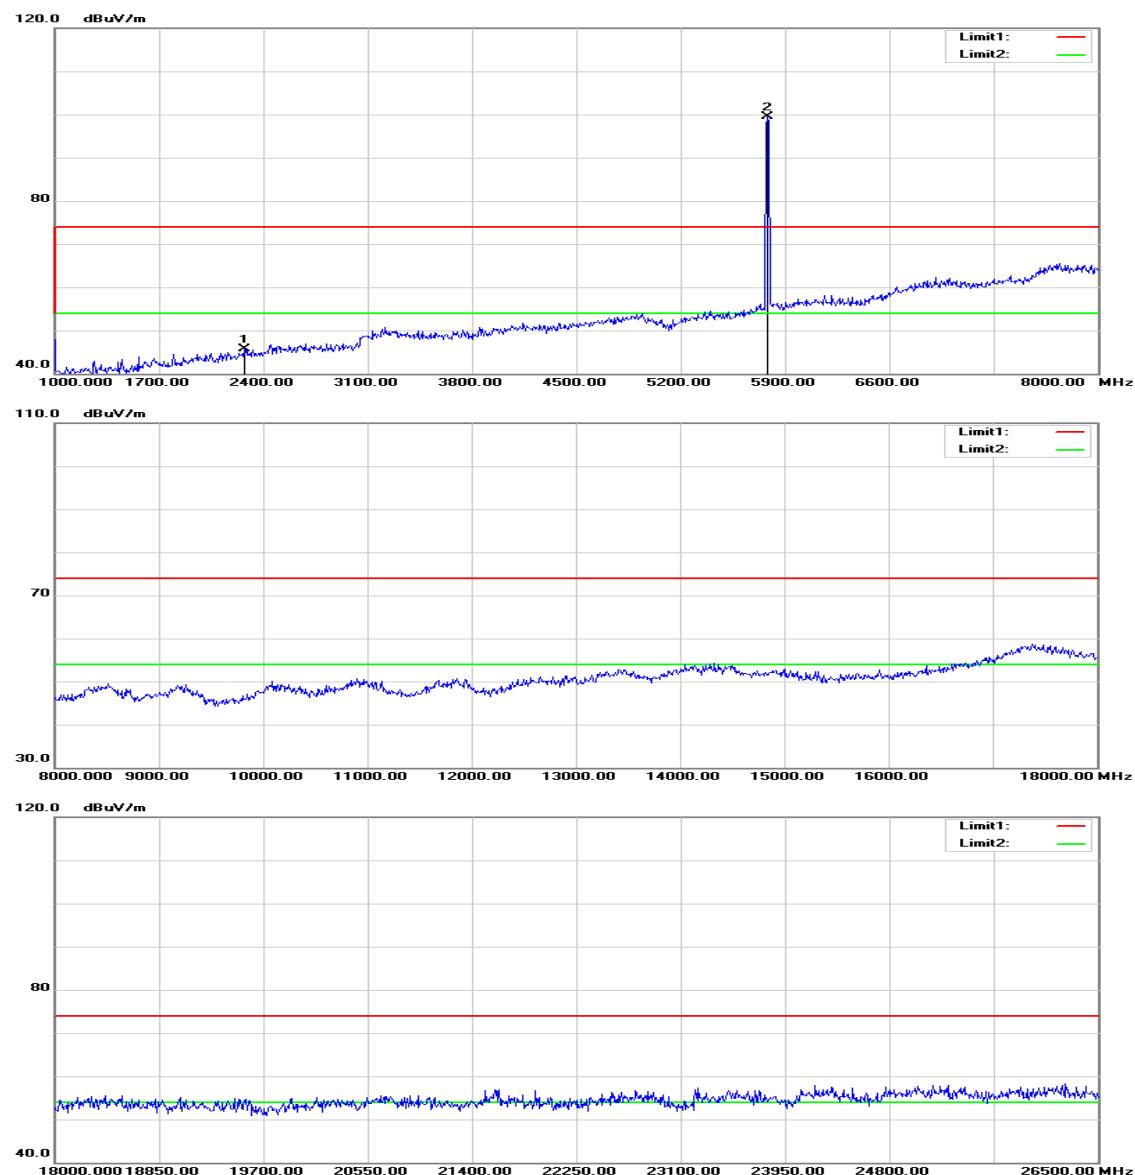
Humidity: 53% RH

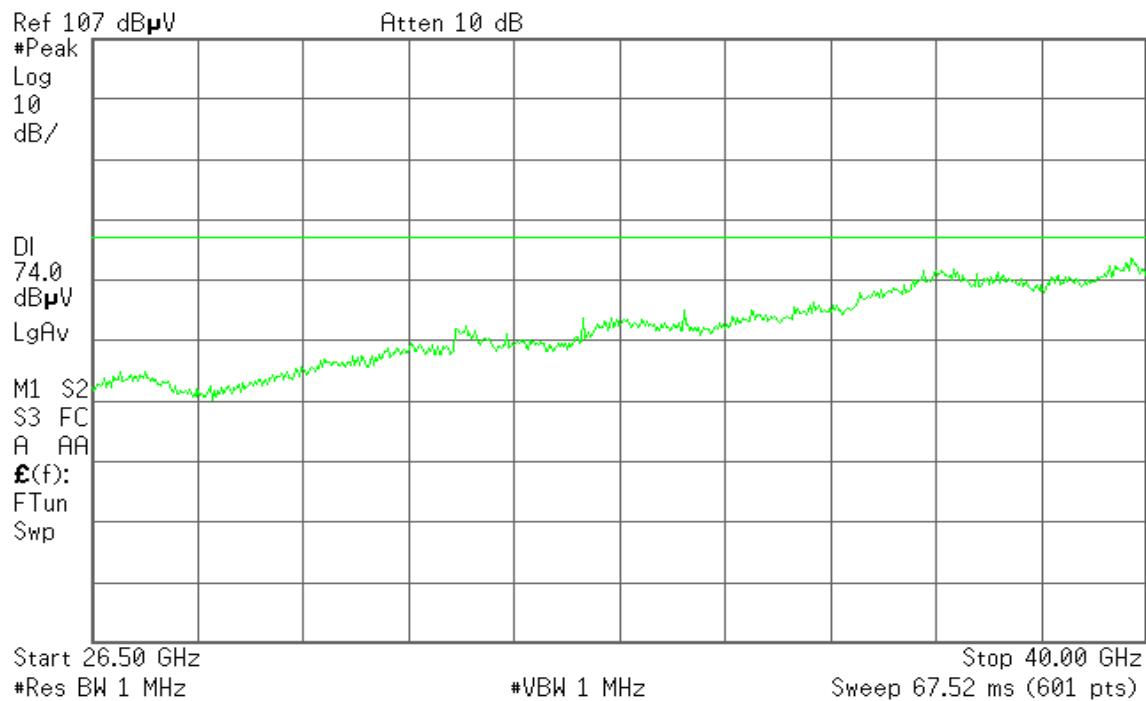
Polarity: Ver. / Hor.

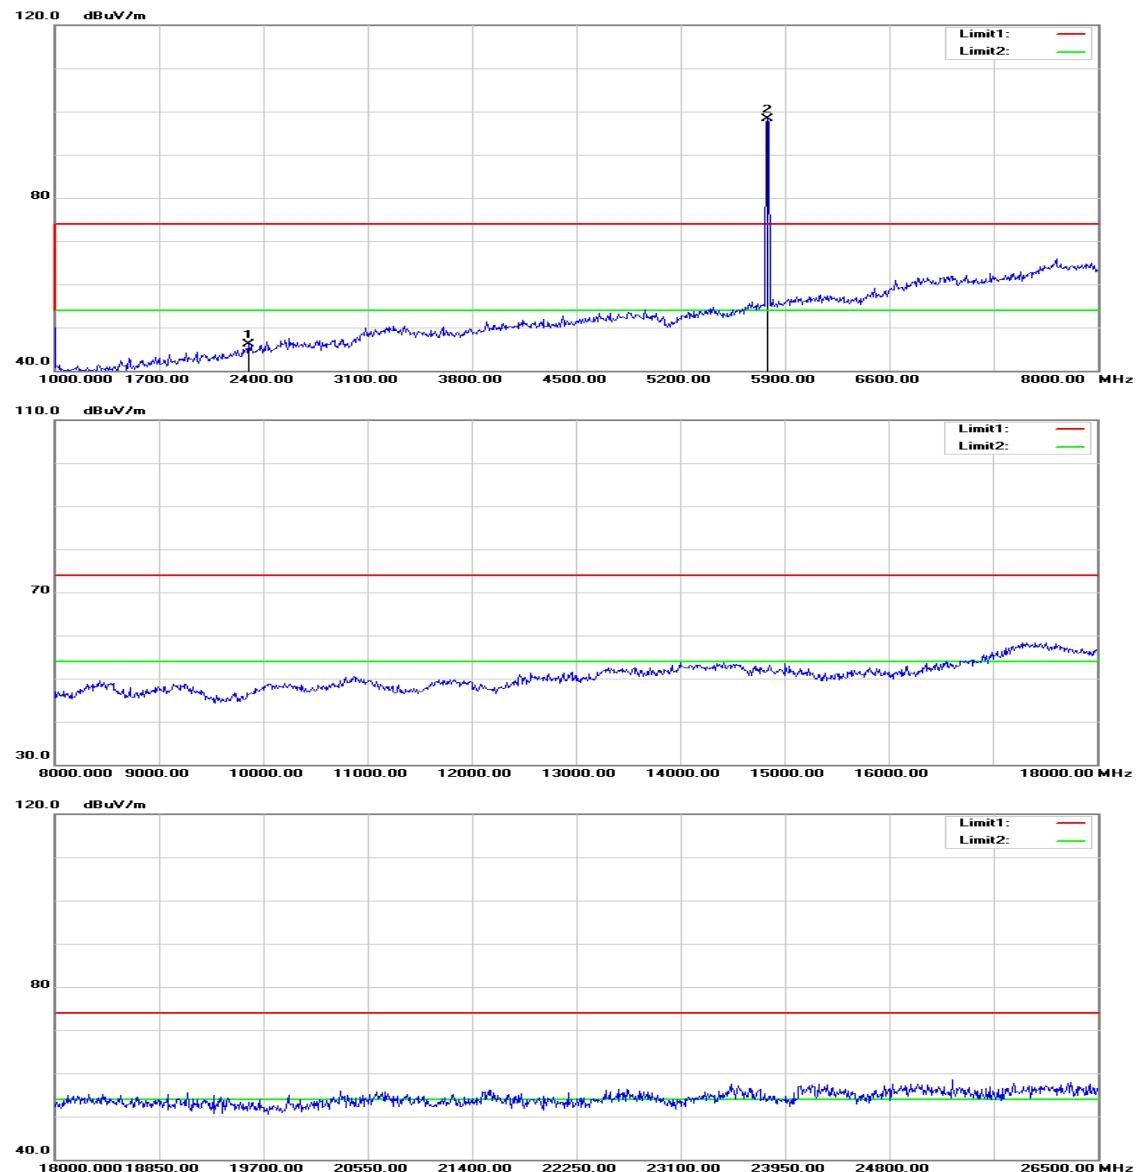
Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2484.000	50.01	-3.27	46.74	74.00	-27.26	peak	V
N/A							
2442.000	49.44	-3.48	45.96	74.00	-28.04	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

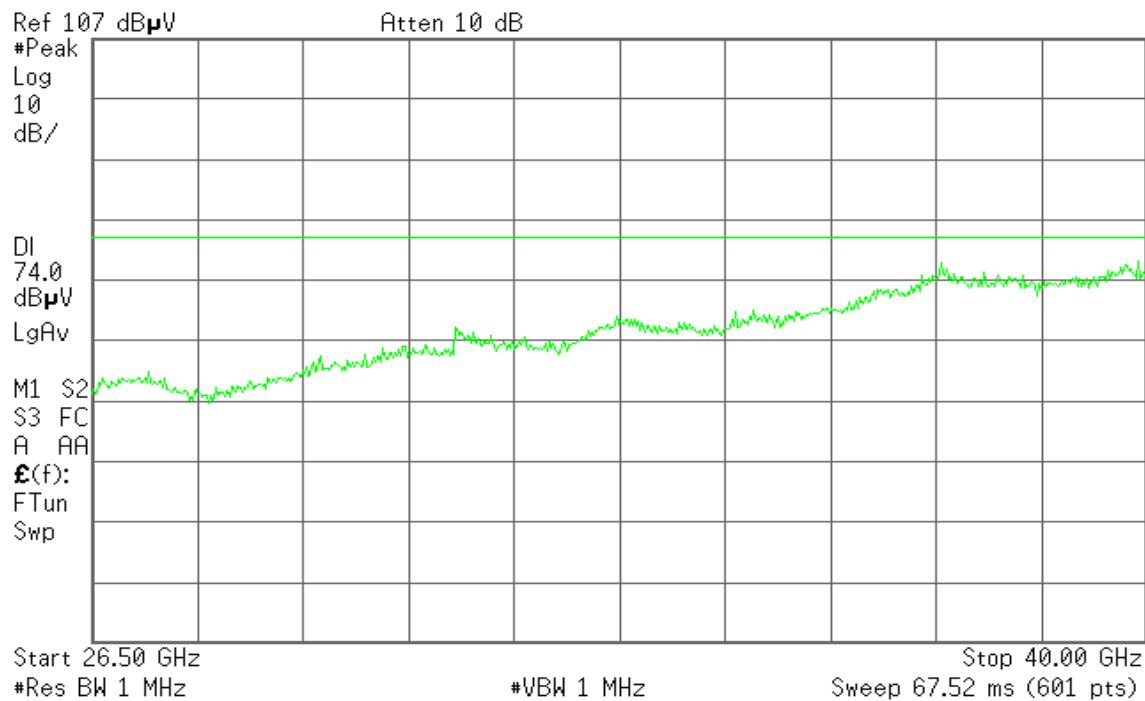
TX / IEEE 802.11n HT 20 MHz mode / CH Mid**Polarity: Vertical**

 **Agilent****R L**

Polarity: Horizontal

Agilent

R L



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode /
CH Mid

Test Date: January 18, 2016

Temperature: 27°C

Tested by: Jason Lu

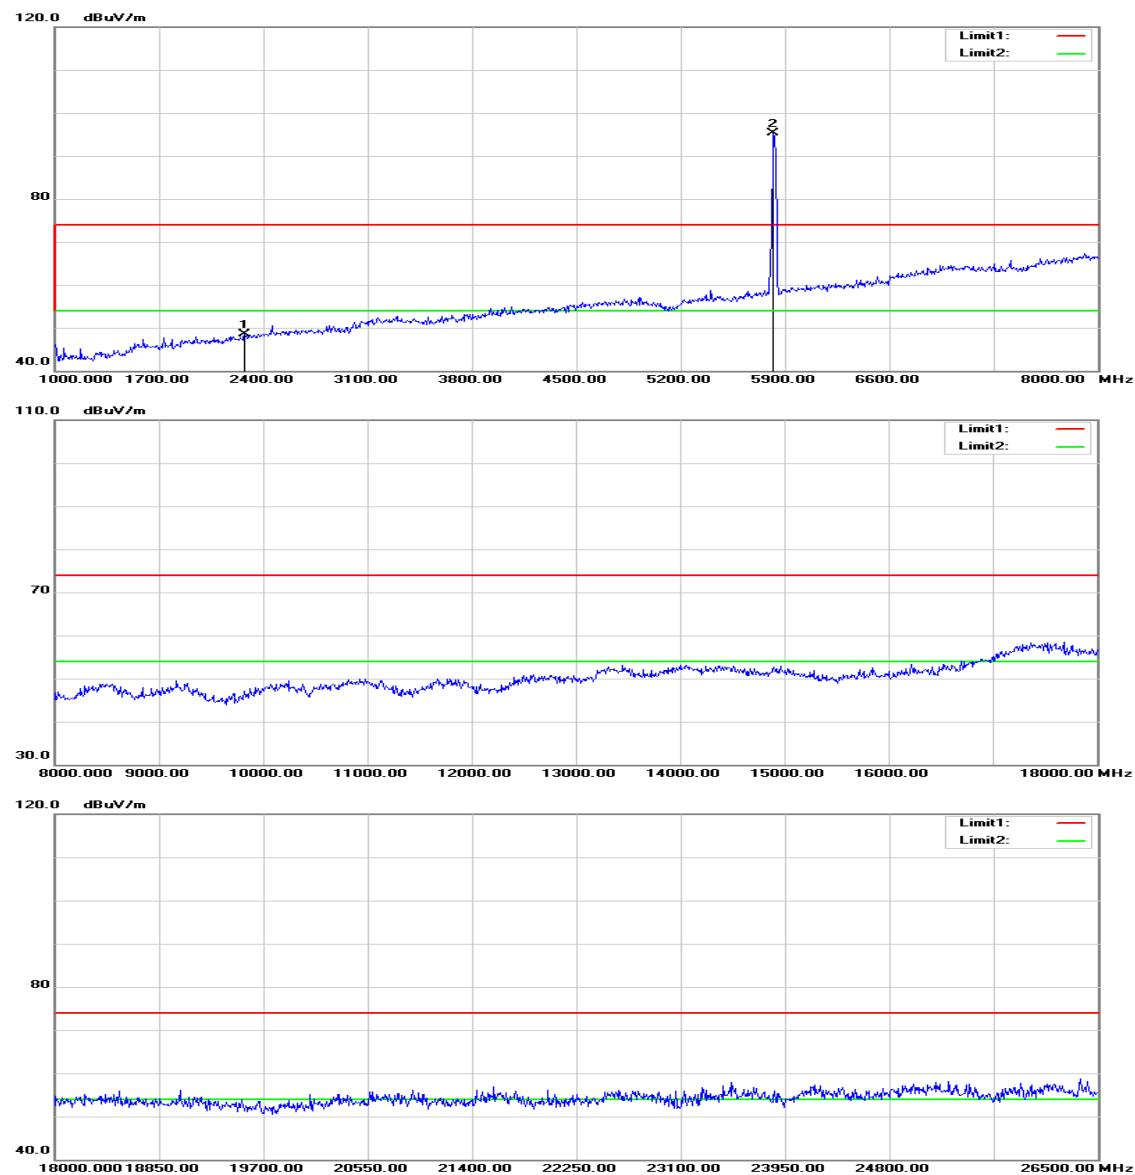
Humidity: 53% RH

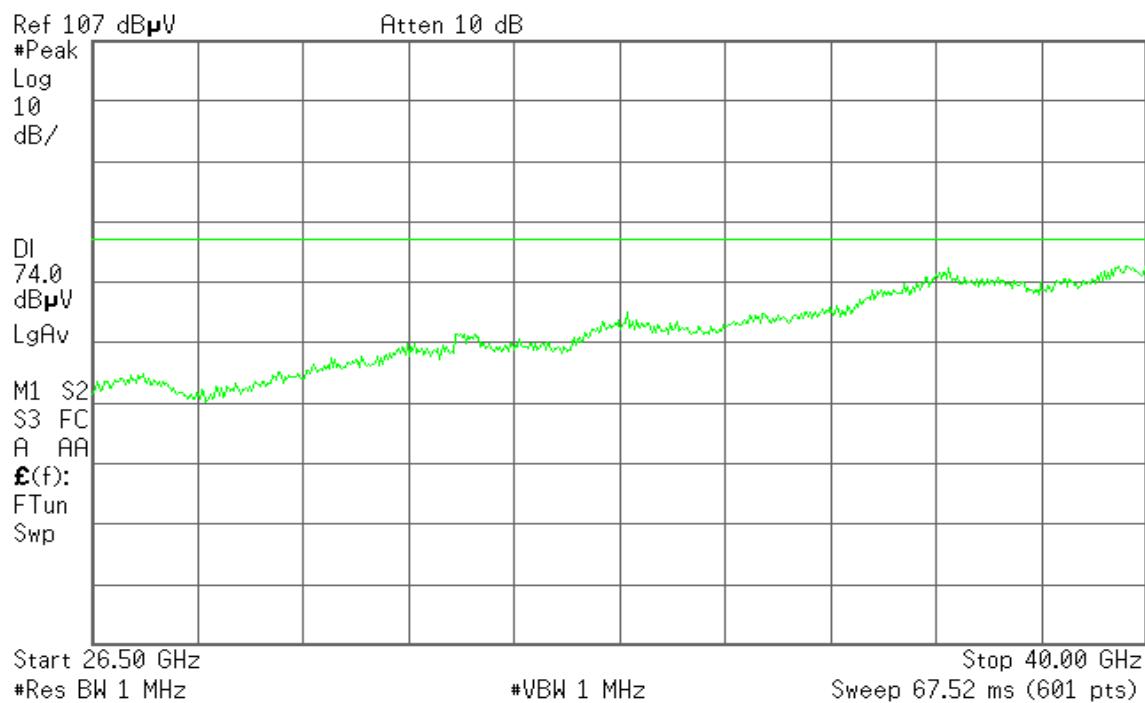
Polarity: Ver. / Hor.

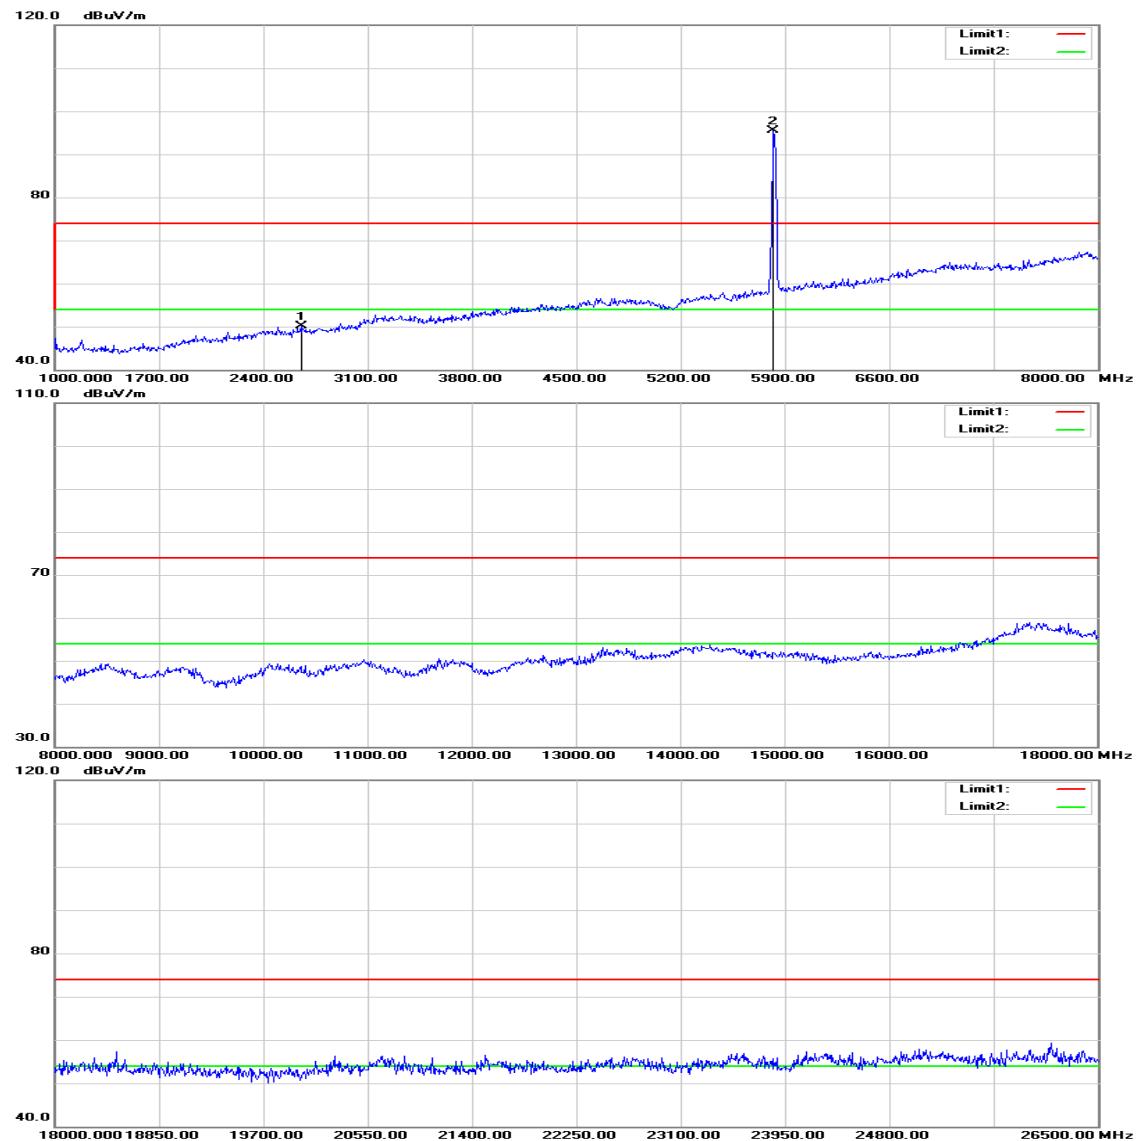
Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2274.000	49.93	-4.33	45.60	74.00	-28.40	peak	V
N/A							
2302.000	50.33	-4.29	46.04	74.00	-27.96	peak	H
N/A							

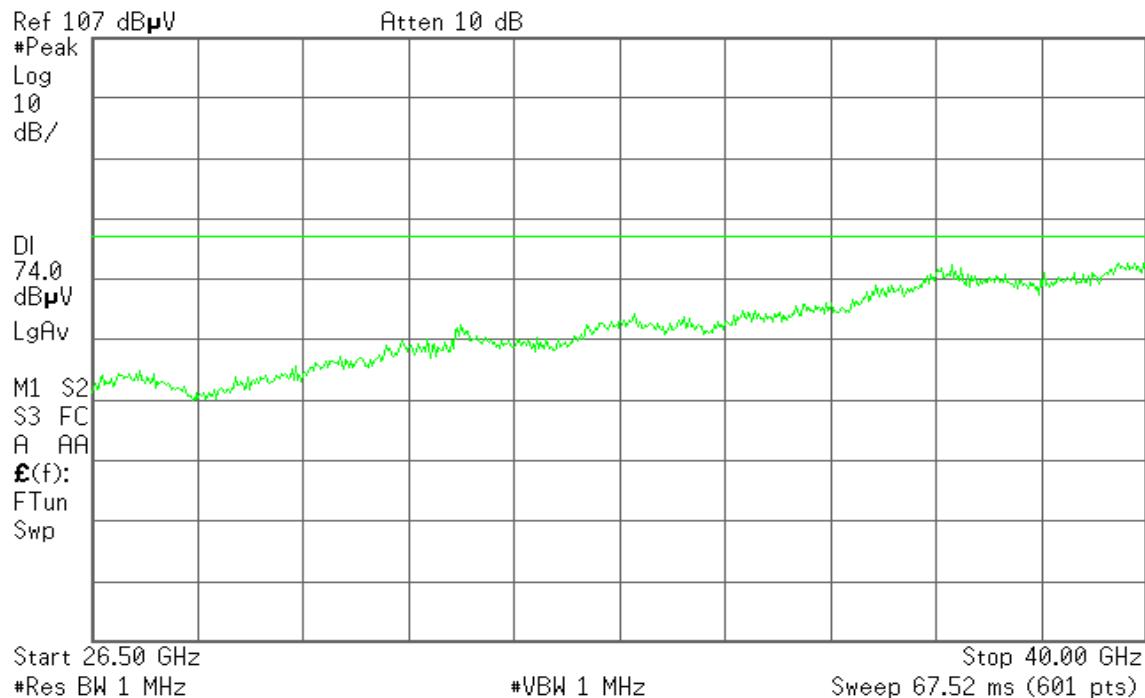
Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz mode / CH High**Polarity: Vertical**

Agilent**R L**

Polarity: Horizontal

Agilent**R L**

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode /
CH High

Test Date: January 18, 2016

Temperature: 27°C

Tested by: Jason Lu

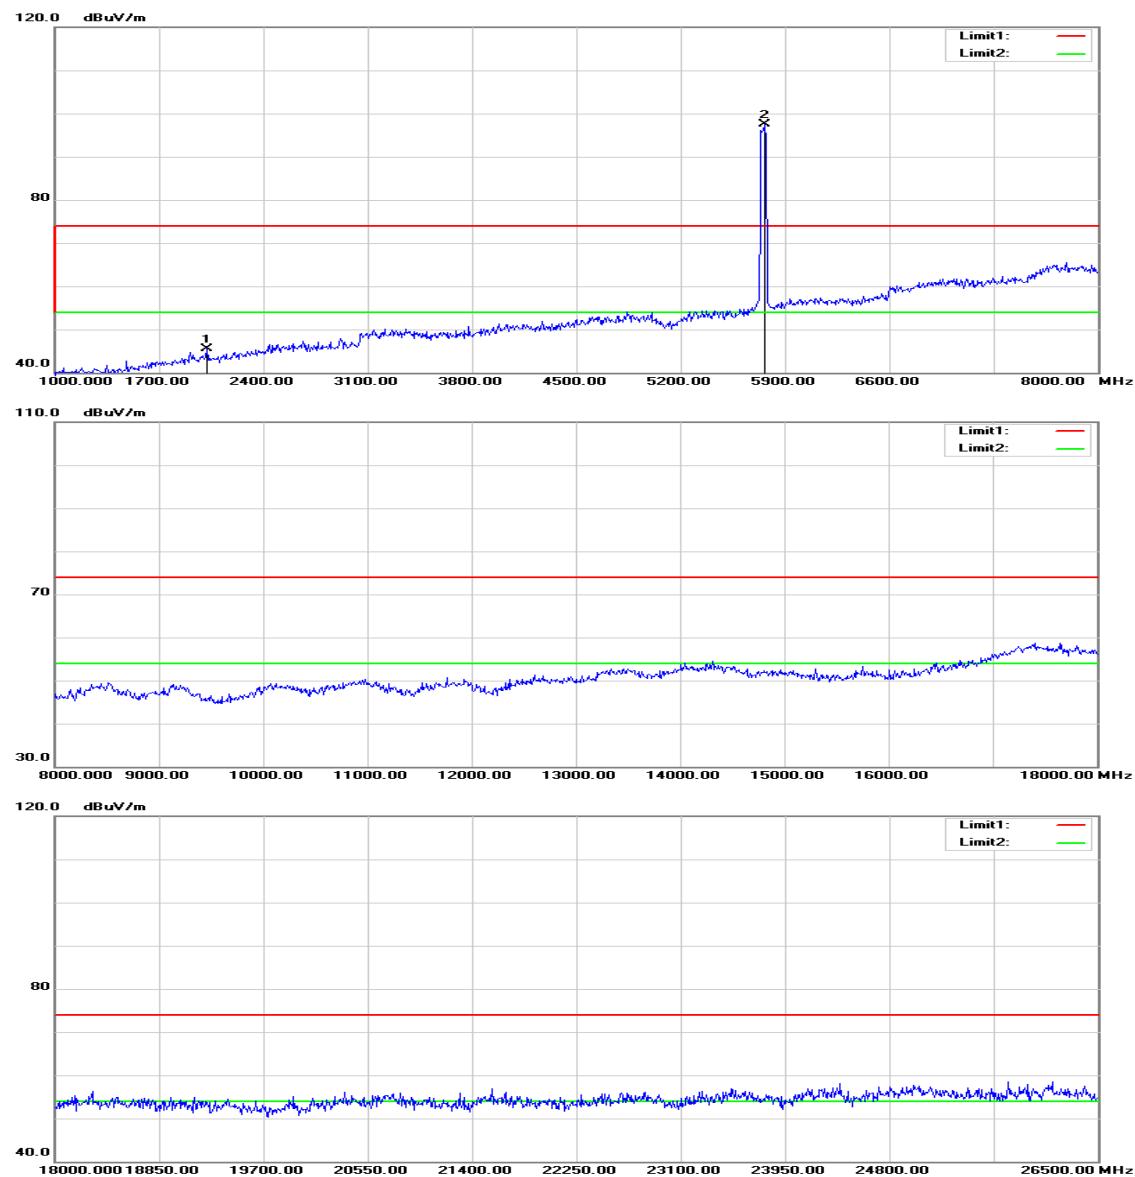
Humidity: 53% RH

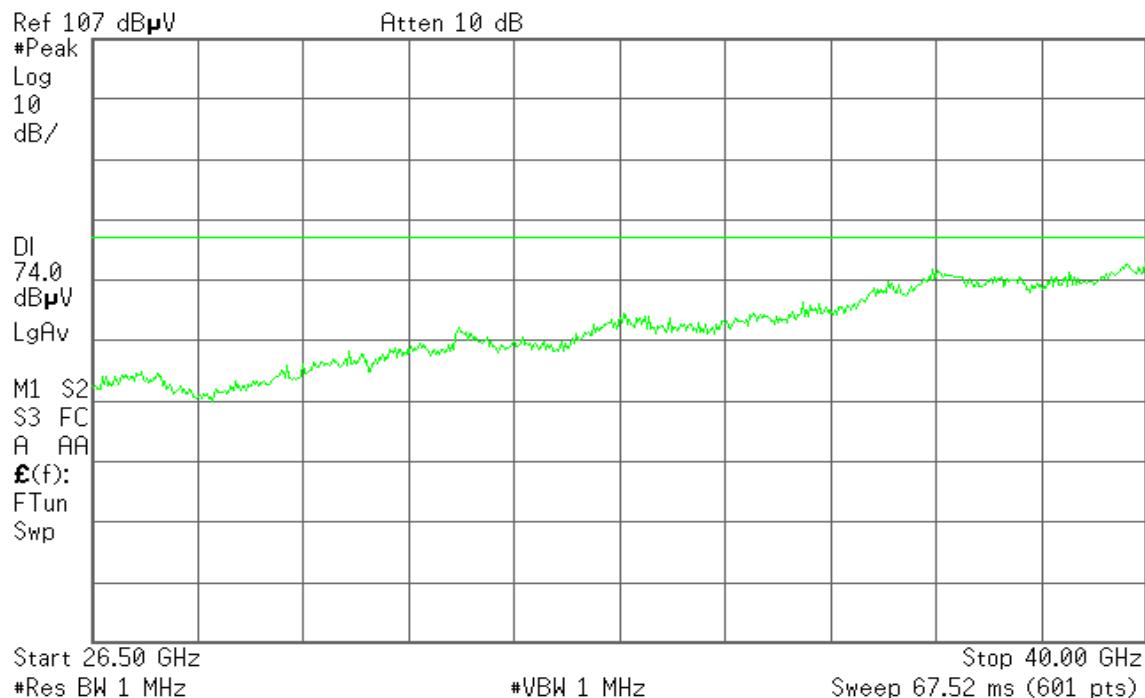
Polarity: Ver. / Hor.

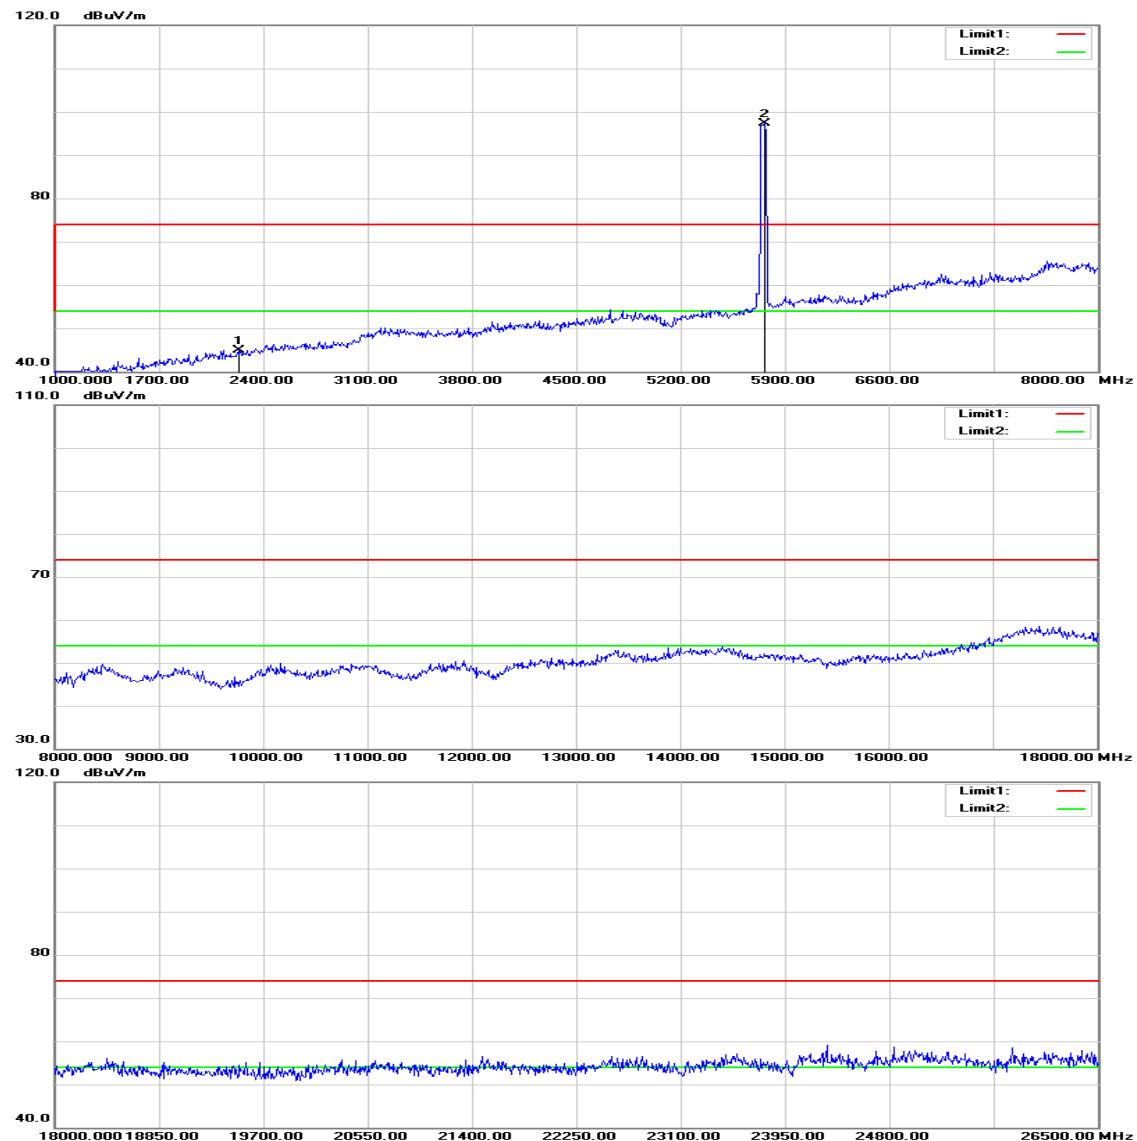
Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2274.000	52.77	-4.33	48.44	74.00	-25.56	peak	V
N/A							
2652.000	52.97	-2.81	50.16	74.00	-23.84	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

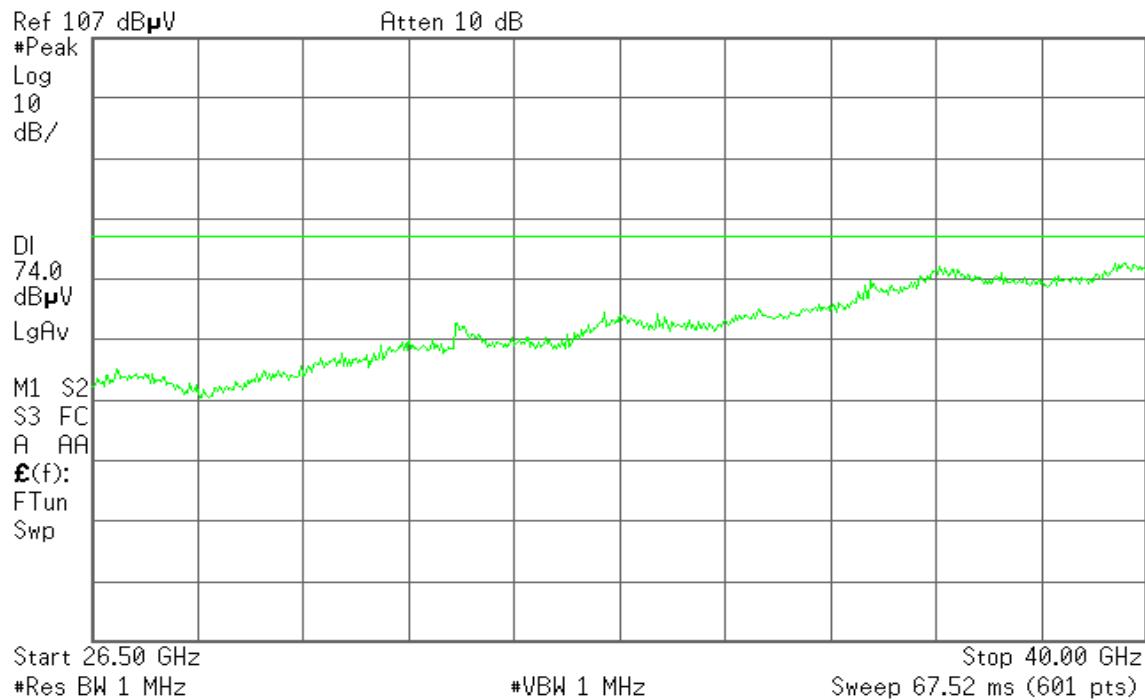
TX / IEEE 802.11n HT 40 MHz mode / CH Low**Polarity: Vertical**

 **Agilent****R L**

Polarity: Horizontal

Agilent

R L



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Low

Test Date: January 18, 2016

Temperature: 27°C

Tested by: Jason Lu

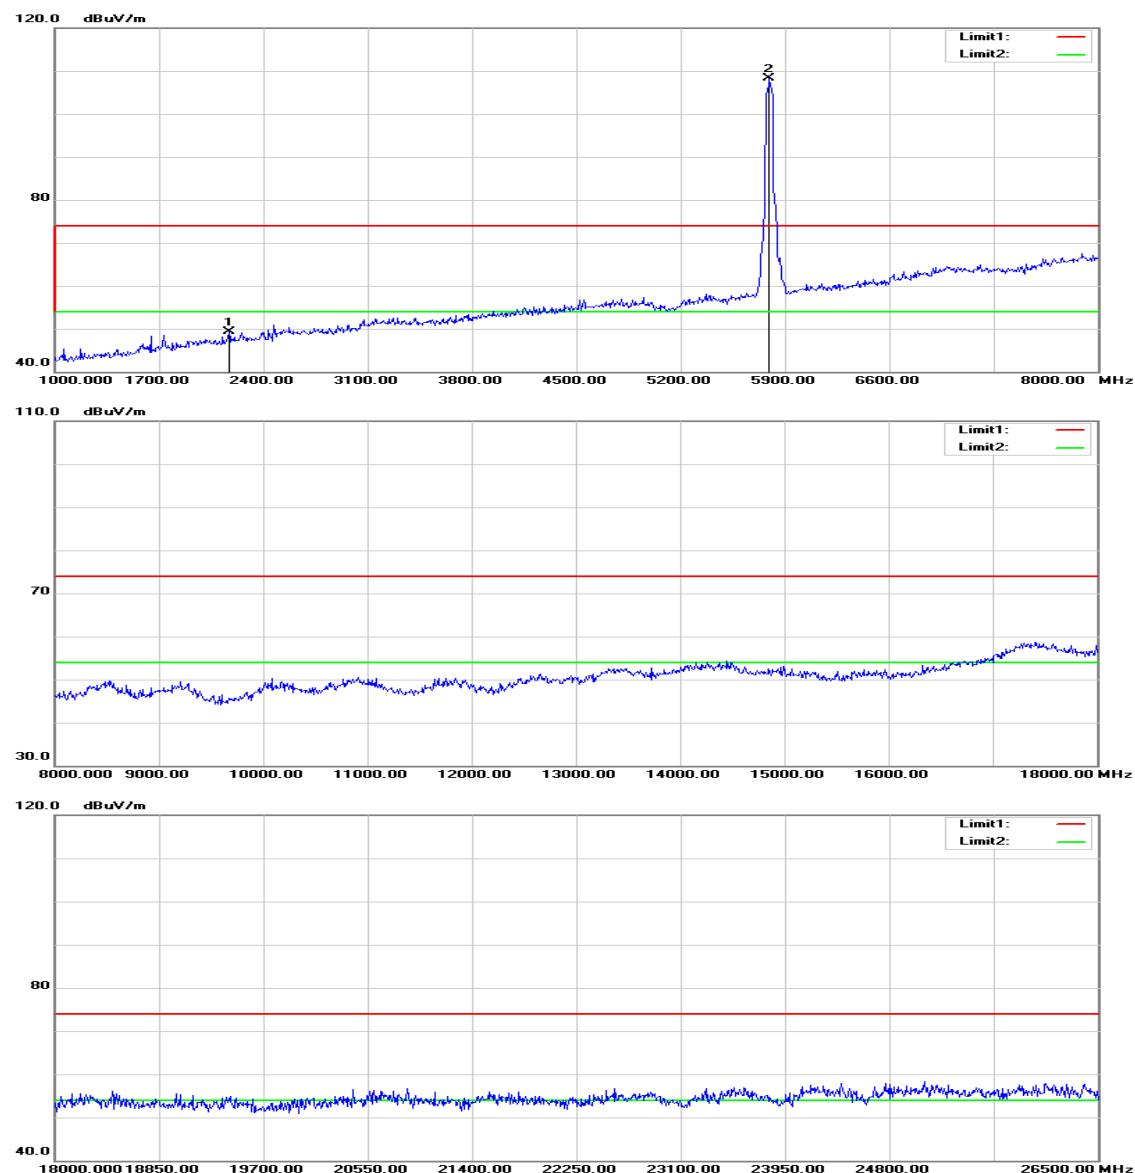
Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2022.000	50.32	-4.90	45.42	74.00	-28.58	peak	V
N/A							
2232.000	49.34	-4.39	44.95	74.00	-29.05	peak	H
N/A							

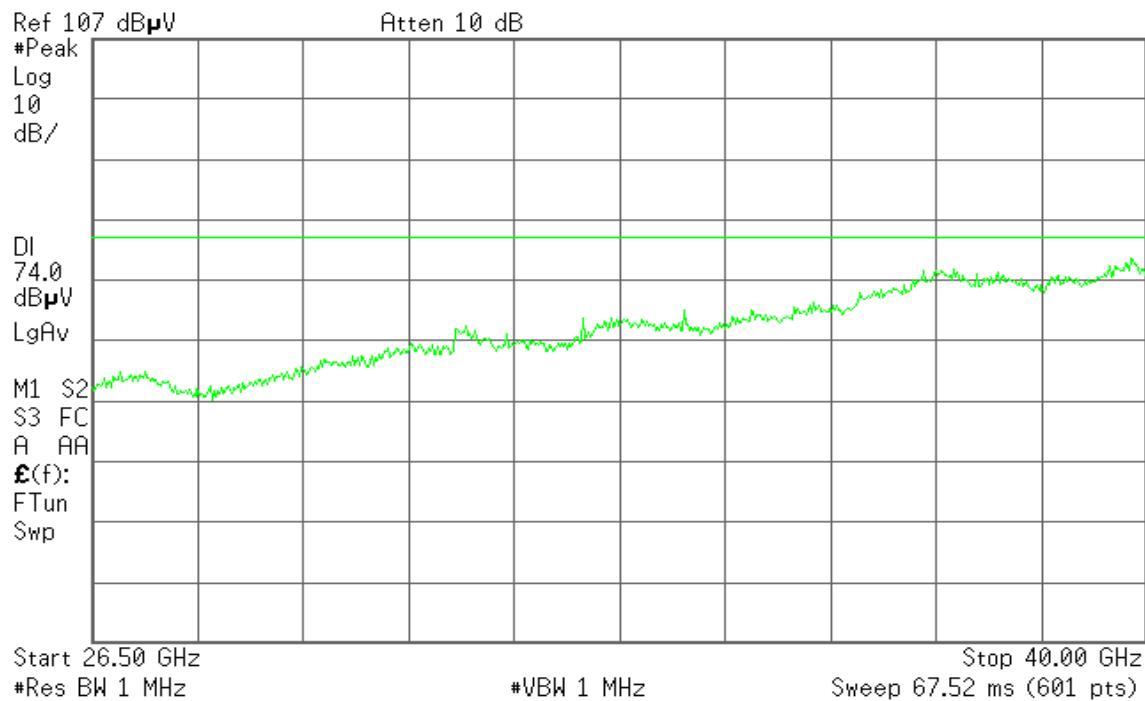
Remark:

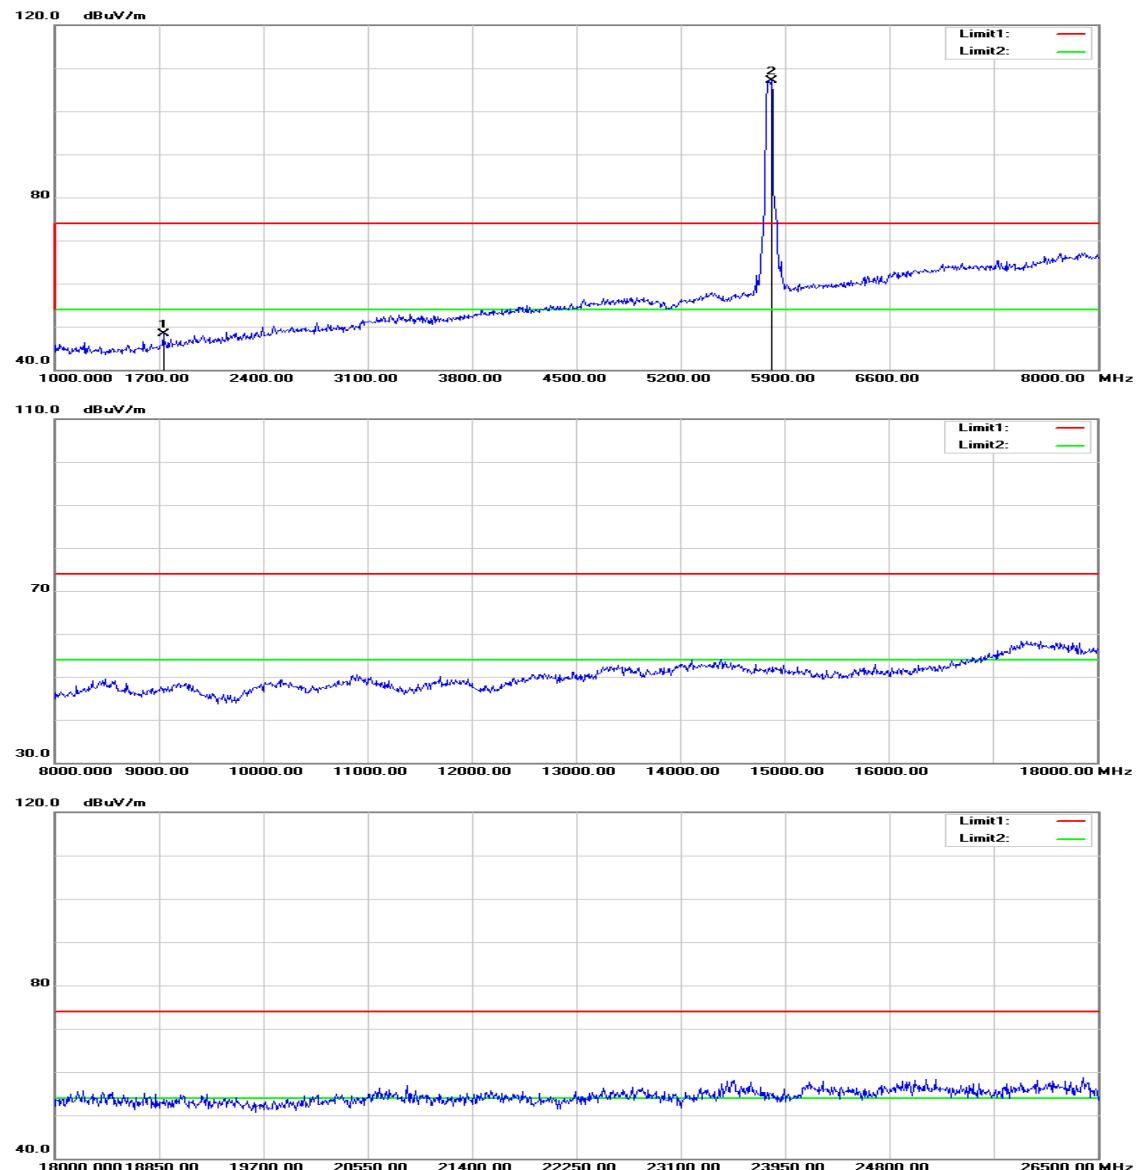
1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

TX / IEEE 802.11n HT 40 MHz mode / CH High**Polarity: Vertical**

Agilent

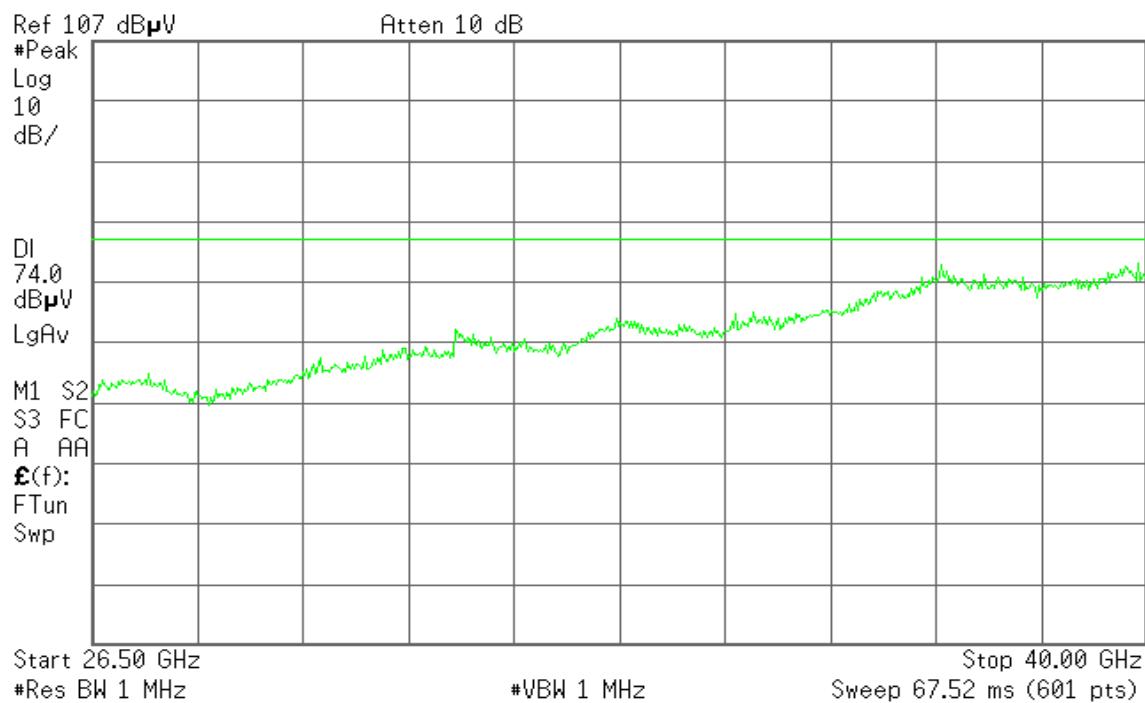
R L



Polarity: Horizontal

Agilent

R L



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / CH High

Test Date: January 18, 2016

Temperature: 27°C

Tested by: Jason Lu

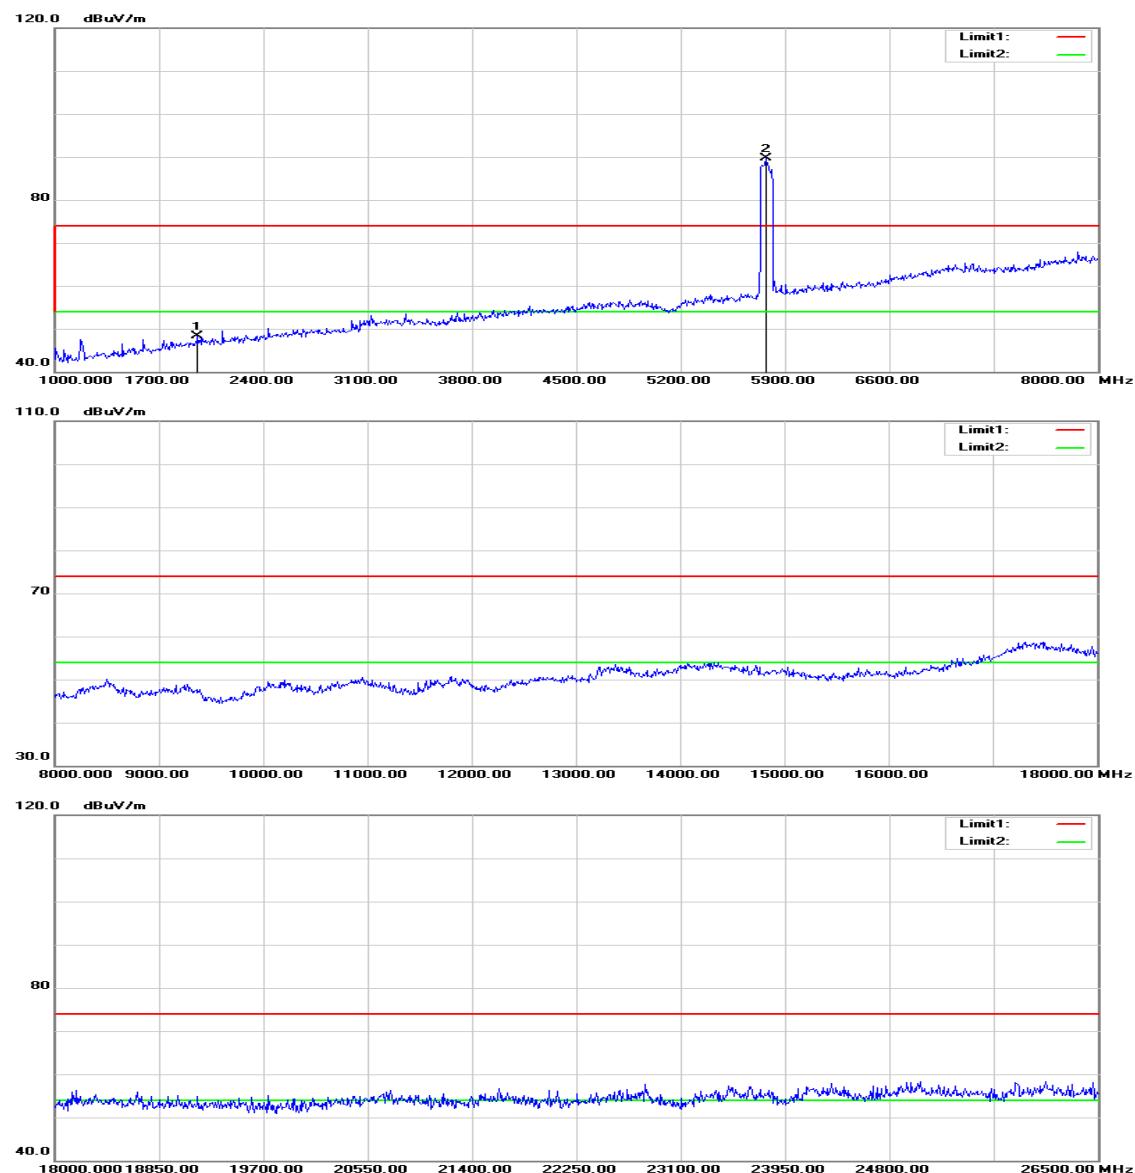
Humidity: 53% RH

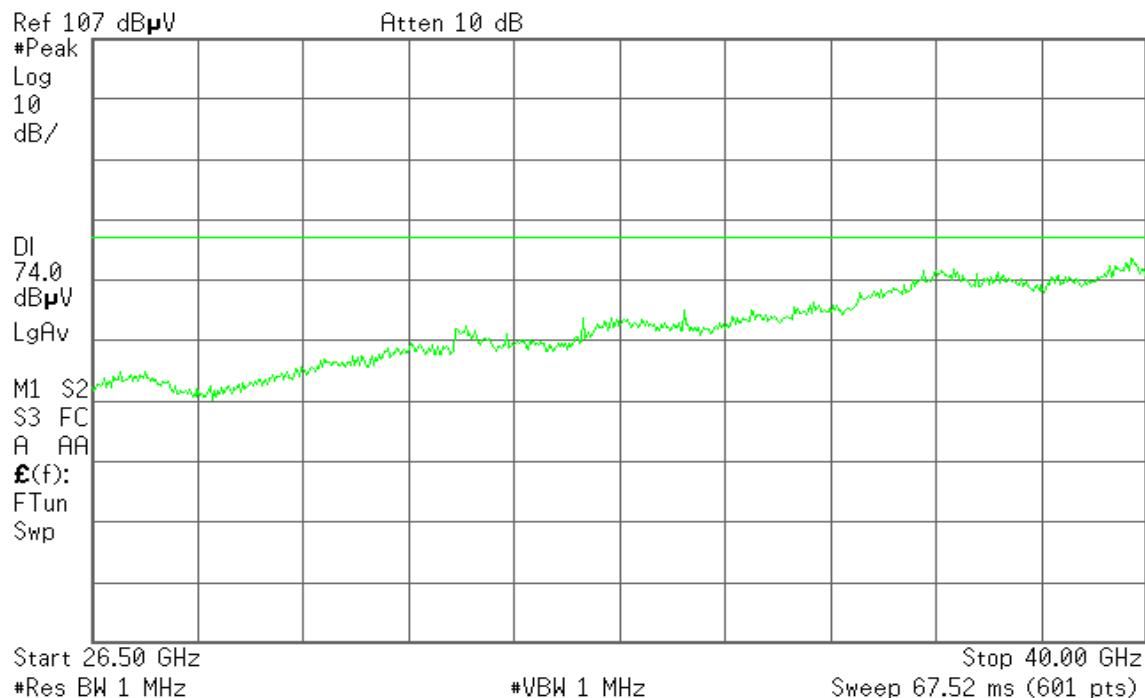
Polarity: Ver. / Hor.

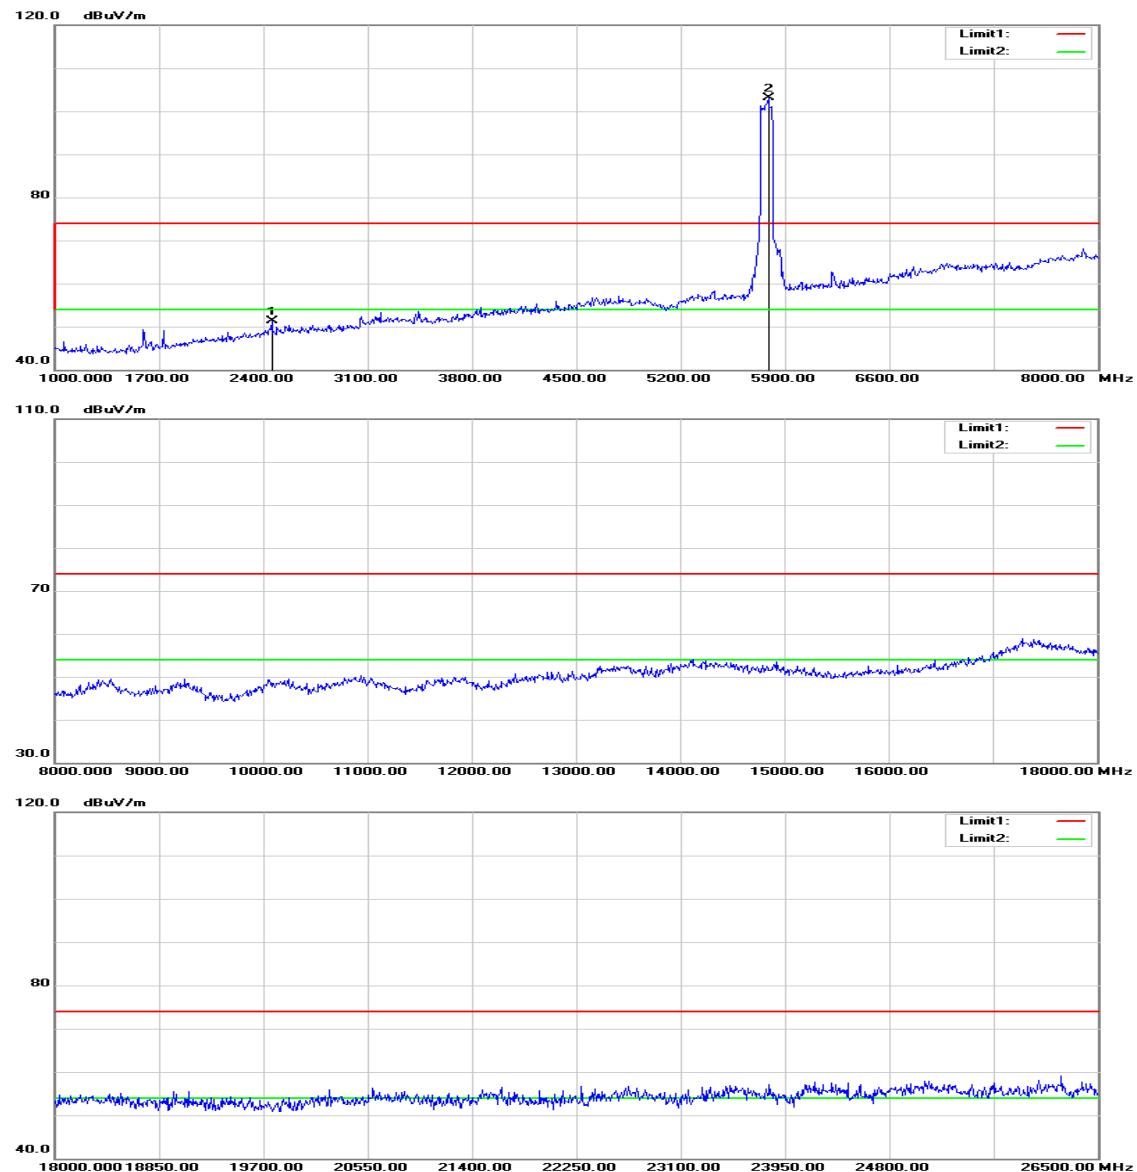
Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2169.000	53.85	-4.60	49.25	74.00	-24.75	peak	V
N/A							
1728.000	54.59	-6.32	48.27	74.00	-25.73	peak	H
N/A							

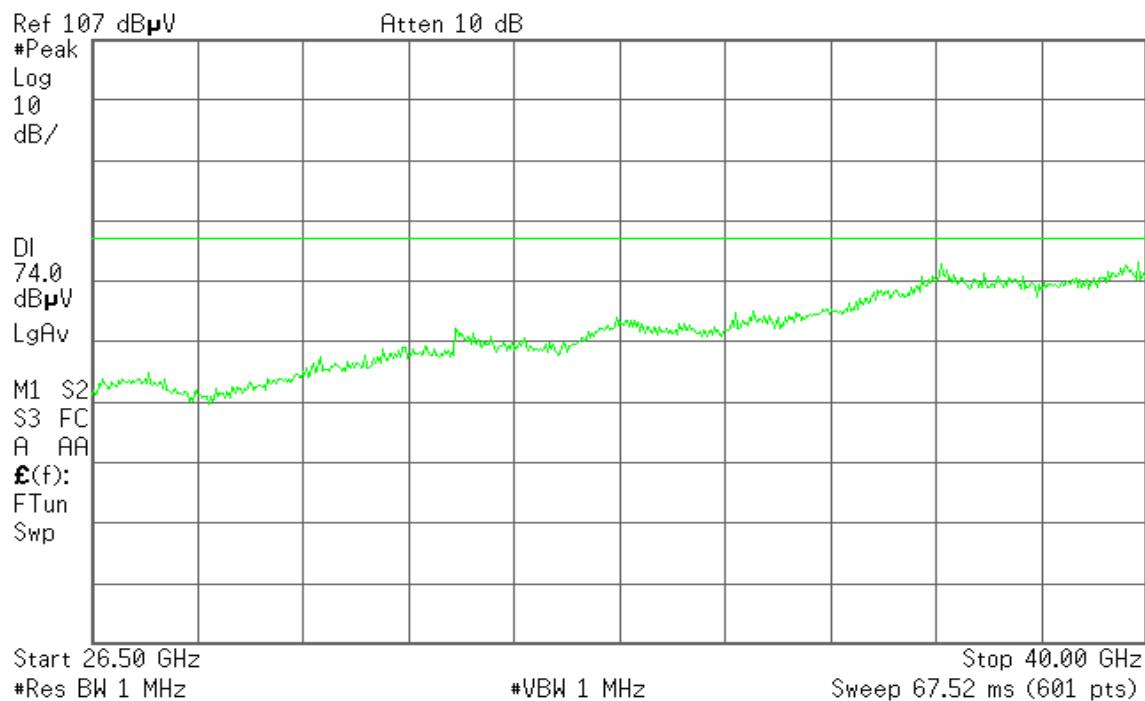
Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

Tx / IEEE 802.11ac VHT 80 MHz mode / CH Mid**Polarity: Vertical**

 **Agilent****R L**

Polarity: Horizontal

 **Agilent****R L**

Operation Mode: Tx / IEEE 802.11ac VHT 80 MHz mode / CH Mid **Test Date:** January 18, 2016

Temperature: 27°C **Tested by:** Jason Lu

Humidity: 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1959.000	53.34	-5.10	48.24	74.00	-25.76	peak	V
N/A							
2456.000	54.62	-3.40	51.22	74.00	-22.78	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a) & RSS-Gen §7.2.4, except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

The conducted emissions shall be measured with a 50 ohm/50 microhenry line impedance stabilization network.

RSS-Gen Table 2 – AC Power Lines Conducted Emission Limits

Frequency Range (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

**Decreases with the logarithm of the frequency*

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode:	Normal Link	Test Date:	January 5, 2016
Temperature:	24°C	Tested by:	Zeus Chen
Humidity:	56% RH		

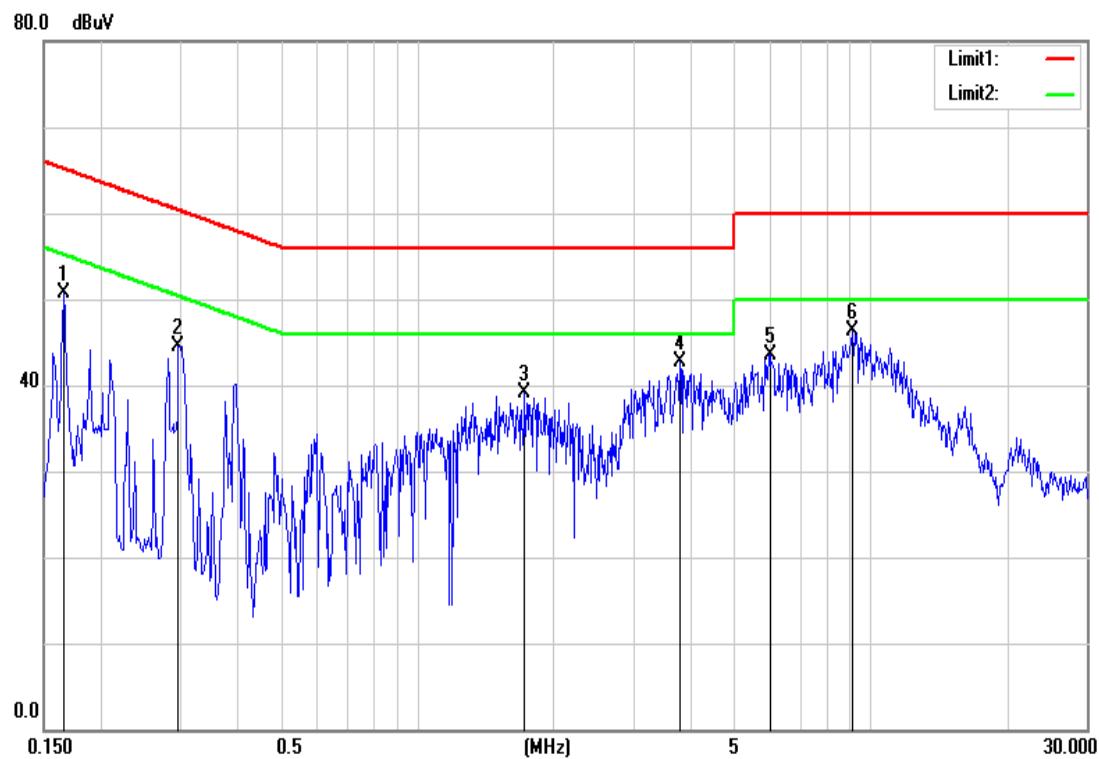
Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1660	41.08	41.08	9.69	50.77	50.77	65.15	55.16	-14.38	-4.39	L1
0.2980	34.85	34.85	9.68	44.53	44.53	60.30	50.30	-15.77	-5.77	L1
1.7340	29.09	29.09	9.96	39.05	39.05	56.00	46.00	-16.95	-6.95	L1
3.8140	32.88	32.88	9.82	42.70	42.70	56.00	46.00	-13.30	-3.30	L1
6.0140	33.71	33.71	9.86	43.57	43.57	60.00	50.00	-16.43	-6.43	L1
9.1340	36.41	36.41	9.92	46.33	46.33	60.00	50.00	-13.67	-3.67	L1
0.1700	40.98	40.98	9.64	50.62	50.62	64.96	54.96	-14.34	-4.34	L2
0.1900	39.24	39.24	9.64	48.88	48.88	64.03	54.04	-15.15	-5.16	L2
0.2980	36.91	36.91	9.64	46.55	46.55	60.30	50.30	-13.75	-3.75	L2
1.7780	29.02	29.02	9.89	38.91	38.91	56.00	46.00	-17.09	-7.09	L2
8.9020	35.95	35.95	9.89	45.84	45.84	60.00	50.00	-14.16	-4.16	L2
9.6500	35.69	35.69	9.91	45.60	45.60	60.00	50.00	-14.40	-4.40	L2

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

Test Plots

Conducted emissions (Line 1)



Conducted emissions (Line 2)

