

**FCC 47 CFR PART 15 SUBPART C &
INDUSTRY CANADA RSS-247****TEST REPORT****For**

Product	Model
Wi-Fi (11a/b/g/n/ac 2Tx2R)+BT (V4.1LE) USB Combo Module	WCBN4510R
	WCBN4510R(2M)
	WCBN4512R
Wi-Fi (11a/b/g/n 2Tx2R)+BT (V4.1LE) USB Combo Module	WCBN4510R(32U)
	WCBN4510R(32U2M)

Trade Name: LITE-ON*Issued to***Lite-On Technology Cop.****Bldg. C, 90, Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C***Issued by***Compliance Certification Services Inc.****No.11, Wugong 6th Rd., Wugu Dist.,****New Taipei City 24891, Taiwan. (R.O.C.)****<http://www.ccsrf.com>****service@ccsrf.com****Issued Date: February 2, 2016**

***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	February 2, 2016	Initial Issue	ALL	Kelly Cheng
01	March 14, 2016	update KDB 558074 D01 DTS Meas Guidance v03r04	P.7	Kelly Cheng

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	7
3.1 EUT CONFIGURATION.....	7
3.2 EUT EXERCISE.....	7
3.3 GENERAL TEST PROCEDURES.....	7
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	8
3.5 DESCRIPTION OF TEST MODES.....	9
4. INSTRUMENT CALIBRATION.....	10
4.1 MEASURING INSTRUMENT CALIBRATION.....	10
4.2 MEASUREMENT EQUIPMENT USED.....	10
4.3 MEASUREMENT UNCERTAINTY.....	11
5. FACILITIES AND ACCREDITATIONS.....	12
5.1 FACILITIES.....	12
5.2 EQUIPMENT.....	12
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	12
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	13
6. SETUP OF EQUIPMENT UNDER TEST.....	14
6.1 SETUP CONFIGURATION OF EUT.....	14
6.2 SUPPORT EQUIPMENT.....	14
7. FCC PART 15.247 REQUIREMENTS & RSS-247 REQUIREMENTS.....	15
7.1 99% BANDWIDTH.....	15
7.2 6DB BANDWIDTH.....	29
7.3 PEAK POWER.....	43
7.4 AVERAGE POWER.....	45
7.5 BAND EDGES MEASUREMENT.....	47
7.6 PEAK POWER SPECTRAL DENSITY.....	87
7.7 RADIATED EMISSIONS.....	98
7.8 POWERLINE CONDUCTED EMISSIONS.....	178
APPENDIX II PHOTOGRAPHS OF TEST SETUP.....	181

1. TEST RESULT CERTIFICATION

Applicant: Lite-On Technology Cop.
Bldg. C, 90, Chien 1 Road, Chung Ho, New Taipei City 23585,
Taiwan, R.O.C

Manufacturer: LITE-ON TECHNOLOGY (Changzhou) CO., LTD
A9 Building, No.88 Yanghu Road, Wujin Hi-Tech Industrial
Development Zone, Changzhou City, Jiangsu Province
213100 China

Equipment Under Test / Model Number:

Product	Model
Wi-Fi (11a/b/g/n/ac 2Tx2R)+BT (V4.1LE) USB Combo Module	WCBN4510R
	WCBN4510R(2M)
	WCBN4512R
Wi-Fi (11a/b/g/n 2Tx2R)+BT (V4.1LE) USB Combo Module	WCBN4510R(32U)
	WCBN4510R(32U2M)

Trade Name: LITE-ON

Date of Test: December 20, 2015~ January 20, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C & Industry Canada RSS-247 Issue 1	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 and Industry Canada RSS-247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:



Miller Lee
Manager
Compliance Certification Services Inc.

Angel Cheng
Section Manager
Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product / Model Number	Product		Model	
	Wi-Fi (11a/b/g/n/ac 2Tx2R)+BT (V4.1LE) USB Combo Module		WCBN4510R	
			WCBN4510R(2M)	
			WCBN4512R	
	Wi-Fi (11a/b/g/n 2Tx2R)+BT (V4.1LE) USB Combo Module		WCBN4510R(32U)	
WCBN4510R(32U2M)				
Trade Name	LITE-ON			
Received Date	November 23, 2015			
Power Adapter	Power form host device			
Frequency Range	2412 ~ 2462 MHz			
Transmit Power	Mode	Frequency Range	Output Power (dBm)	Output Power (W)
	IEEE 802.11b	2412 - 2462	21.39	0.1377
	IEEE 802.11g	2412 - 2462	25.38	0.3451
	IEEE 802.11n HT 20 MHz	2412 - 2462	28.12	0.6486
	IEEE 802.11n HT 40 MHz	2422 - 2452	27.70	0.5888
Modulation Technique	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) IEEE 802.11n HT 40 MHz mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)			
Number of Channels	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels IEEE 802.11n HT 40 MHz mode: 7 Channels			
Antenna Specification	1. Walsin / PIFA Antenna RFMTA401029IMLB701 / 1.93dBi 2. Walsin / Dipole Antenna SOUND BAR / 3.9dBi 3. Walsin / PIFA Antenna Integral Antenna1 / 1.92dBi Integral Antenna2 / 1.91dBi For PIFA Antenna MIMO:10*LOG(((10^(1.93 / 20)+10^(1.93 /20))^2)/2)= 4.94 dBi For Dipole Antenna MIMO:10*LOG(((10^(3.9 / 20)+10^(3.9 /20))^2)/2)= 6.91 dBi			

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC&IC ID: **PPQ-WCBN4510R&4491A-WCBN4510R** filing to comply with FCC Part 15C, Section 15.207, 15.209 and IC RSS-247 & RSS-GEN.
3. Model Discrepancy :

Model	Main Chipset	Function	Antenna Mode
WCBN4510R	Media Tek MT7662U	Wi-Fi (11a/b/g/n/ac) + Bluetooth	Triple External Antennas for WiFi&BT
WCBN4510R(2M)	Media Tek MT7662U	Wi-Fi (11a/b/g/n/ac) + Bluetooth	Two Metal Antenna for WiFi Single External Antenna for BT
WCBN4512R	Media Tek MT7662U	Wi-Fi (11a/b/g/n/ac) + Bluetooth	Two Metal Antenna for WiFi Single External Antenna for BT
WCBN4510R(32U)	Media Tek MT7632U	Wi-Fi (11a/b/g/n) + Bluetooth	Triple External Antennas for WiFi&BT
WCBN4510R(32U2M)	Media Tek MT7632U	Wi-Fi (11a/b/g/n) + Bluetooth	Two Metal Antenna for WiFi Single External Antenna for BT

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.247, KDB 558074 D01 DTS Meas Guidance v03r04

The tests documented in this report were performed in accordance with IC RSS-247, IC RSS-Gen and ANSI C63.10:2013.

This submittal(s) (test report) is intended for IC Certification with Industry Canada RSS-247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

The tests documented in this report were performed in accordance with IC RSS-247, IC RSS-Gen, IC RSS-102, and ANSI C63.10: 2013.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

According to the requirements in ANSI C63.10: 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2013.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: WCBN4510R) had been tested under operating condition.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode and receiving radiated spurious emission above 1GHz, which worst case was in CH Mid mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

For PIFA Antenna

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Y axis) and the worst case was recorded.

For Dipole Antenna

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	12/07/2016
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	10/07/2016
AC Power Source	EXTECH	6205	1140845	N.C.R
DC Power Supply	ABM	8301HD	D011531	N.C.R
Power Meter	Anritsu	ML2495A	1012009	07/07/2016
Power Sensor	Anritsu	MA2411A	0917072	07/07/2016
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/19/2016

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	01/24/2017
EMI Test Receiver	R&S	ESCI	100064	06/03/2016
Bilog Antenna	Sunol Sciences	JB3	A030105	08/05/2016
Horn Antenna	EMCO	3117	00055165	01/25/2017
Horn Antenna	EMCO	3116	26370	12/24/2016
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Pre-Amplifier	MITEQ	1652-3000	1490939	08/09/2016
Pre-Amplifier	EMC	EMC 012635	980151	06/04/2016
Pre-Amplifier	MITEQ	AMF-6F-260400-40-8P	985646	12/24/2016
Coaxial Cable	Huber+Suhner	102	29212/2	12/24/2016
Coaxial Cable	Huber+Suhner	102	29406/2	12/24/2016
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission Room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101073	09/08/2016
LISN	R&S	ENV216	101054	06/06/2016
LISN	SCHWARZBECK	NSLK 8127	8127-541	11/22/2016
Capacitive Voltage Probe	FCC	F-CVP-1	100185	03/12/2016
Test S/W	CCS-3A1-CE			

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, ridged waveguide, horn and/or Loop. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-247, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	ASUS	M5200AE	5BN0AG019631	PD9WM3B2100	N/A	AC I/P: Unshielded, 1.8m with a core DC O/P: Unshielded, 1.8m


Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

7. FCC PART 15.247 REQUIREMENTS & RSS-247 REQUIREMENTS

7.1 99% BANDWIDTH

Test Configuration



TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold.

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	12.2865
Mid	2437	12.2431
High	2462	12.2865

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.5846
Mid	2437	16.9319
High	2462	16.9319

Test mode: IEEE 802.11n HT 20 MHz / Chain 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.8002
Mid	2437	17.8871
High	2462	17.7568

Test mode: IEEE 802.11n HT 20 MHz / Chain 1

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.8002
Mid	2437	17.8871
High	2462	17.8002

Test mode: IEEE 802.11n HT 40 MHz / Chain 0


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2422	36.7004
Mid	2437	36.8162
High	2452	36.7004

Test mode: IEEE 802.11n HT 40 MHz / Chain 1

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2422	36.7004
Mid	2437	36.8162
High	2452	36.7004


Test Plot

IEEE 802.11b mode 99% Bandwidth (CH Low)

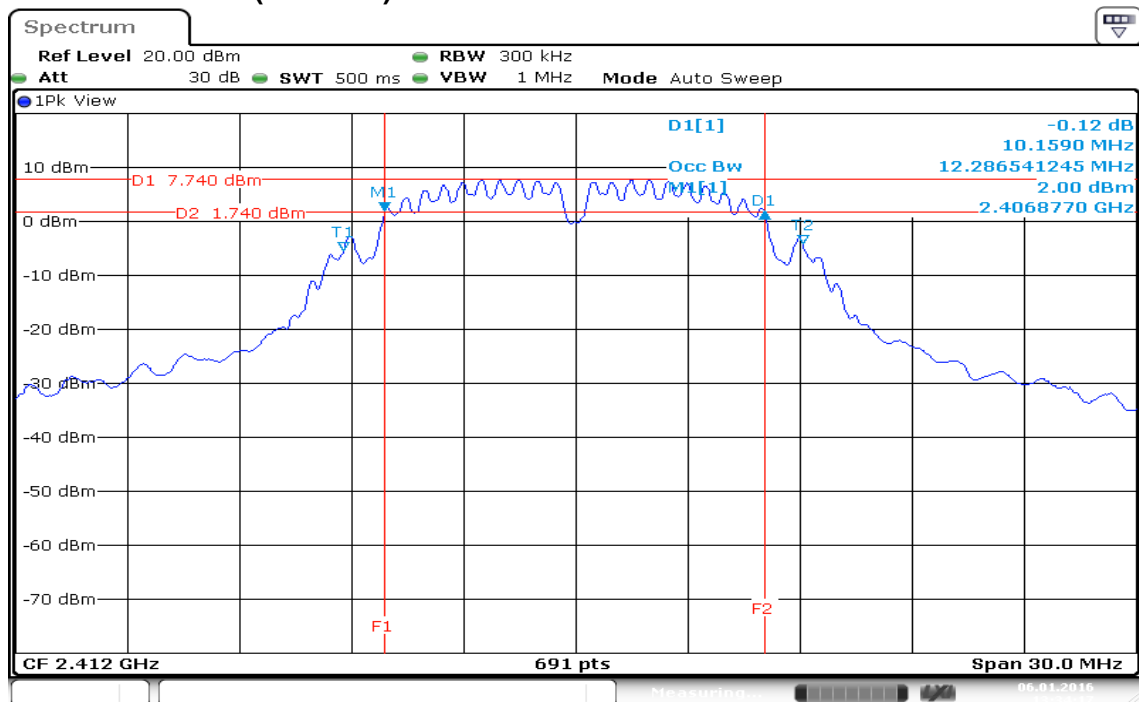


Date: 6.JAN.2016 13:34:17

99% Bandwidth (CH Mid)

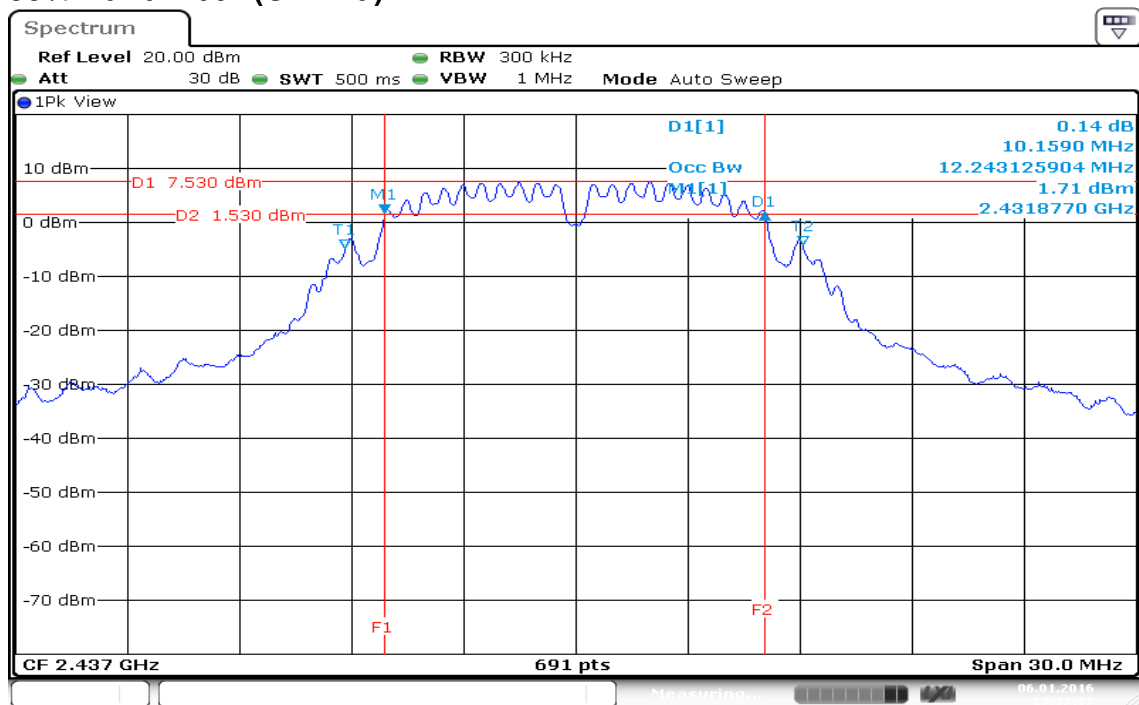


Date: 6.JAN.2016 13:37:37


IEEE 802.11g mode 99% Bandwidth (CH Low)

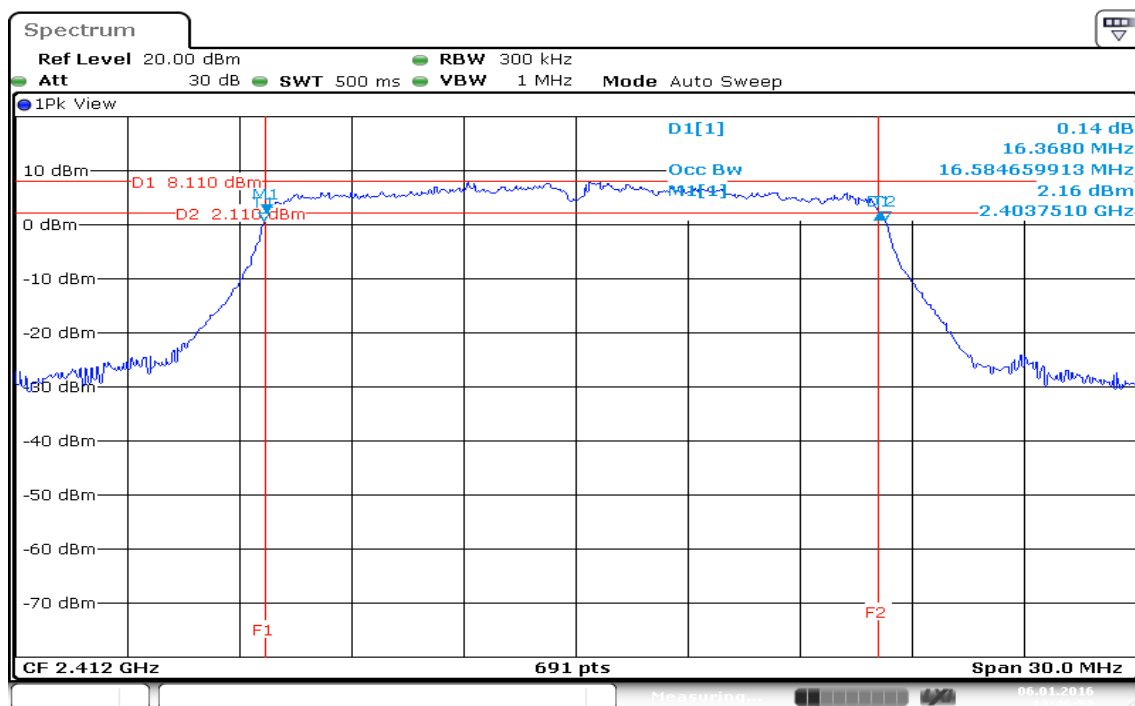

99% Bandwidth (CH Mid)

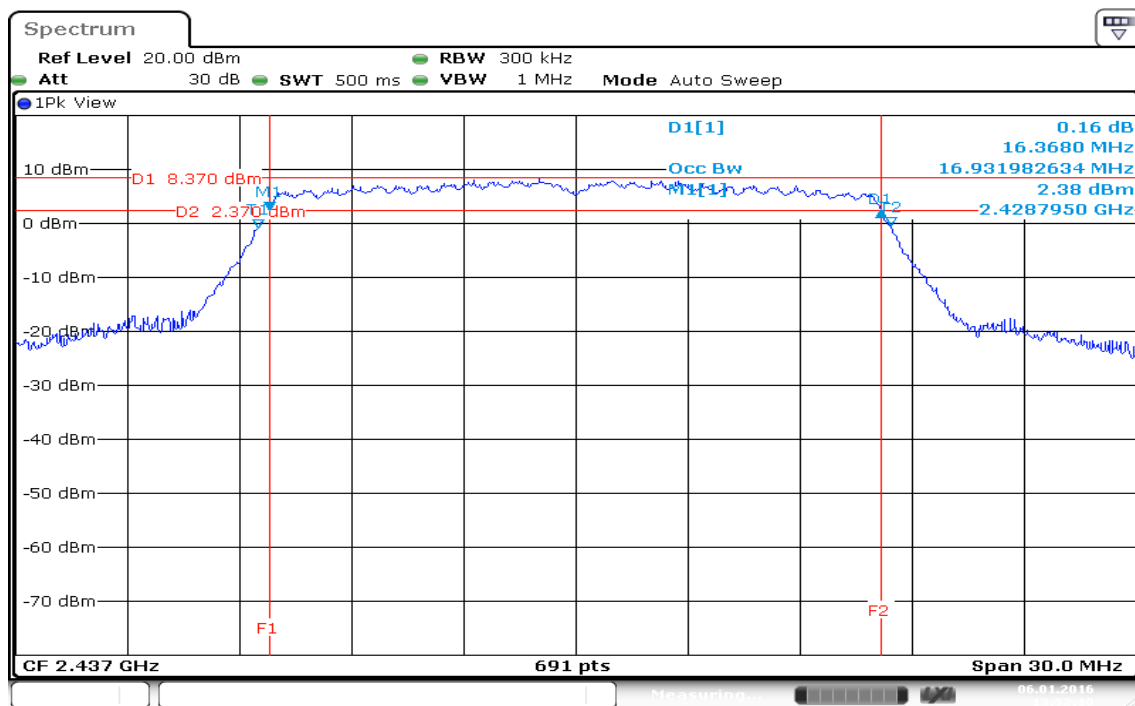


99% Bandwidth (CH High)

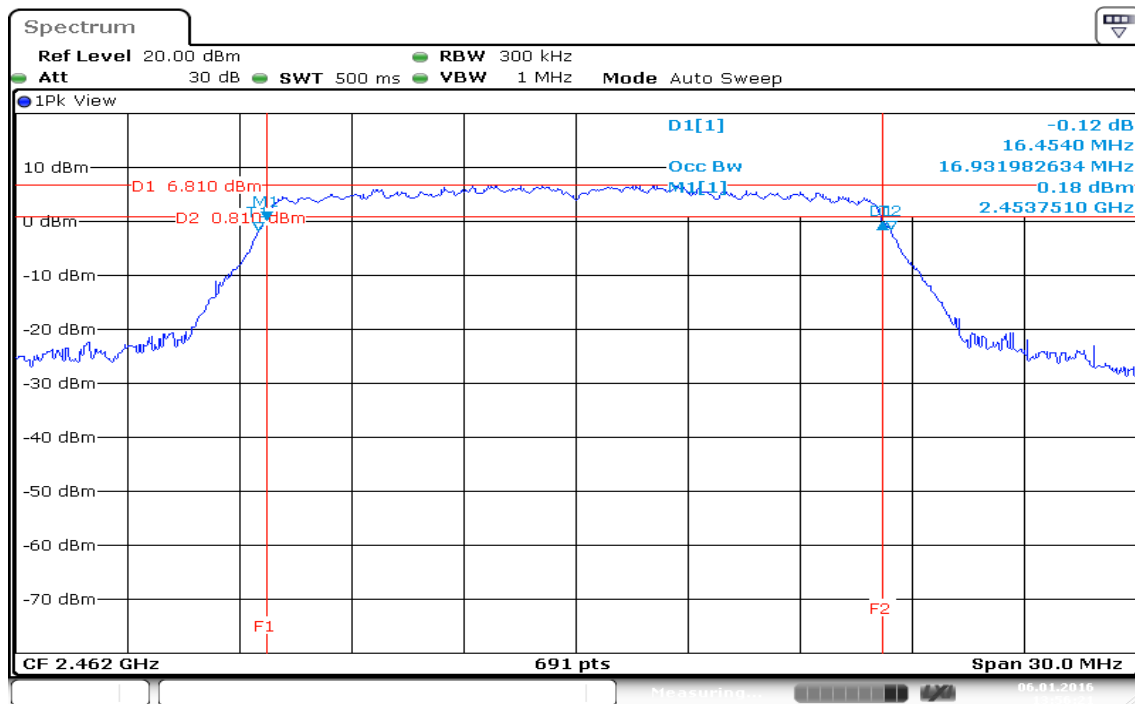


Date: 6.JAN.2016 13:56:21

IEEE 802.11n HT 20 MHz mode / Chain 0


99% Bandwidth (CH Low)

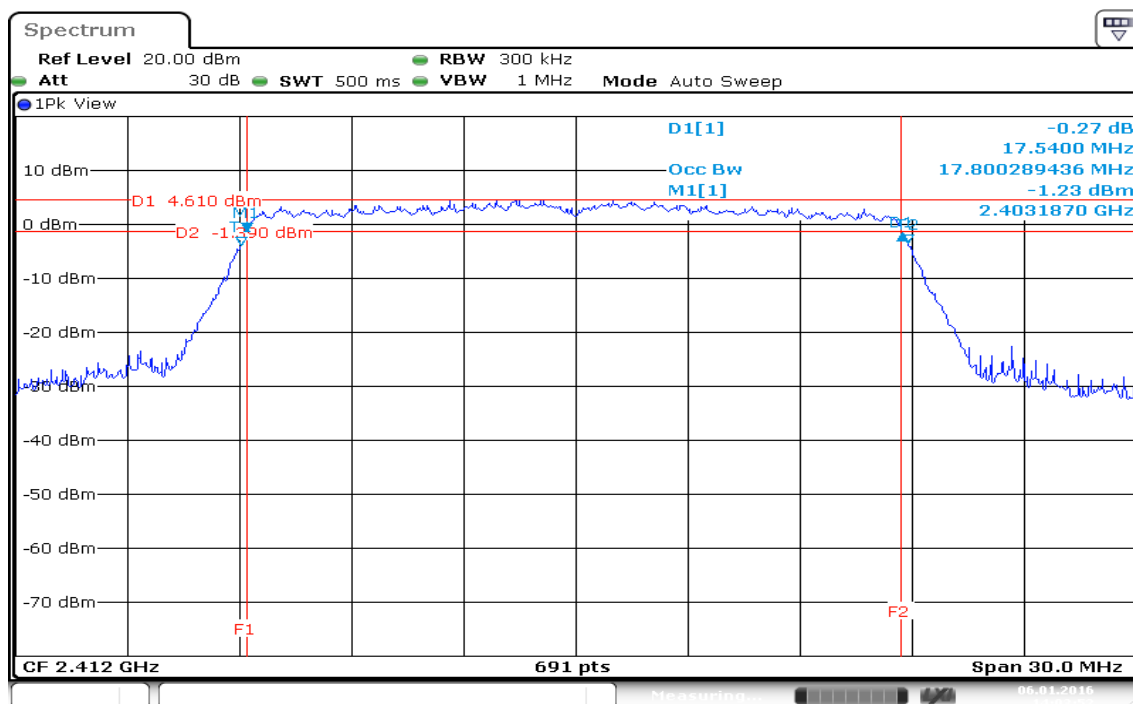

99% Bandwidth (CH Mid)

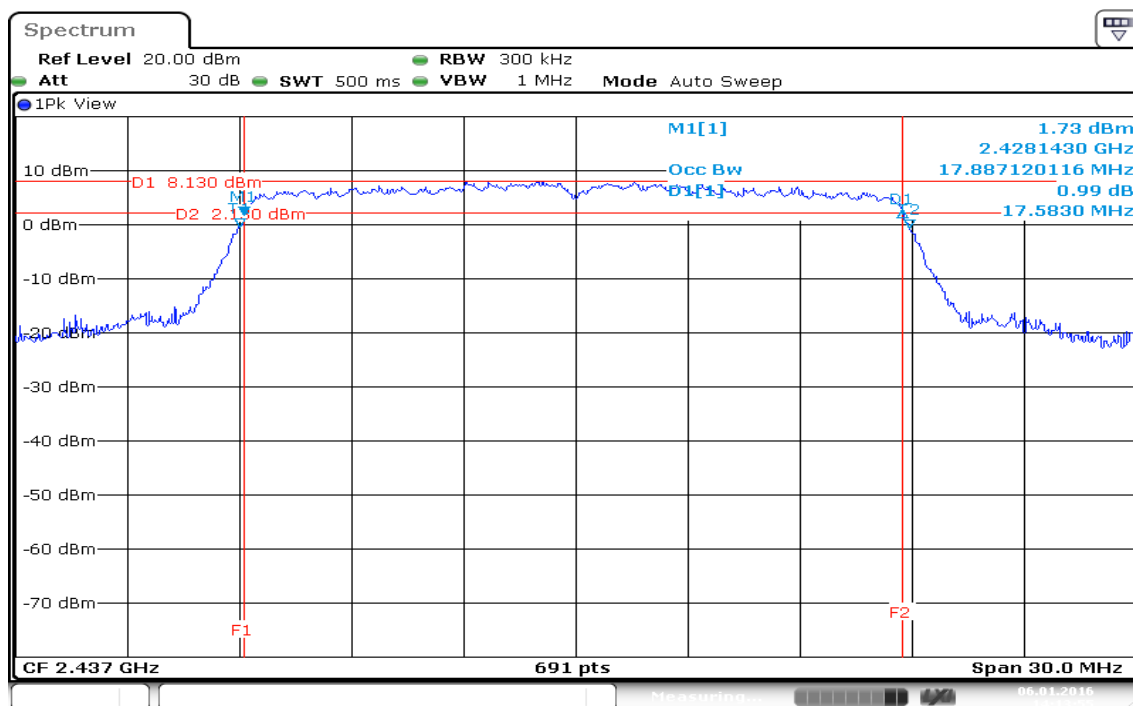


99% Bandwidth (CH High)

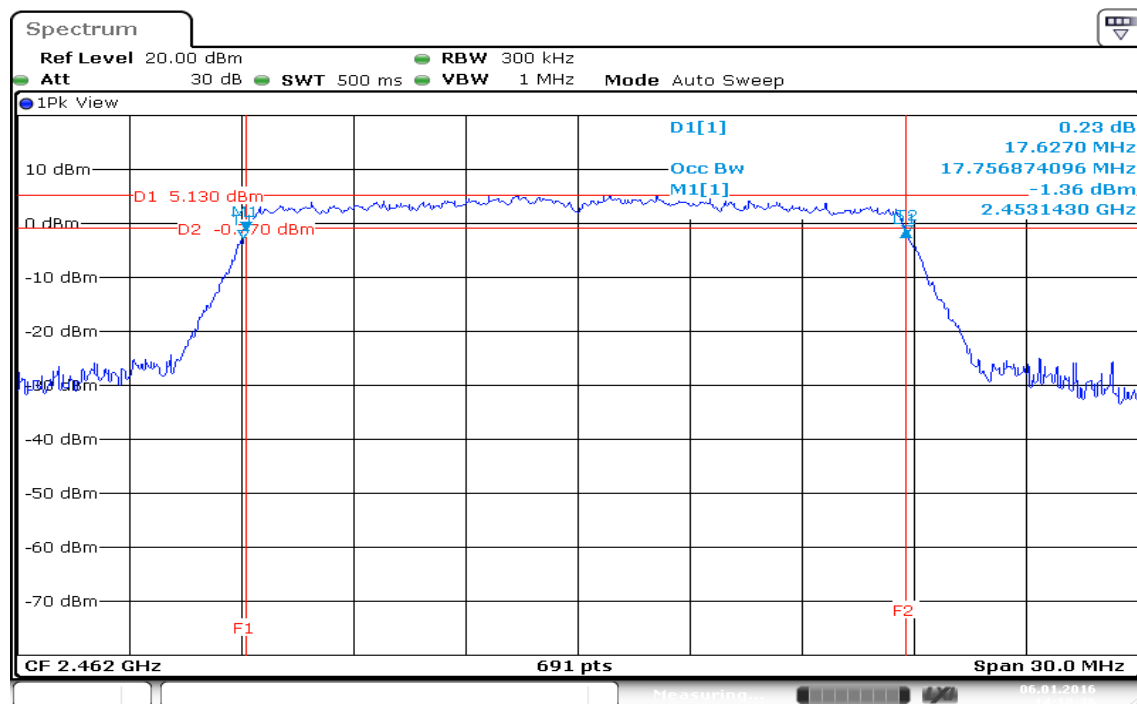

Date: 6.JAN.2016 14:18:37


IEEE 802.11n HT 20 MHz mode / Chain 1

99% Bandwidth (CH Low)

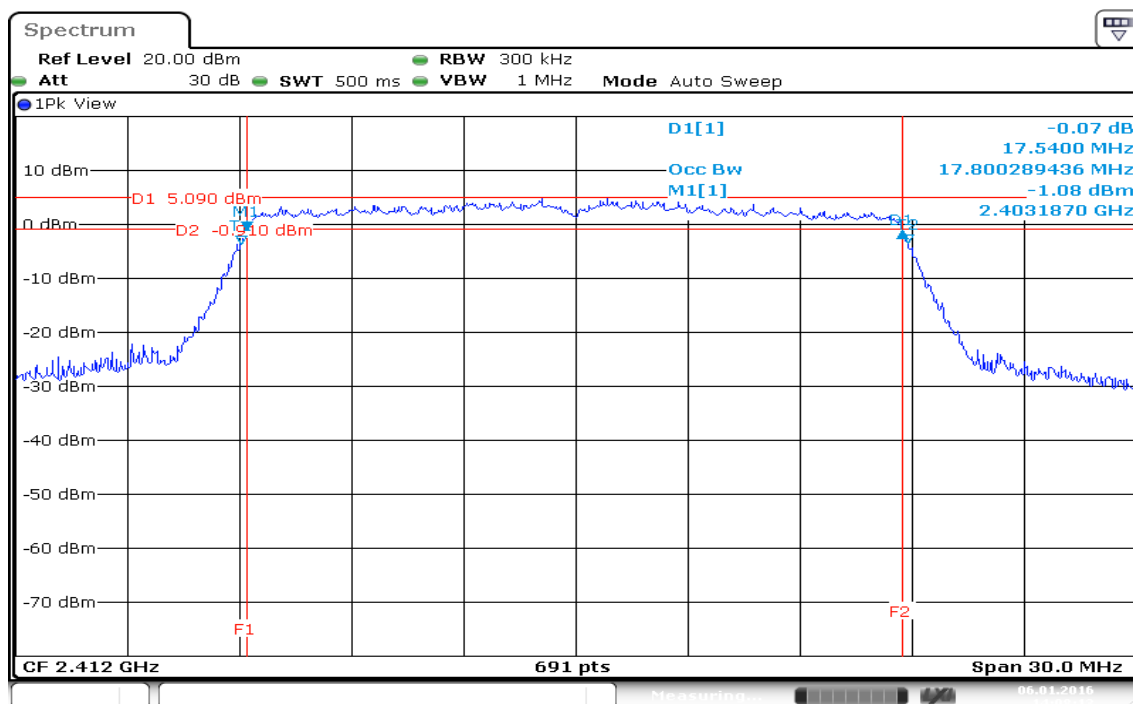


Date: 6.JAN.2016 14:08:14

99% Bandwidth (CH Mid)

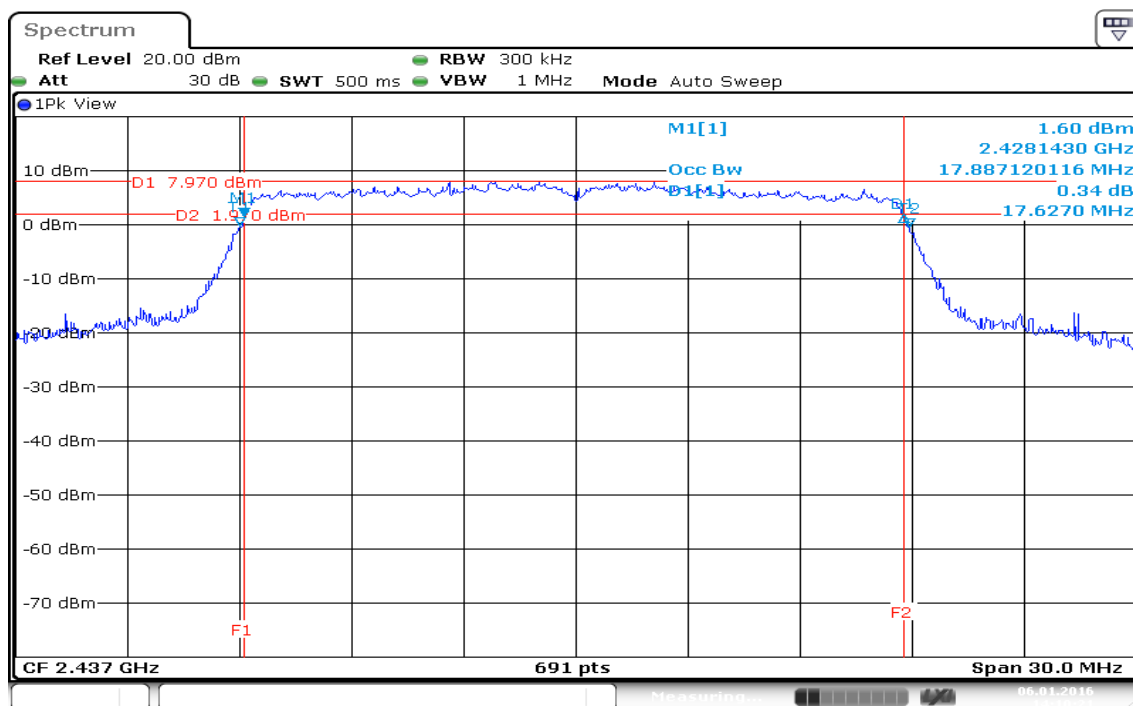

Date: 6.JAN.2016 14:10:21


99% Bandwidth (CH High)

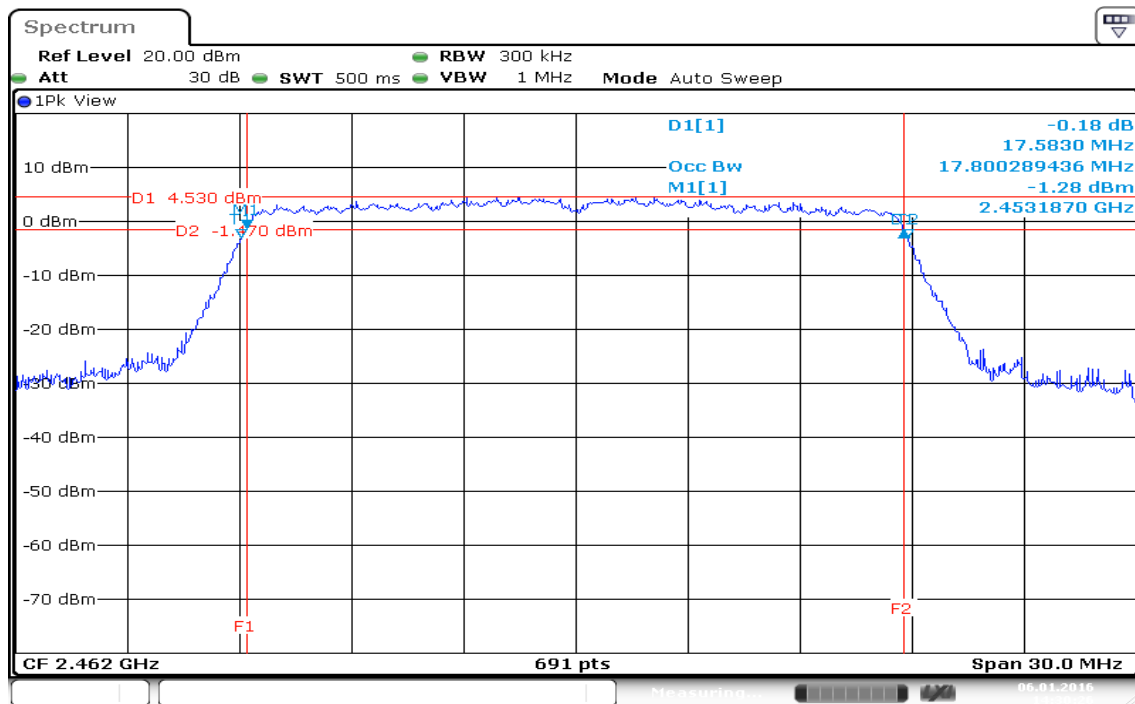


Date: 6.JAN.2016 14:30:26

802.11n Standard-40 MHz / Chain 0


99% Bandwidth (CH Low)

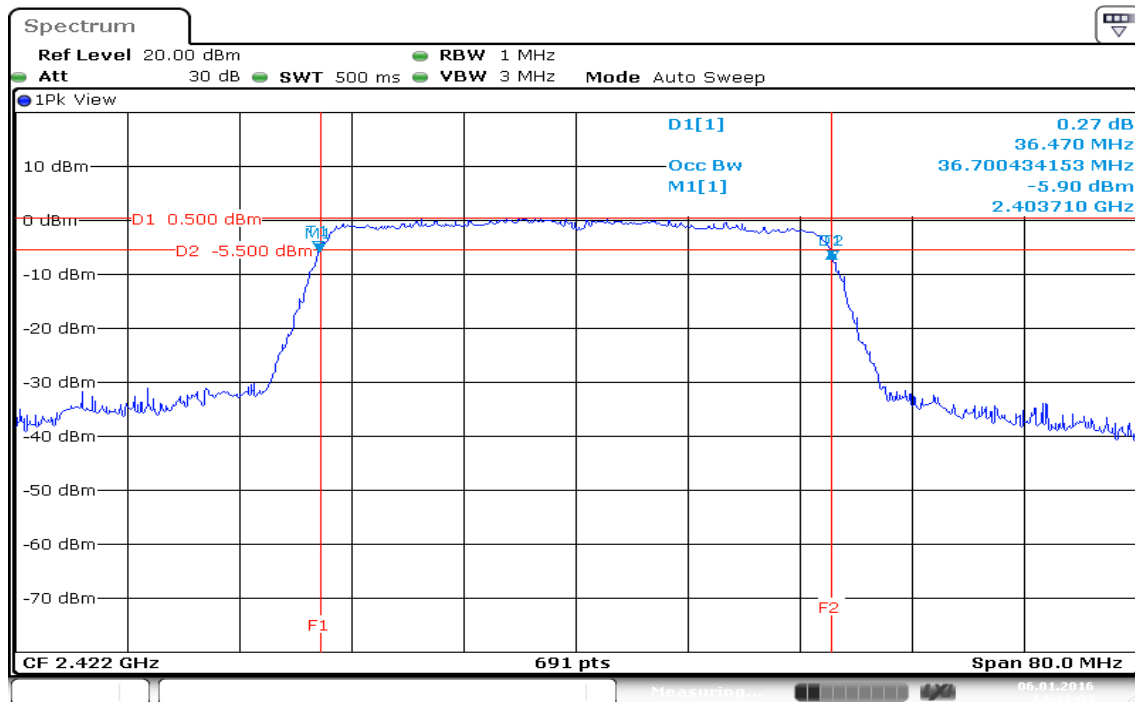

99% Bandwidth (CH Mid)

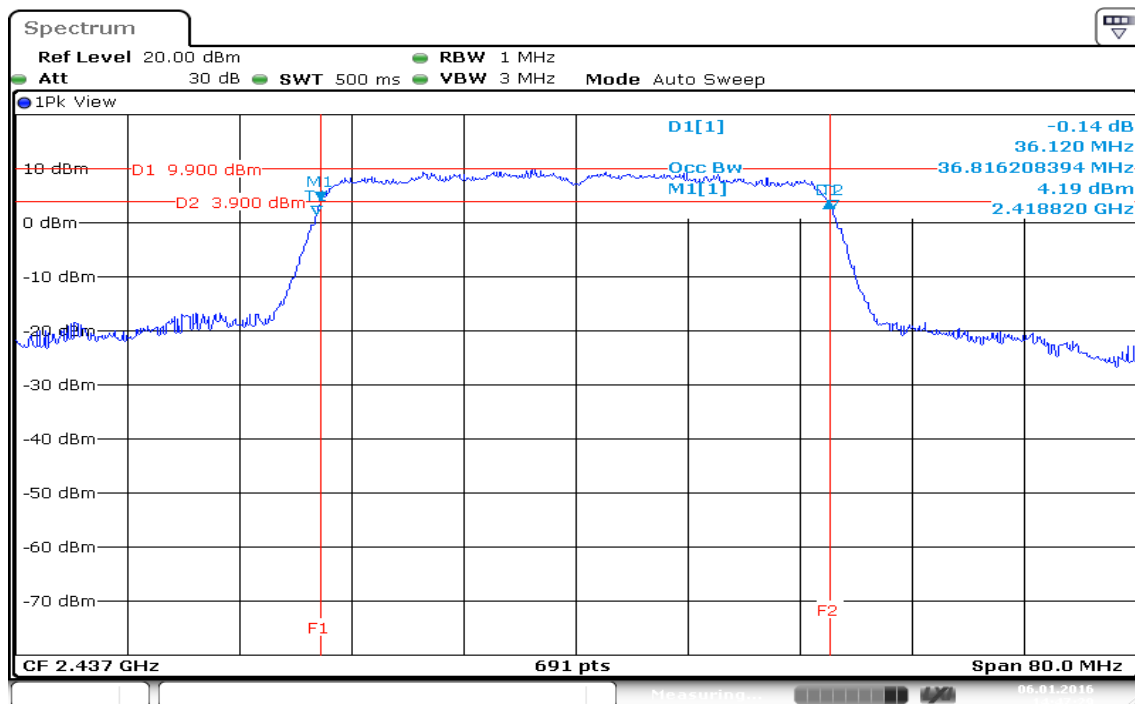


99% Bandwidth (CH High)

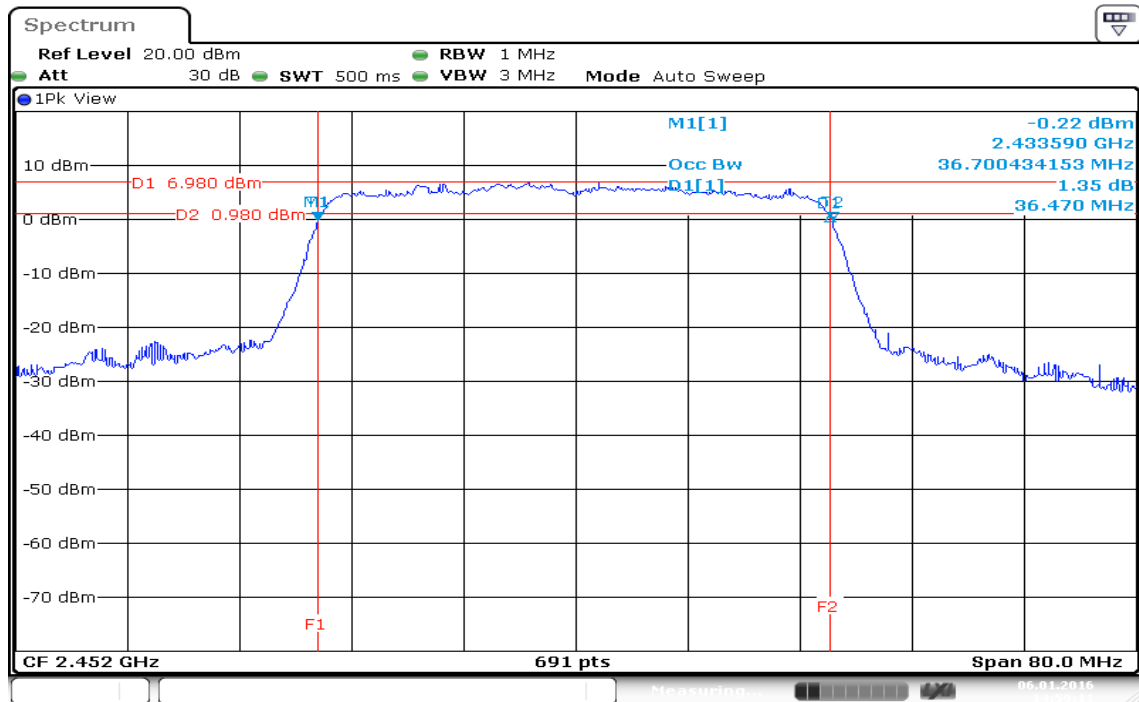


Date: 6.JAN.2016 14:59:11

802.11n Standard-40 MHz / Chain1


99% Bandwidth (CH Low)

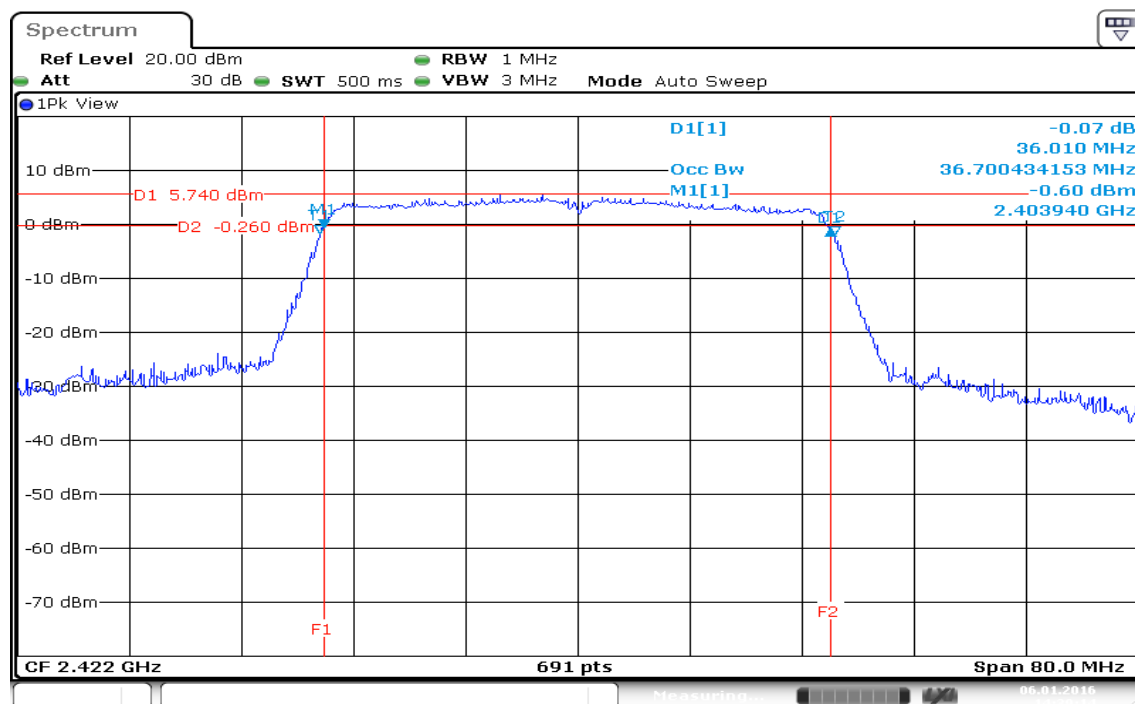

99% Bandwidth (CH Mid)

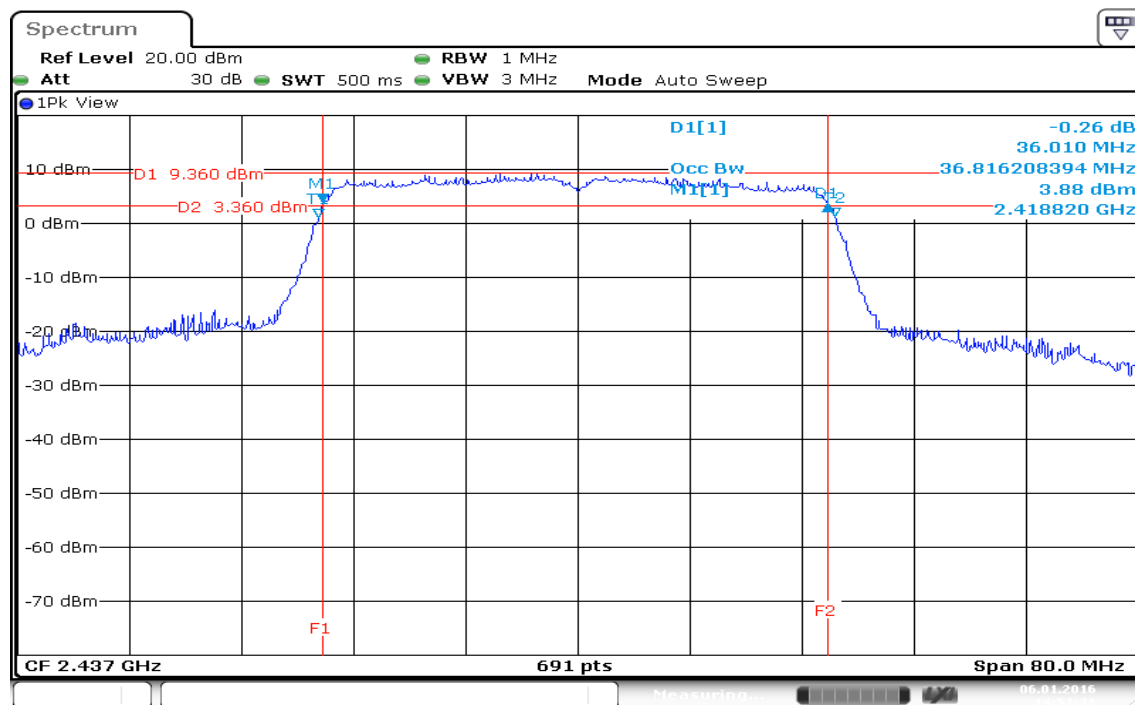

99% Bandwidth (CH High)

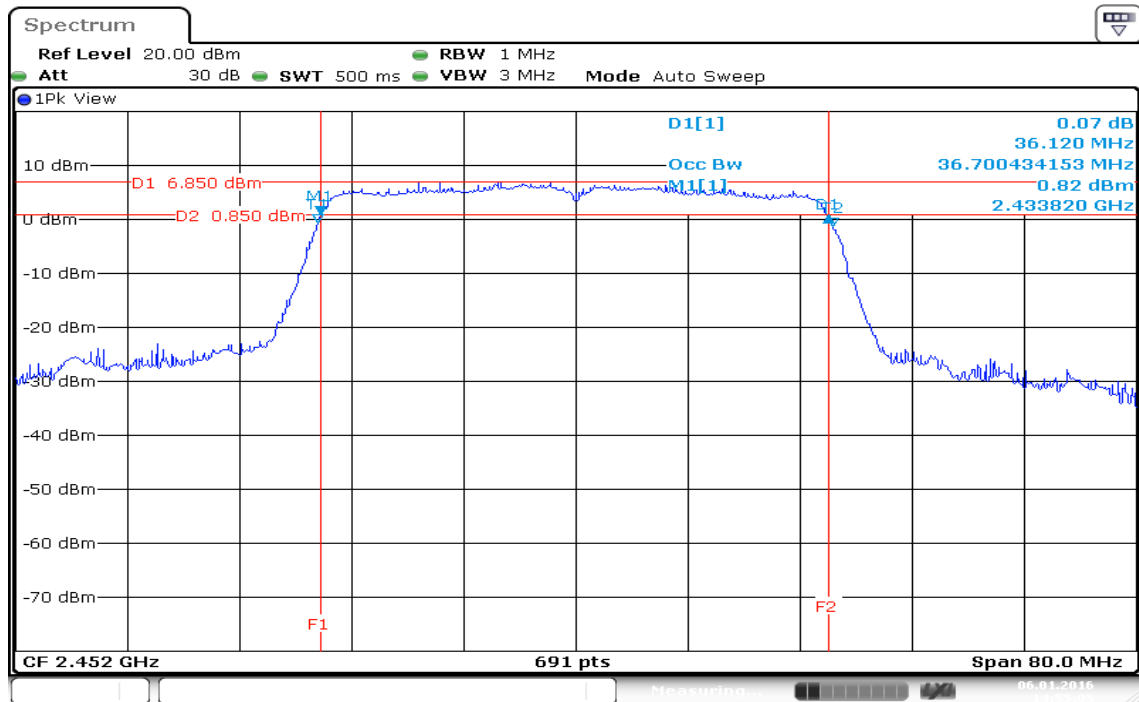


Date: 6.JAN.2016 14:55:05

7.2 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2) & RSS-247, systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and –6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.9860	>500	PASS
Mid	2437	10.1160		PASS
High	2462	10.1160		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.3680	>500	PASS
Mid	2437	16.3680		PASS
High	2462	16.2810		PASS

Test mode: IEEE 802.11n HT 20 MHz mode / Chain 0

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.1490	>500	PASS
Mid	2437	17.2790		PASS
High	2462	17.1060		PASS

Test mode: IEEE 802.11n HT 20 MHz mode / Chain 1

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.1490	>500	PASS
Mid	2437	17.2790		PASS
High	2462	16.8890		PASS

Test mode: IEEE 802.11n HT 40 MHz mode / Chain 0

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.660	>500	PASS
Mid	2437	35.540		PASS
High	2452	35.540		PASS


Test mode: IEEE 802.11n HT 40 MHz mode / Chain 1

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.430	>500	PASS
Mid	2437	35.430		PASS
High	2452	35.540		PASS


Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

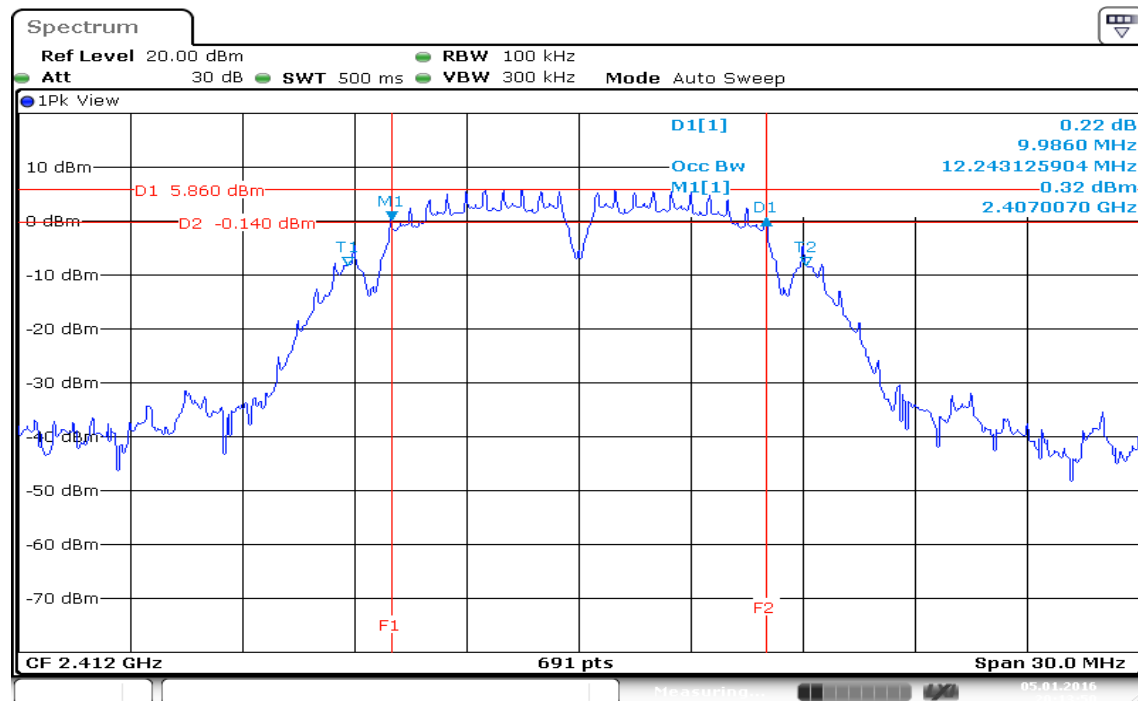


6dB Bandwidth (CH Mid)

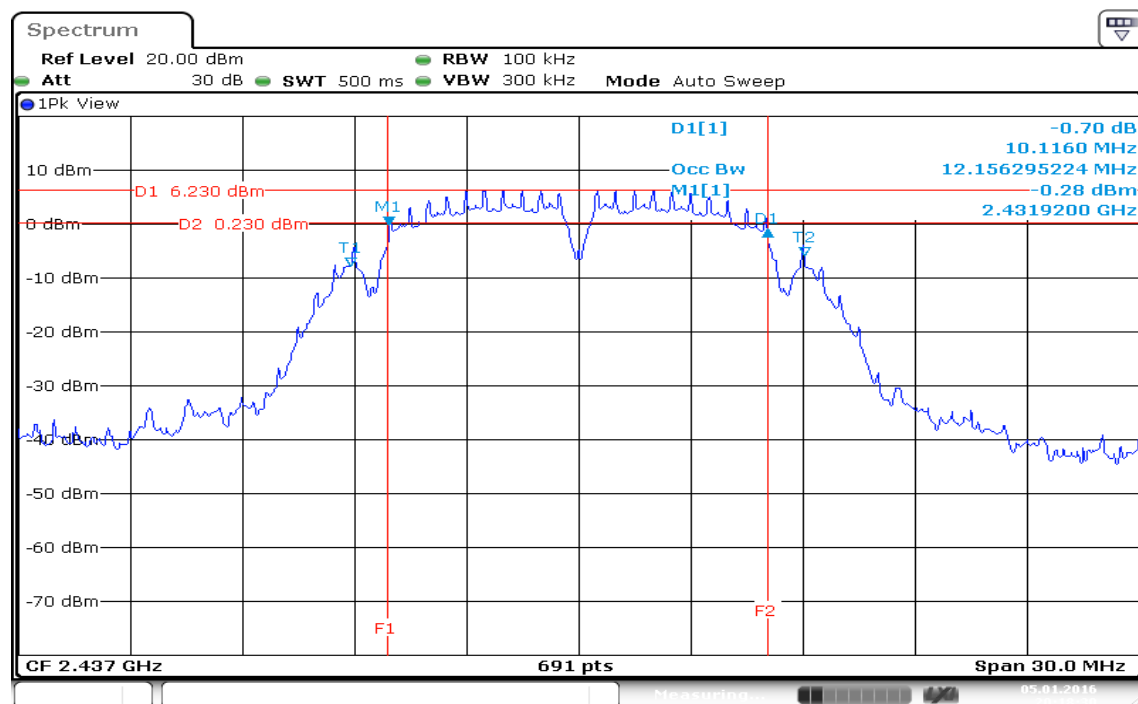

Date: 5.JAN.2016 20:21:46


6dB Bandwidth (CH High)

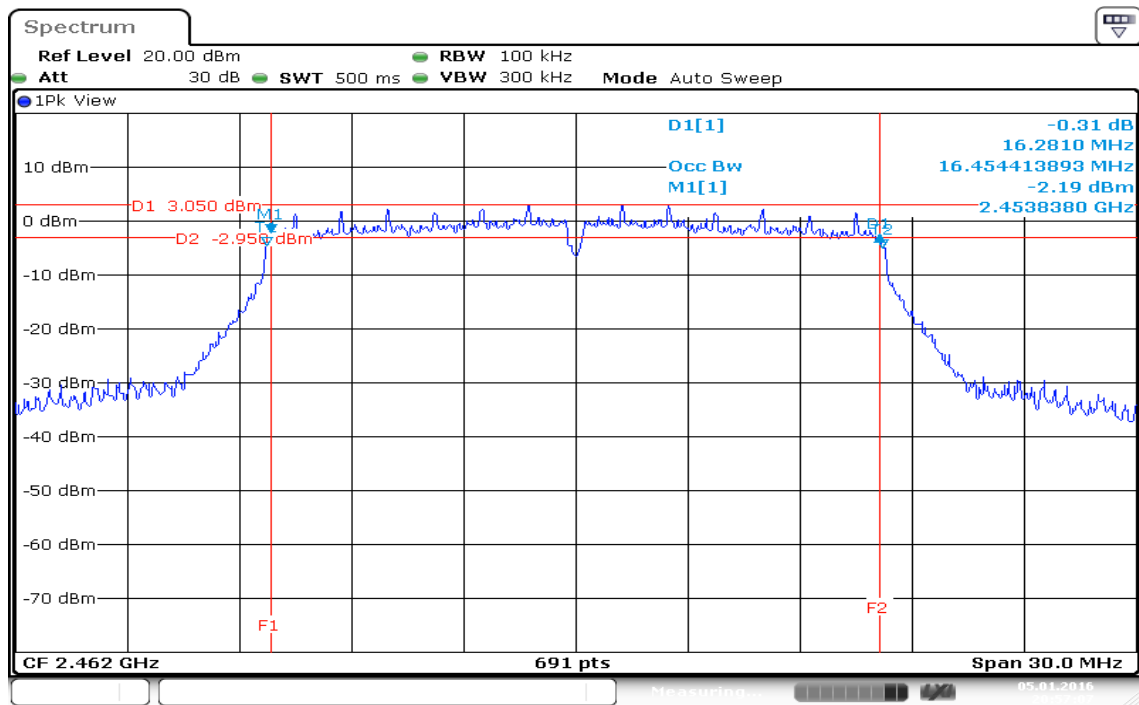

Date: 5.JAN.2016 20:57:07


IEEE 802.11n HT 20 MHz mode / Chain 0

6dB Bandwidth (CH Low)

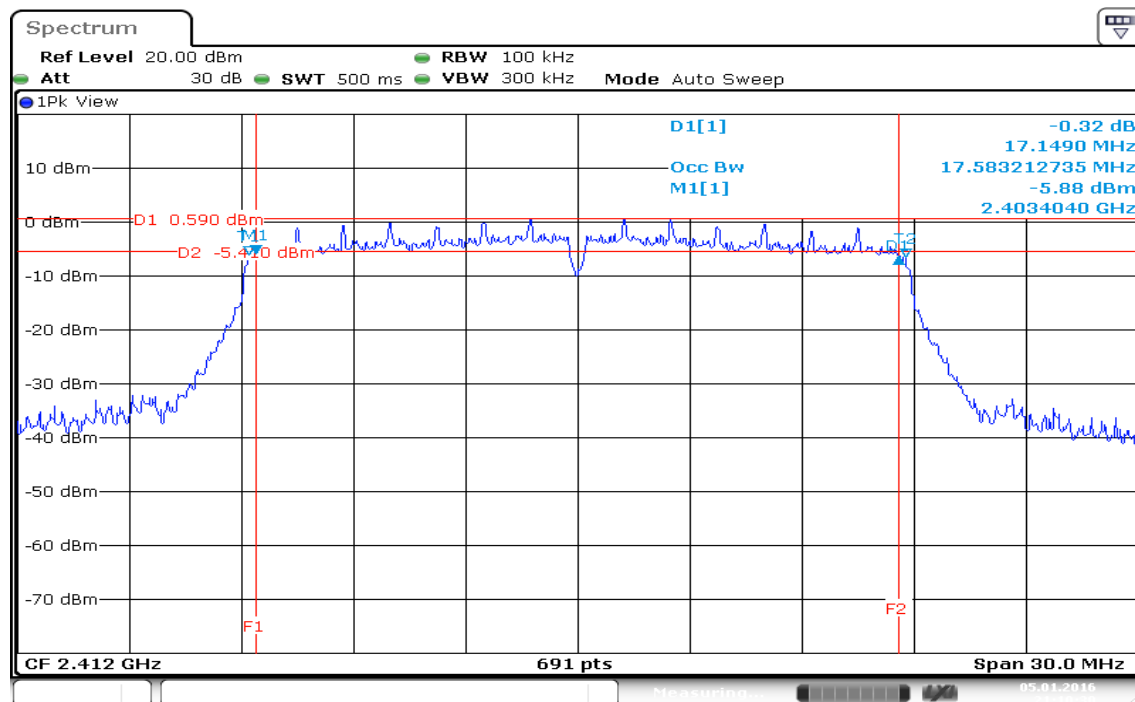


Date: 5.JAN.2016 21:10:30

6dB Bandwidth (CH Mid)

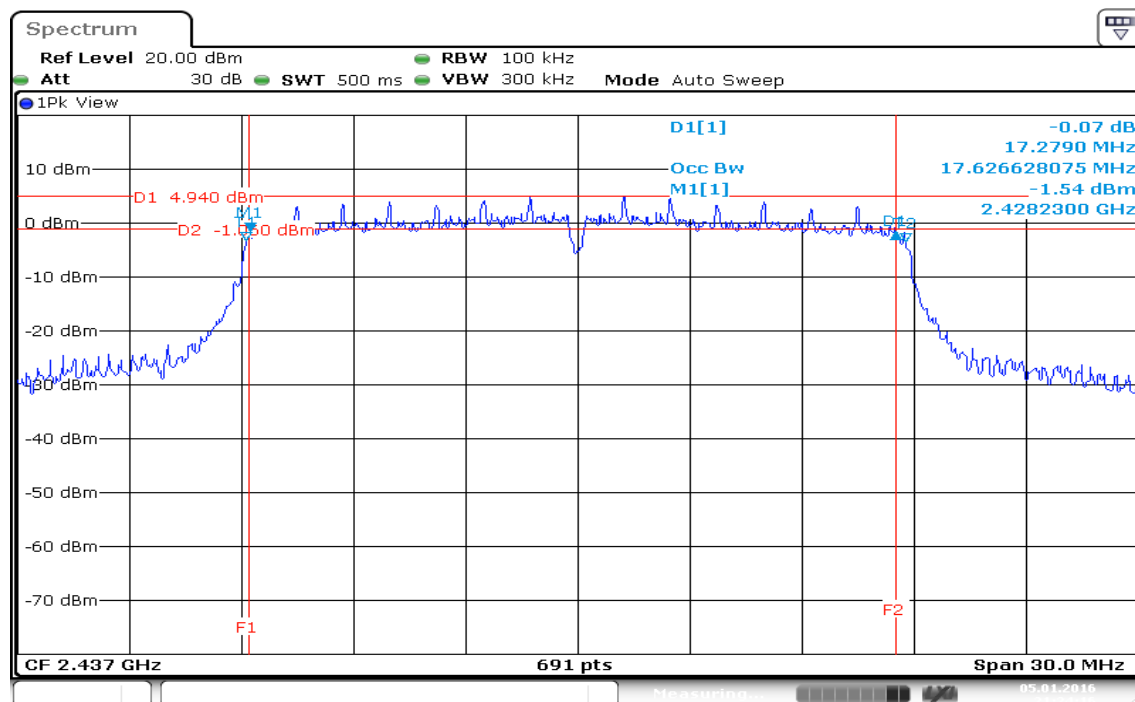

Date: 5.JAN.2016 21:24:16


6dB Bandwidth (CH High)

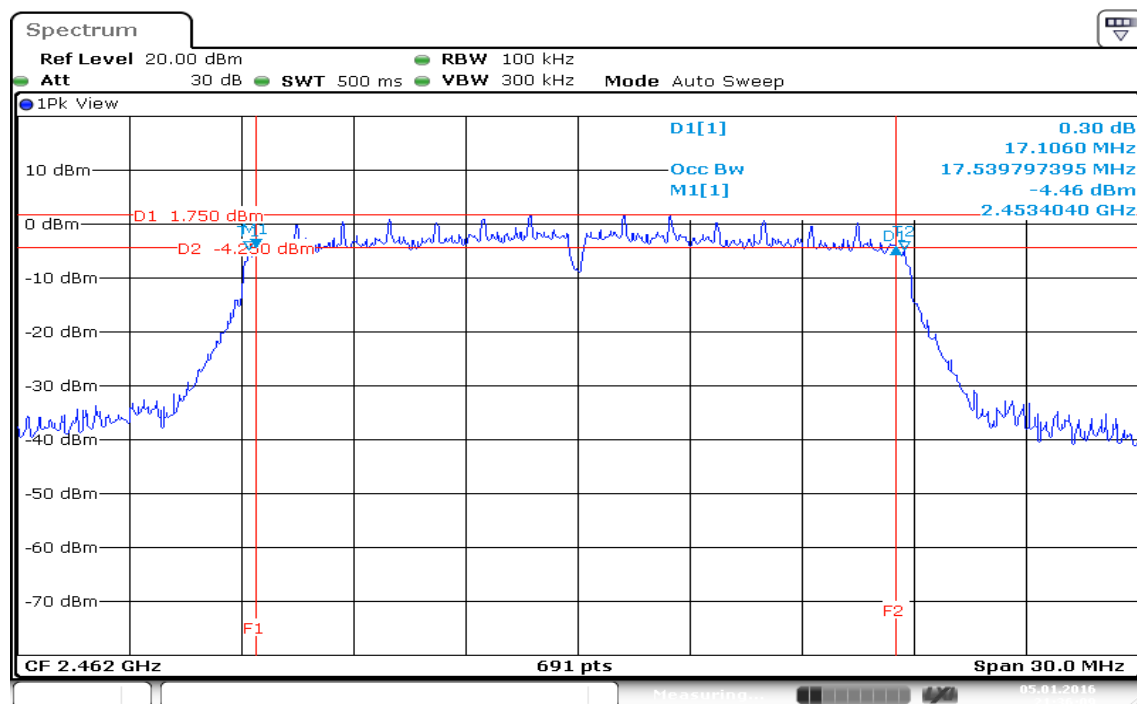


Date: 5.JAN.2016 21:36:09

IEEE 802.11n HT 20 MHz mode / Chain 1


6dB Bandwidth (CH Low)

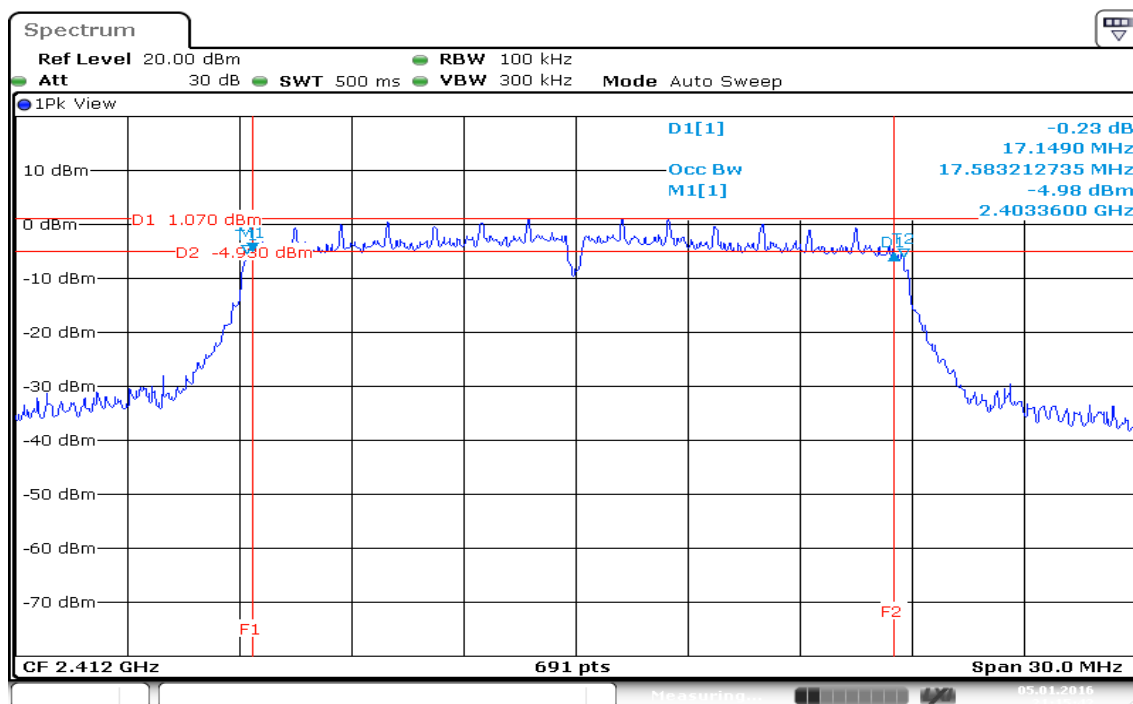

6dB Bandwidth (CH Mid)

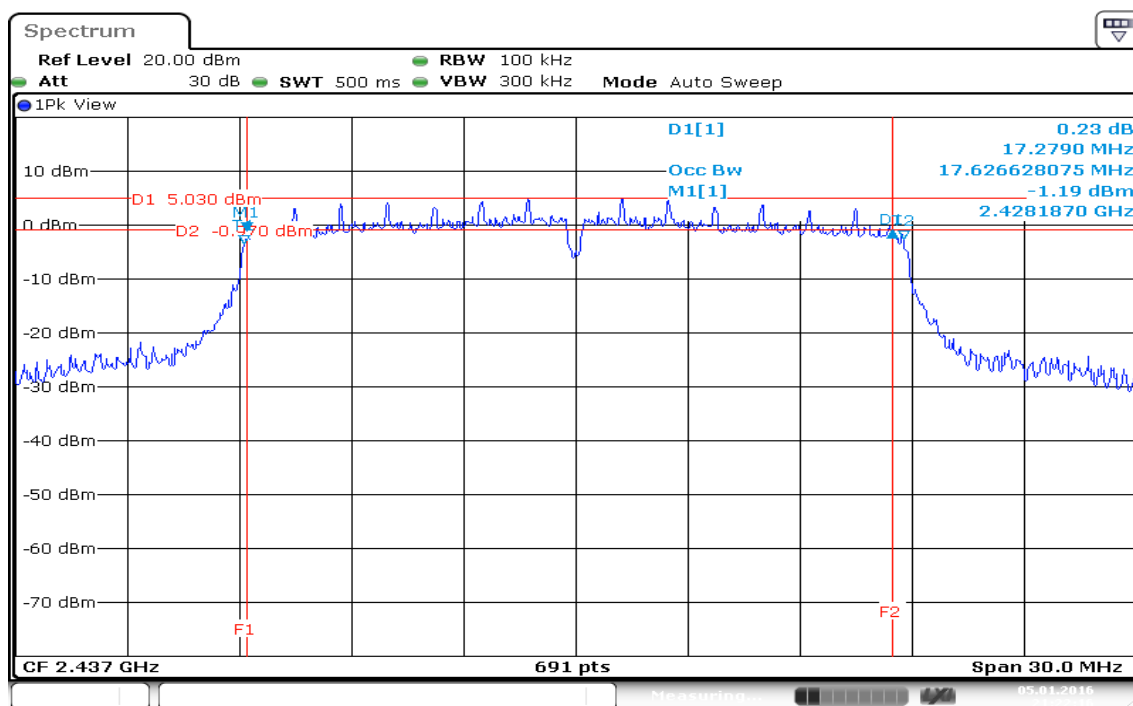


6dB Bandwidth (CH High)

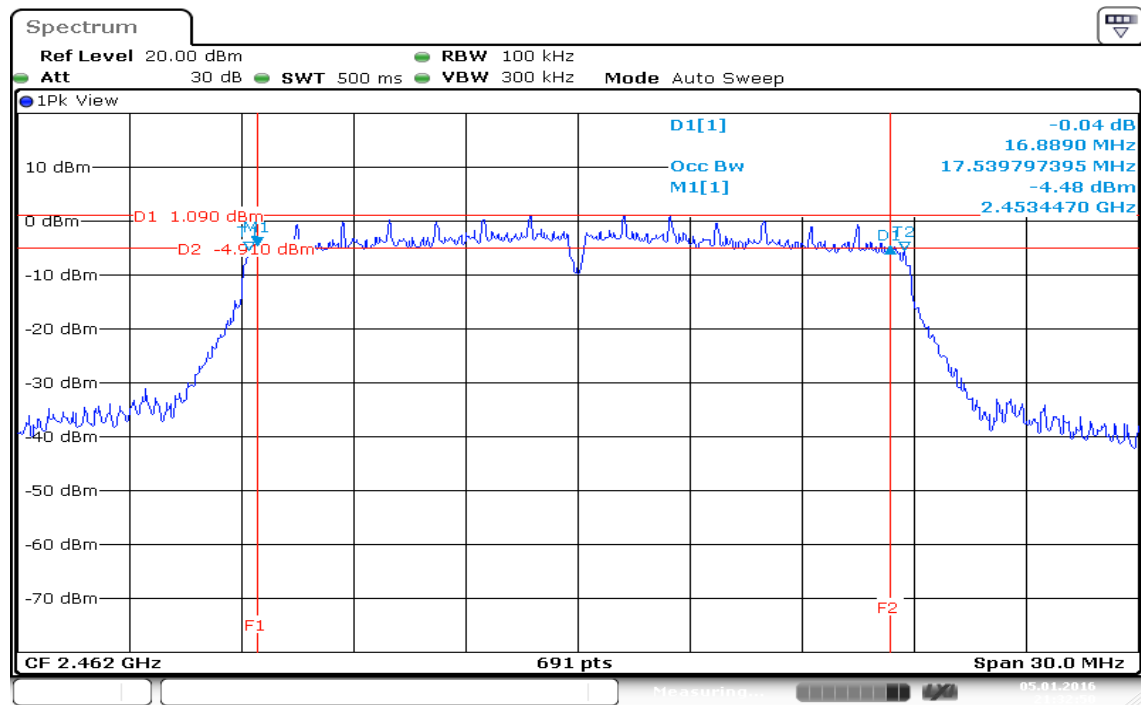

Date: 5.JAN.2016 21:32:51


IEEE 802.11n HT 40 MHz mode / Chain 0

6dB Bandwidth (CH Low)

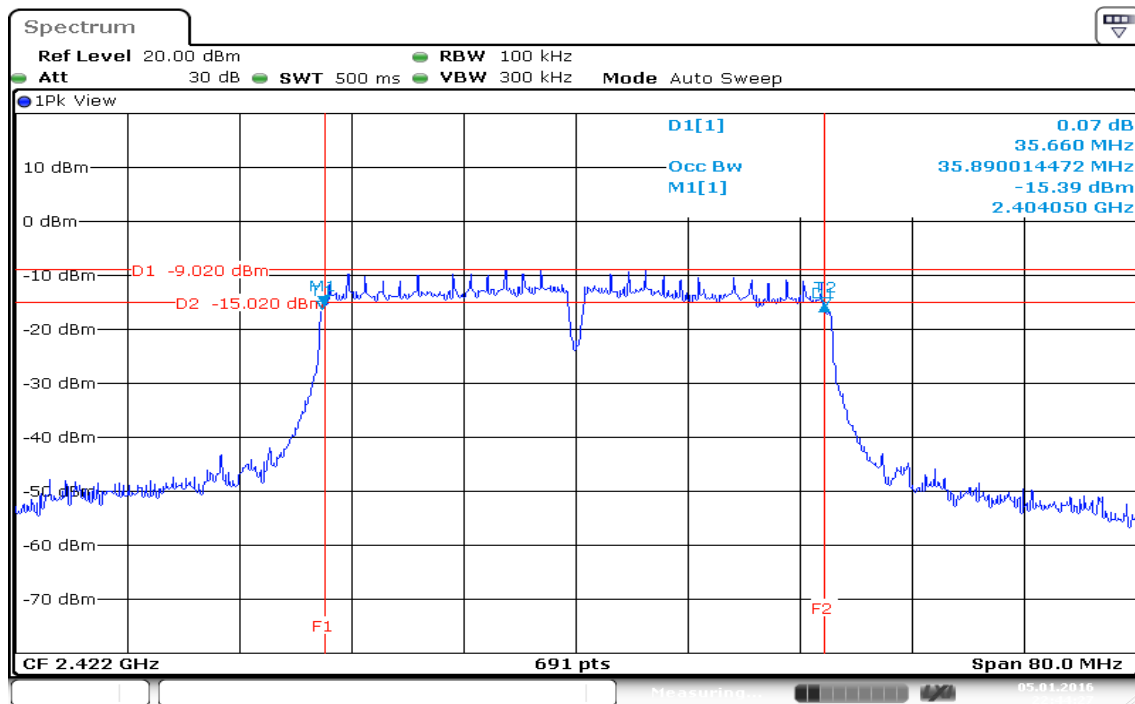


Date: 5.JAN.2016 22:44:27

6dB Bandwidth (CH Mid)

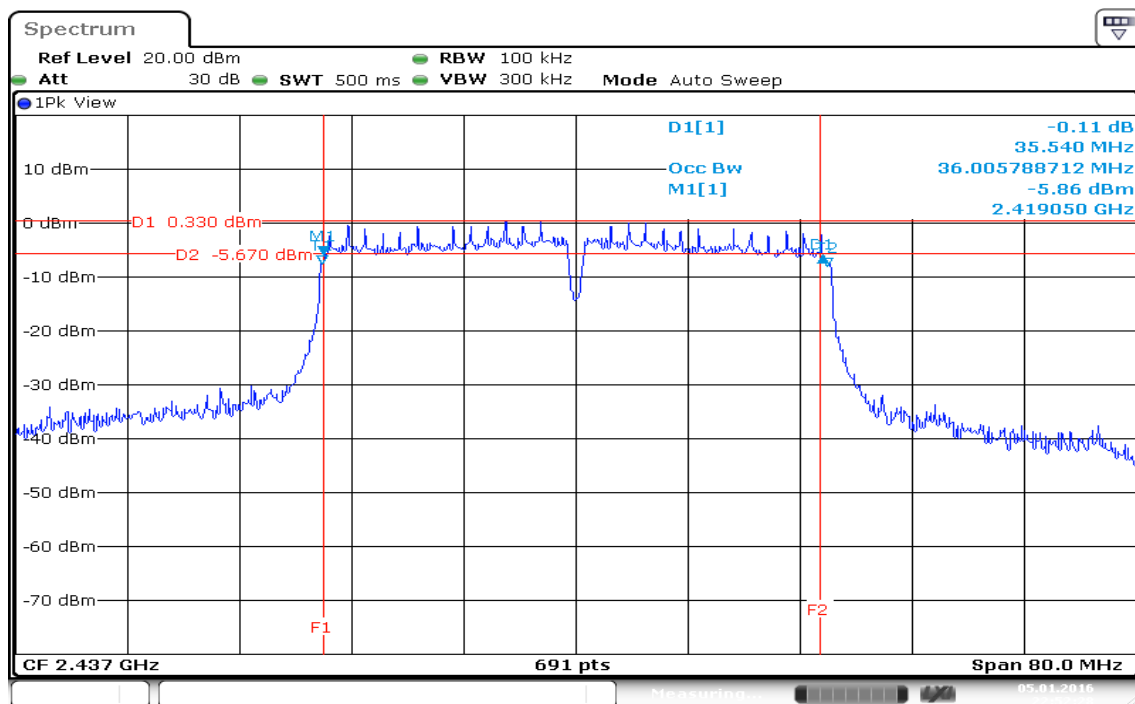

Date: 5.JAN.2016 22:52:28


6dB Bandwidth (CH High)

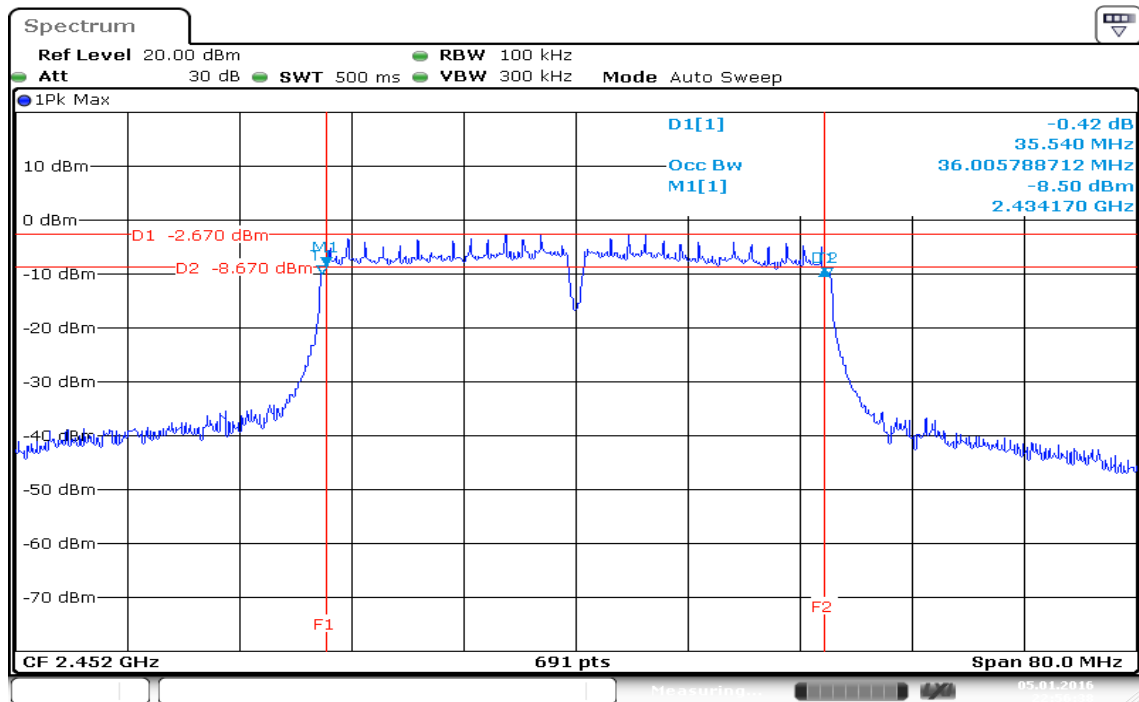

Date: 5.JAN.2016 22:56:39


IEEE 802.11n HT 40 MHz mode / Chain 1

6dB Bandwidth (CH Low)

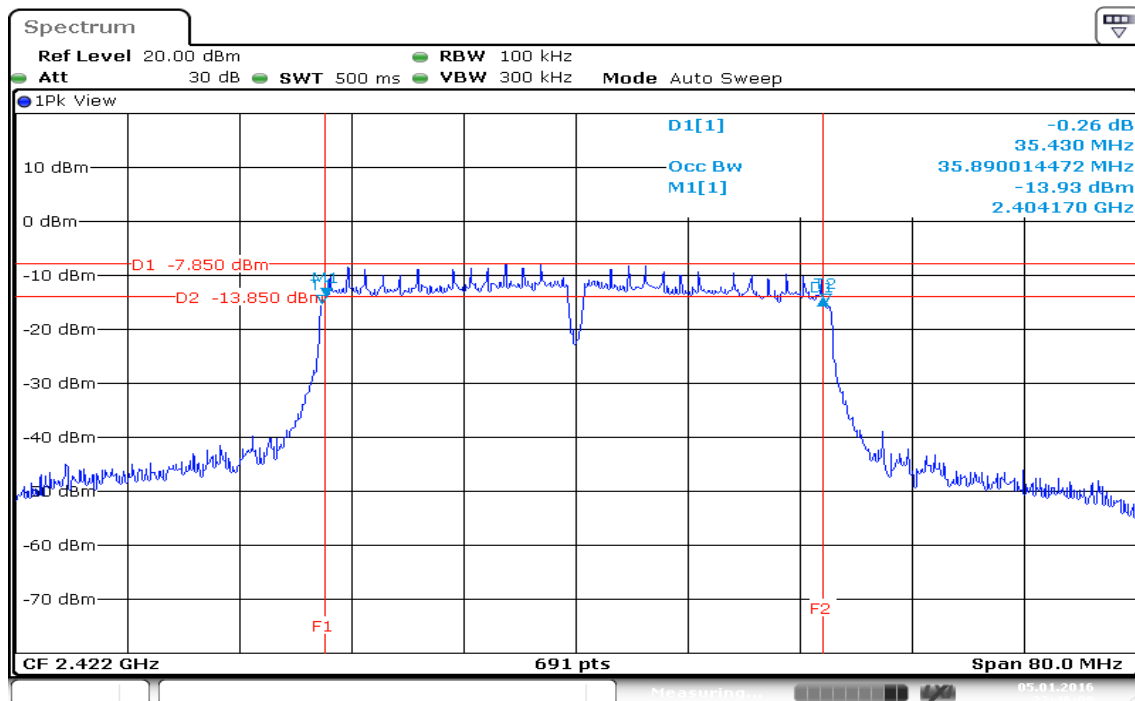

Date: 5.JAN.2016 22:46:08

6dB Bandwidth (CH Mid)

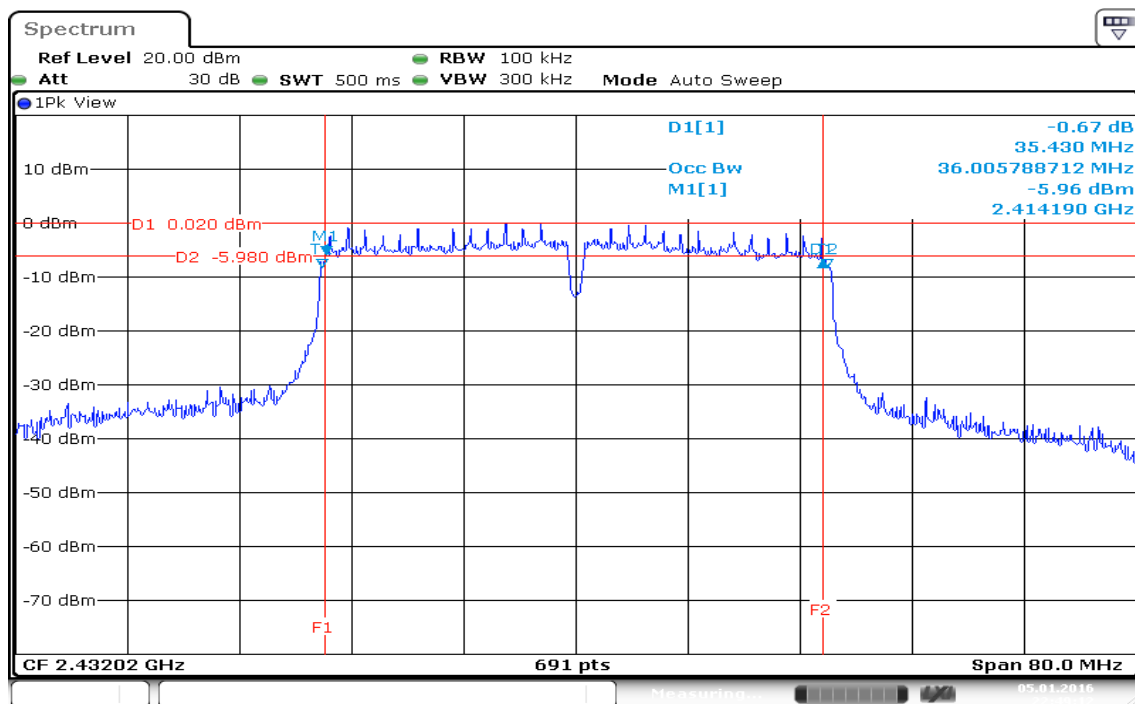

Date: 5.JAN.2016 22:49:13

Date: 5.JAN.2016 22:58:54


7.3 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. According to RSS-247, for systems employing digital modulation techniques operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	21.35	0.1365	30	PASS
Mid	2437	21.06	0.1276		PASS
High	2462	*21.39	0.1377		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	25.23	0.3334	30	PASS
Mid	2437	*25.38	0.3451		PASS
High	2462	24.76	0.2992		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	23.51	23.01	26.28	0.4246	26.08	PASS
Mid	2437	25.33	24.88	*28.12	0.6486		PASS
High	2462	24.56	23.97	27.29	0.5358		PASS

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2422	21.57	21.03	24.32	0.2704	26.08	PASS
Mid	2437	25.12	24.22	*27.70	0.5888		PASS
High	2452	23.04	23.05	26.06	0.4036		PASS

Remark:


1. Total Output Power (w) = Chain 0 ($10^{(Output\ Power / 10) / 1000}$) + Chain 1 ($10^{(Output\ Power / 10) / 1000}$)
2. The maximum antenna gain is 9.92dBi; therefore the reduction due to antenna gain is 3.92dBi, so the limit is 26.08dBm.

7.4 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	17.53	0.0566
Mid	2437	17.46	0.0557
High	2462	17.33	0.0541

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	16.05	0.0403
Mid	2437	16.97	0.0498
High	2462	15.50	0.0355

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2412	13.25	13.44	16.35	0.0432
Mid	2437	16.94	16.88	19.92	0.0982
High	2462	13.95	13.59	16.78	0.0476

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2422	10.57	10.90	13.75	0.0237
Mid	2437	15.03	15.06	18.06	0.0640
High	2452	12.30	12.91	15.63	0.0366

Remark: Total Output Power (w) = Chain 0 ($10^{(\text{Output Power}/10)/1000}$) + Chain 1 ($10^{(\text{Output Power}/10)/1000}$)


7.5 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d) & RSS-247, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

For Radiated

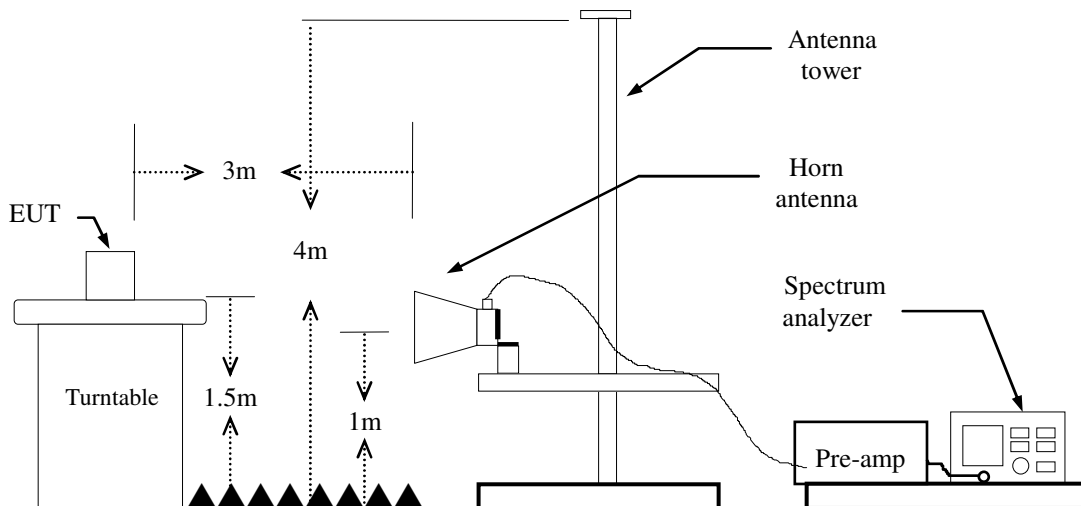

For Conducted



TEST PROCEDURE

For Radiated

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz,
if duty cycle $\geq 98\%$, VBW=10Hz.
if duty cycle $< 98\%$ VBW=1/T.

For PIFA Antenna

IEEE 802.11b mode: $\geq 98\%$, VBW=10Hz

IEEE 802.11g mode: = 92%, VBW=680Hz

IEEE 802.11n HT 20 MHz mode: = 78%, VBW=1.5 KHz

IEEE 802.11n HT 40 MHz mode: = 69%, VBW=2.7 KHz

For Dipole Antenna

IEEE 802.11b mode: $\geq 98\%$, VBW=10Hz

IEEE 802.11g mode: = 91%, VBW=680Hz

IEEE 802.11n HT 20 MHz mode: = 88%, VBW=750Hz

IEEE 802.11n HT 40 MHz mode: = 83%, VBW=1.5 KHz

5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.
6. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


TEST RESULTS

Refer to attach spectrum analyzer data chart.

For PIFA Antenna


Band Edges (IEEE 802.11b mode / CH Low)

Polarity: Vertical

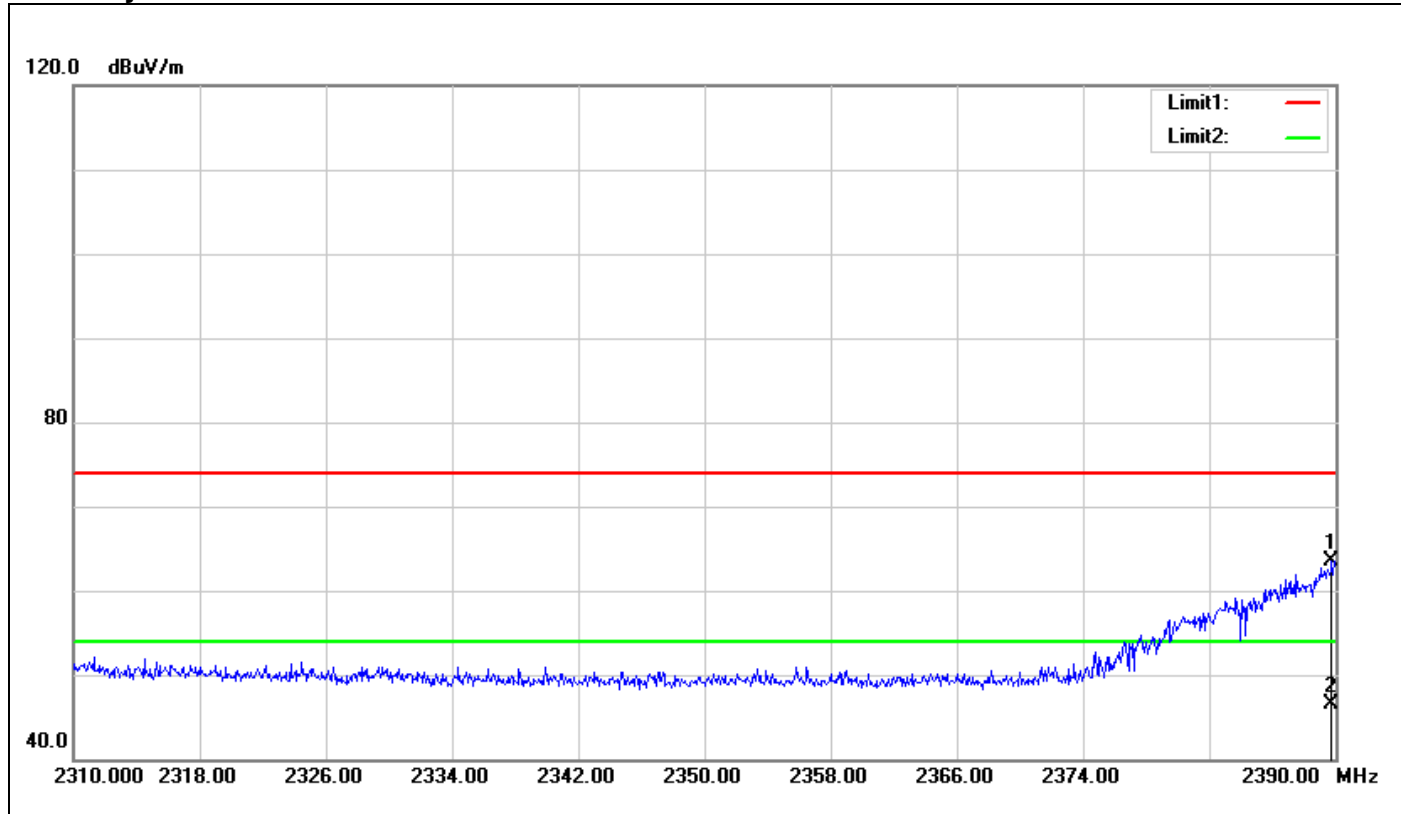

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.760	66.07	-2.49	63.58	74.00	-10.42	150	299	peak
2	2389.760	49.01	-2.49	46.52	54.00	-7.48	150	299	AVG


Polarity: Horizontal

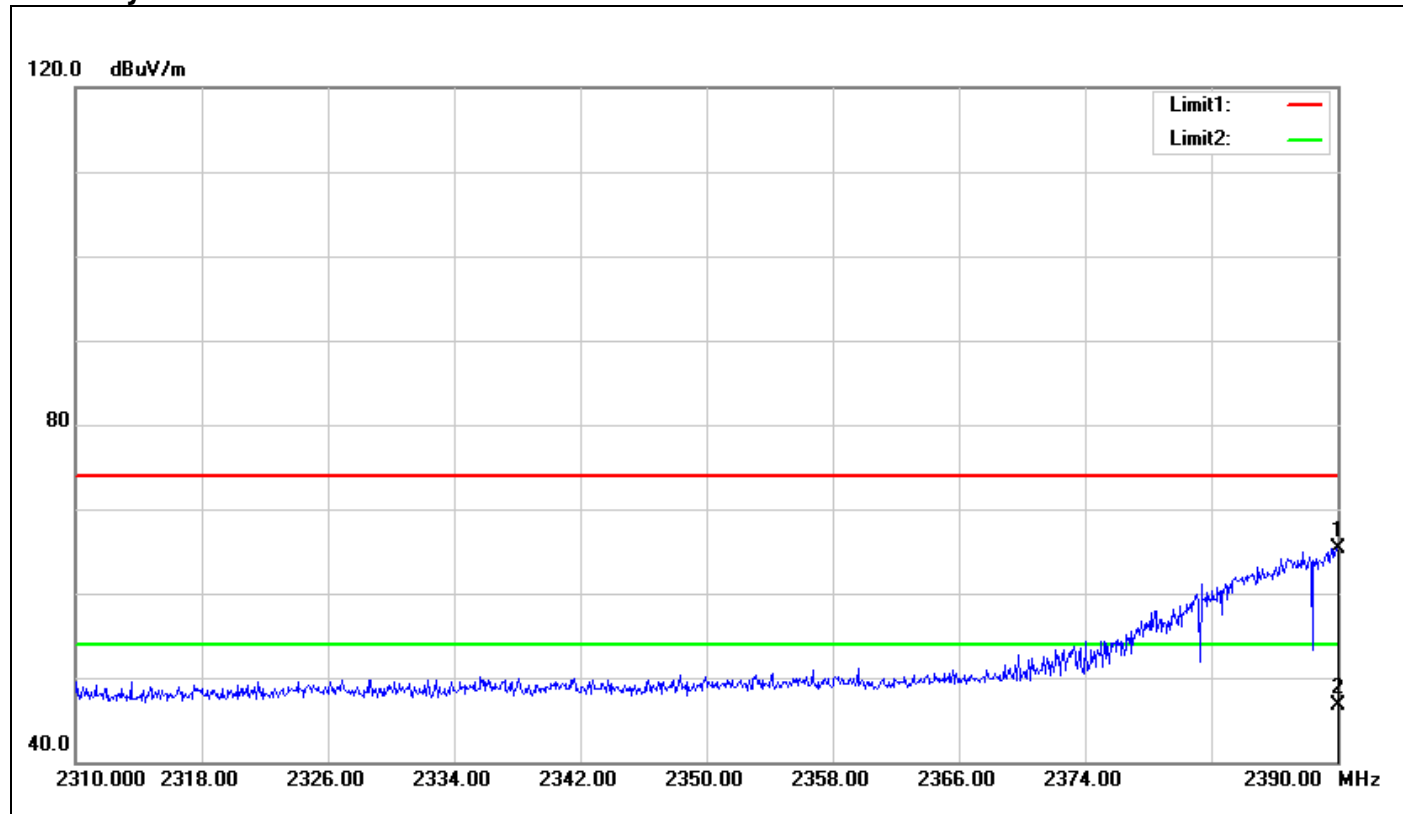

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2390.000	67.85	-2.49	65.36	74.00	-8.64	150	310	peak
2	2390.000	49.21	-2.49	46.72	54.00	-7.28	150	310	AVG


Band Edges (IEEE 802.11b mode / CH High)

Polarity: Vertical

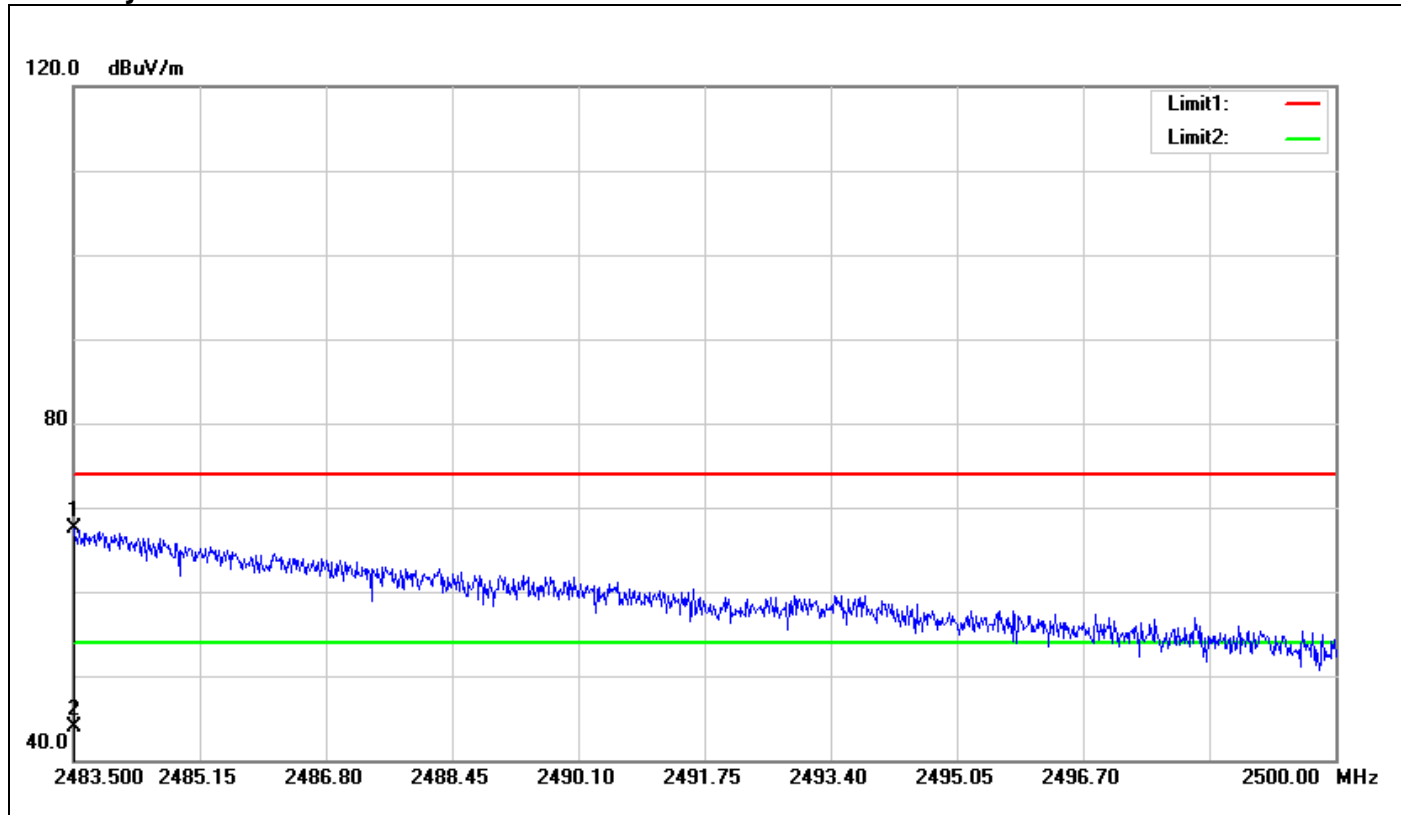

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.500	69.57	-1.99	67.58	74.00	-6.42	150	285	peak
2	2483.500	45.95	-1.99	43.96	54.00	-10.04	150	285	AVG


Polarity: Horizontal

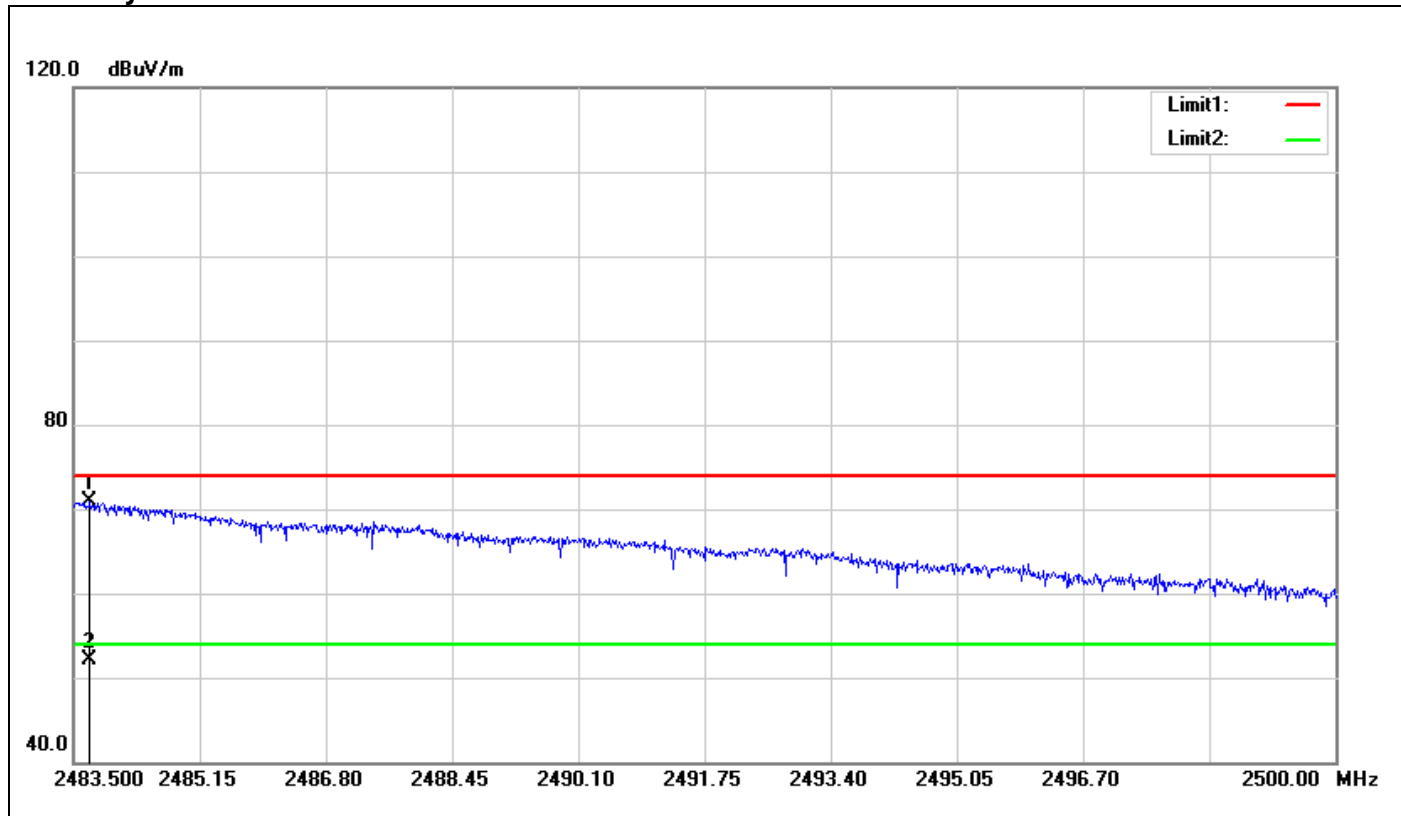

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.715	72.85	-1.99	70.86	74.00	-3.14	150	232	peak
2	2483.715	54.15	-1.99	52.16	54.00	-1.84	150	232	AVG


Band Edges (IEEE 802.11g mode / CH Low)

Polarity: Vertical

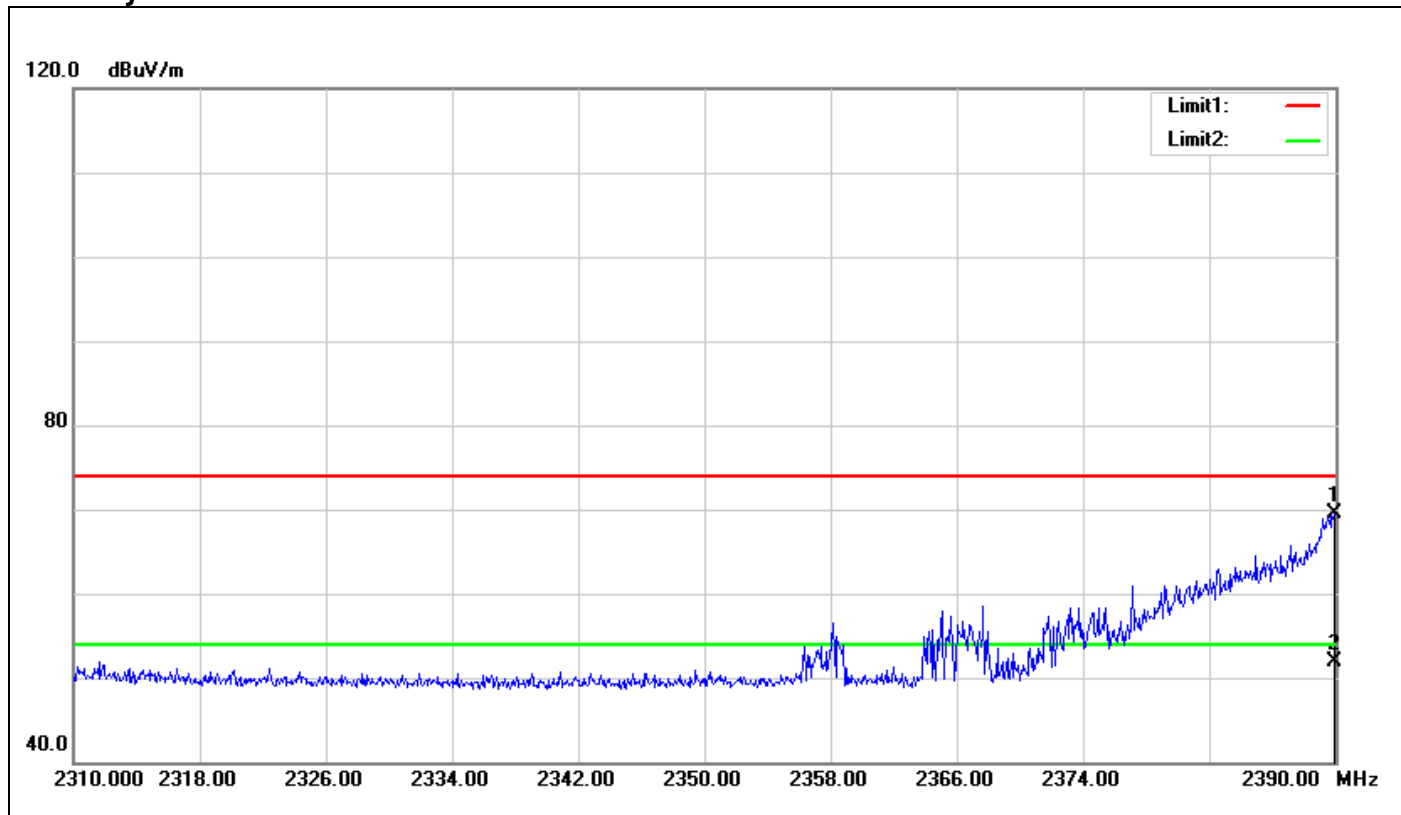

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.920	71.99	-2.49	69.50	74.00	-4.50	150	86	peak
2	2389.920	54.30	-2.49	51.81	54.00	-2.19	150	86	AVG


Polarity: Horizontal

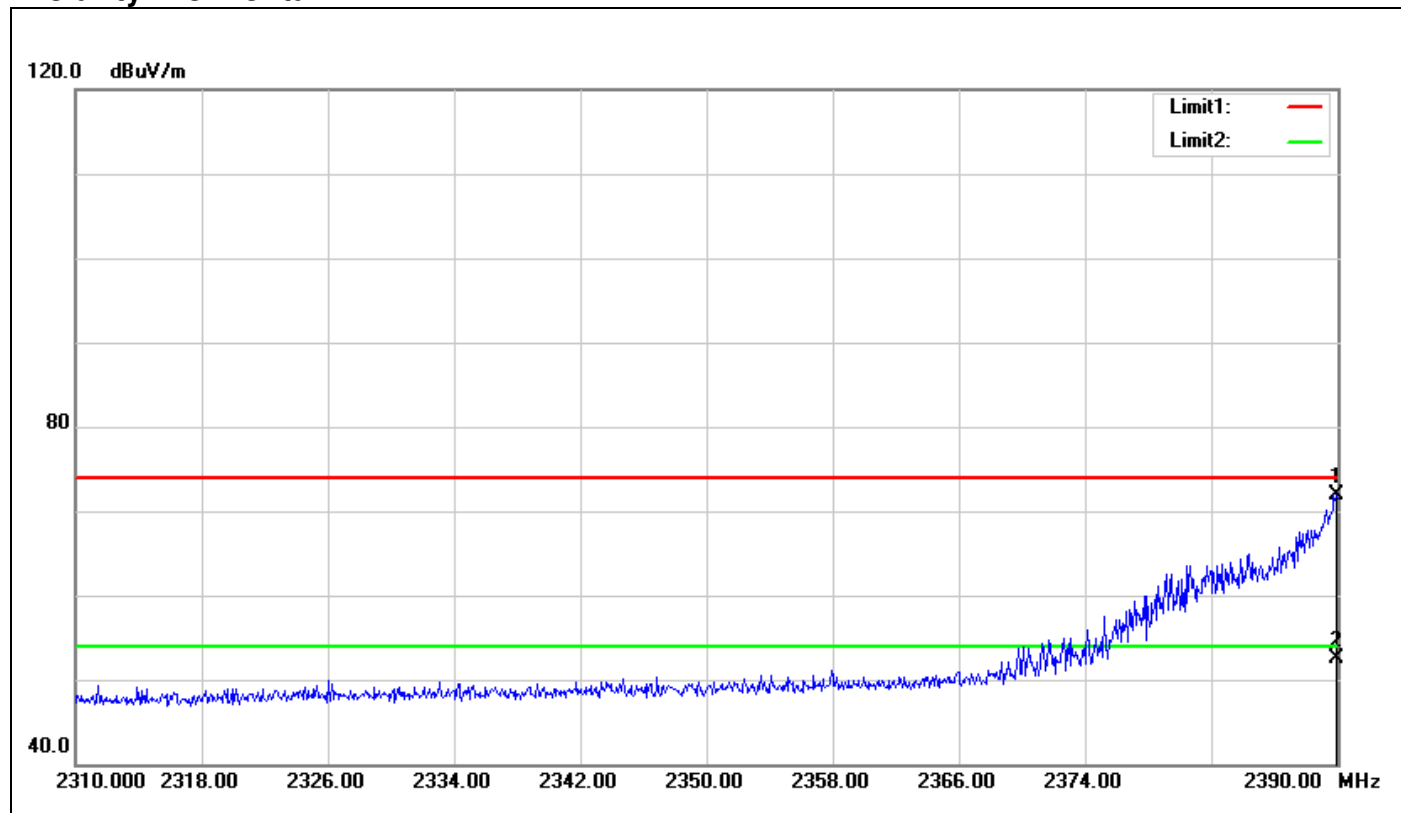

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.920	74.42	-2.49	71.93	74.00	-2.07	100	122	peak
2	2389.920	55.00	-2.49	52.51	54.00	-1.49	100	122	AVG


Band Edges (IEEE 802.11g mode / CH High)

Polarity: Vertical

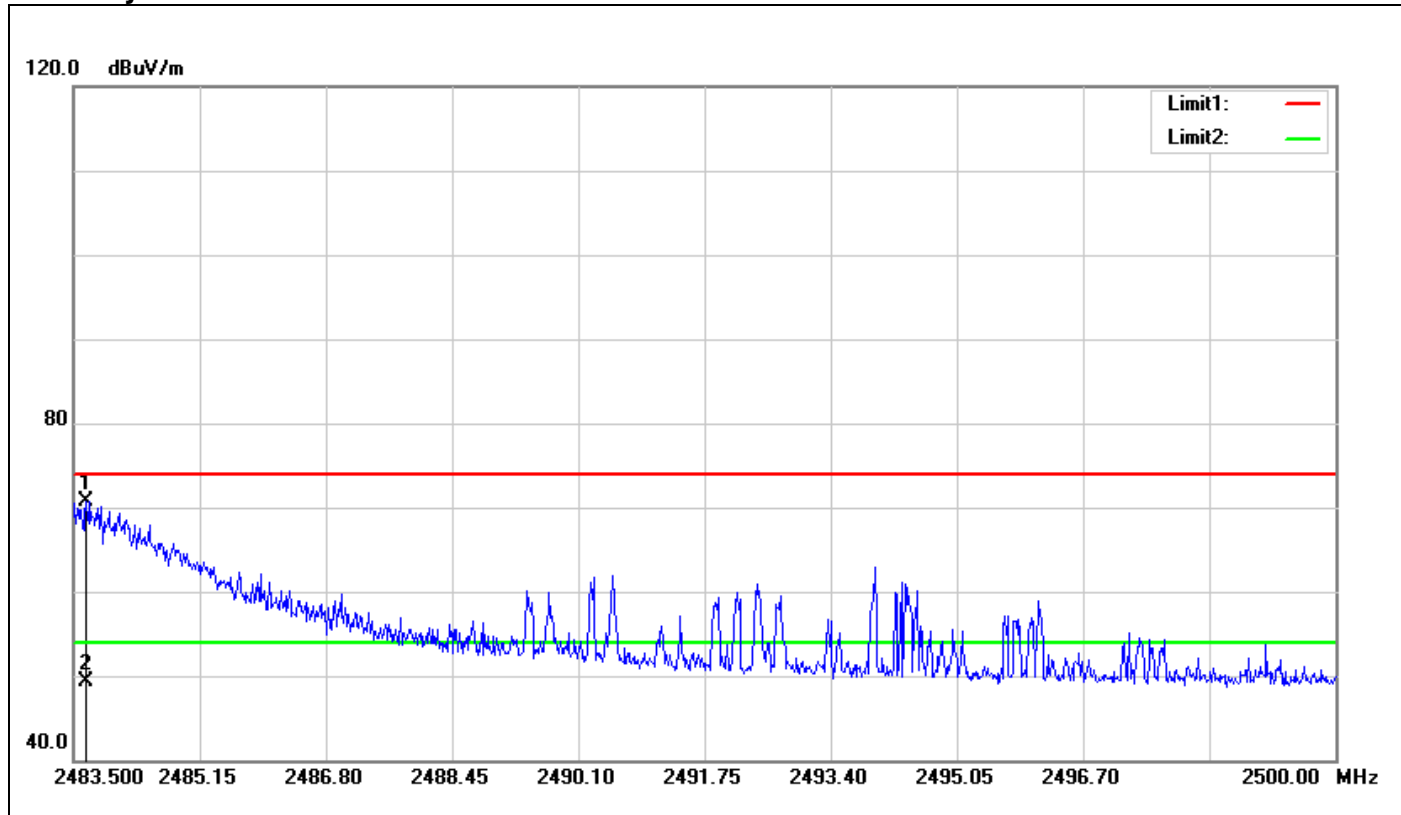

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.665	72.75	-1.99	70.76	74.00	-3.24	150	114	peak
2	2483.665	51.38	-1.99	49.39	54.00	-4.61	150	114	AVG


Polarity: Horizontal

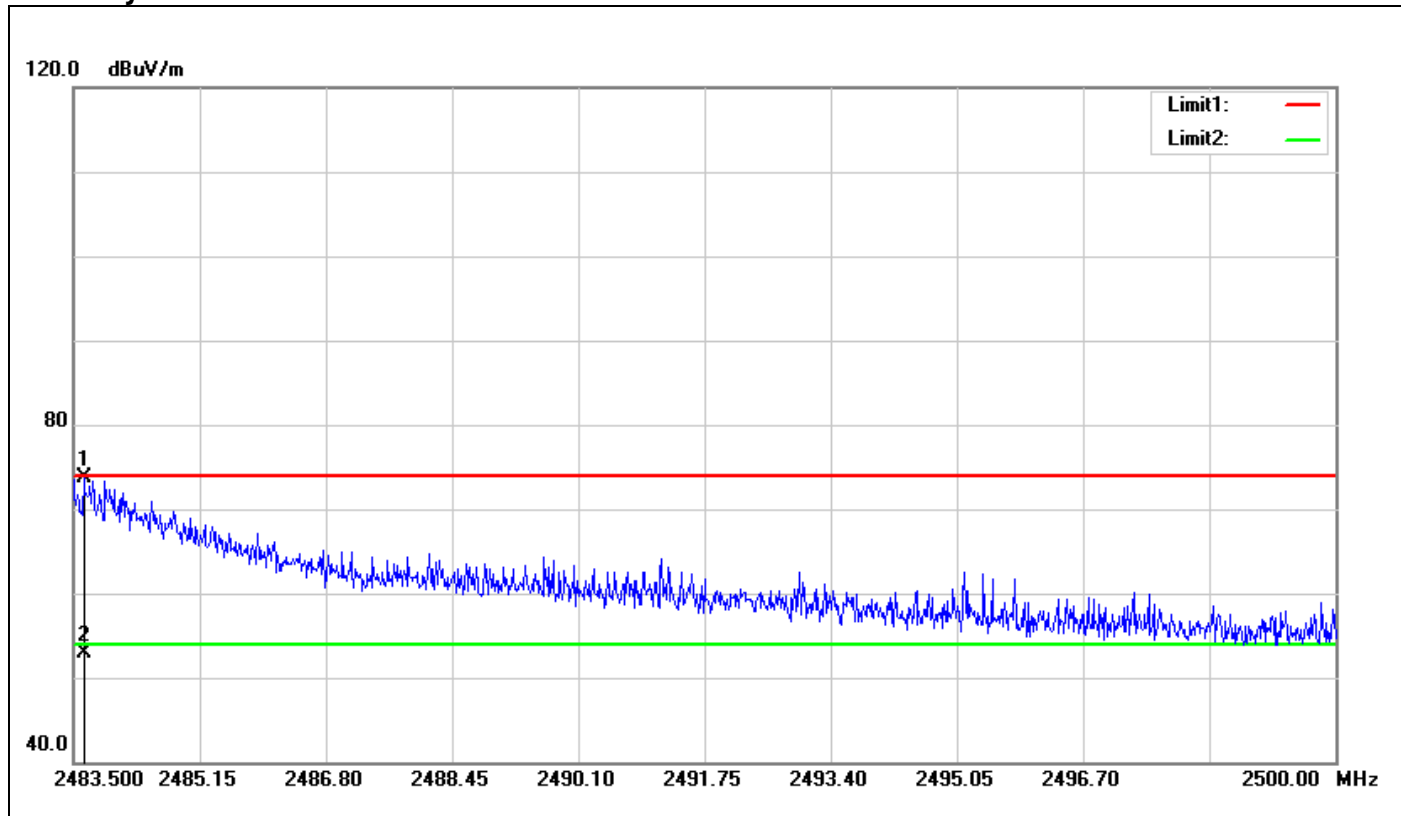

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.632	75.64	-1.99	73.65	74.00	-0.35	150	342	peak
2	2483.632	54.99	-1.99	53.00	54.00	-1.00	150	342	AVG


Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)

Polarity: Vertical

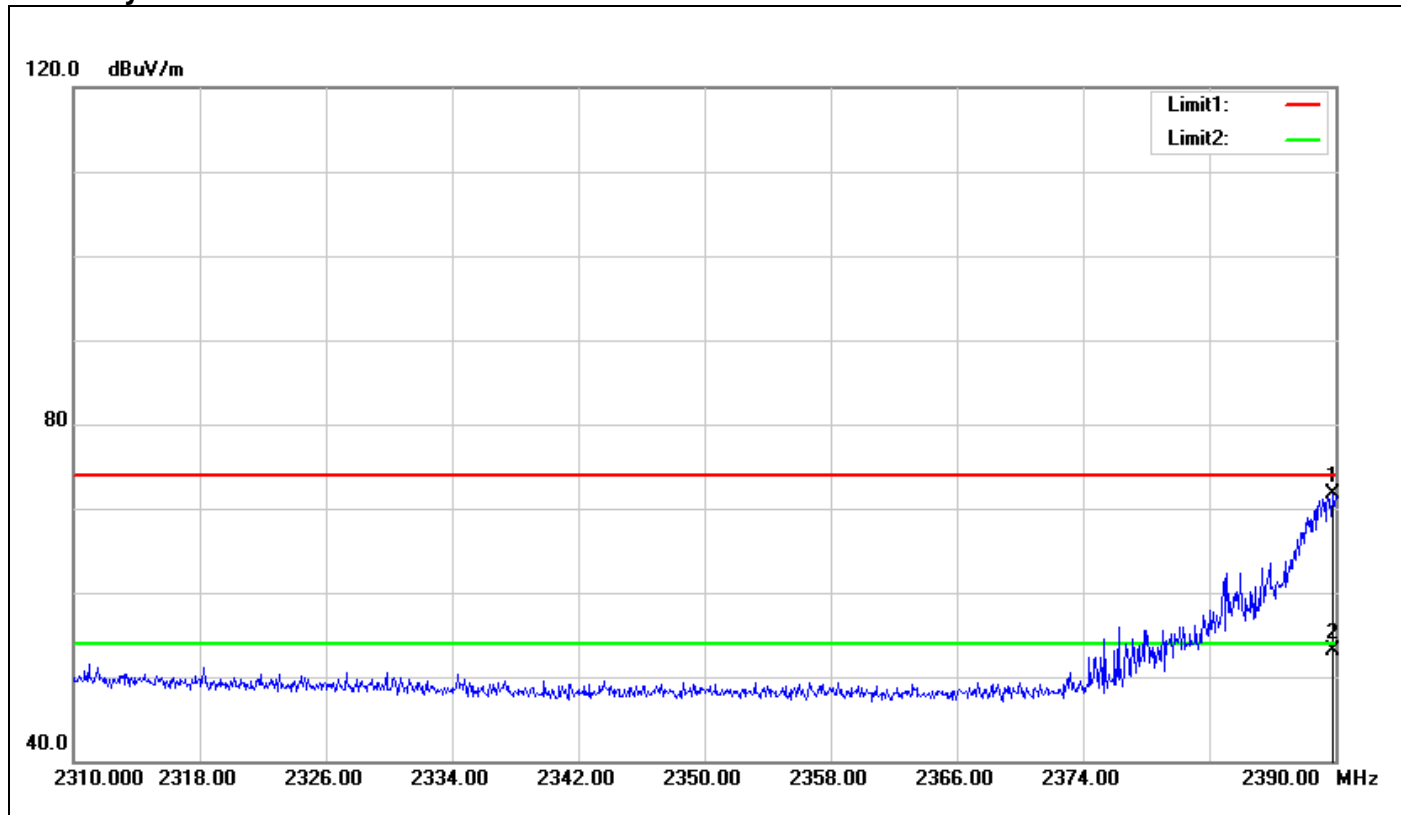

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.840	74.24	-2.49	71.75	74.00	-2.25	150	245	peak
2	2389.840	55.66	-2.49	53.17	54.00	-0.83	150	245	AVG


Polarity: Horizontal

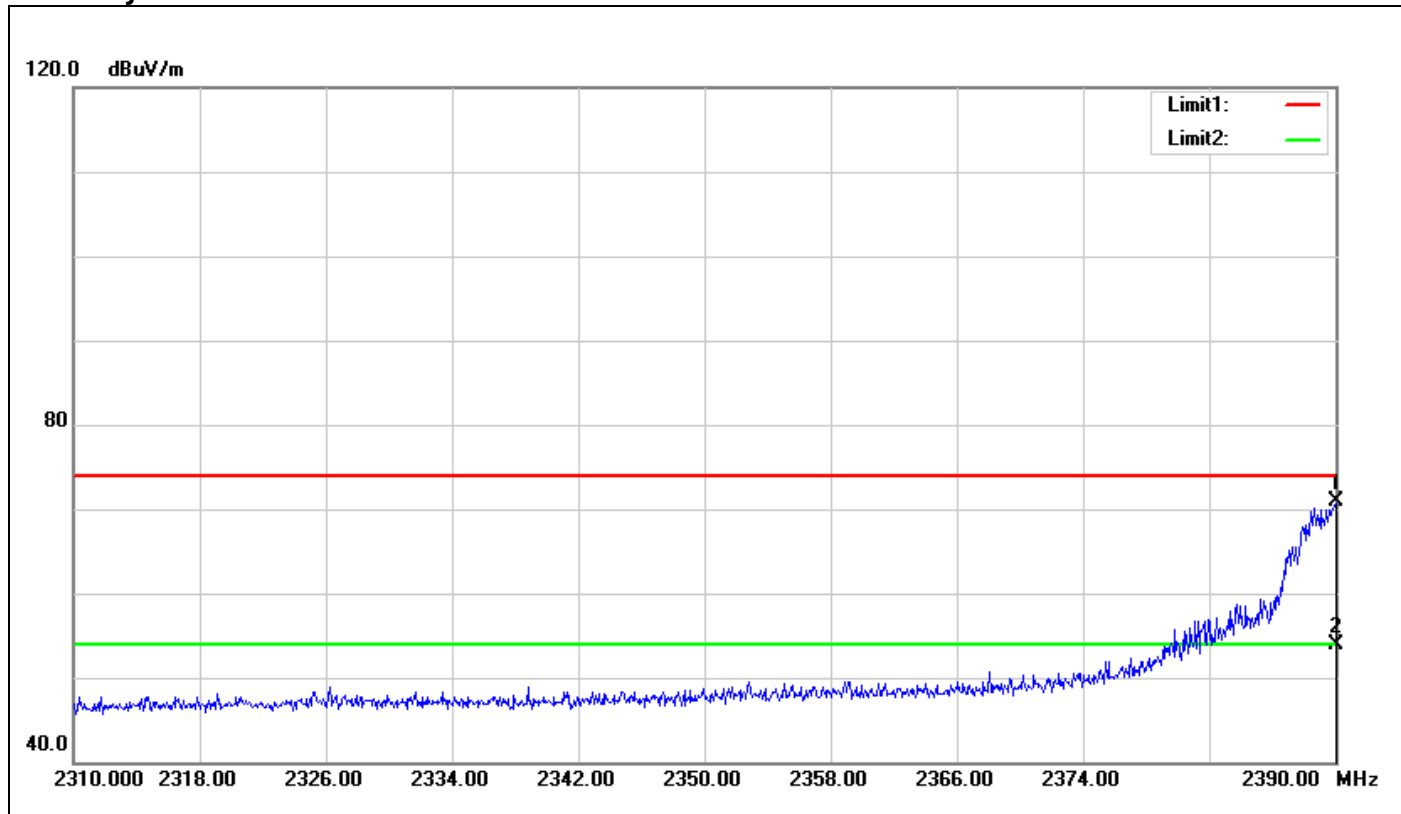

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2390.000	73.41	-2.49	70.92	74.00	-3.08	150	171	peak
2	2390.000	56.32	-2.49	53.83	54.00	-0.17	150	171	AVG


Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)

Polarity: Vertical

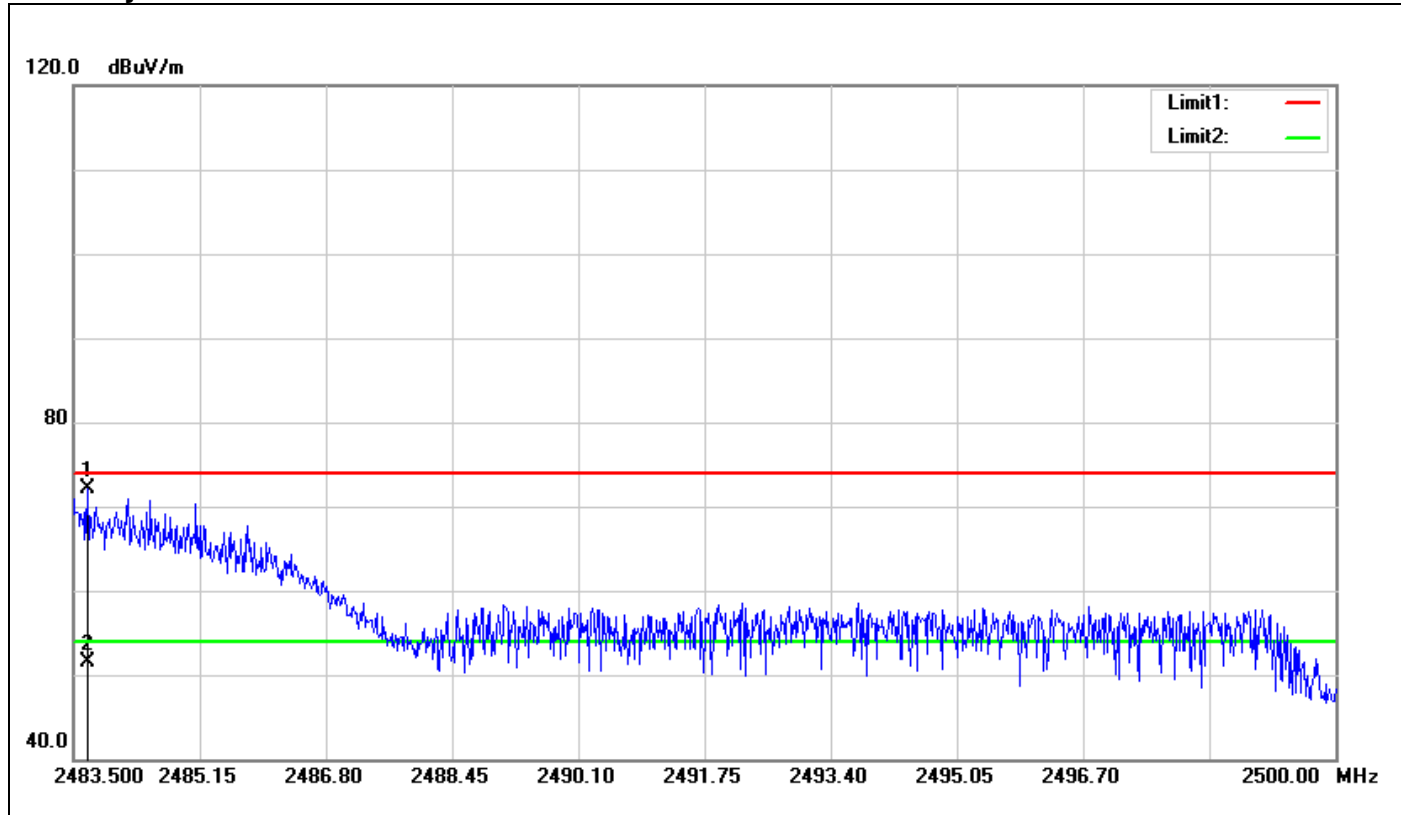

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.682	74.07	-1.99	72.08	74.00	-1.92	150	221	peak
2	2483.682	53.53	-1.99	51.54	54.00	-2.46	150	221	AVG


Polarity: Horizontal

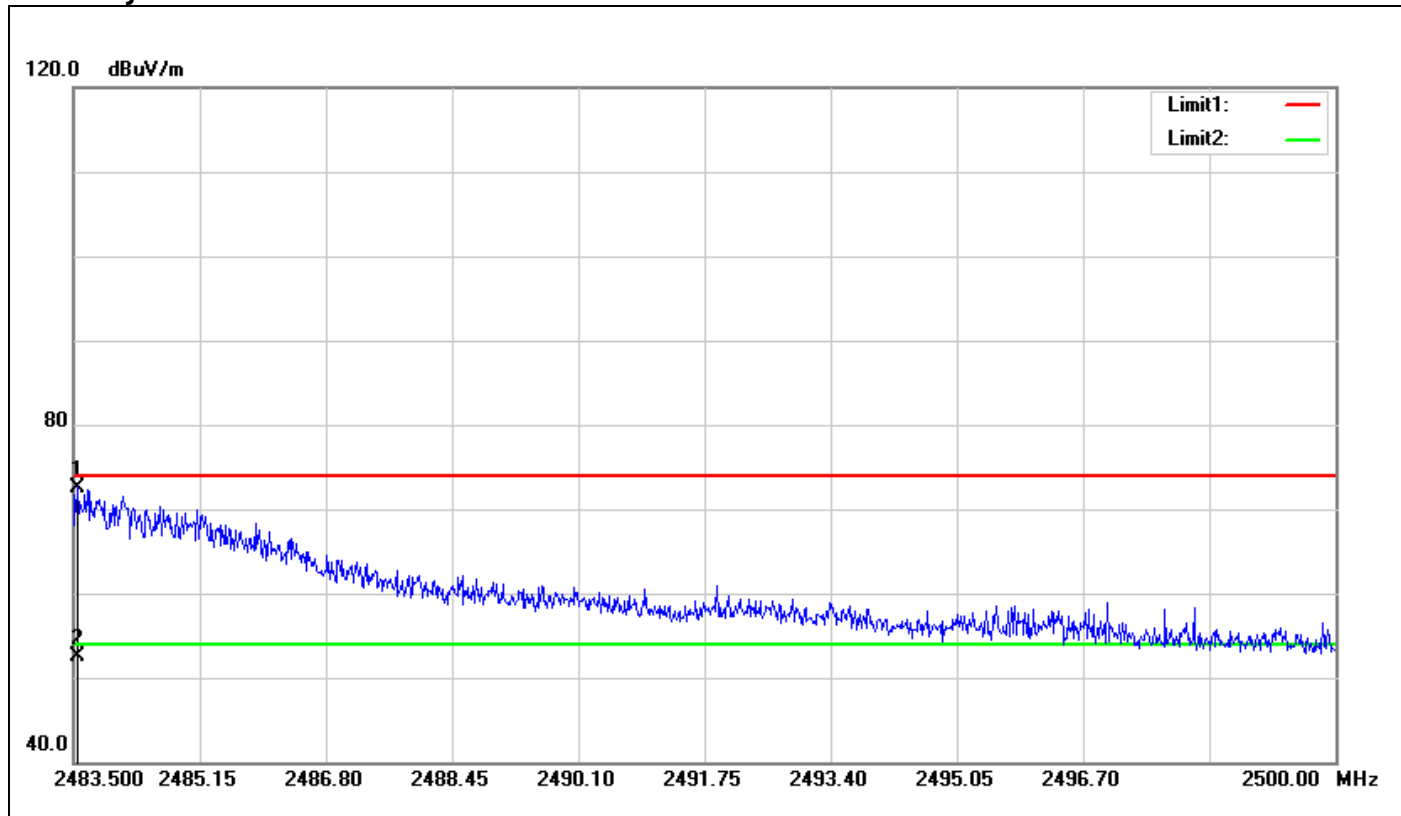

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.550	74.59	-1.99	72.60	74.00	-1.40	150	177	peak
2	2483.550	54.56	-1.99	52.57	54.00	-1.43	150	177	AVG


Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)

Polarity: Vertical

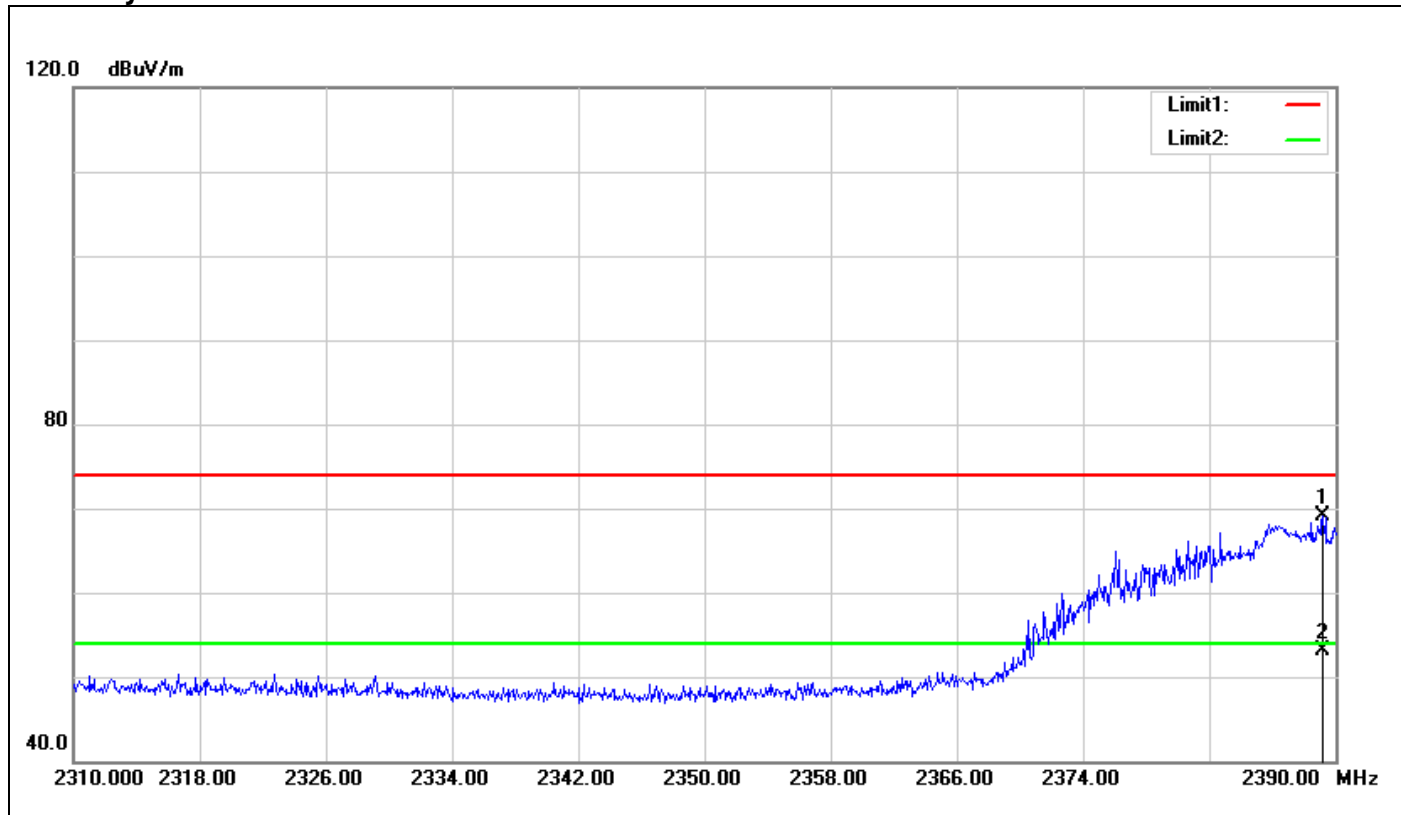

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.200	71.62	-2.50	69.12	74.00	-4.88	150	277	peak
2	2389.200	55.63	-2.50	53.13	54.00	-0.87	150	277	AVG


Polarity: Horizontal

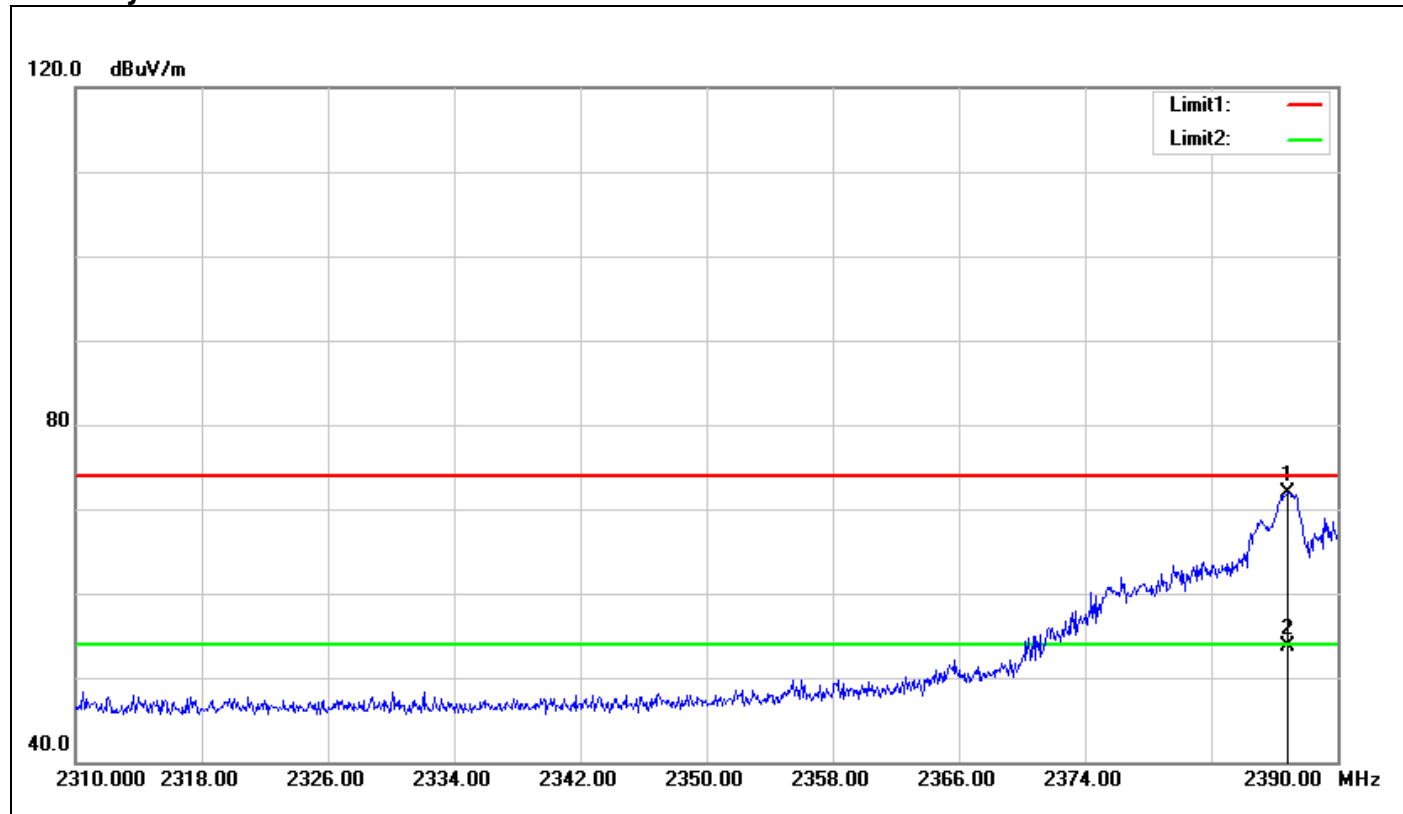


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2386.800	74.43	-2.52	71.91	74.00	-2.09	150	111	peak
2	2386.800	56.17	-2.52	53.65	54.00	-0.35	150	111	AVG

Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)

Polarity: Vertical

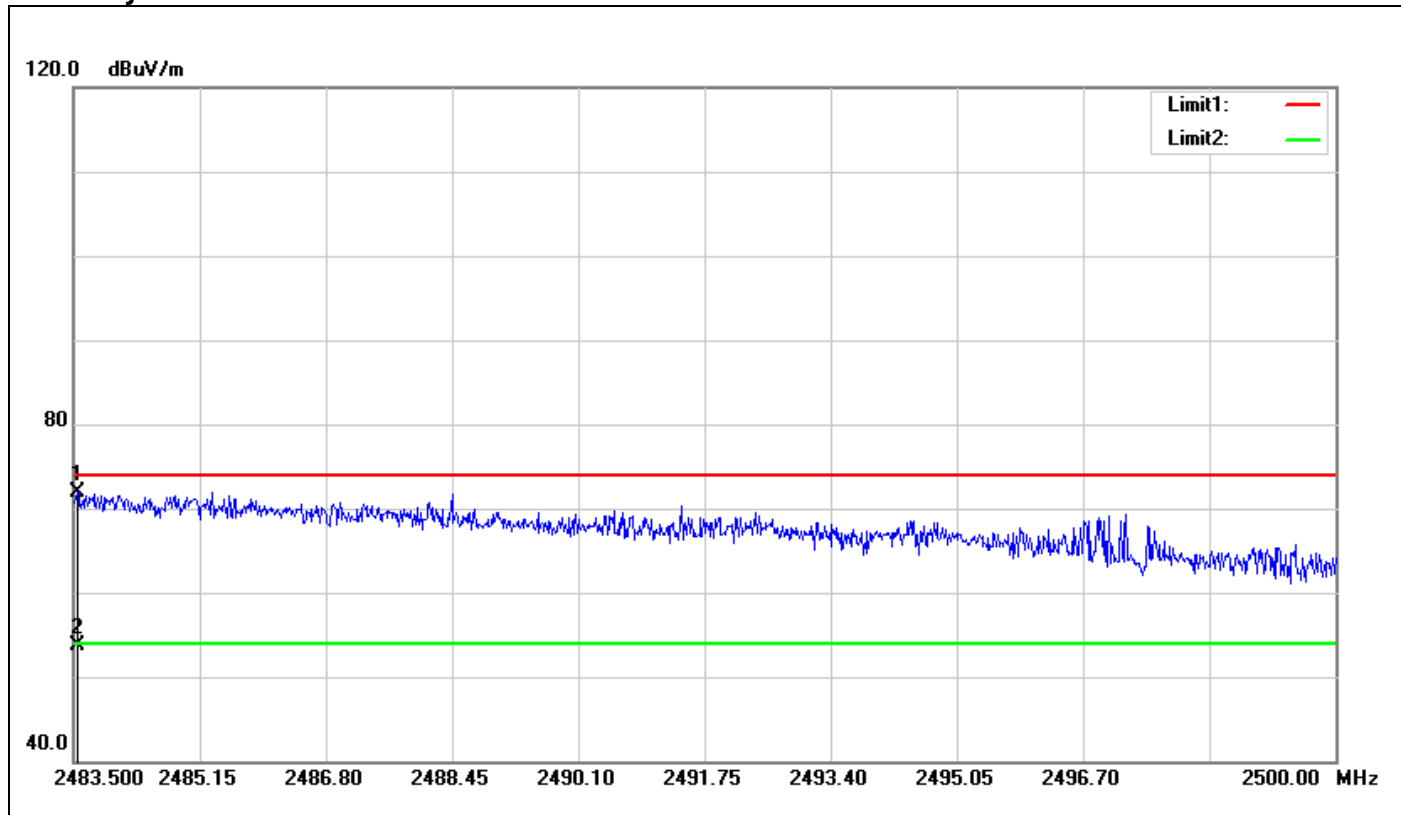

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.550	73.83	-1.99	71.84	74.00	-2.16	150	360	peak
2	2483.550	55.63	-1.99	53.64	54.00	-0.36	150	360	AVG

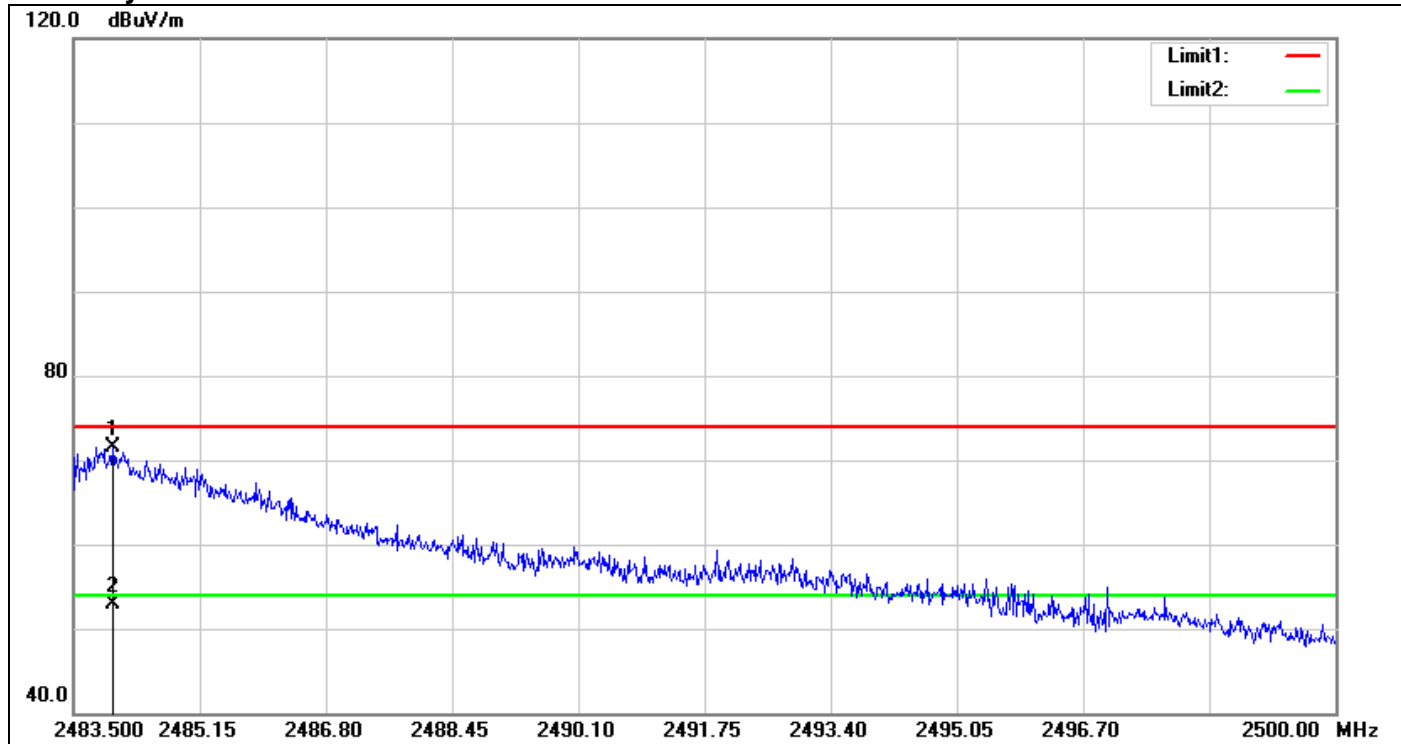
Polarity: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2484.012	73.50	-1.99	71.51	74.00	-2.49	150	210	peak
2	2484.012	54.92	-1.99	52.93	54.00	-1.07	150	210	AVG


For Dipole Antenna

Band Edges (IEEE 802.11b mode / CH Low)

Polarity: Vertical

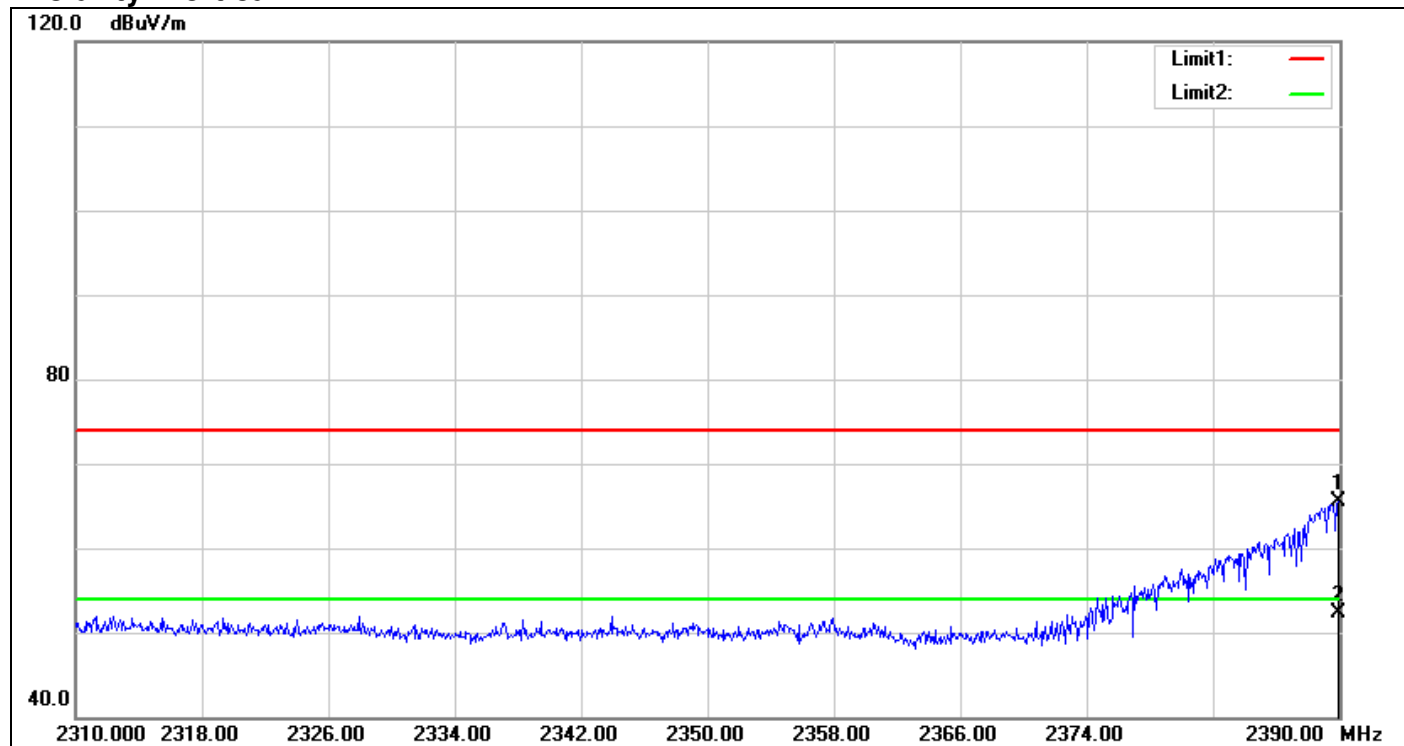


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.920	67.92	-2.49	65.43	74.00	-8.57	150	40	peak
2	2389.920	54.85	-2.49	52.36	54.00	-1.64	150	40	AVG

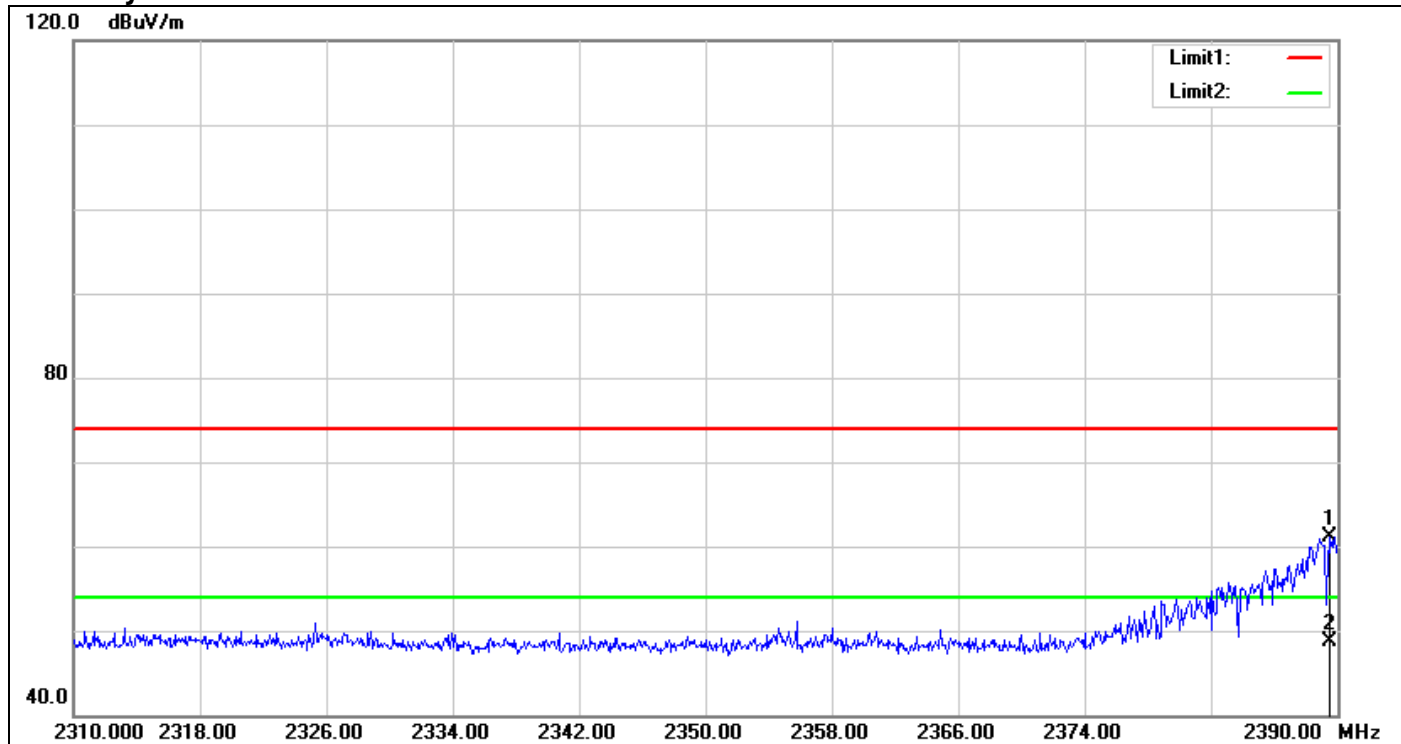Polarity: Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.520	63.62	-2.49	61.13	74.00	-12.87	150	157	peak
2	2389.520	51.23	-2.49	48.74	54.00	-5.26	150	157	AVG

Band Edges (IEEE 802.11b mode / CH High)

Polarity: Vertical

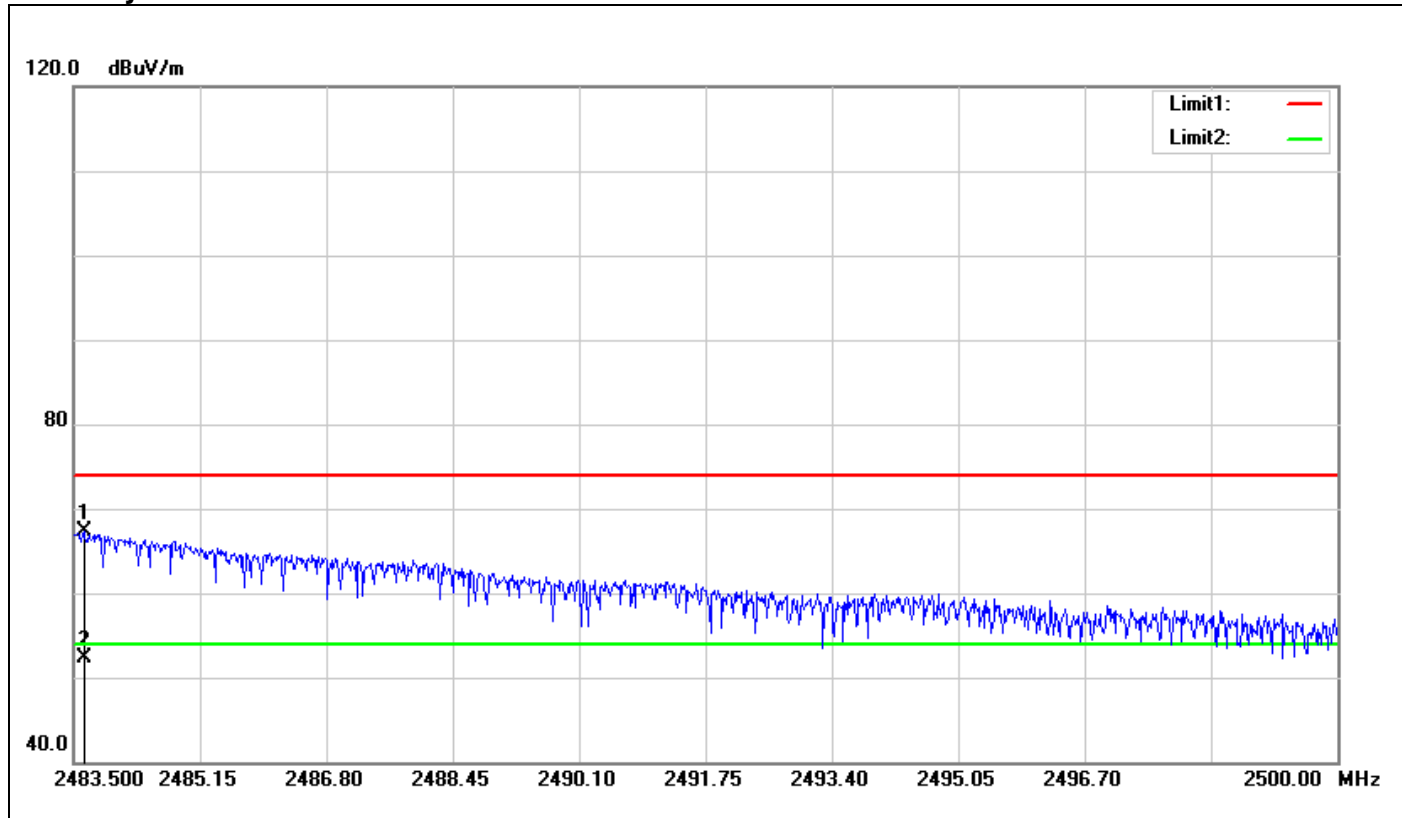


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.632	69.23	-1.99	67.24	74.00	-6.76	150	190	peak
2	2483.632	54.33	-1.99	52.34	54.00	-1.66	150	190	AVG

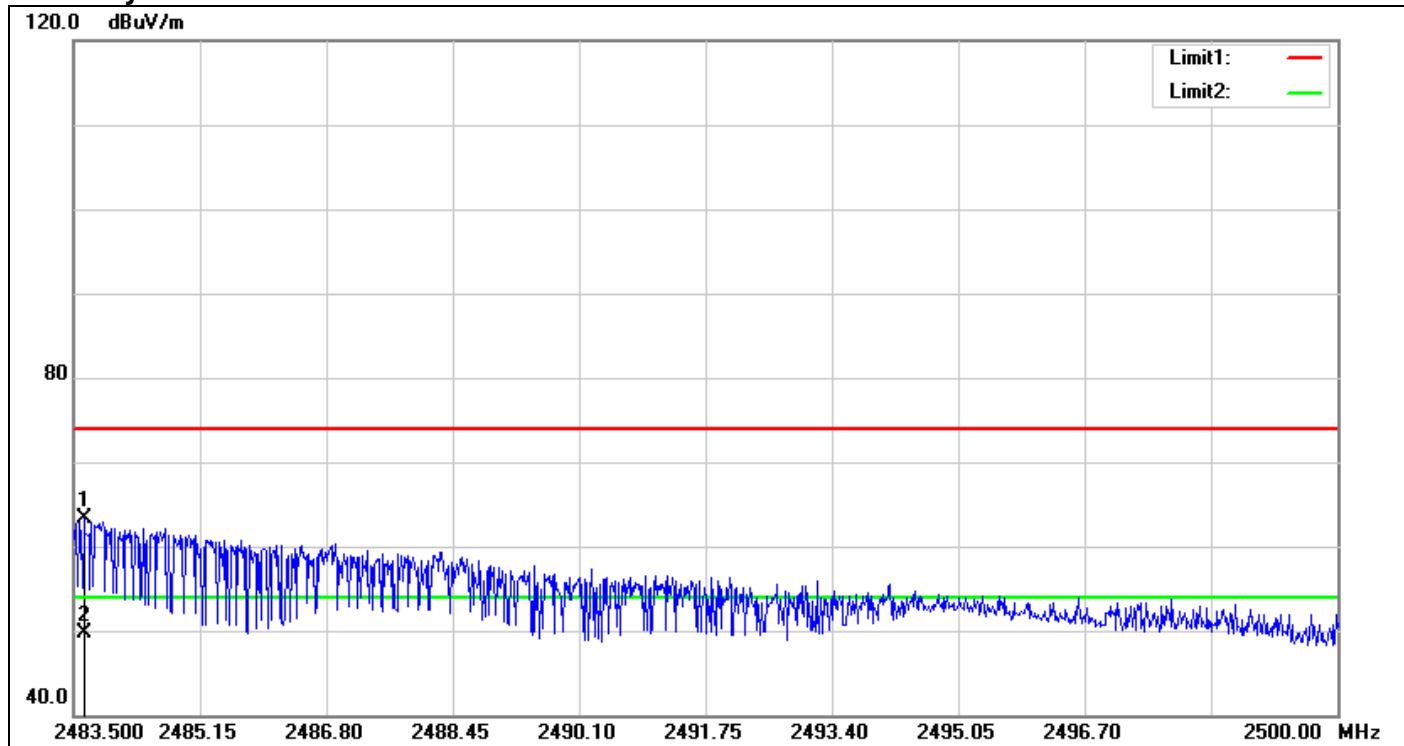Polarity: Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.632	65.21	-1.99	63.22	74.00	-10.78	150	190	peak
2	2483.632	51.74	-1.99	49.75	54.00	-4.25	150	190	AVG

Band Edges (IEEE 802.11g mode / CH Low)

Polarity: Vertical

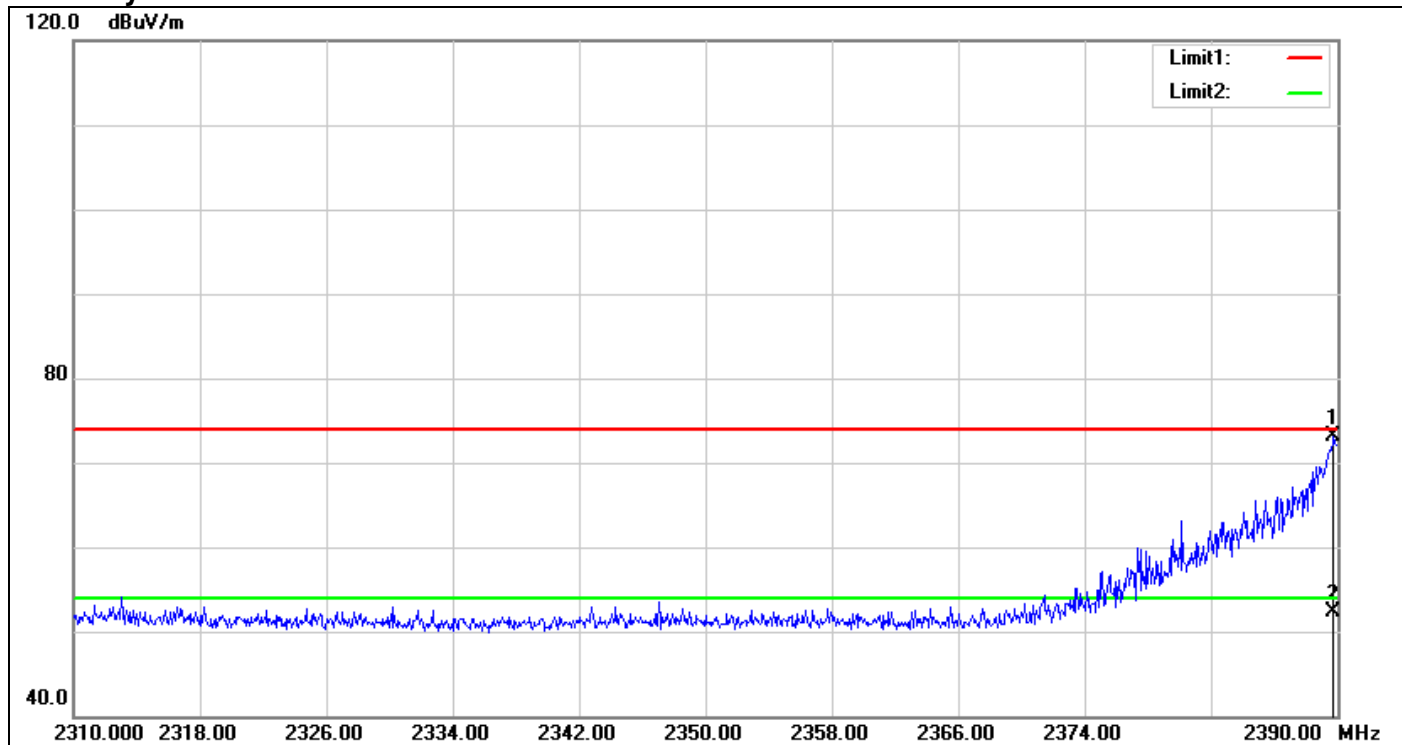


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.760	75.50	-2.49	73.01	74.00	-0.99	150	217	peak
2	2389.760	54.86	-2.49	52.37	54.00	-1.63	150	217	AVG

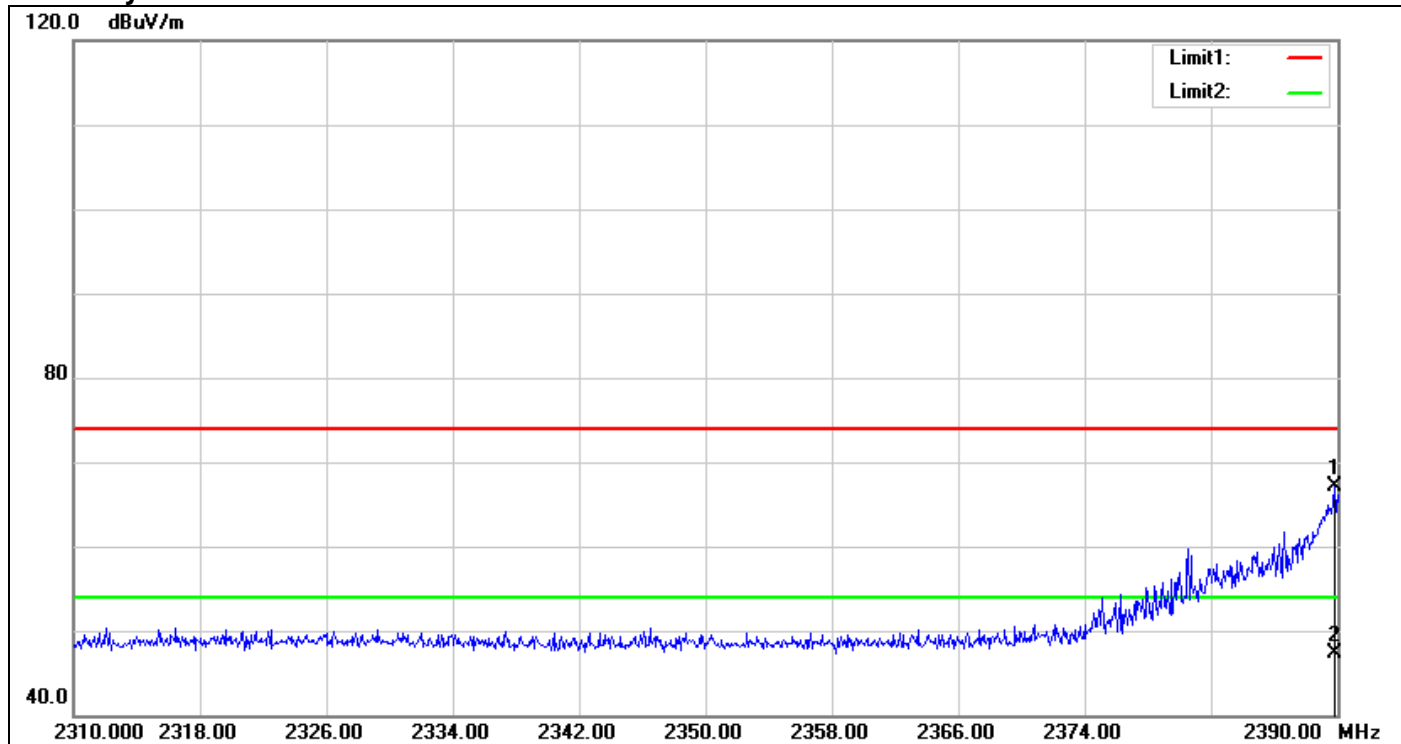Polarity: Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.840	69.53	-2.49	67.04	74.00	-6.96	150	173	peak
2	2389.840	49.78	-2.49	47.29	54.00	-6.71	150	173	AVG

Band Edges (IEEE 802.11g mode / CH High)

Polarity: Vertical

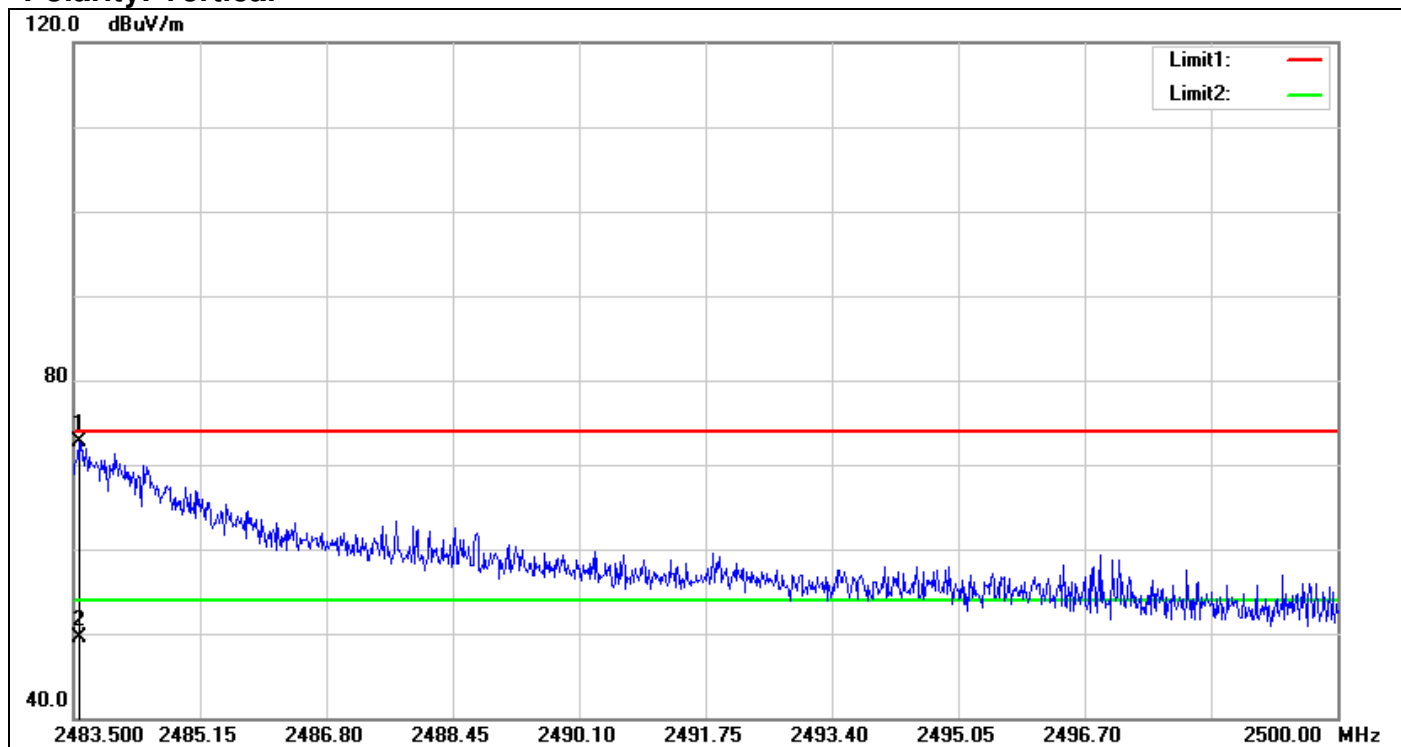


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.566	74.66	-1.99	72.67	74.00	-1.33	150	272	peak
2	2483.566	51.40	-1.99	49.41	54.00	-4.59	150	272	AVG

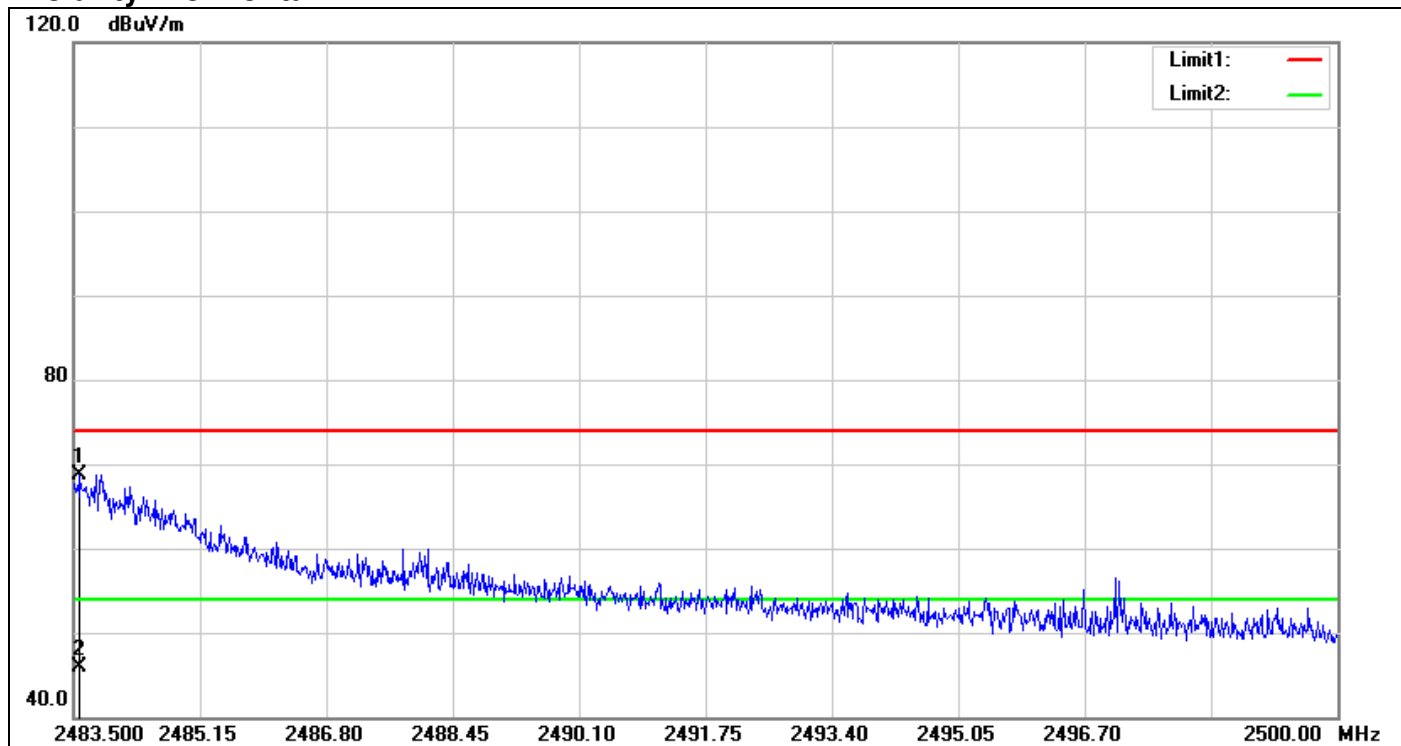Polarity: Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.582	70.79	-1.99	68.80	74.00	-5.20	150	225	peak
2	2483.582	47.93	-1.99	45.94	54.00	-8.06	150	225	AVG

Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)

Polarity: Vertical

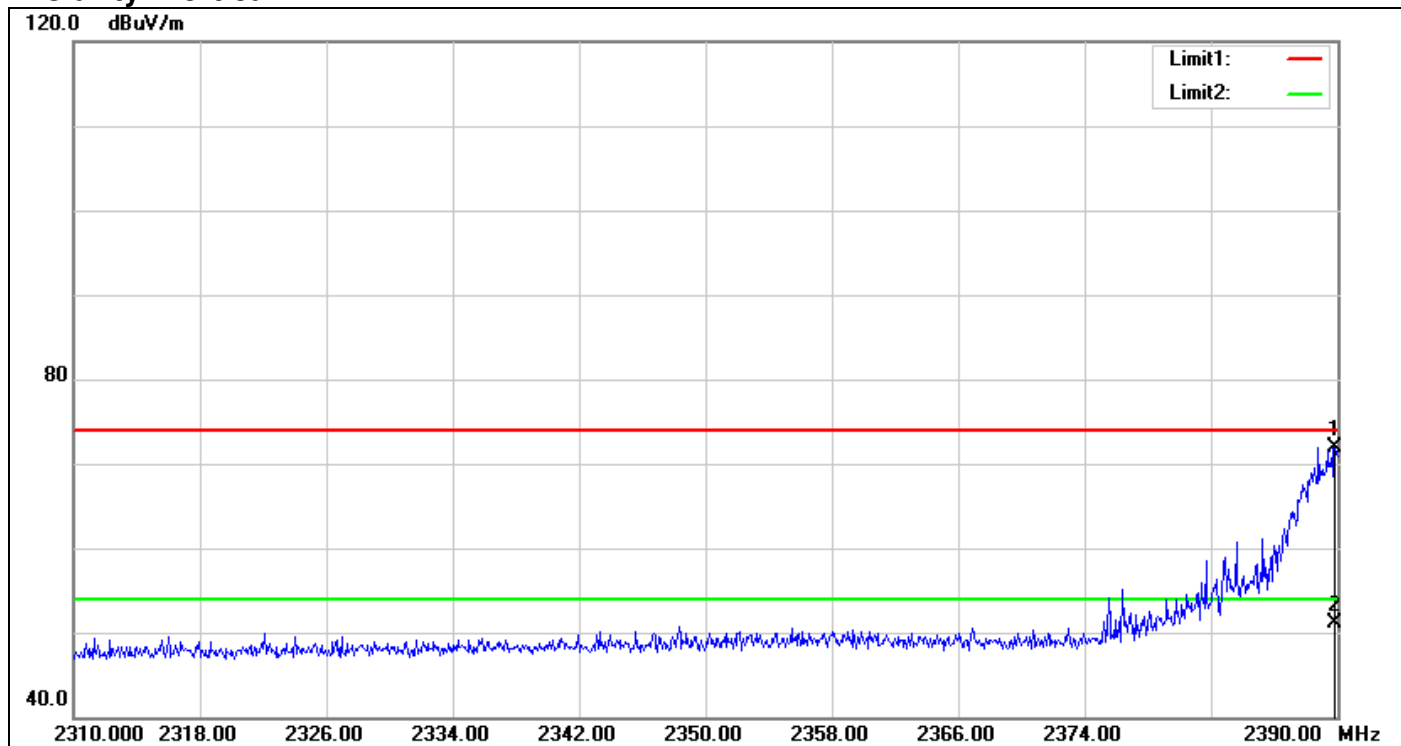


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.840	74.44	-2.49	71.95	74.00	-2.05	150	302	peak
2	2389.840	53.53	-2.49	51.04	54.00	-2.96	150	302	AVG

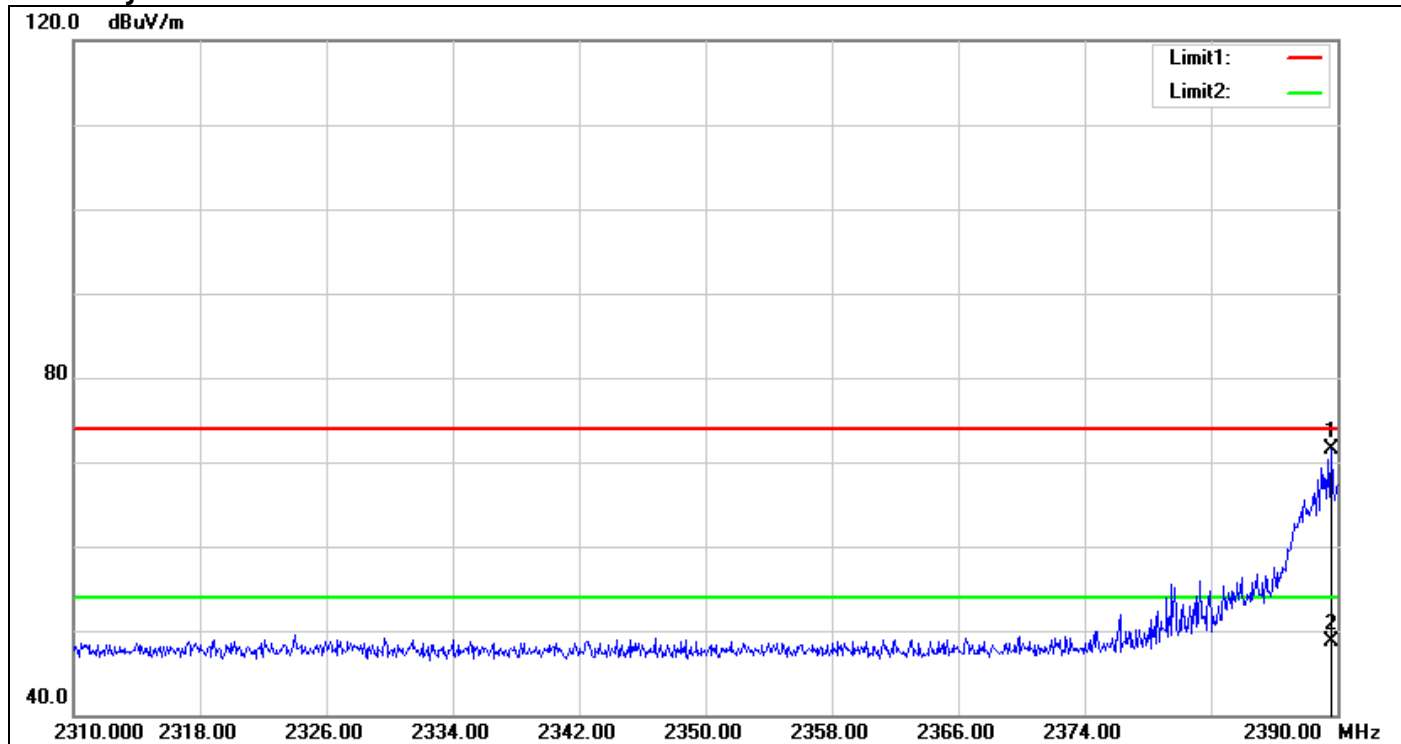Polarity: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.600	73.94	-2.49	71.45	74.00	-2.55	150	37	peak
2	2389.600	51.19	-2.49	48.70	54.00	-5.30	150	37	AVG


Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)

Polarity: Vertical

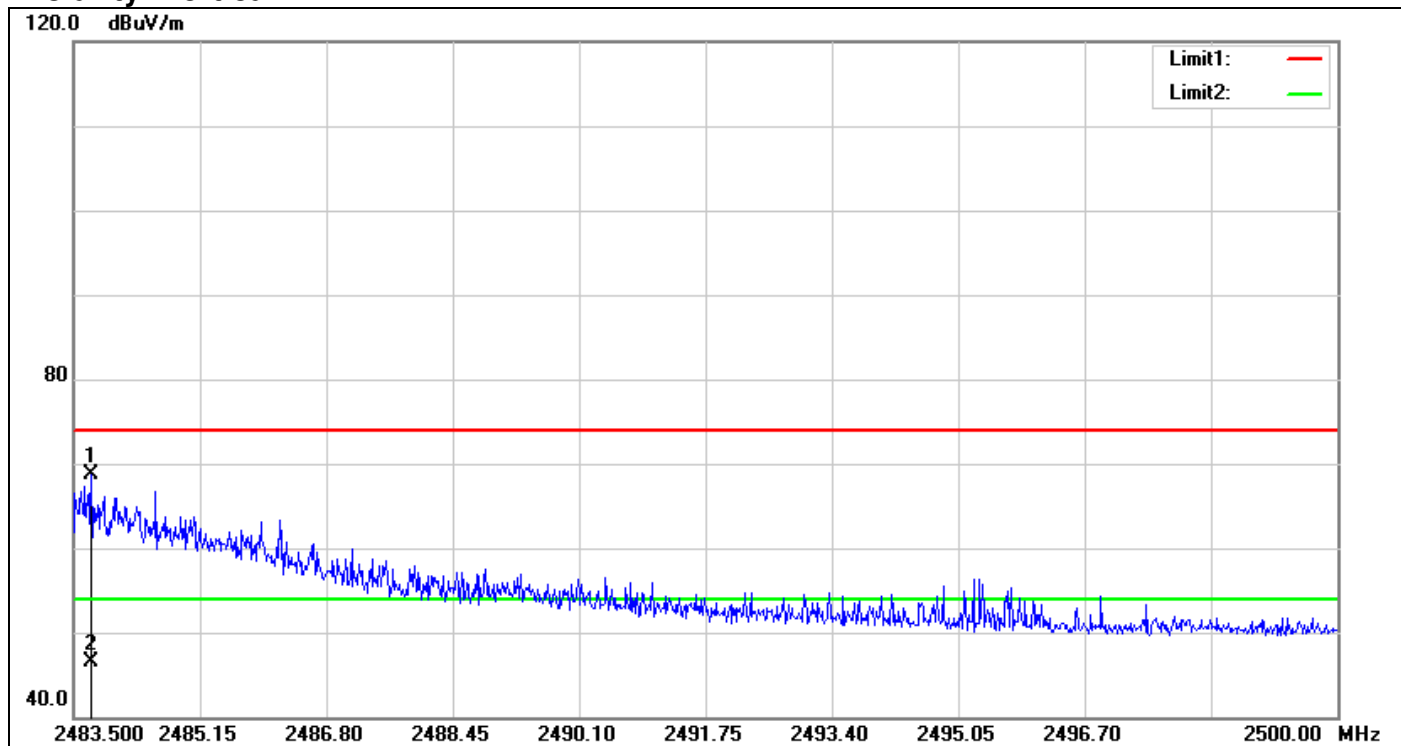

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.731	70.60	-1.99	68.61	74.00	-5.39	150	29	peak
2	2483.731	48.46	-1.99	46.47	54.00	-7.53	150	29	AVG


Polarity: Horizontal

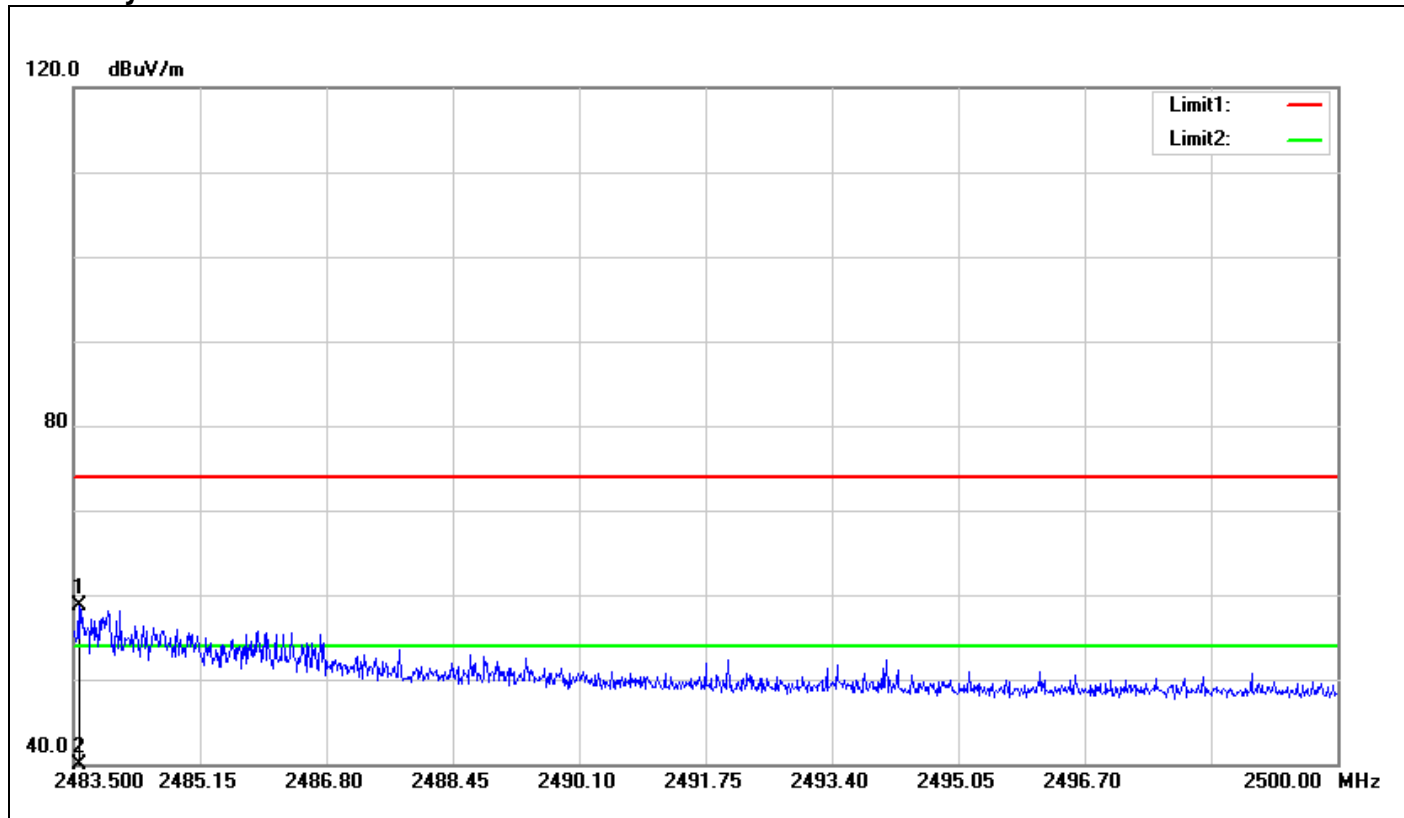


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.566	60.60	-1.99	58.61	74.00	-15.39	150	43	peak
2	2483.566	41.84	-1.99	39.85	54.00	-14.15	150	43	AVG

Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)

Polarity: Vertical

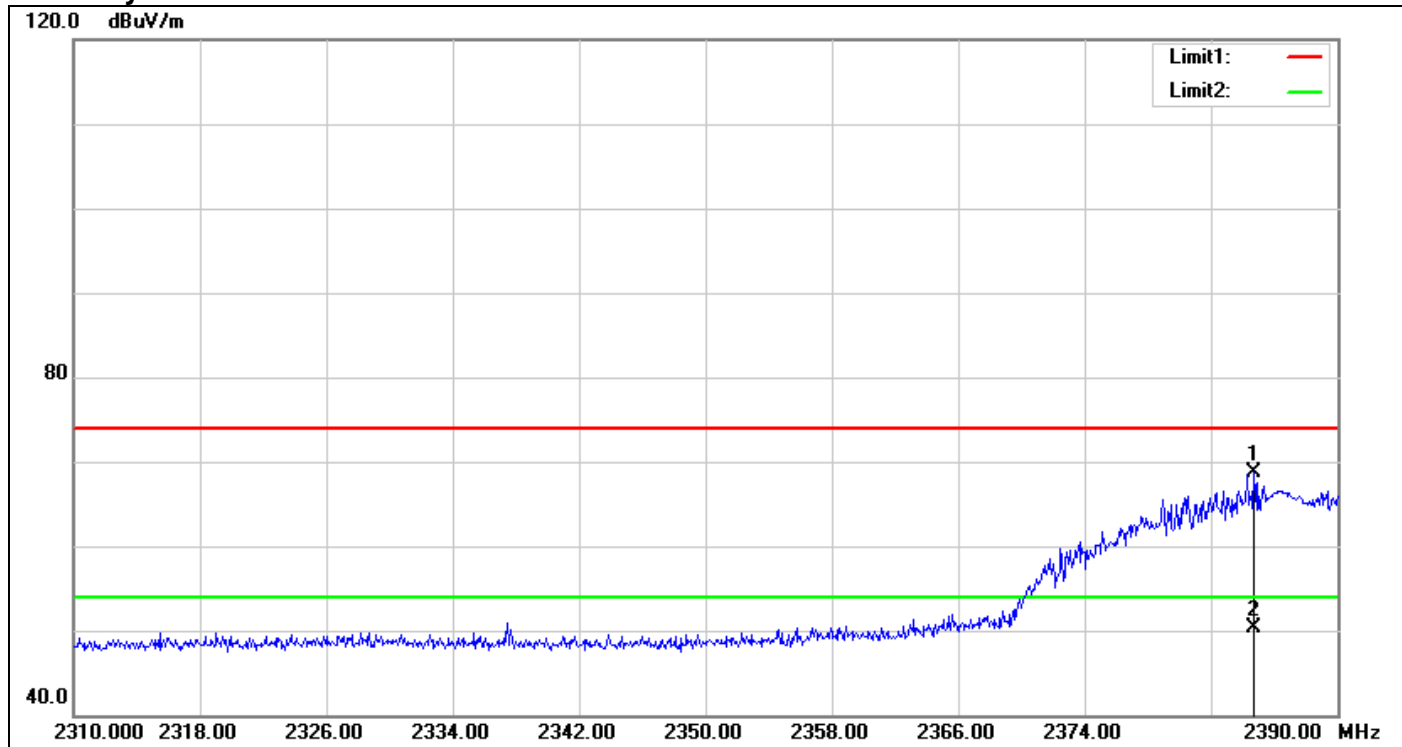


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2384.720	71.20	-2.54	68.66	74.00	-5.34	150	24	peak
2	2384.720	52.79	-2.54	50.25	54.00	-3.75	150	24	AVG

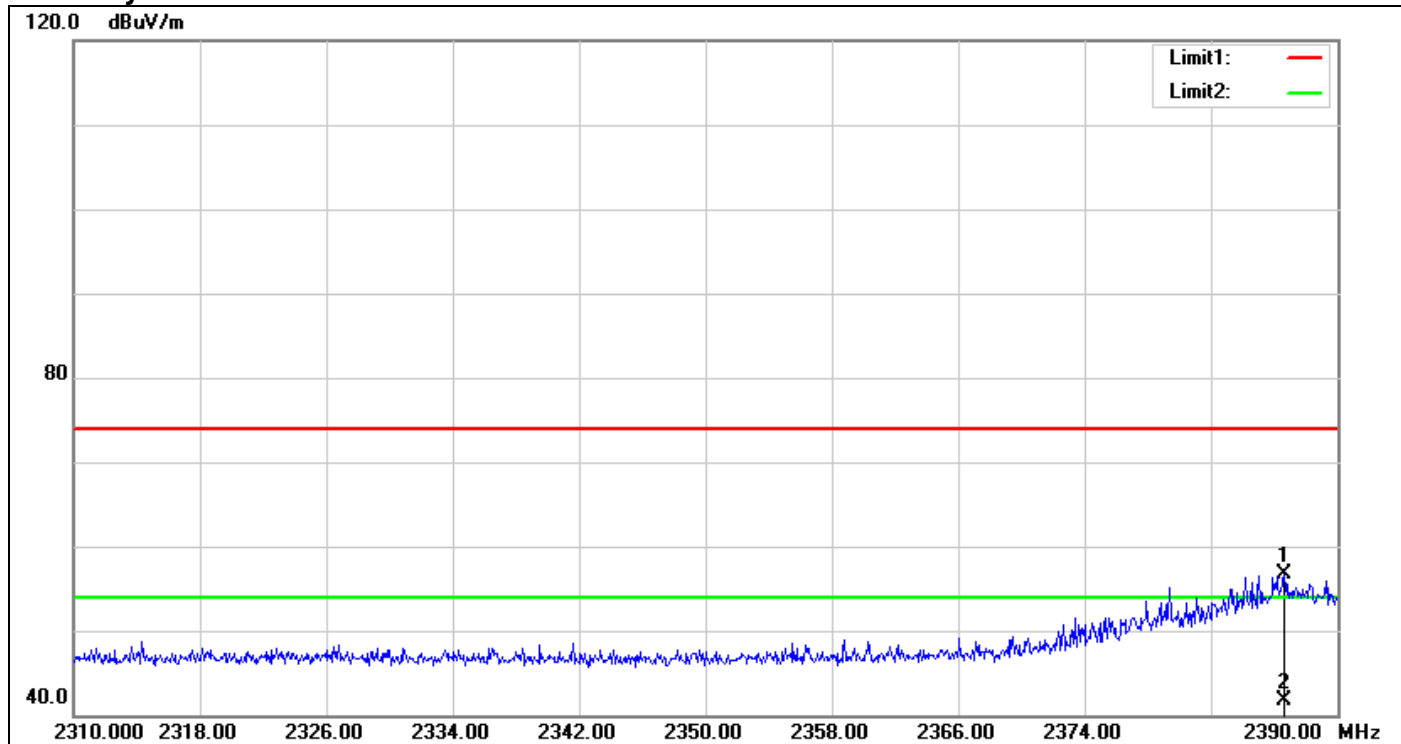Polarity: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2386.640	59.17	-2.52	56.65	74.00	-17.35	150	49	peak
2	2386.640	44.16	-2.52	41.64	54.00	-12.36	150	49	AVG


Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)

Polarity: Vertical

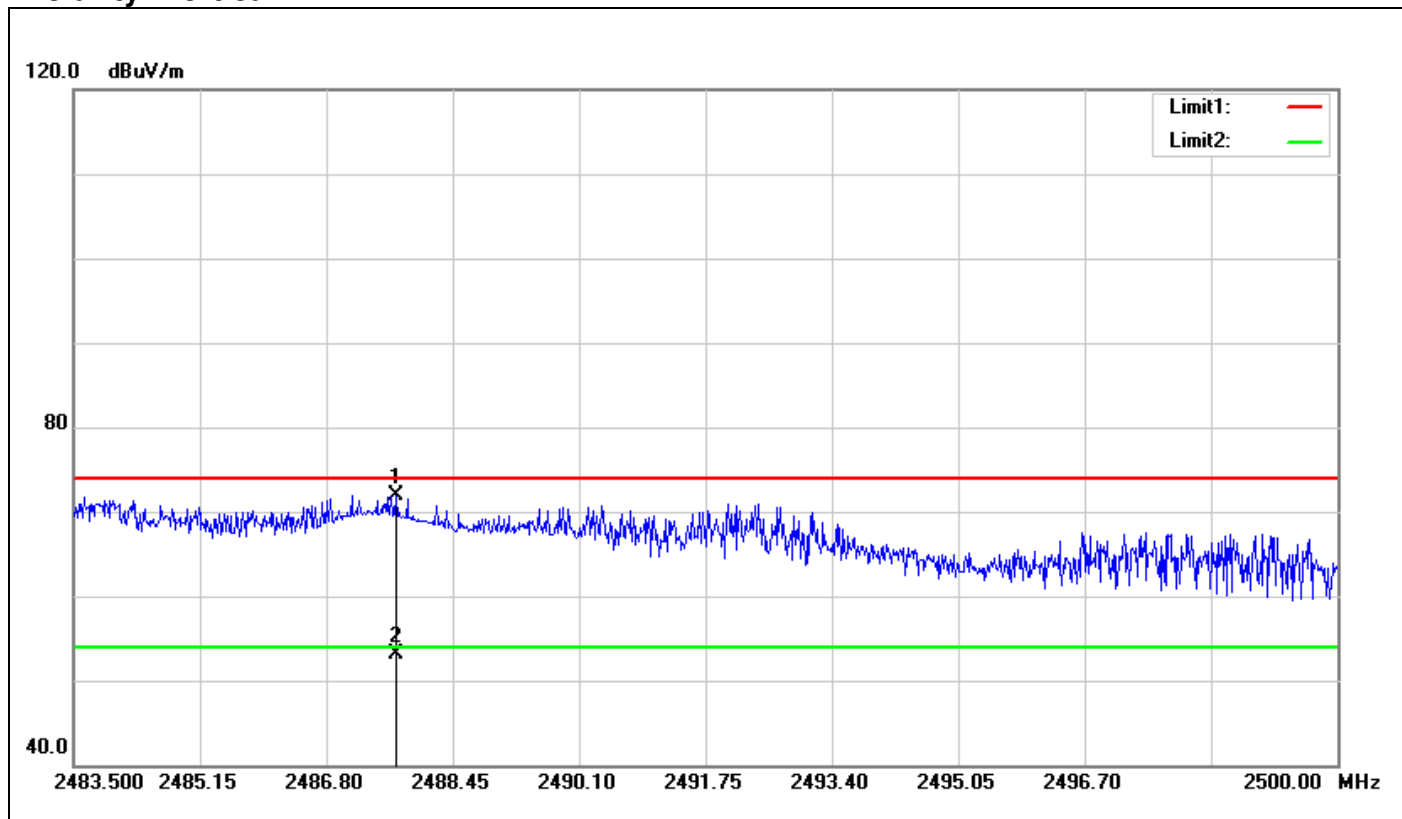

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2487.707	73.76	-1.95	71.81	74.00	-2.19	150	40	peak
2	2487.707	55.02	-1.95	53.07	54.00	-0.93	150	40	AVG


Polarity: Horizontal

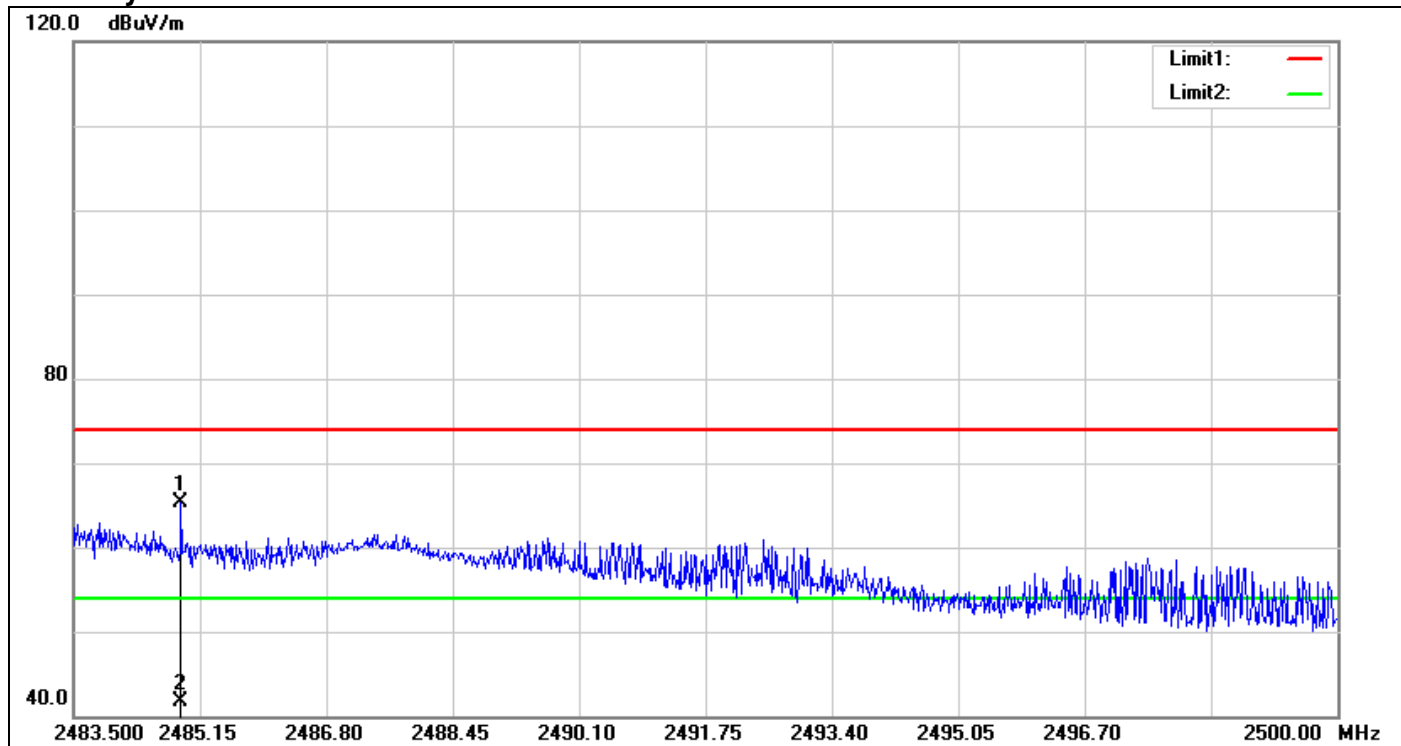

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2484.903	67.26	-1.98	65.28	74.00	-8.72	150	281	peak
2	2484.903	43.74	-1.98	41.76	54.00	-12.24	150	281	AVG


Test Plot

Conducted Band Edges (IEEE 802.11b mode / CH Low)

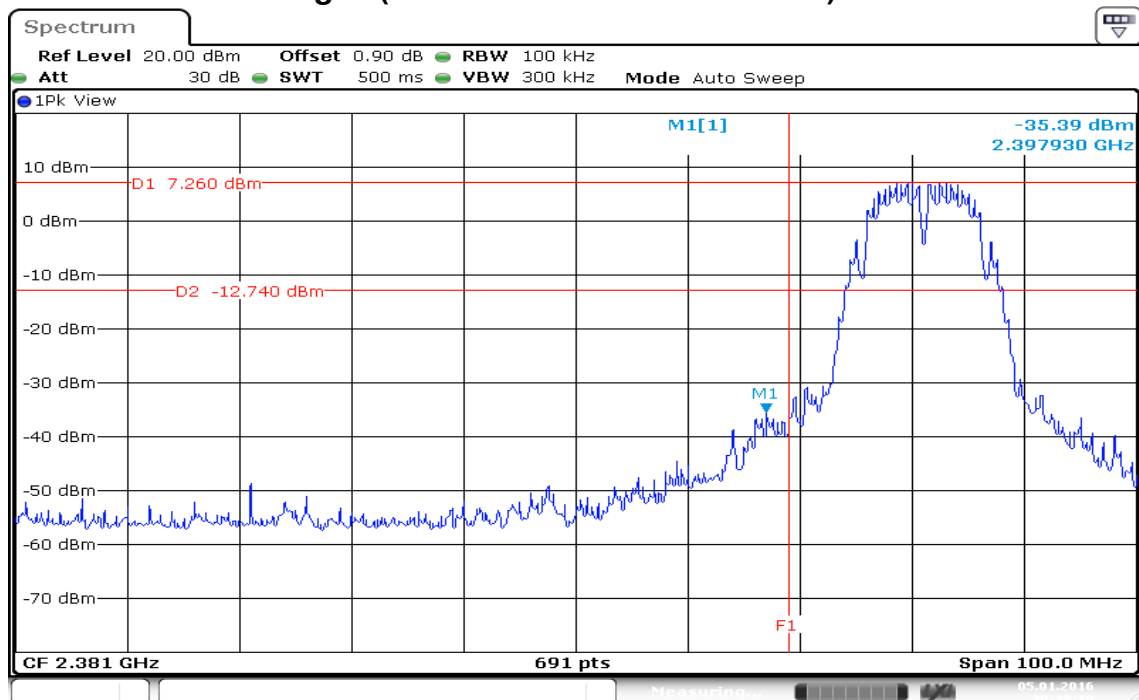

Date: 5.JAN.2016 20:28:19

Conducted Band Edges (IEEE 802.11b mode / CH High)

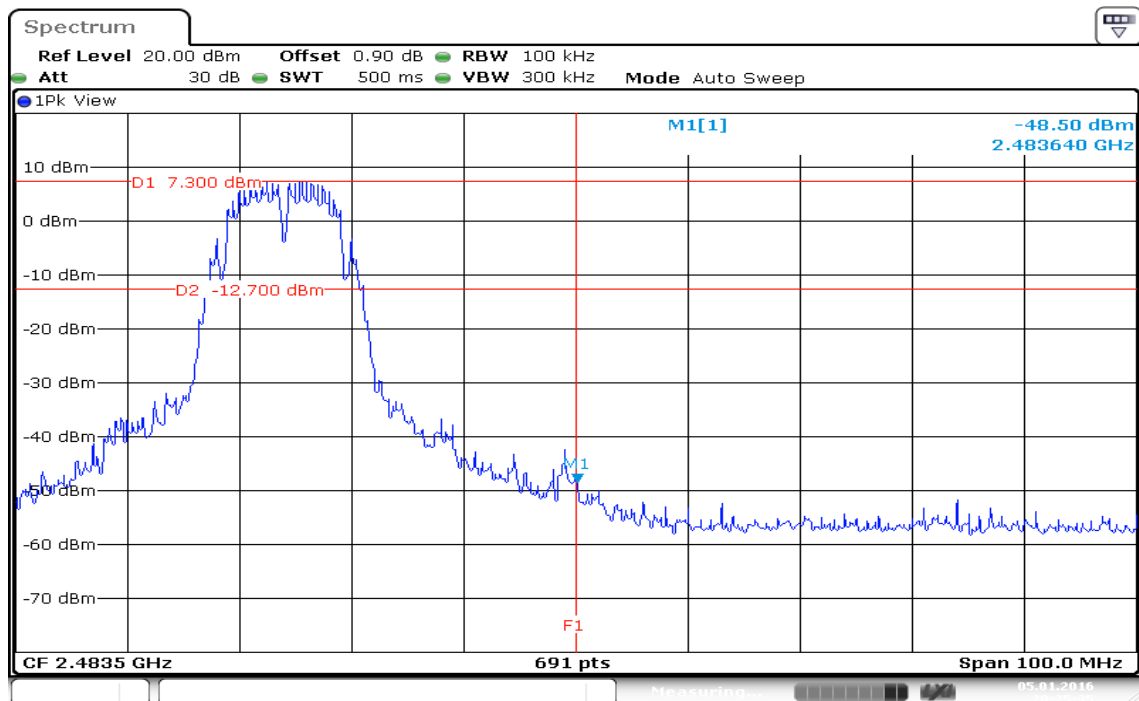

Date: 5.JAN.2016 20:25:35

Spectrum

Ref Level 20.00 dBm Offset 0.90 dB RBW 100 kHz
Att 30 dB SWT 500 ms VBW 300 kHz Mode Auto Sweep

1Pk View

M1[1] -30.76 dBm
2.399180 GHz

D1 3.530 dBm
D2 -16.470 dBm

M1

F1

CF 2.385 GHz 691 pts Span 100.0 MHz

Measuring...

05.01.2016

Spectrum

Ref Level 20.00 dBm Offset 0.90 dB RBW 100 kHz
Att 30 dB SWT 500 ms VBW 300 kHz Mode Auto Sweep

1Pk View

M1[1] -43.80 dBm
2.483790 GHz

D1 3.500 dBm
D2 -16.500 dBm

F1


CF 2.489 GHz 691 pts Span 100.0 MHz

Measuring...

05.01.2016


Rev.00

Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low) / Chain 0

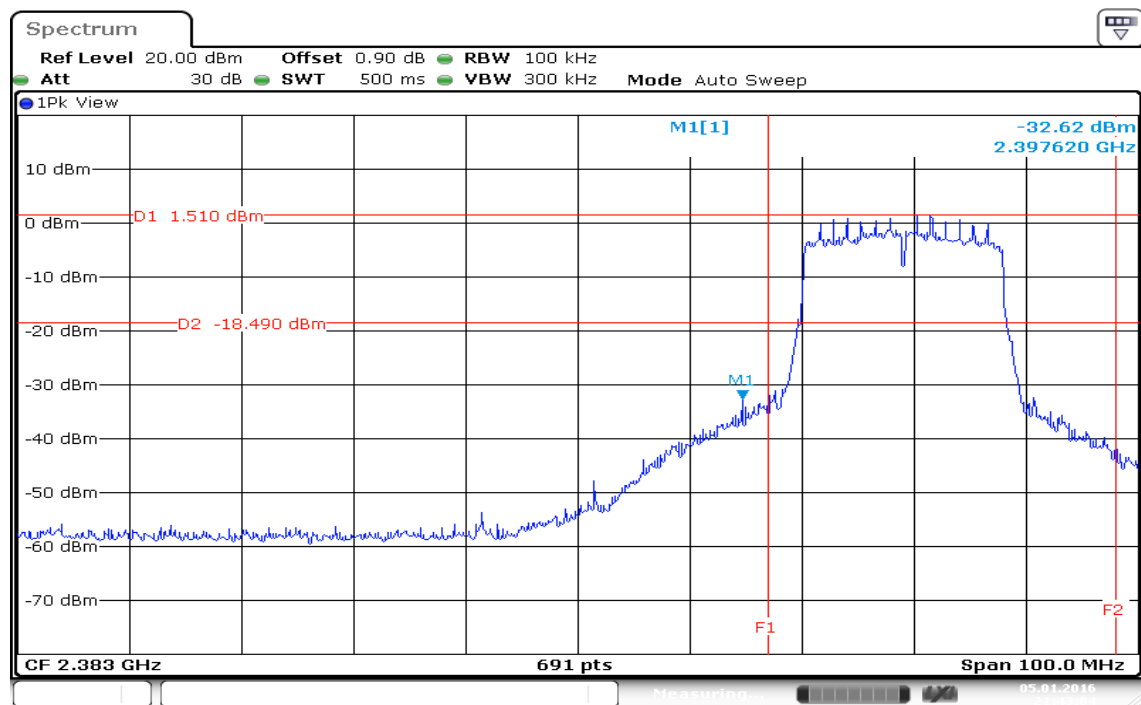


Date: 5.JAN.2016 21:43:04

Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH High) / Chain 0

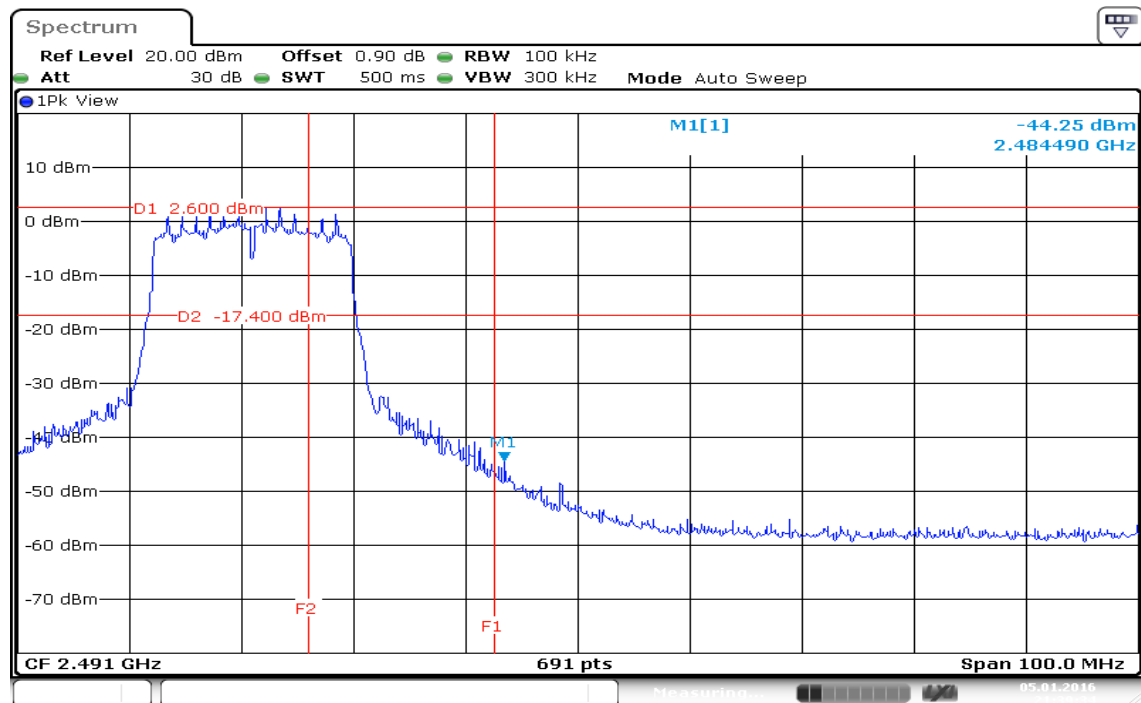


Date: 5.JAN.2016 21:39:34

Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low) / Chain 1

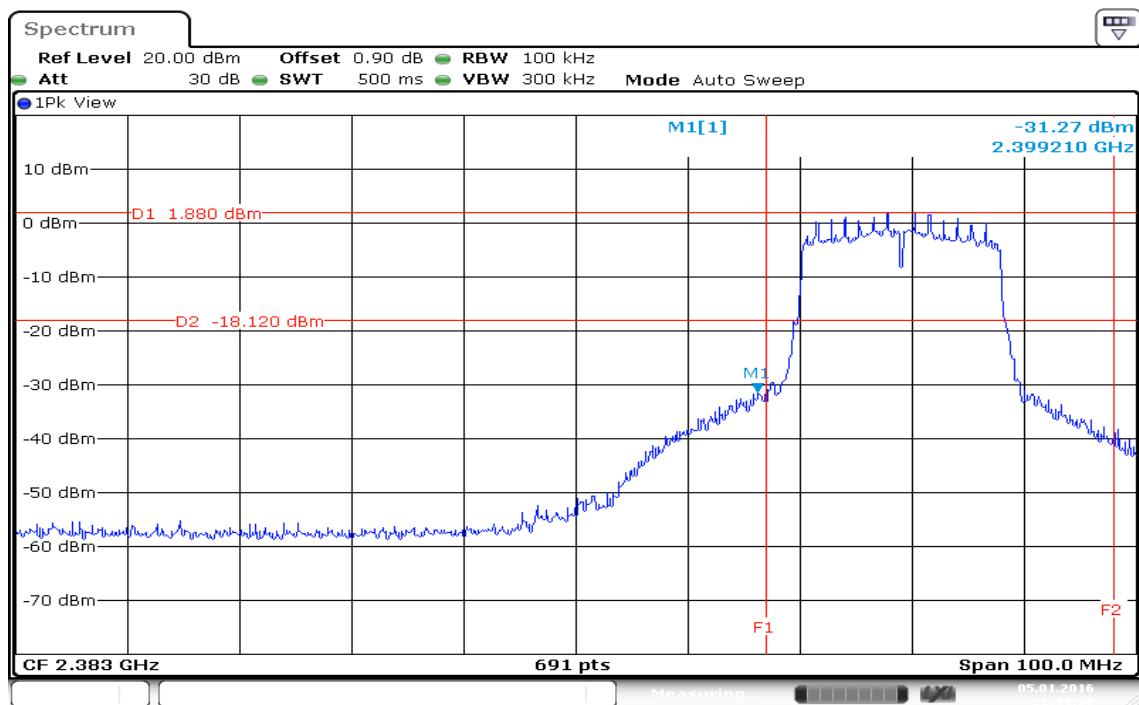


Date: 5.JAN.2016 21:44:58

Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH High) / Chain 1

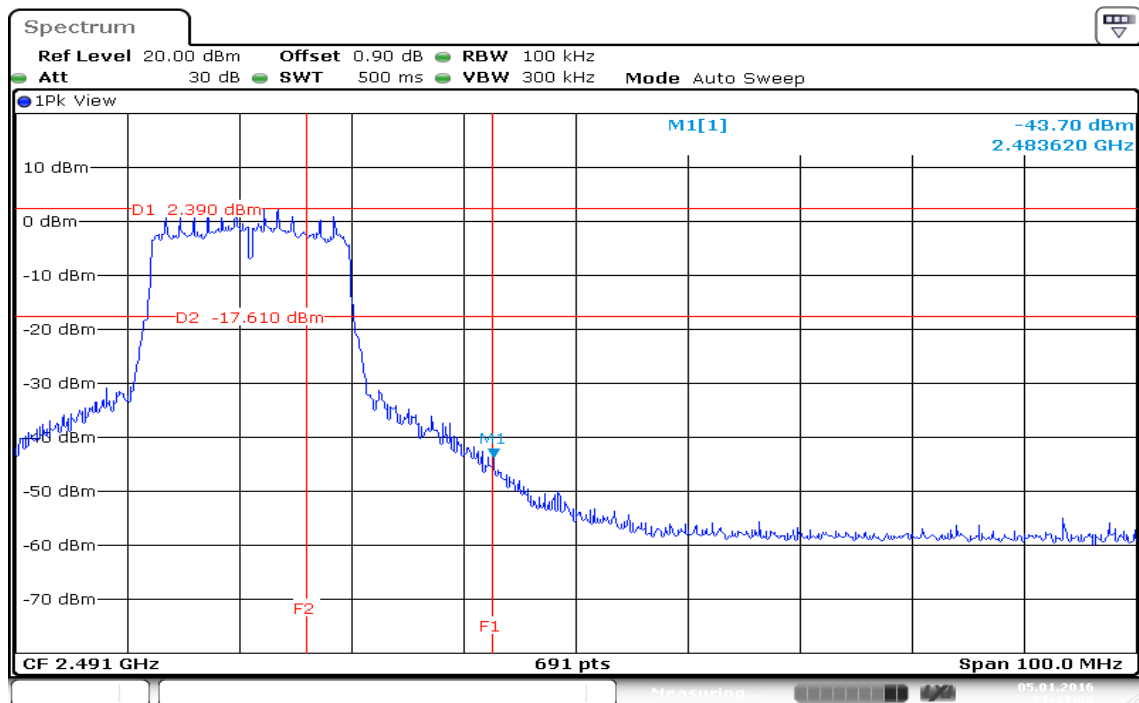


Date: 5.JAN.2016 21:41:08


Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low) / Chain 0

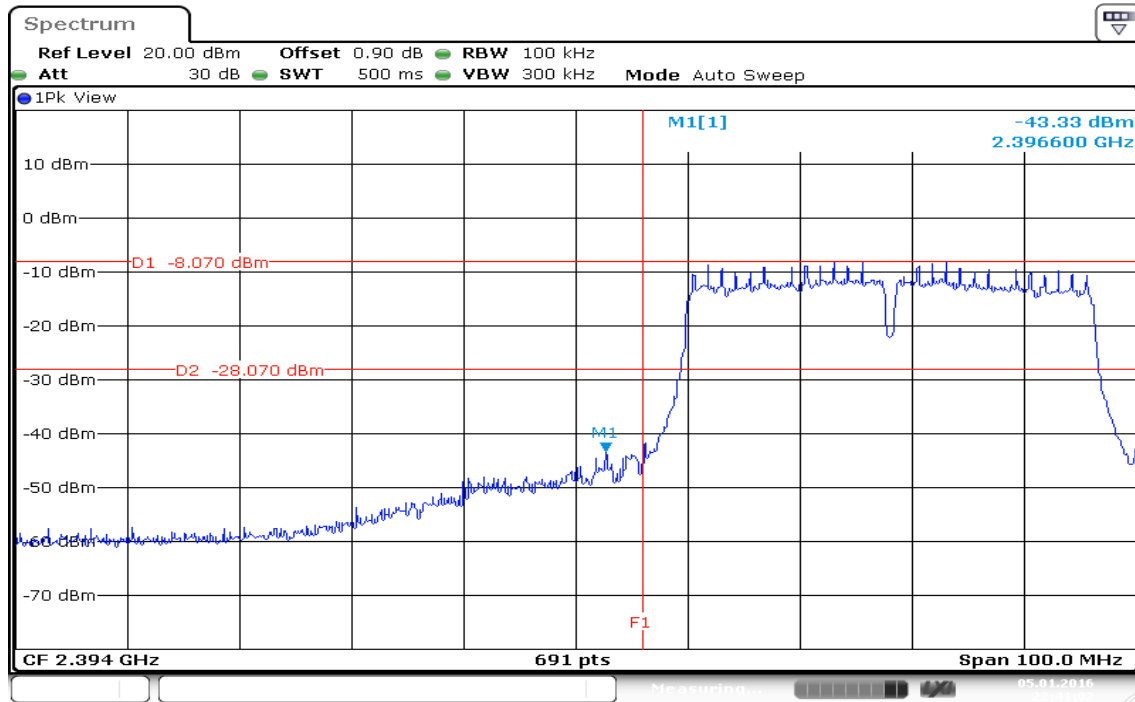


Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH High) / Chain 0

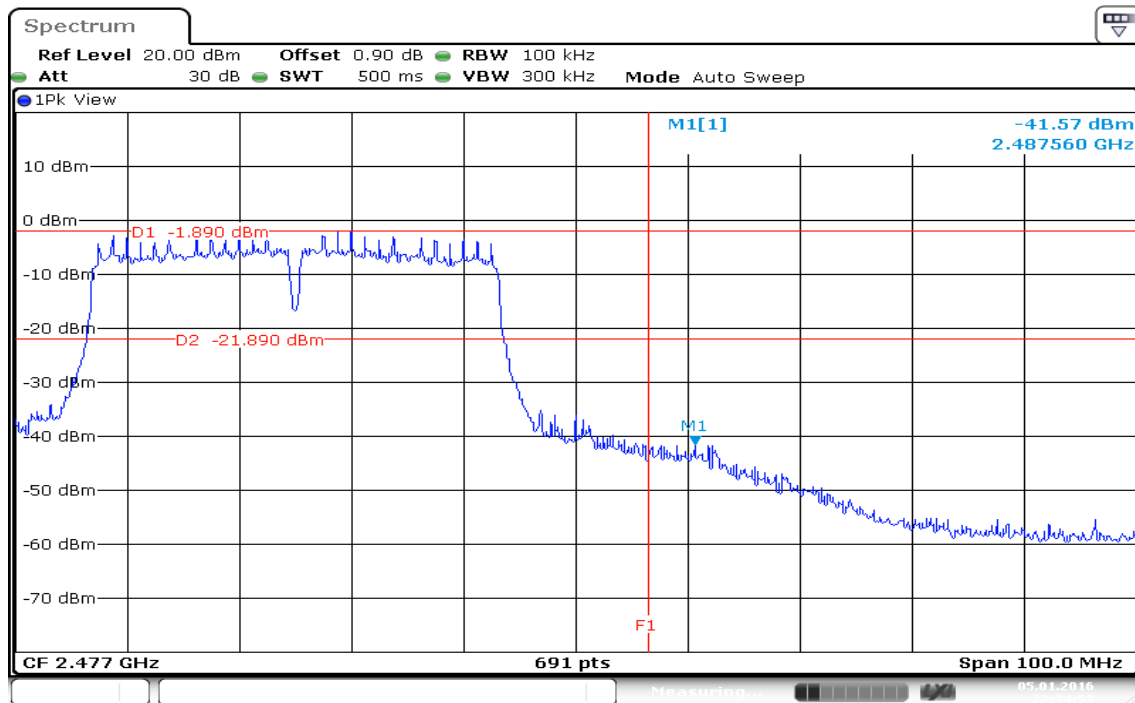

Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low) / Chain 1

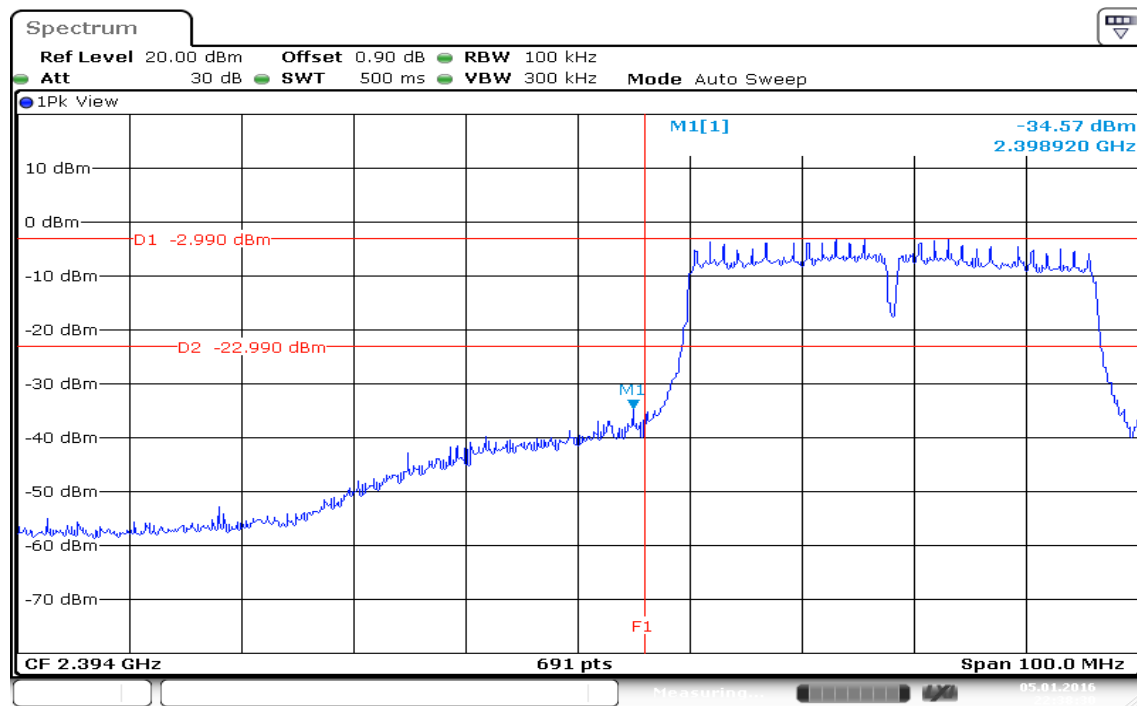

Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH High) / Chain 1

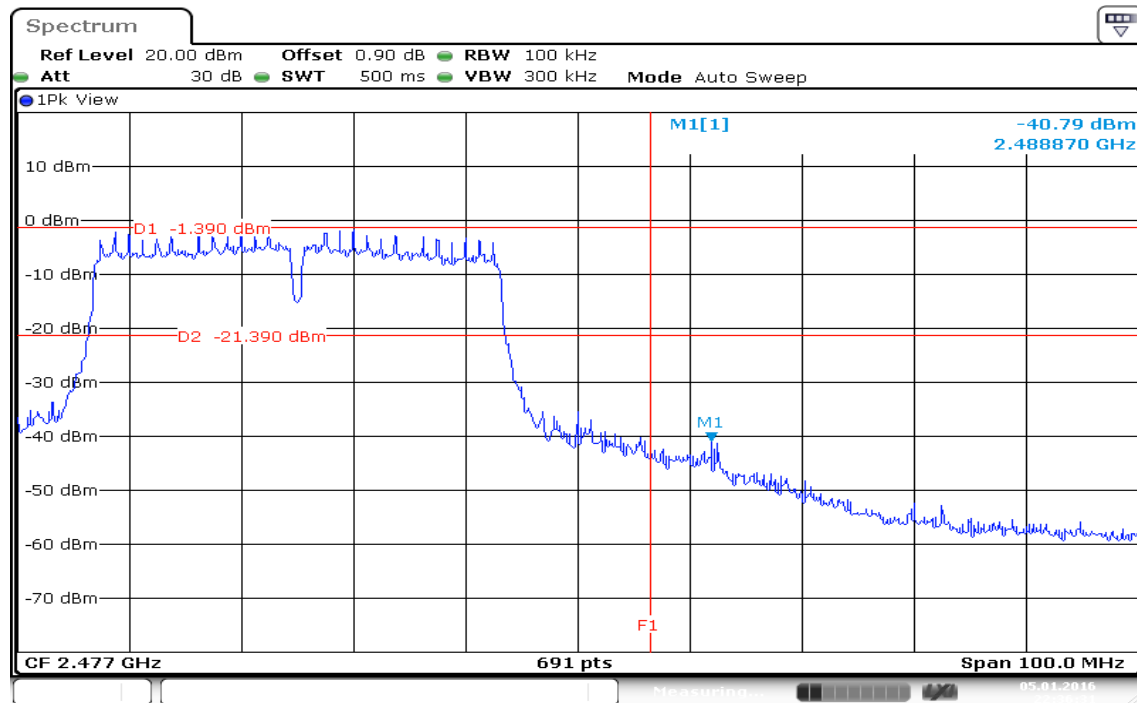


7.6 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e) & RSS-247, for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f) & RSS-247, the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-5.84	8.00	PASS
Mid	2437	-5.93		PASS
High	2462	-6.17		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-7.55	8.00	PASS
Mid	2437	-6.86		PASS
High	2462	-7.85		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSP (dBm)	Chain 1 PPSP (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-1.30	-11.05	-0.86	6.45	PASS
Mid	2437	-6.07	-6.33	-3.19		PASS
High	2462	-10.36	-10.28	-7.31		PASS

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSP (dBm)	Chain 1 PPSP (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-15.55	-15.26	-12.39	6.45	PASS
Mid	2437	-10.51	-12.14	-8.24		PASS
High	2452	-14.38	-13.84	-11.09		PASS

Remark:


1. Total PPSP (dBm) = $10 \cdot \log(10^{\text{Chain 0 PPSP} / 10} + 10^{\text{Chain 1 PPSP} / 10})$

2. The maximum antenna gain is 7.55dBi; therefore the reduction due to antenna gain is 1.55dBi, so the limit is 6.45dBm.

Test Plot


IEEE 802.11b mode

PPSD (CH Low)

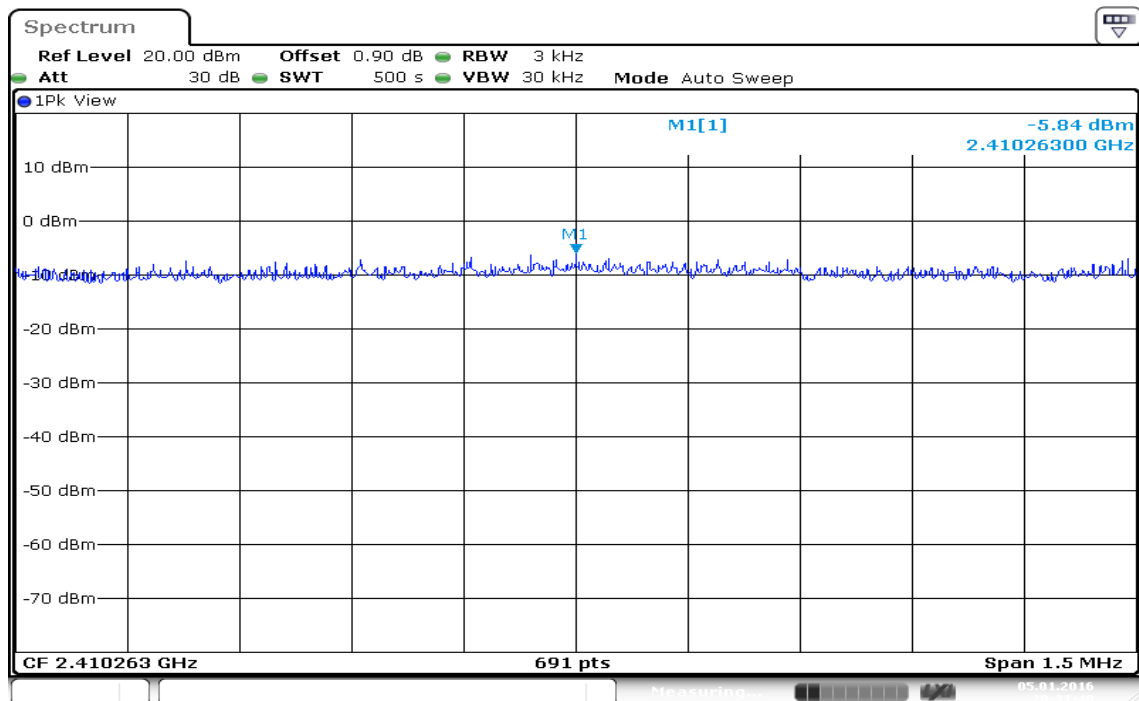


Date: 5.JAN.2016 20:31:40

PPSD (CH Mid)

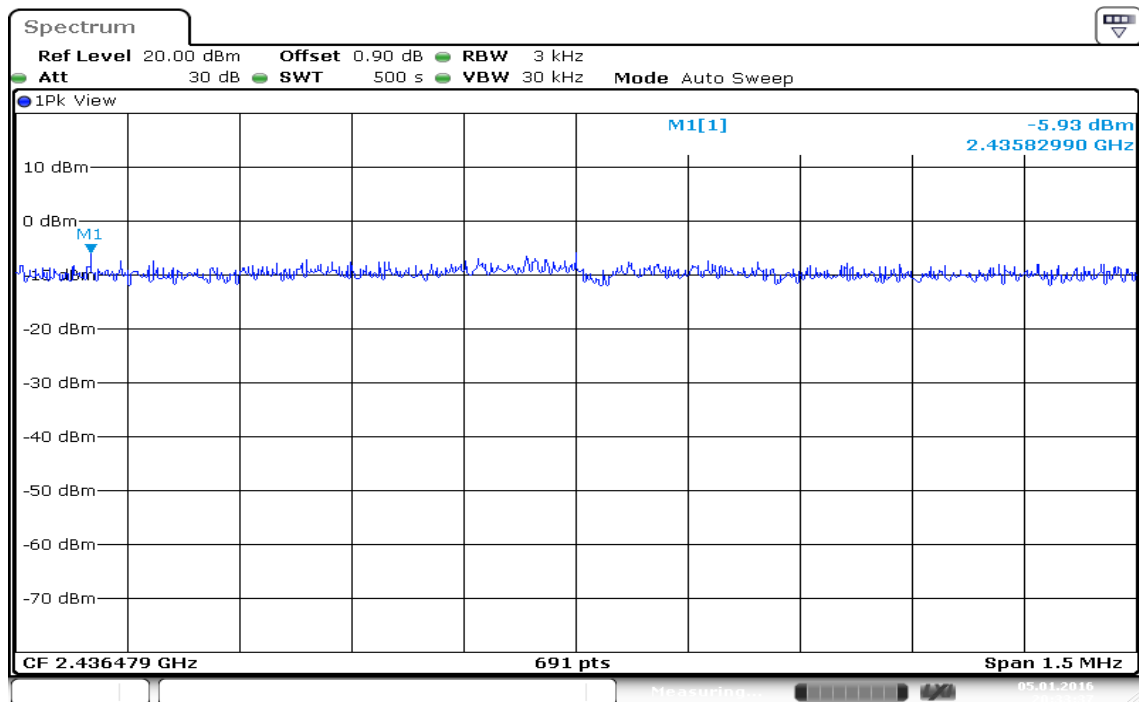

Date: 5.JAN.2016 20:33:37


PPSD (CH High)

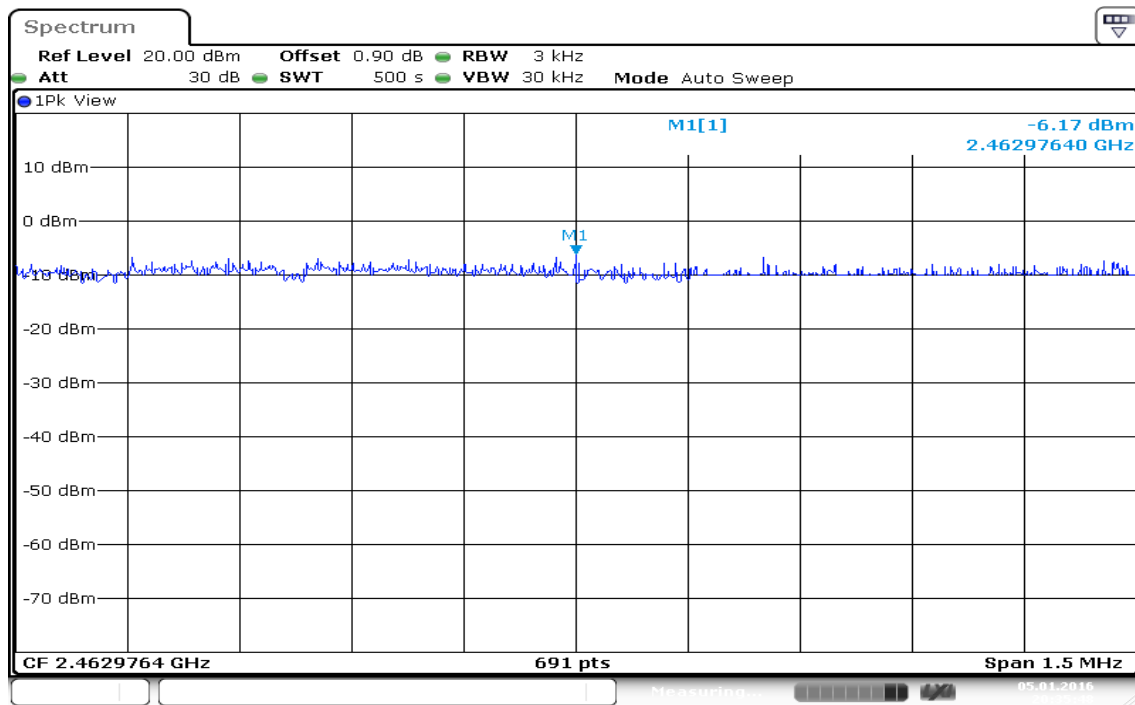

Date: 5.JAN.2016 20:35:48


IEEE 802.11g mode

PPSD (CH Low)

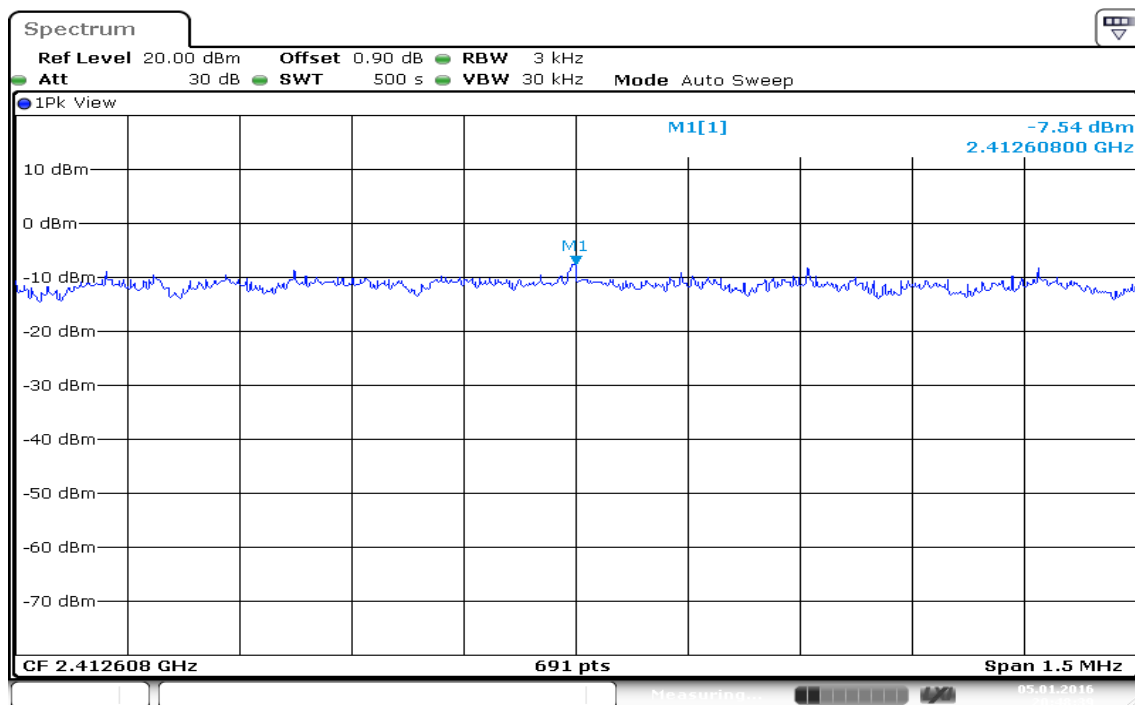


Date: 5.JAN.2016 20:48:39

PPSD (CH Mid)

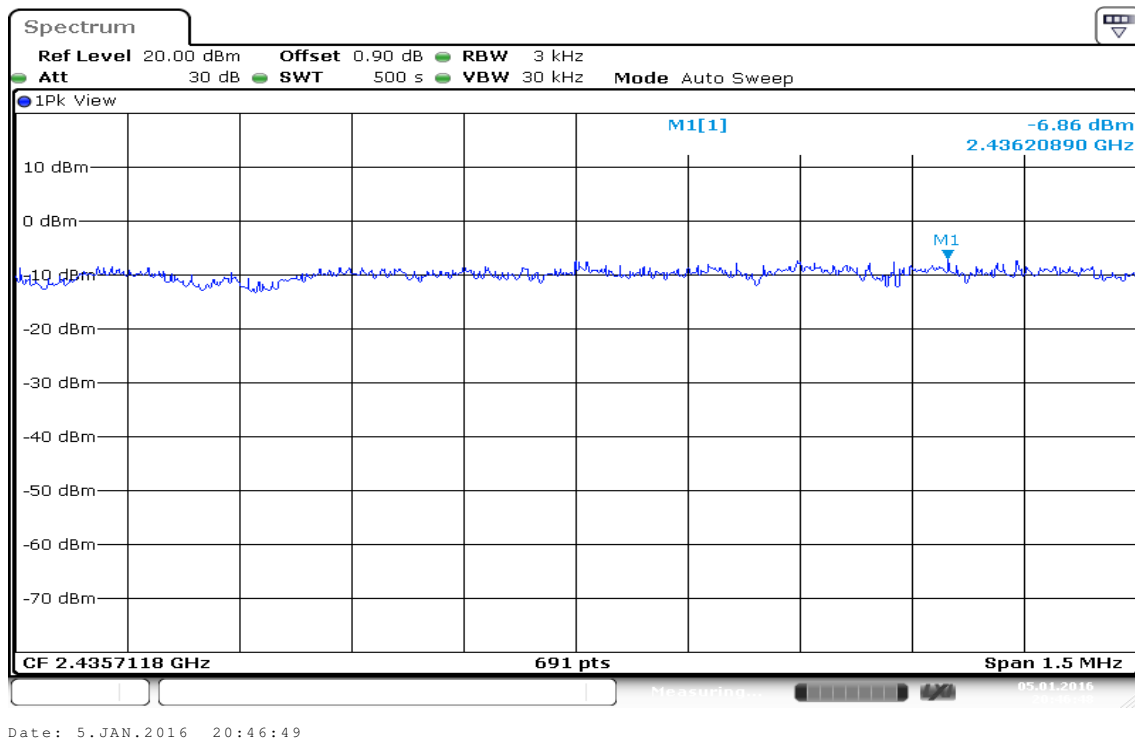


PPSD (CH High)

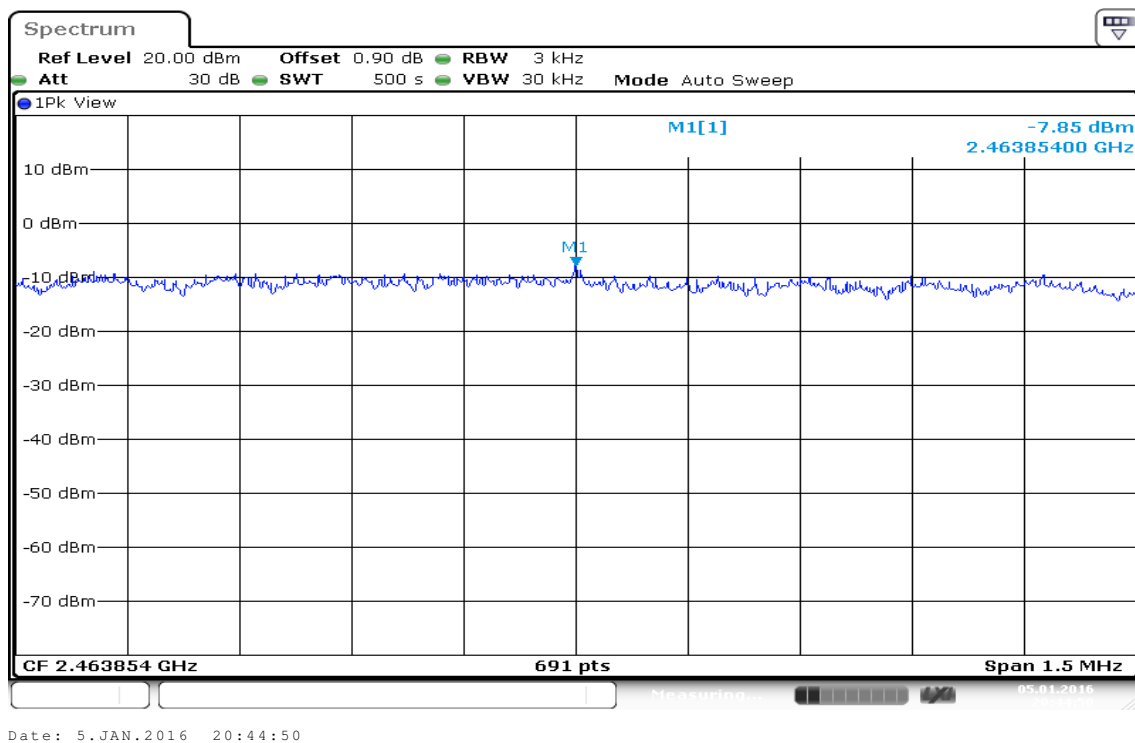


IEEE 802.11n HT 20 MHz mode / Chain 0

PPSD (CH Low)

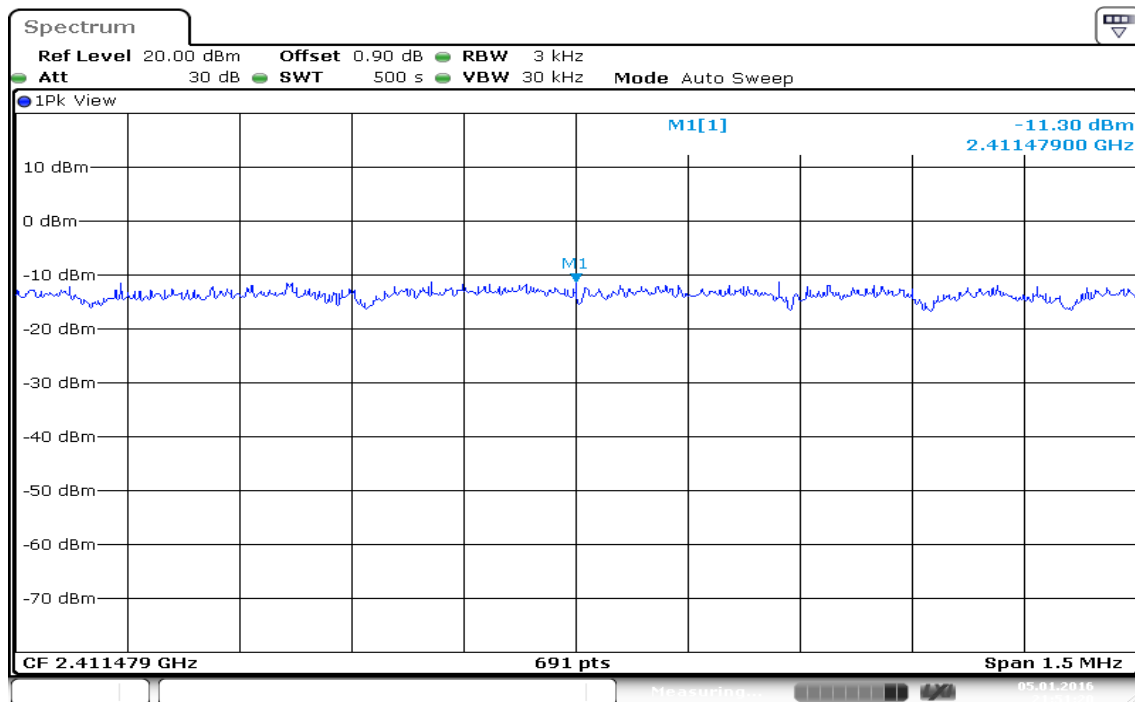


Date: 5.JAN.2016 21:51:20

PPSD (CH Mid)

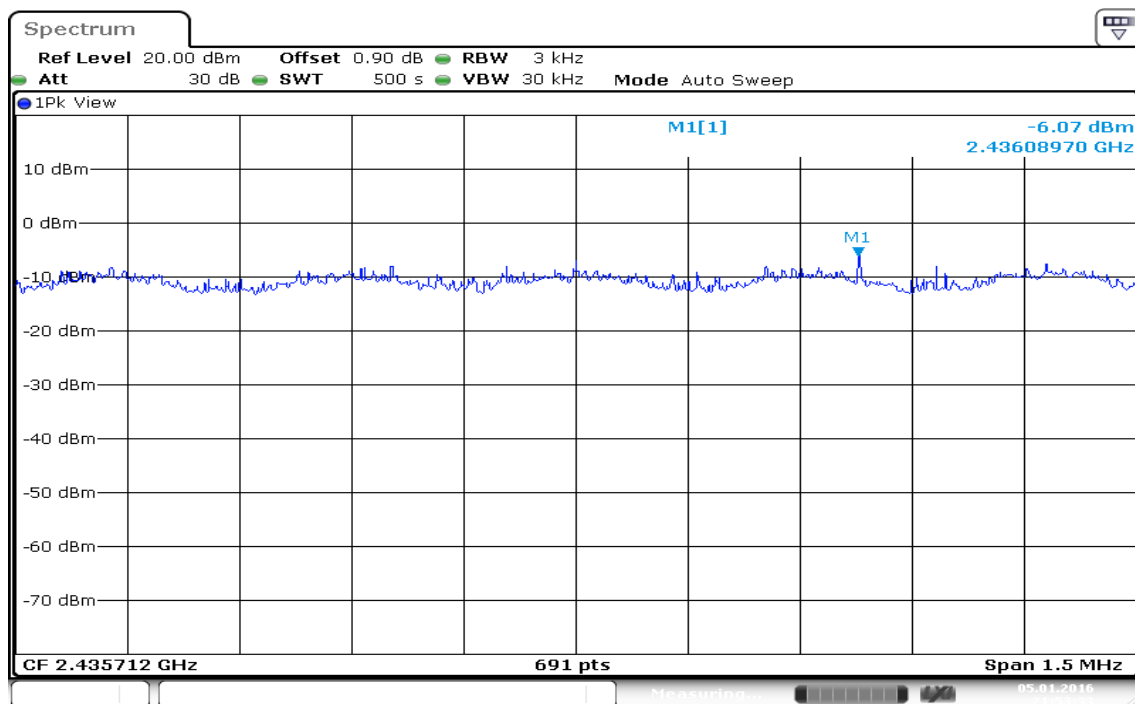

Date: 5.JAN.2016 21:53:34


PPSD (CH High)

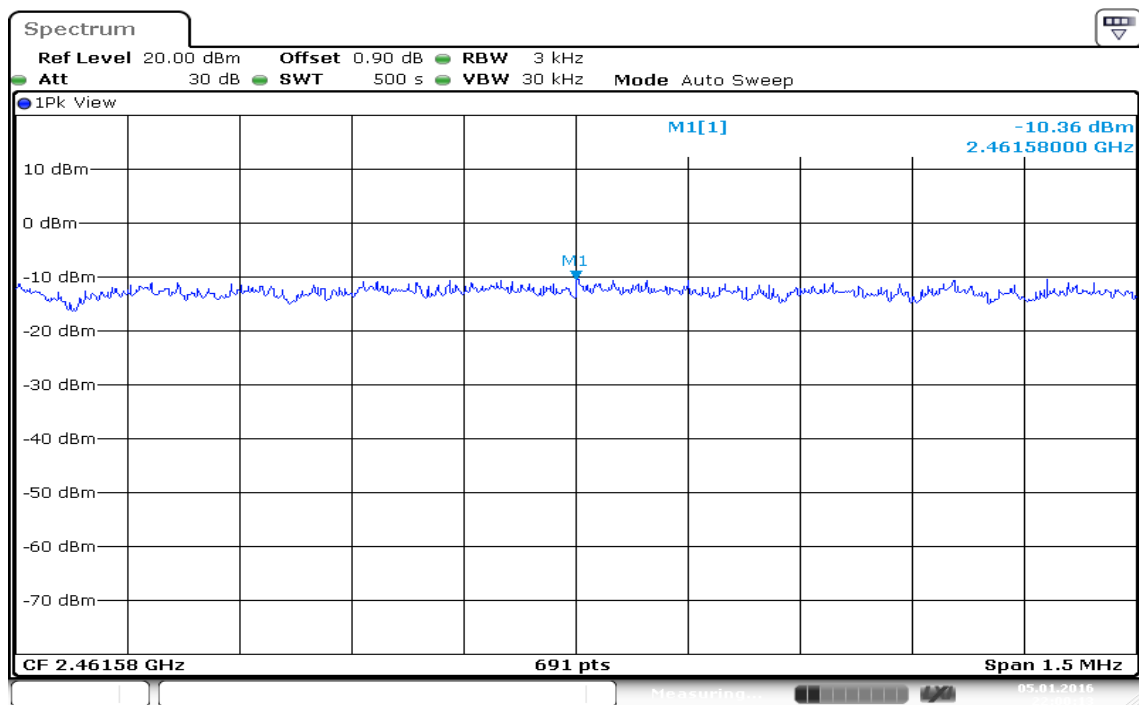

Date: 5.JAN.2016 22:00:13


IEEE 802.11n HT 20 MHz mode / Chain 1

PPSD (CH Low)

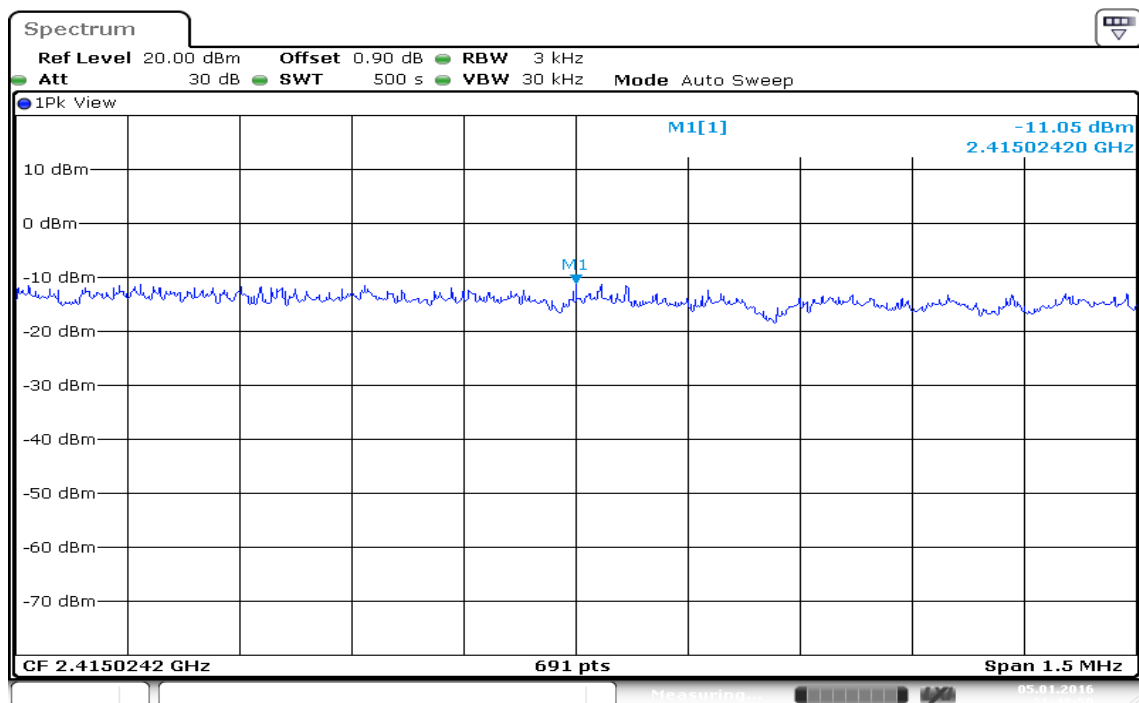


Date: 5.JAN.2016 21:48:51

PPSD (CH Mid)

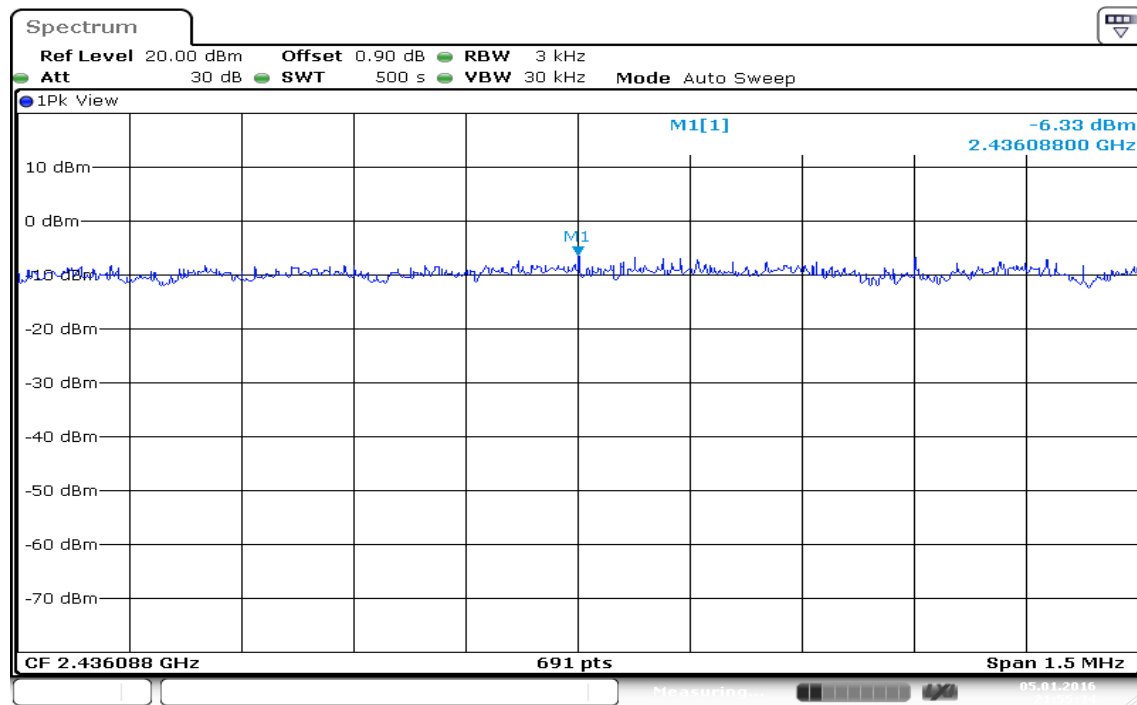

Date: 5.JAN.2016 21:55:34


PPSD (CH High)

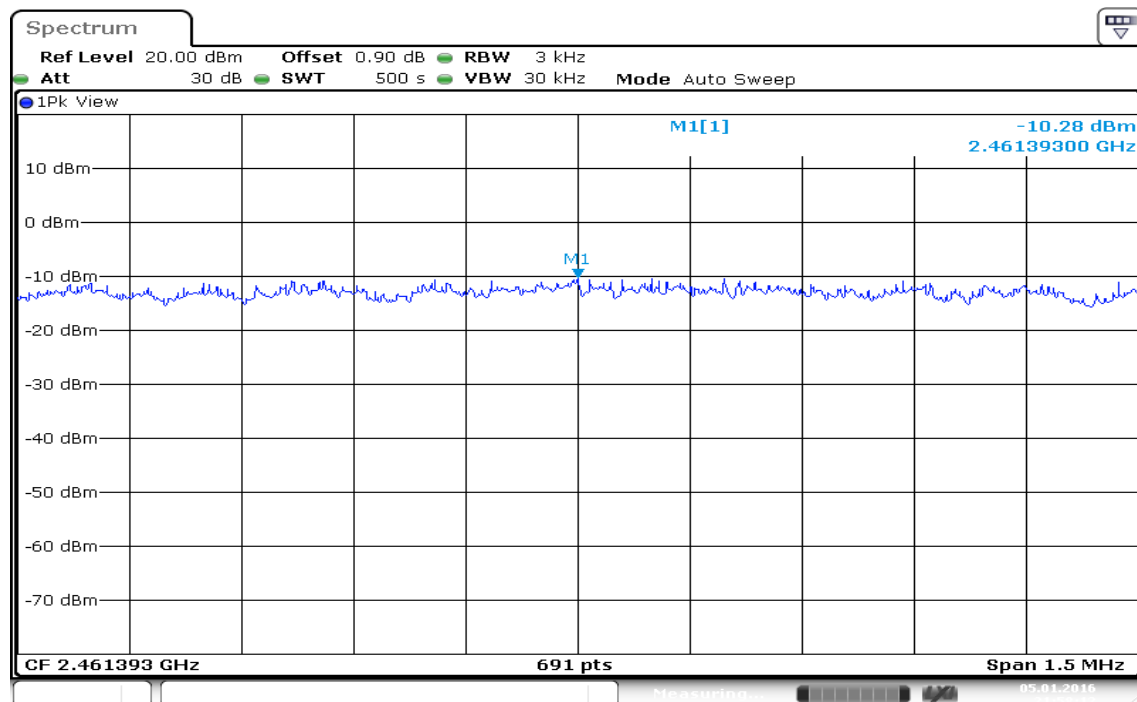

Date: 5.JAN.2016 21:58:13


IEEE 802.11n HT 40 MHz mode / Chain 0

PPSD (CH Low)

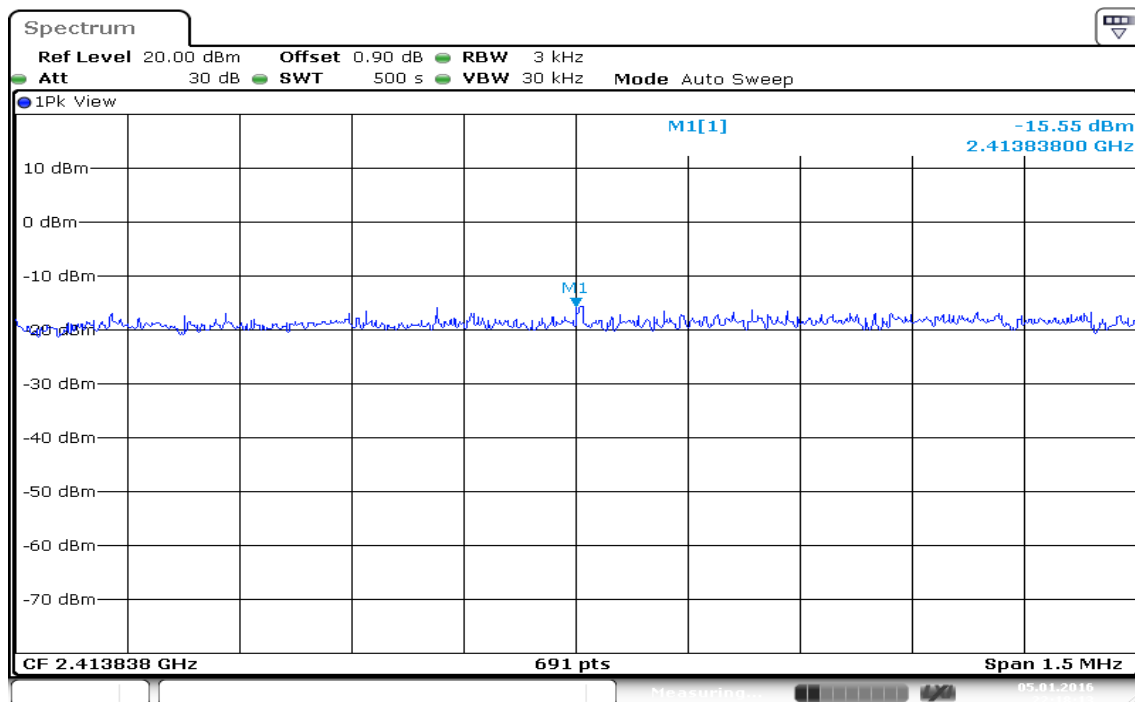


Date: 5.JAN.2016 22:18:13

PPSD (CH Mid)

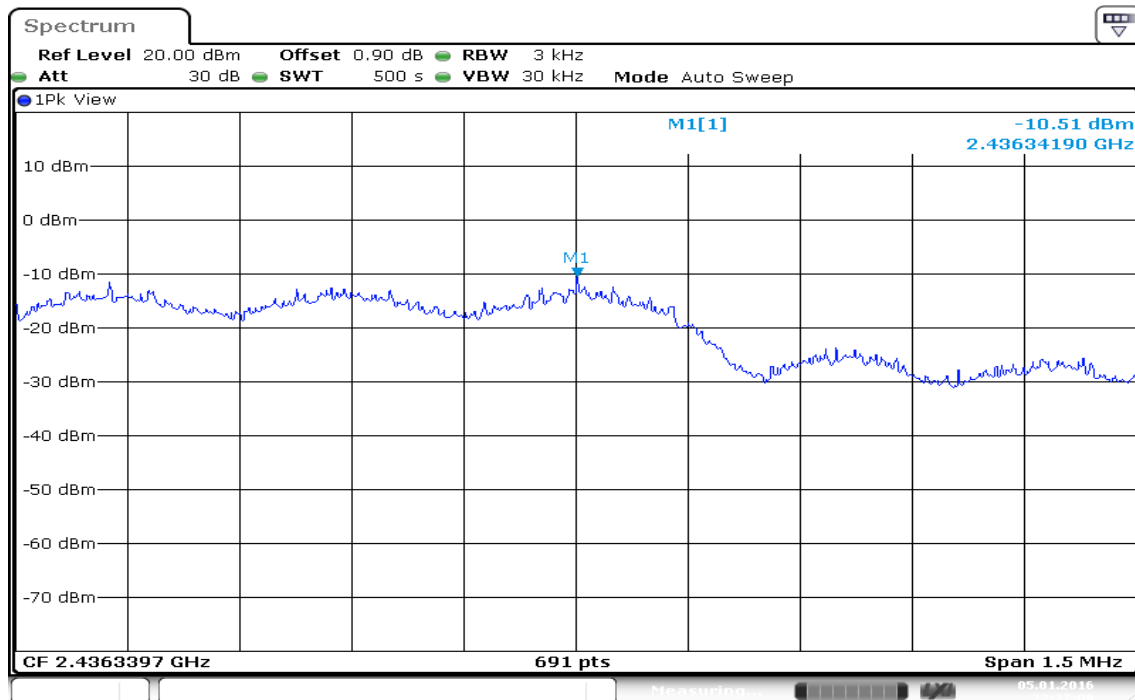

Date: 5.JAN.2016 22:27:10


PPSD (CH High)

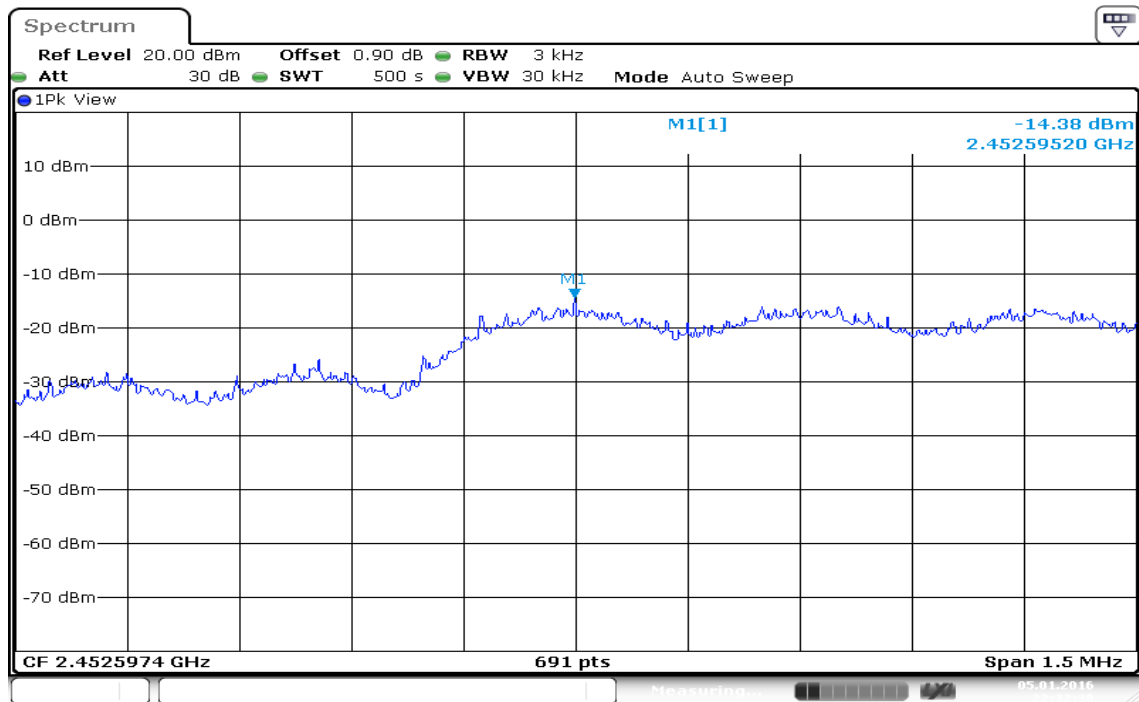

Date: 5.JAN.2016 22:32:39


IEEE 802.11n HT 40 MHz mode / Chain 1

PPSD (CH Low)

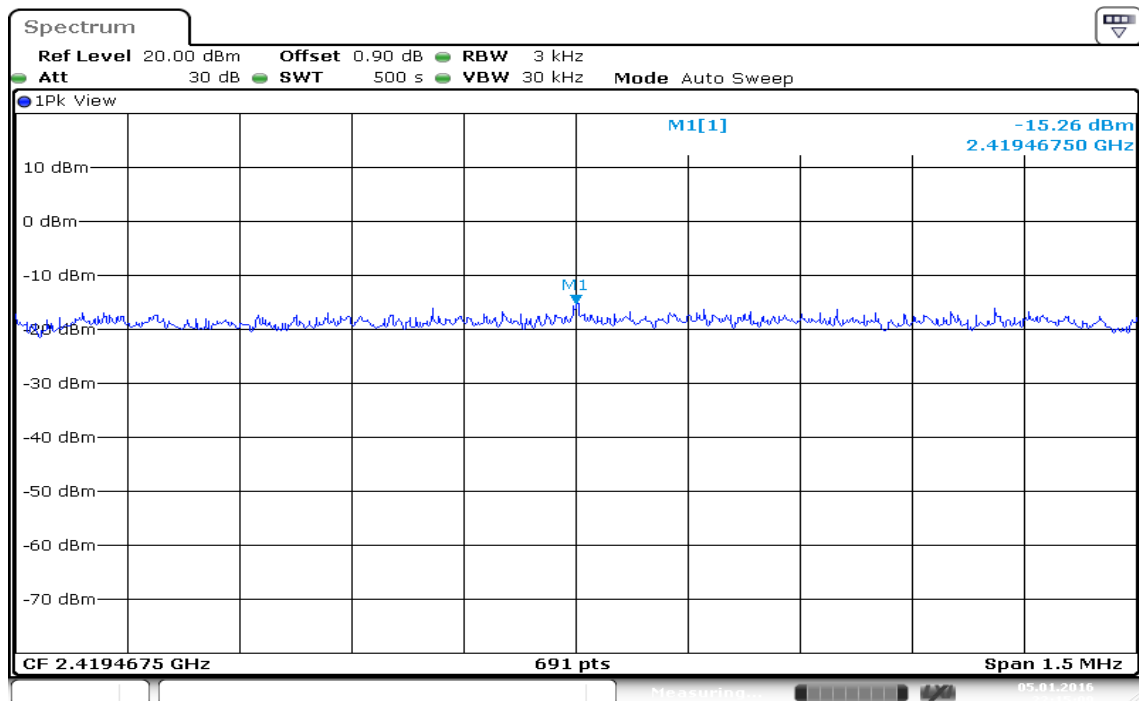


Date: 5.JAN.2016 22:15:09

PPSD (CH Mid)

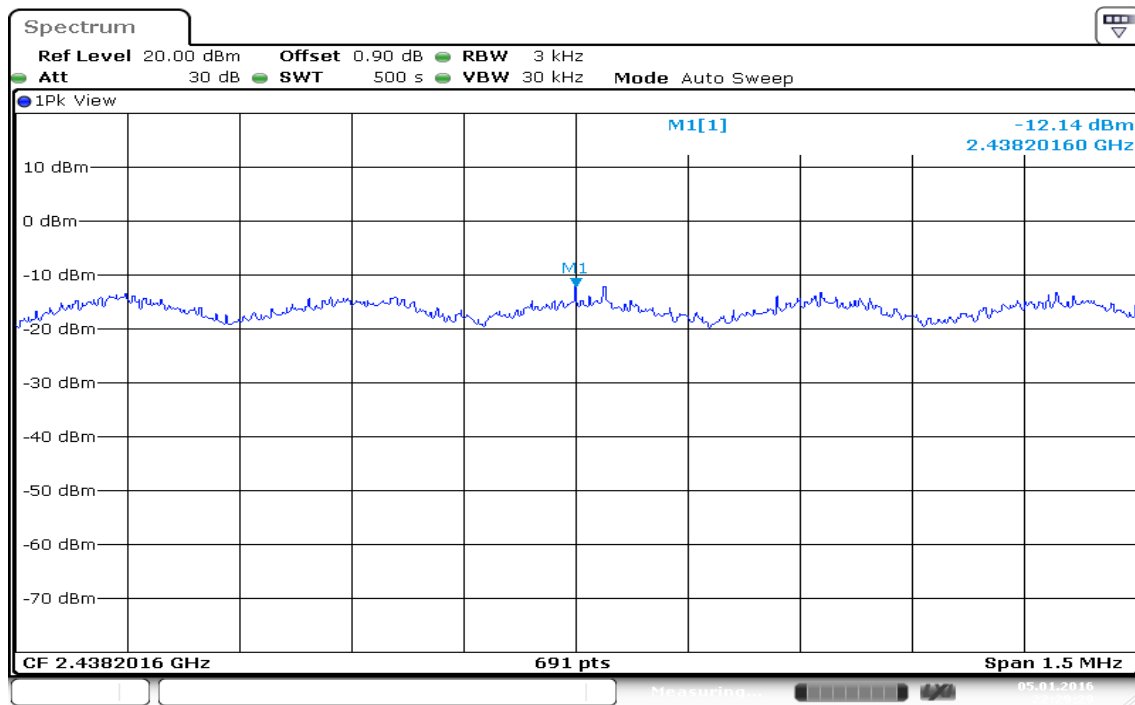

Date: 5.JAN.2016 22:29:30

PPSD (CH High)

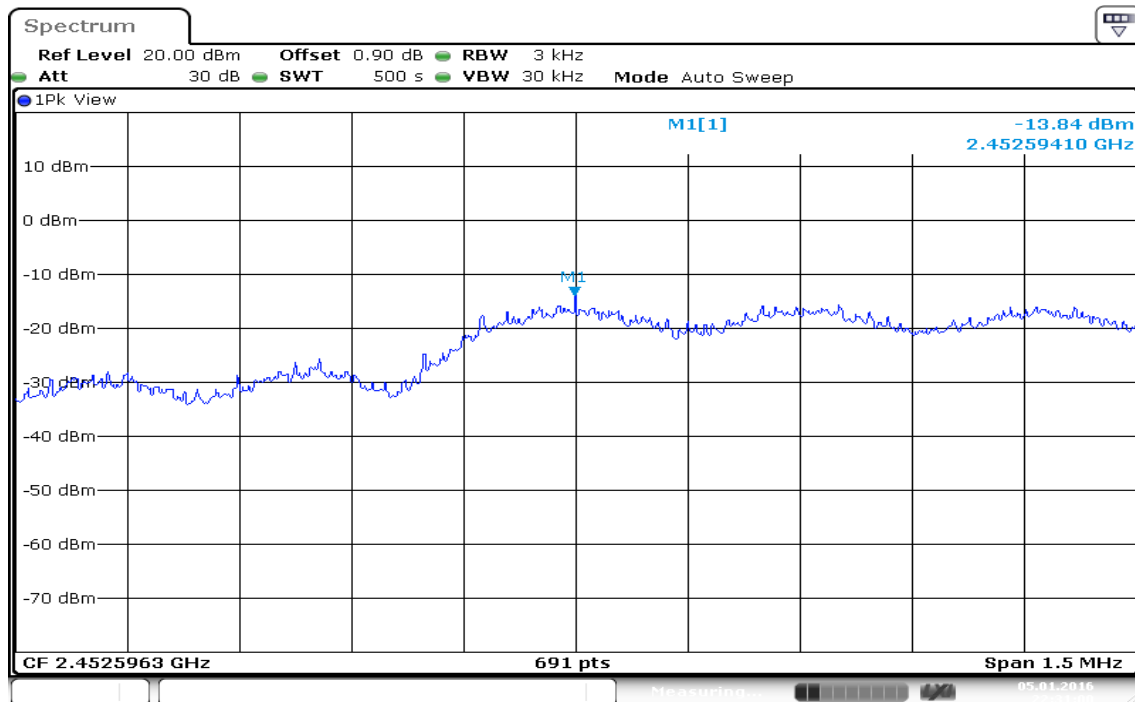

Date: 5.JAN.2016 22:31:00

7.7 RADIATED EMISSIONS

LIMIT

All spurious emissions shall comply with the limits of §15.209(a) and RSS-Gen Table 2 & Table 5.

RSS-Gen Table 2 & Table 5: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz ^(Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Note: *Measurements for compliance with limits in the above table may be performed at distances other than 3 metres, in accordance with Section 7.2.7.

Transmitting devices are not permitted in Table 1 bands or, unless stated otherwise, in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz).


RSS-Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	3000
490-1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30


Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.

Test Configuration


9kHz ~ 30MHz

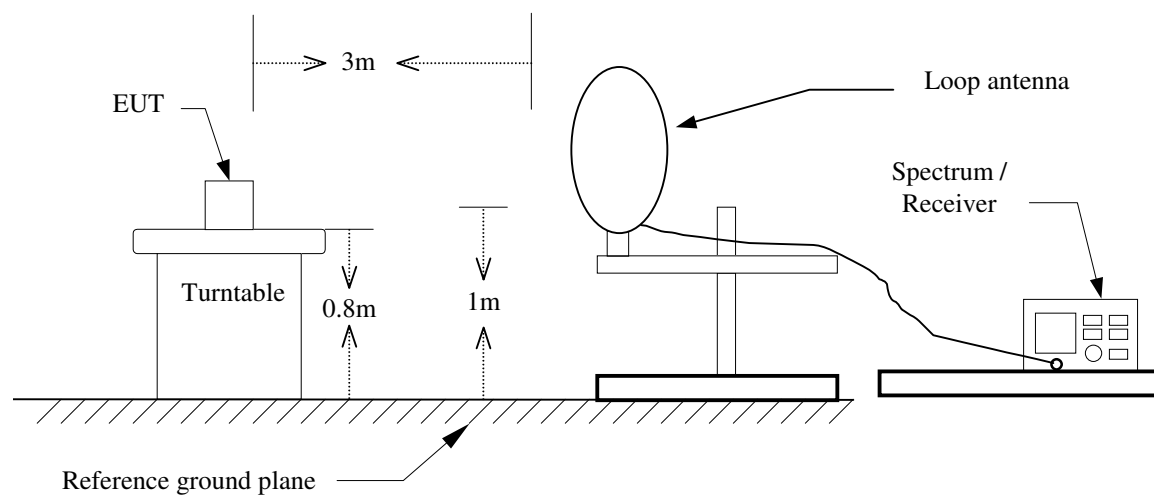

30MHz ~ 1GHz

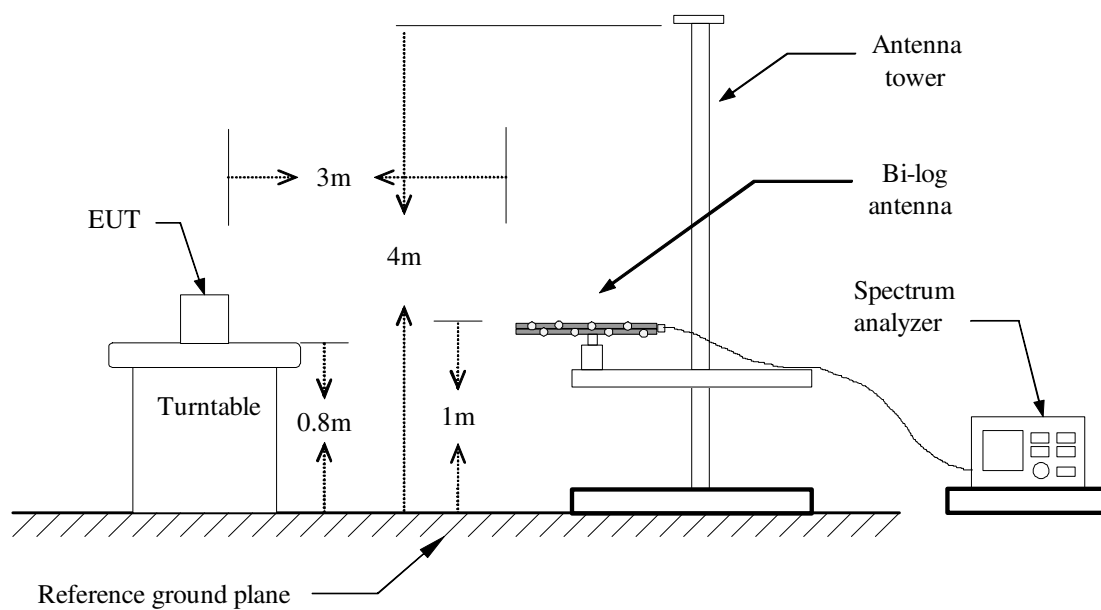

Above 1 GHz

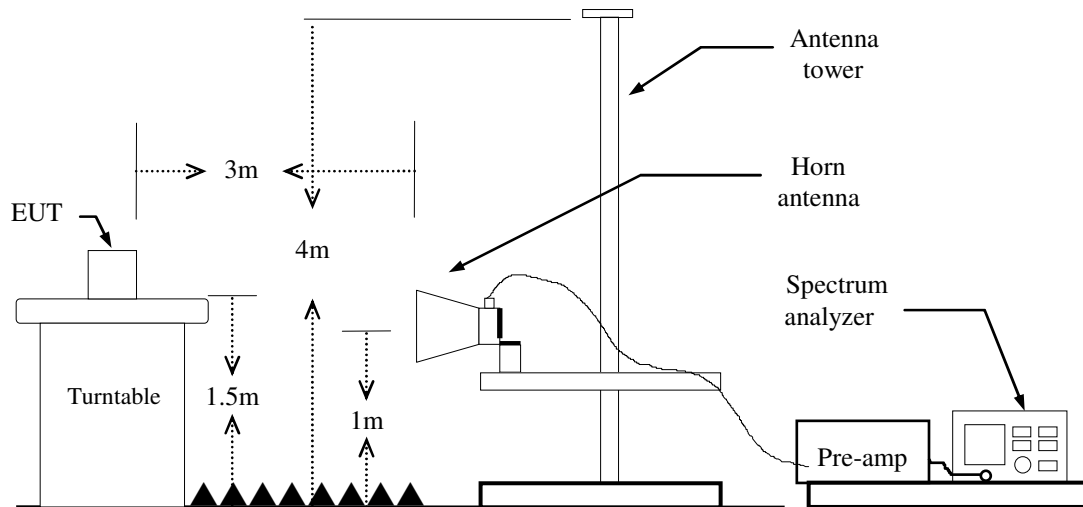

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz,

if duty cycle $\geq 98\%$, VBW=10Hz.

if duty cycle $< 98\%$ VBW=1/T.

For PIFA Antenna

IEEE 802.11b mode: $\geq 98\%$, VBW=10Hz

IEEE 802.11g mode: = 92%, VBW=680Hz

IEEE 802.11n HT 20 MHz mode: = 78%, VBW=1.5 KHz

IEEE 802.11n HT 40 MHz mode: = 69%, VBW=2.7 KHz

For Dipole Antenna


IEEE 802.11b mode: $\geq 98\%$, VBW=10Hz

IEEE 802.11g mode: = 91%, VBW=680Hz

IEEE 802.11n HT 20 MHz mode: = 88%, VBW=750Hz

IEEE 802.11n HT 40 MHz mode: = 83%, VBW=1.5 KHz

7. Repeat above procedures until the measurements for all frequencies are complete.
8. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

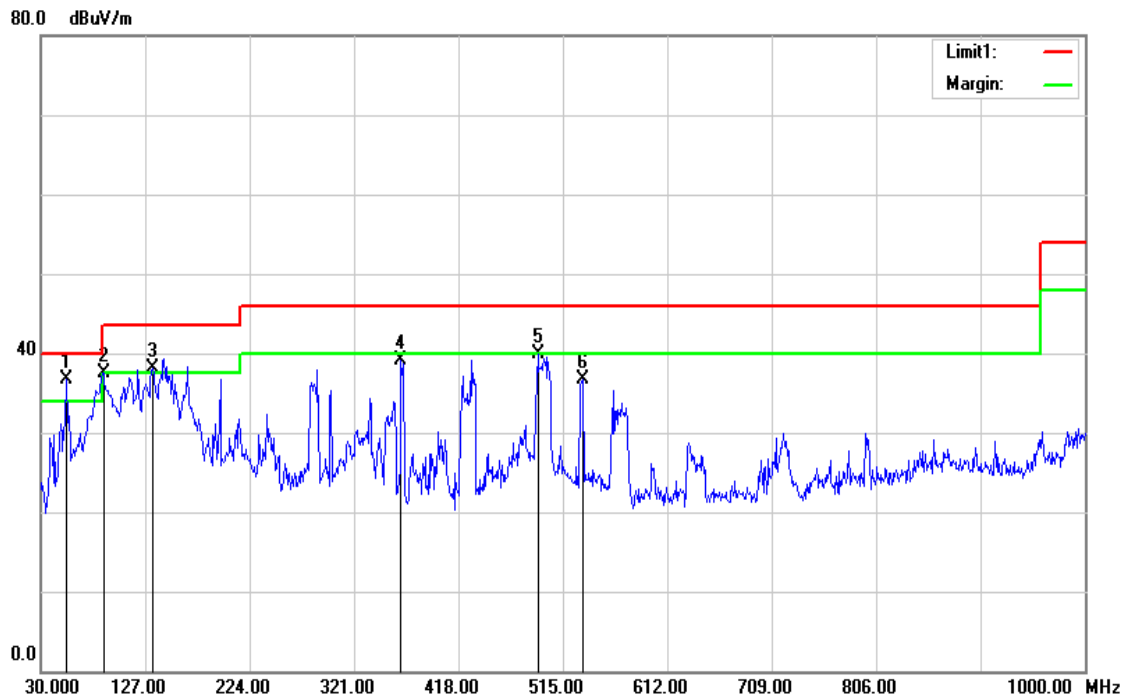For PIFA Antenna**Below 1GHz****Operation Mode:** Normal Link**Test Date:** December 20, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
54.2500	58.28	-21.51	36.77	40.00	-3.23	Peak	V
88.2000	58.92	-21.45	37.47	43.50	-6.03	Peak	V
133.7900	53.85	-15.69	38.16	43.50	-5.34	Peak	V
364.6500	51.59	-12.54	39.05	46.00	-6.95	Peak	V
491.7200	49.23	-9.40	39.83	46.00	-6.17	Peak	V
533.4300	45.40	-8.74	36.66	46.00	-9.34	Peak	V

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. $\text{Margin (dB)} = \text{Result (dBuV/m)} - \text{Limit (dBuV/m)}$.

Operation Mode: Normal Link


Test Date: December 22, 2015

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Hor.

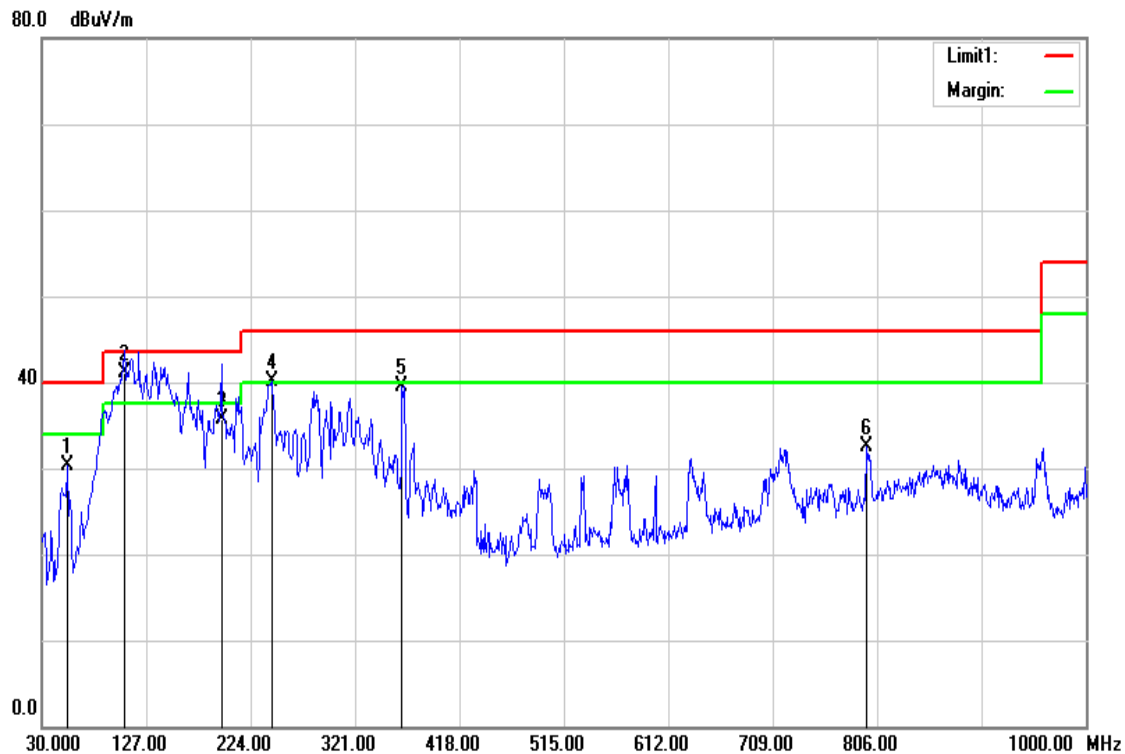

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
54.2500	51.74	-21.51	30.23	40.00	-9.77	peak	H
106.6300	59.06	-17.86	41.20	43.50	-2.30	QP	H
196.8400	51.59	-15.83	35.76	43.50	-7.74	QP	H
243.4000	56.60	-16.43	40.17	46.00	-5.83	peak	H
364.6500	52.09	-12.54	39.55	46.00	-6.45	peak	H
796.3000	37.09	-4.53	32.56	46.00	-13.44	peak	H





Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. $\text{Margin (dB)} = \text{Result (dBuV/m)} - \text{Limit (dBuV/m)}$.




Above 1 GHz

TX / IEEE 802.11b / CH Low

Polarity: Vertical

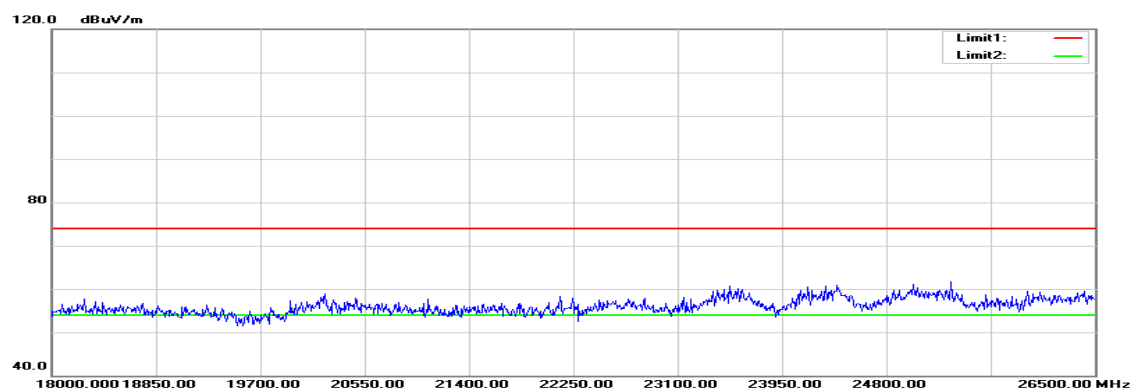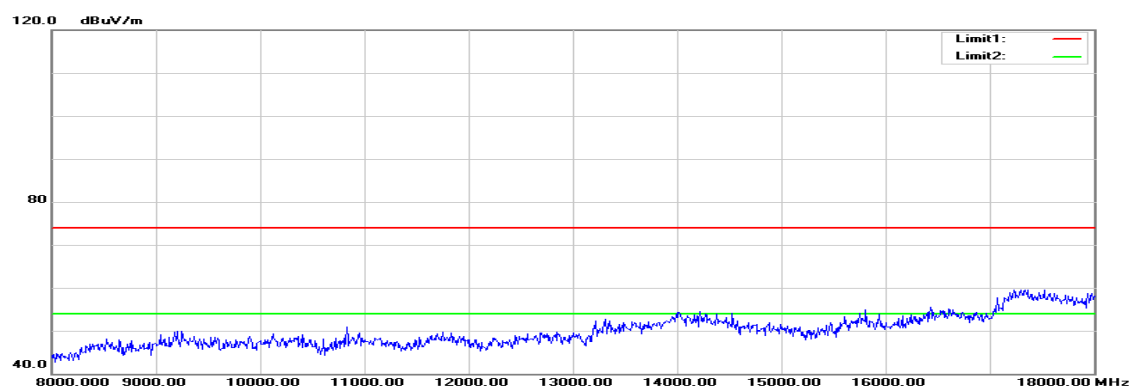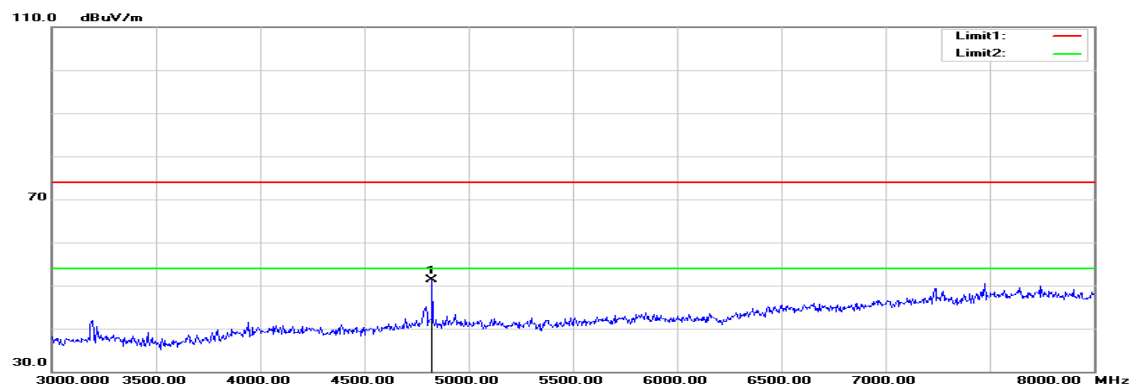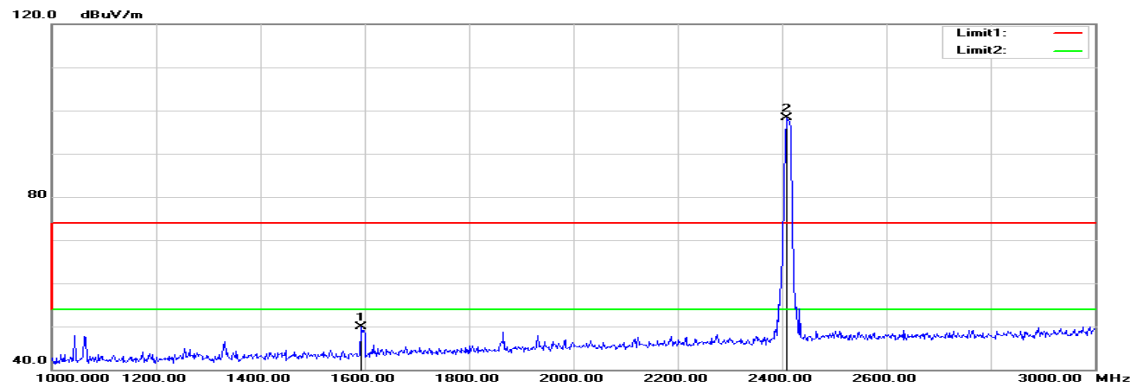

Polarity: Horizontal


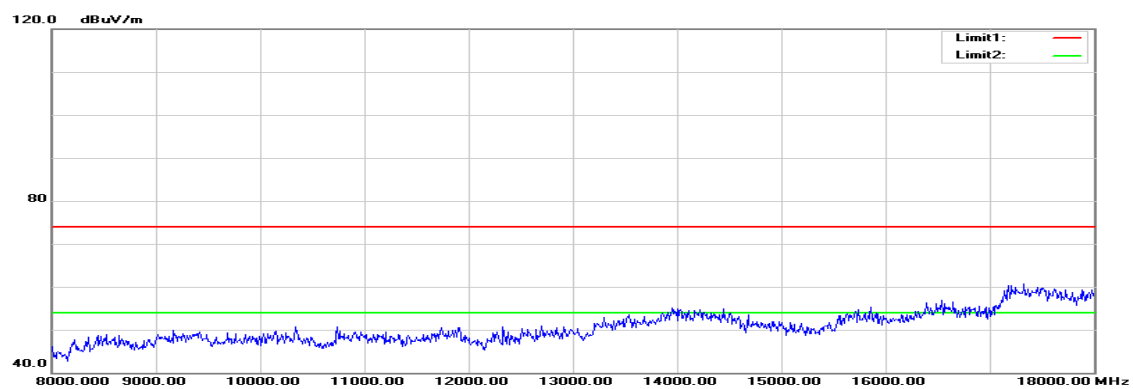
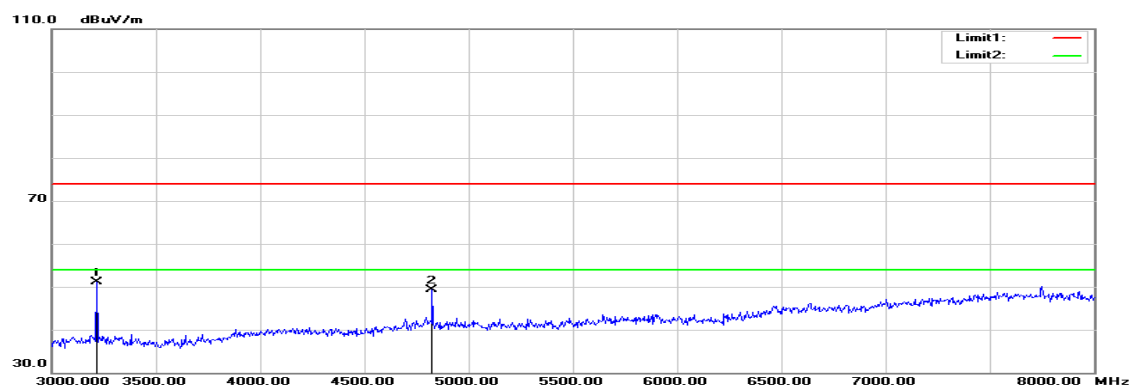
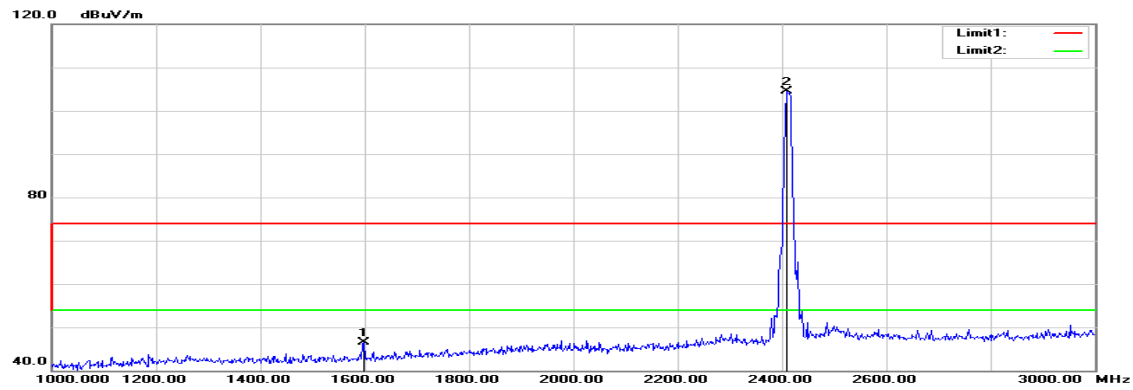


Above 1 GHz**Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** December 20, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1592.000	55.58	-5.71	49.87	74.00	-24.13	peak	V
4825.000	46.14	5.10	51.24	74.00	-22.76	peak	V
N/A							
1598.000	52.23	-5.68	46.55	74.00	-27.45	peak	H
3215.000	51.18	-0.09	51.09	74.00	-22.91	peak	H
4825.000	44.10	5.10	49.20	74.00	-24.80	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.

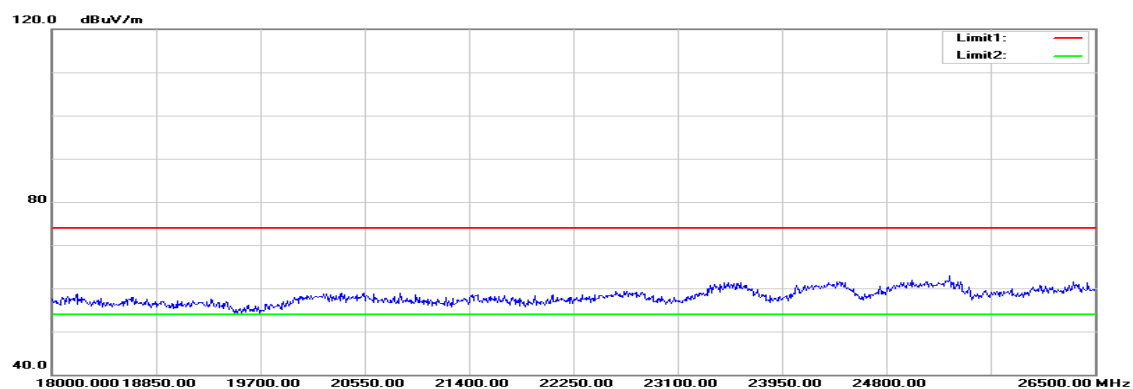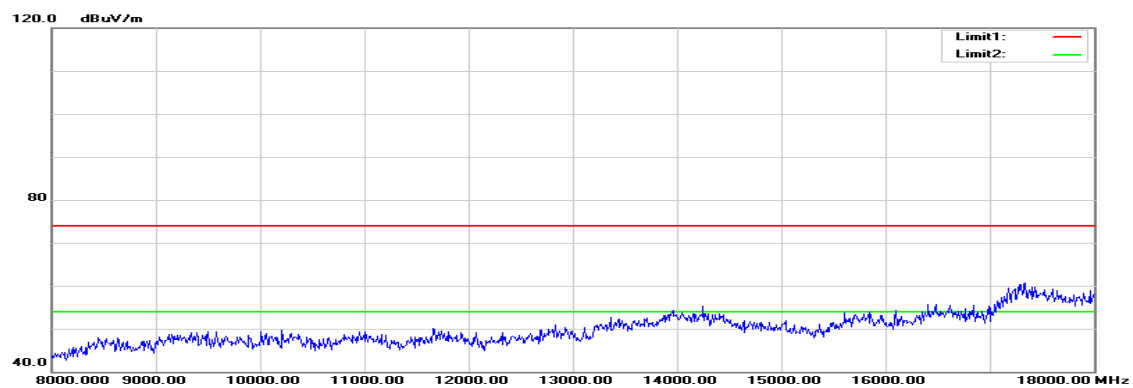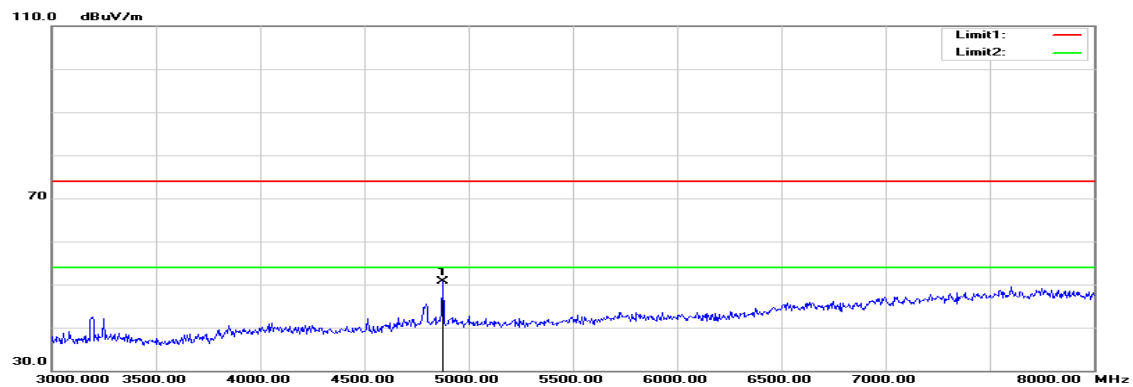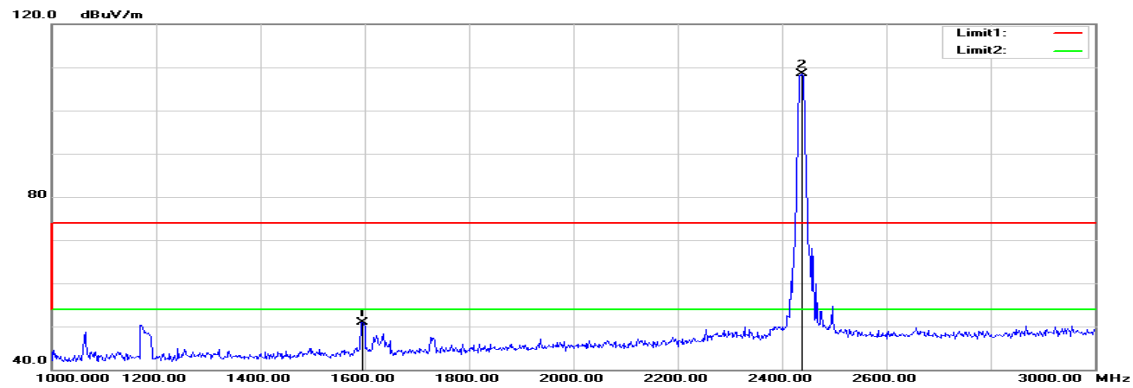TX / IEEE 802.11b / CH Mid**Polarity: Vertical**

Polarity: Horizontal

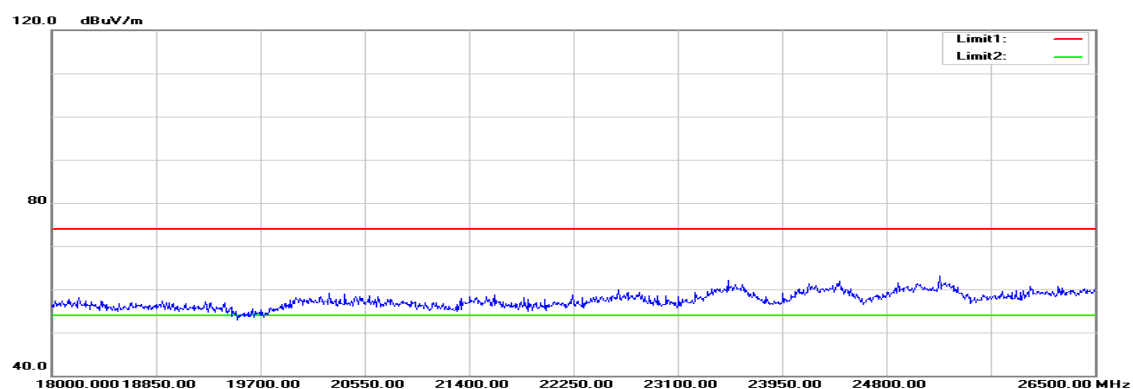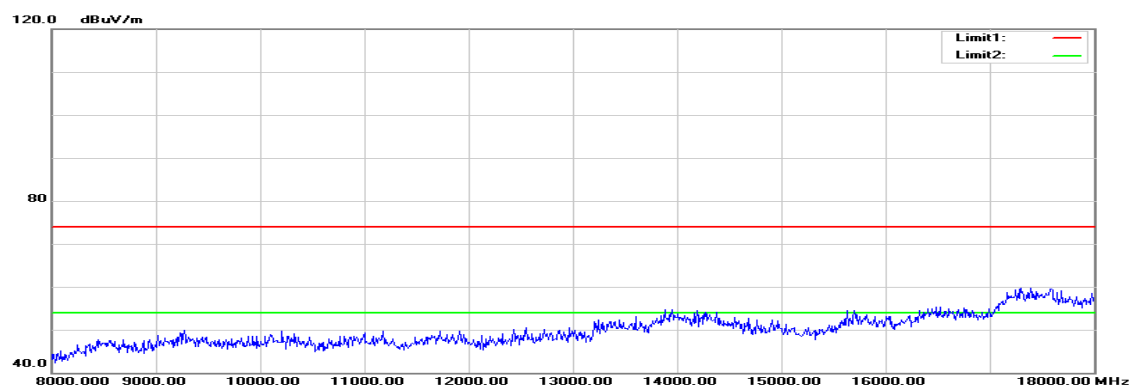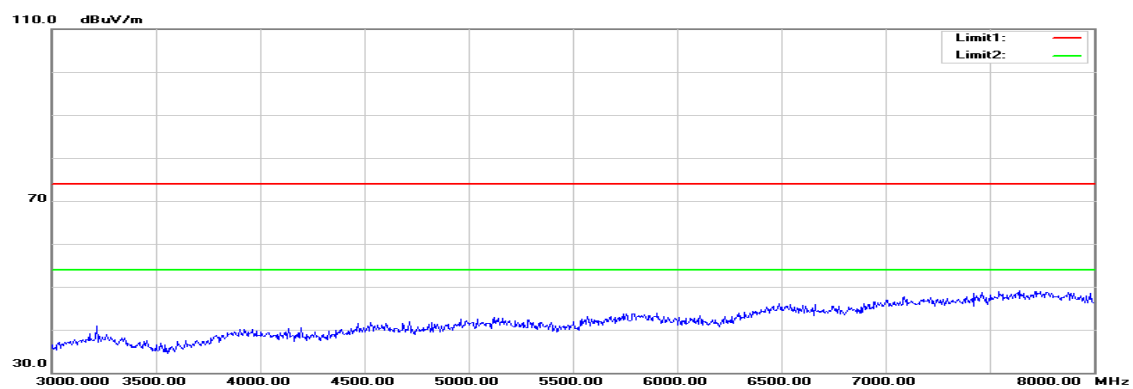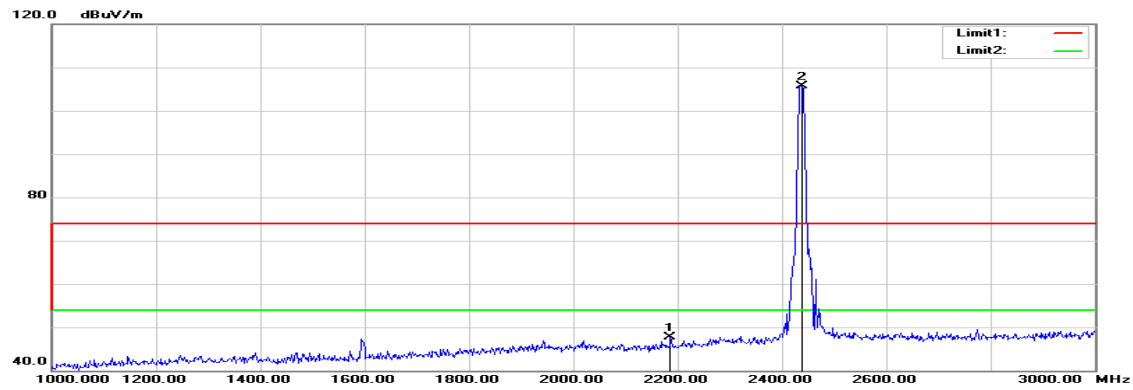


Operation Mode: TX / IEEE 802.11b / CH Mid**Test Date:** December 20, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1596.000	56.68	-5.69	50.99	74.00	-23.01	peak	V
4875.000	45.53	5.24	50.77	74.00	-23.23	peak	V
N/A							
2186.000	50.96	-3.23	47.73	74.00	-26.27	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

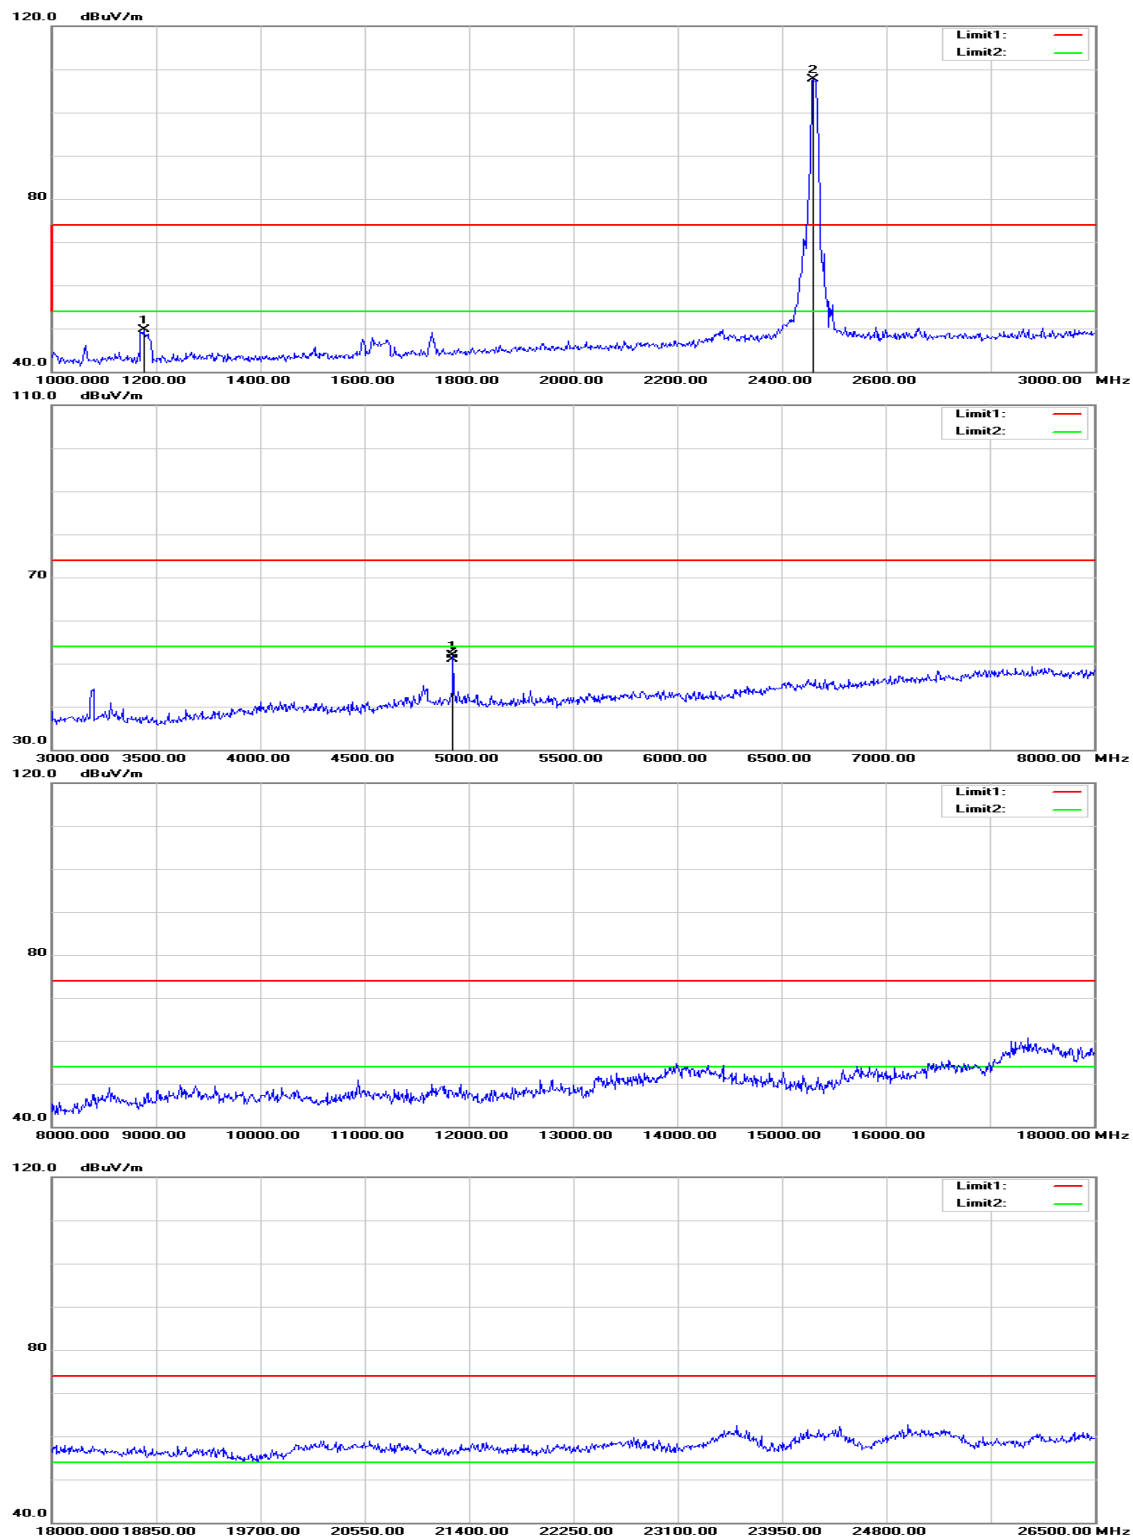TX / IEEE 802.11b / CH High**Polarity: Vertical**

Polarity: Horizontal




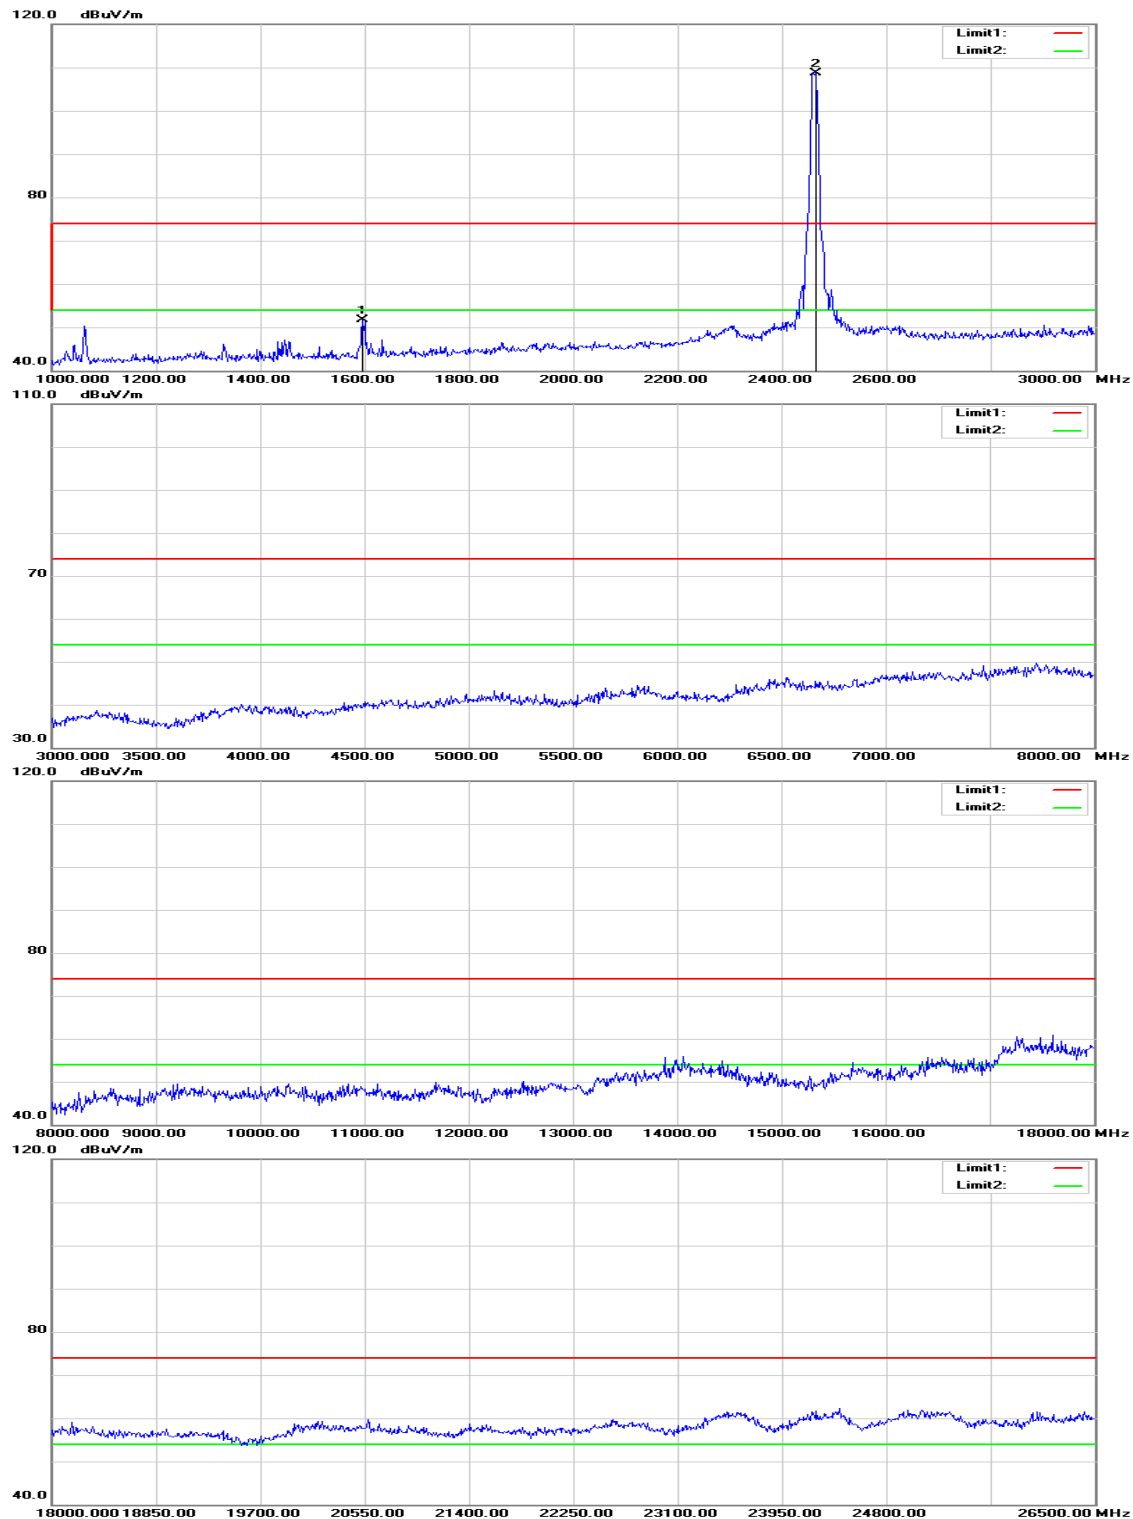



Operation Mode: TX / IEEE 802.11b / CH High**Test Date:** December 20, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1176.000	57.01	-7.32	49.69	74.00	-24.31	peak	V
4925.000	46.48	5.37	51.85	74.00	-22.15	peak	V
4925.000	45.57	5.37	50.94	54.00	-3.06	AVG	V
N/A							
1596.000	57.29	-5.69	51.60	74.00	-22.40	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

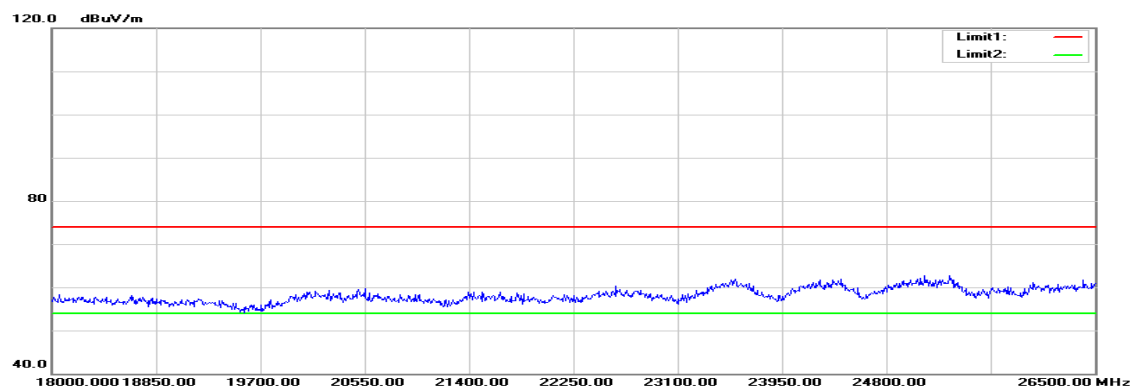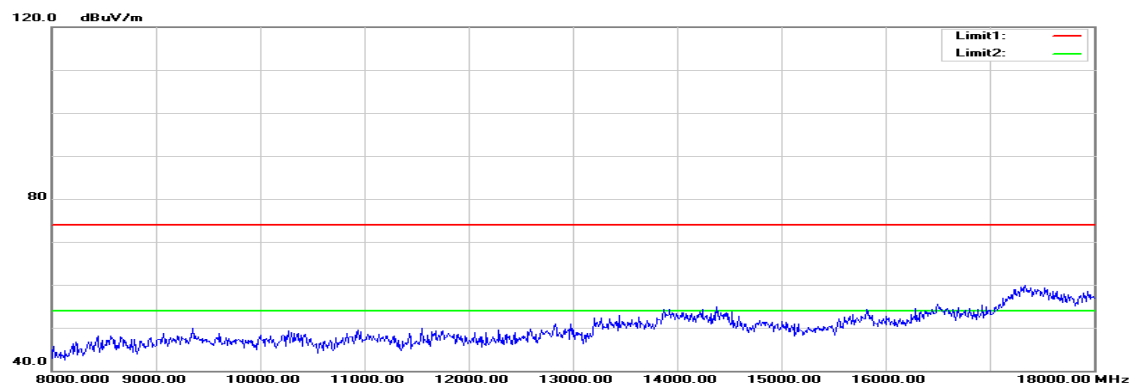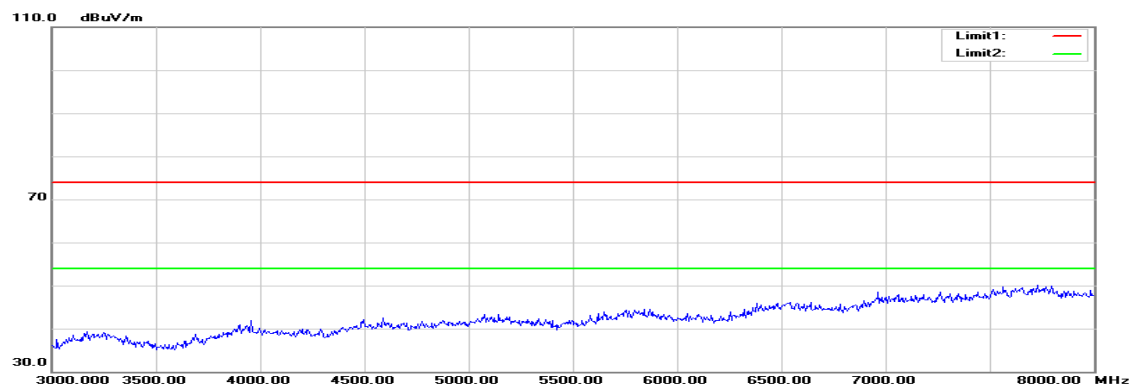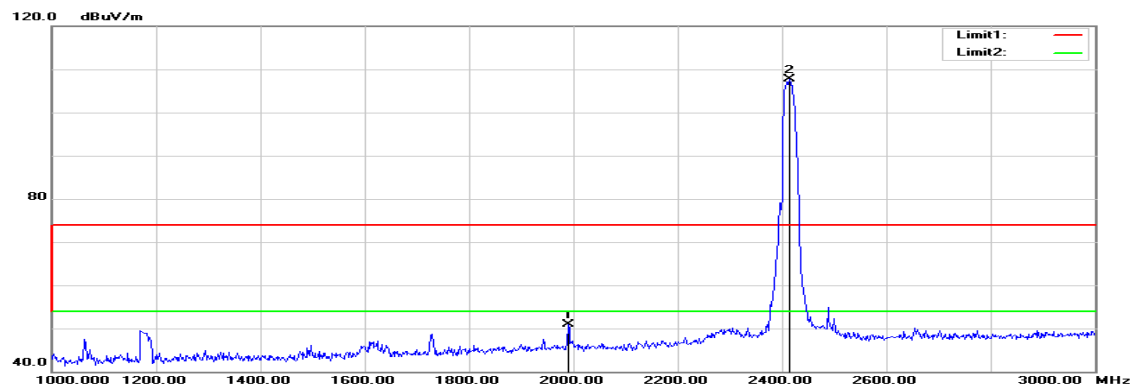TX / IEEE 802.11g / CH Low**Polarity: Vertical**

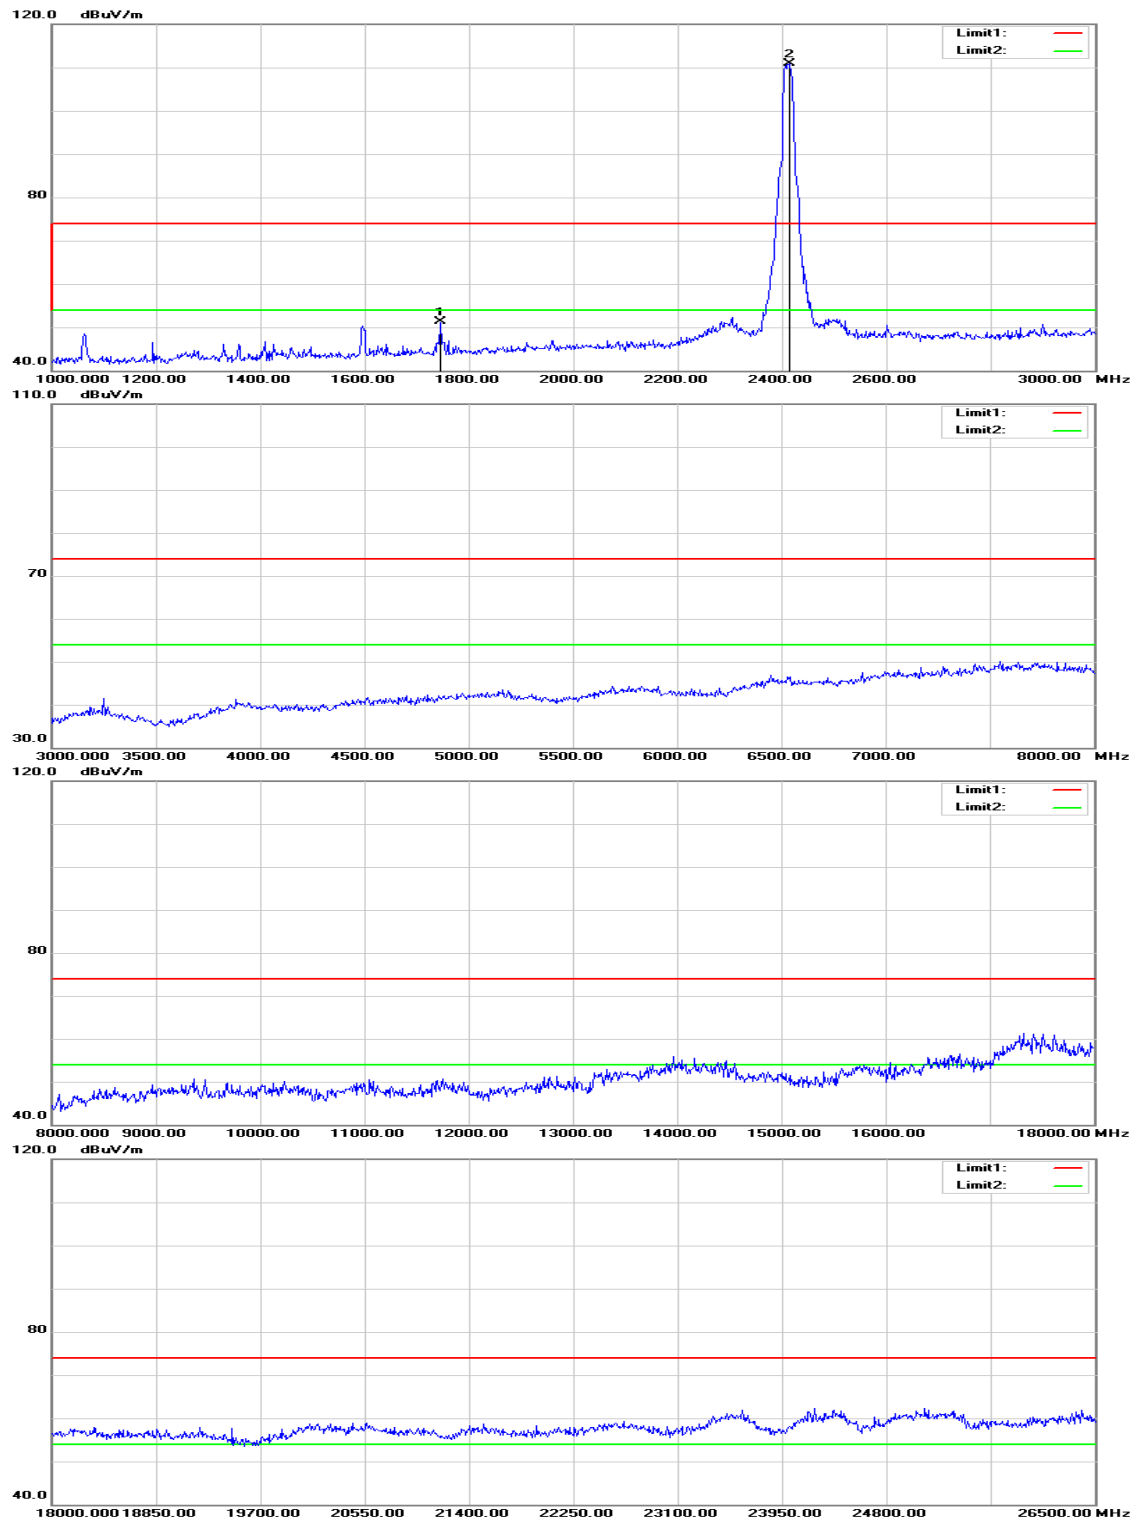Polarity: Horizontal

Operation Mode: TX / IEEE 802.11g / CH Low**Test Date:** December 20, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1990.000	54.60	-3.65	50.95	74.00	-23.05	peak	V
N/A							
1746.000	56.12	-4.92	51.20	74.00	-22.80	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11g / CH Mid

Polarity: Vertical

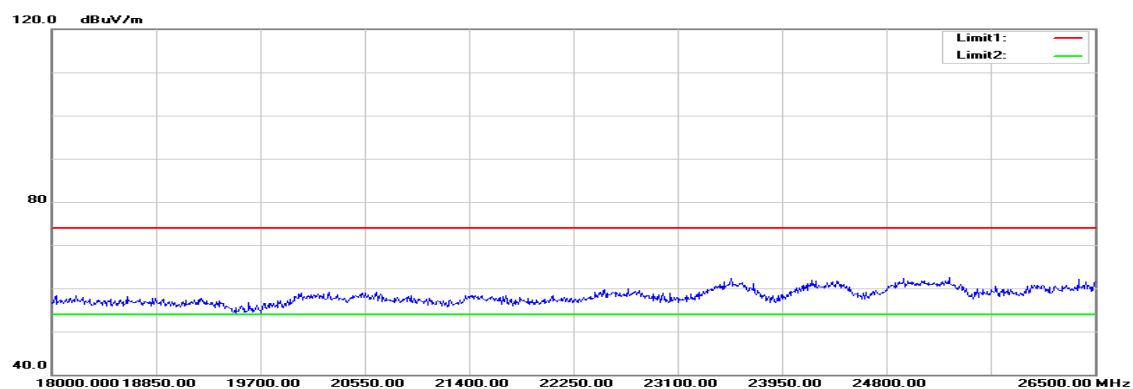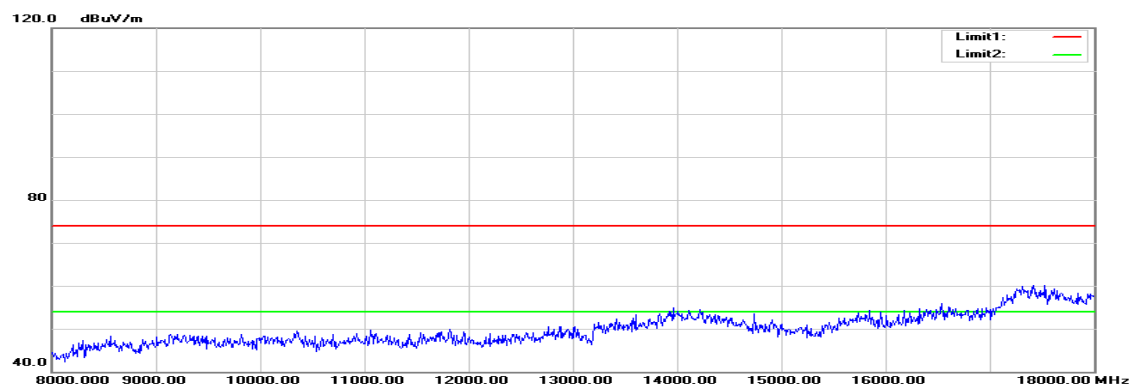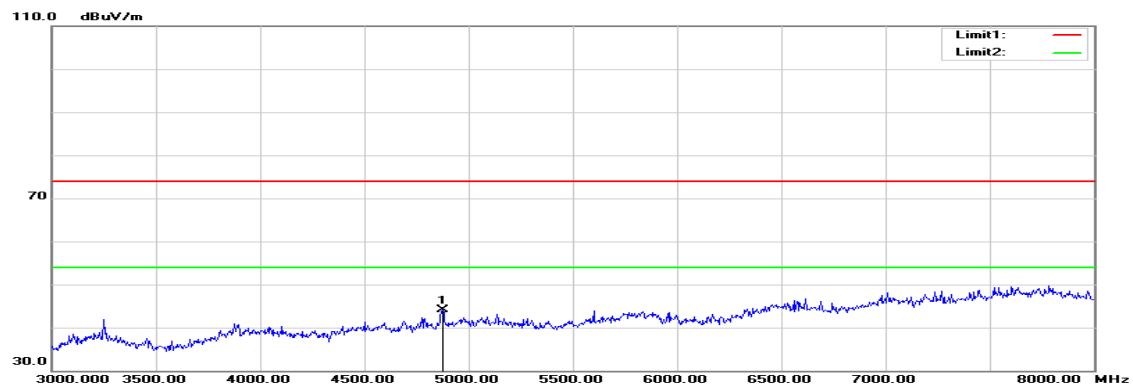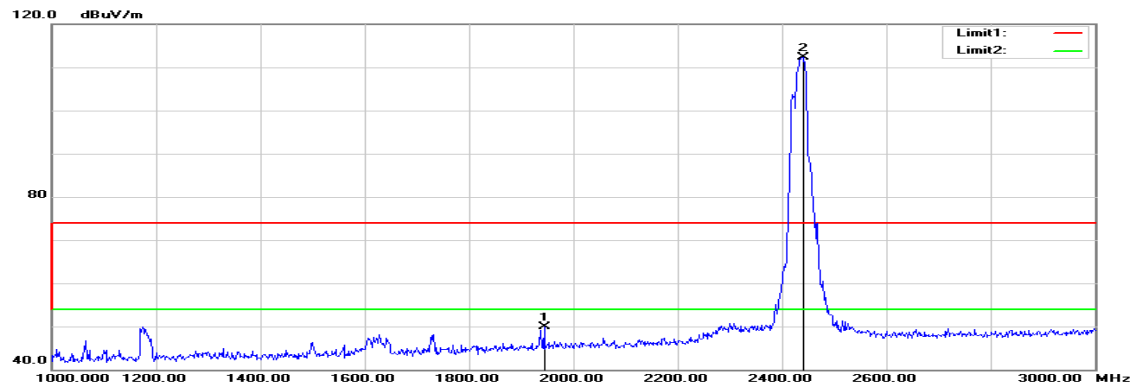

Polarity: Horizontal

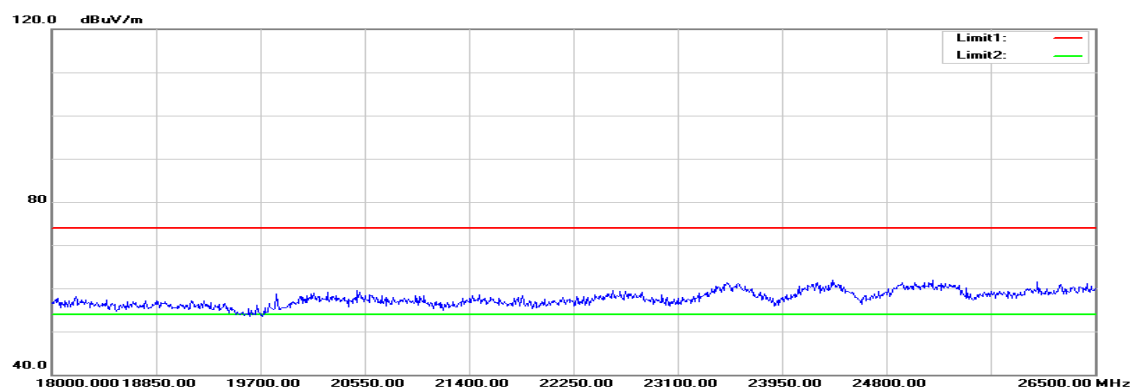
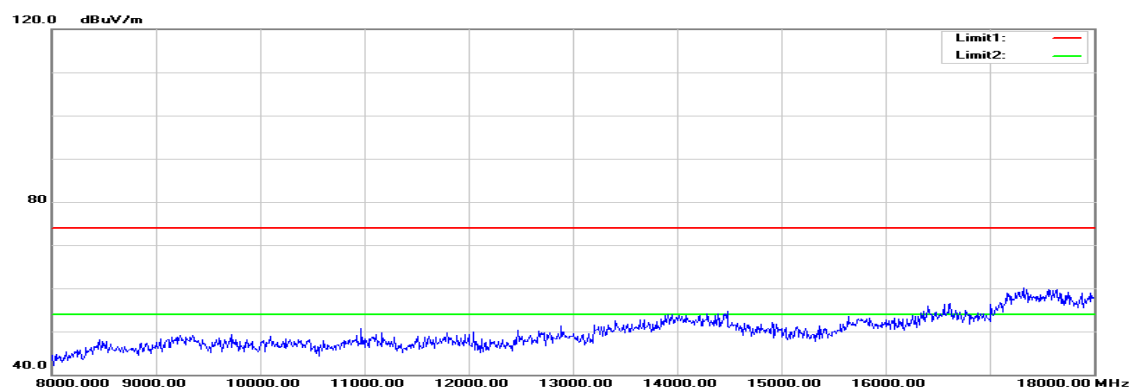
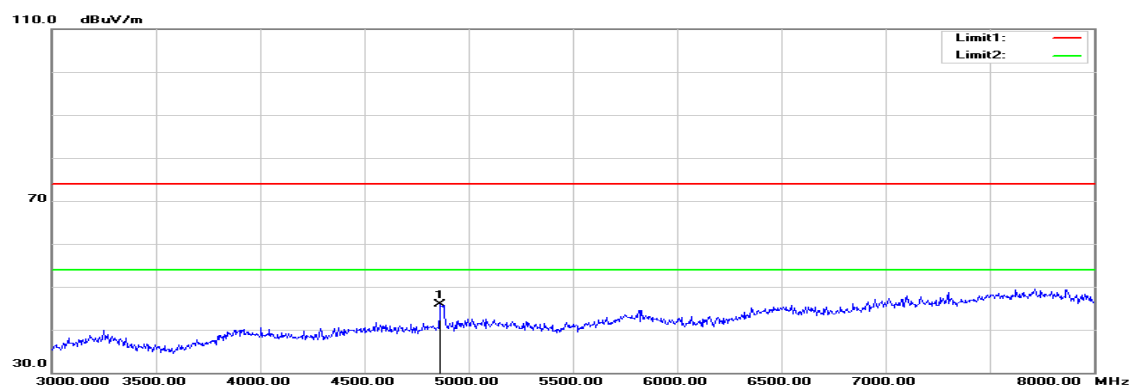
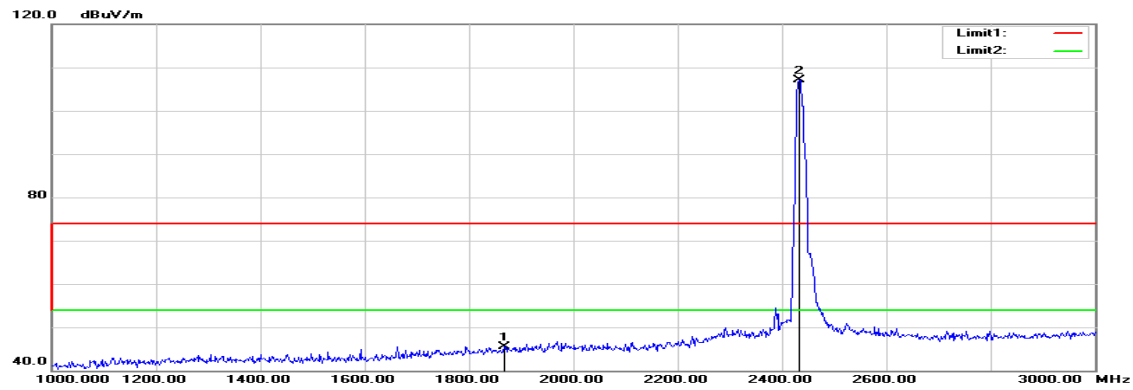


Operation Mode: TX / IEEE 802.11g / CH Mid**Test Date:** December 20, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1944.000	53.74	-3.89	49.85	74.00	-24.15	peak	V
4875.000	38.77	5.24	44.01	74.00	-29.99	peak	V
N/A							
1868.000	49.87	-4.28	45.59	74.00	-28.41	peak	H
4865.000	40.74	5.21	45.95	74.00	-28.05	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

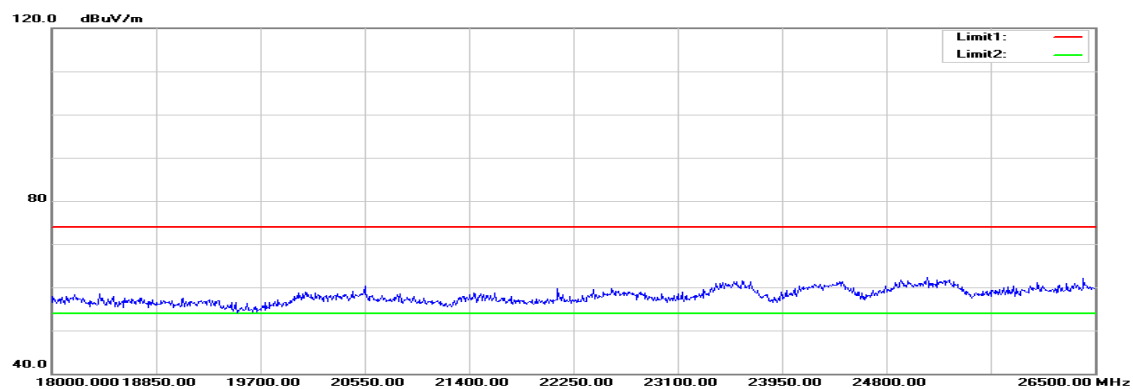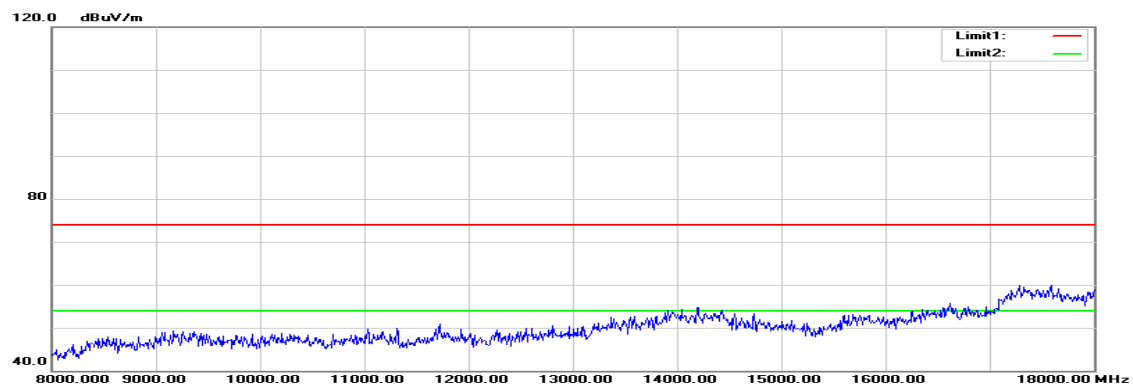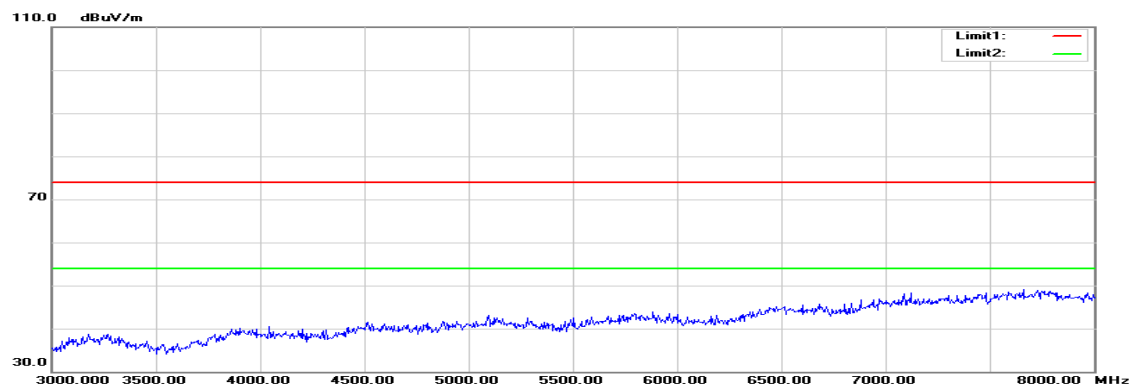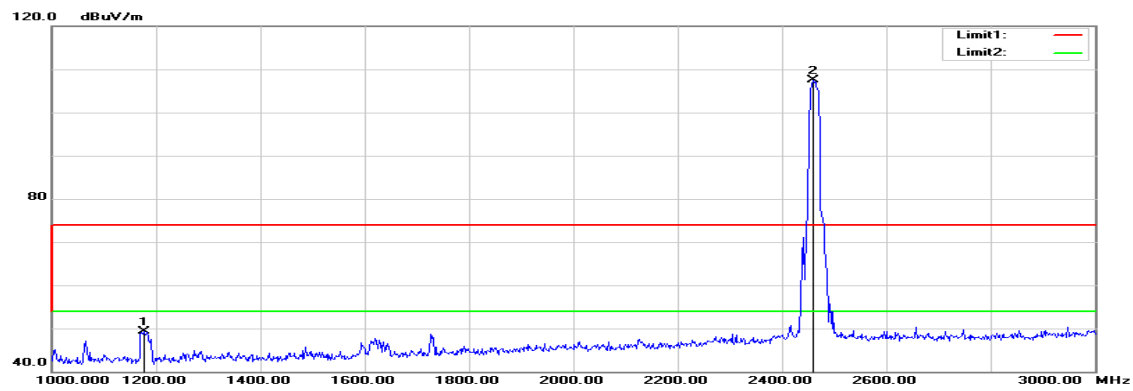TX / IEEE 802.11g / CH High**Polarity: Vertical**

Polarity: Horizontal

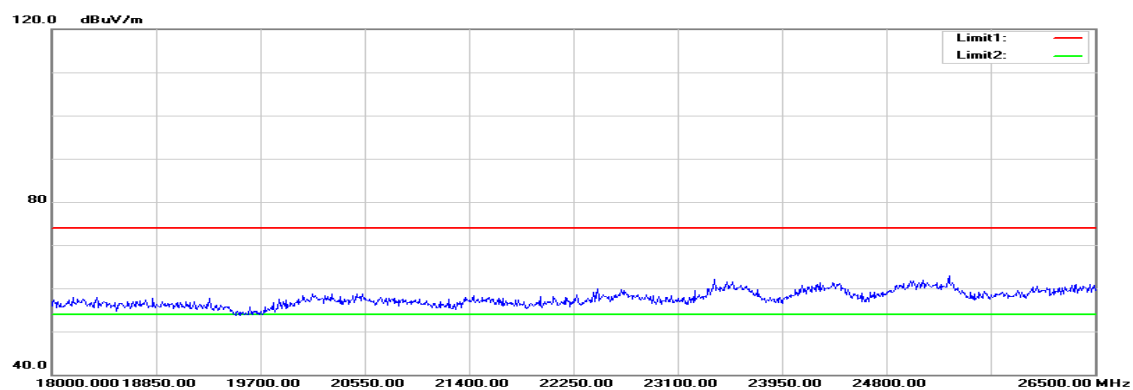
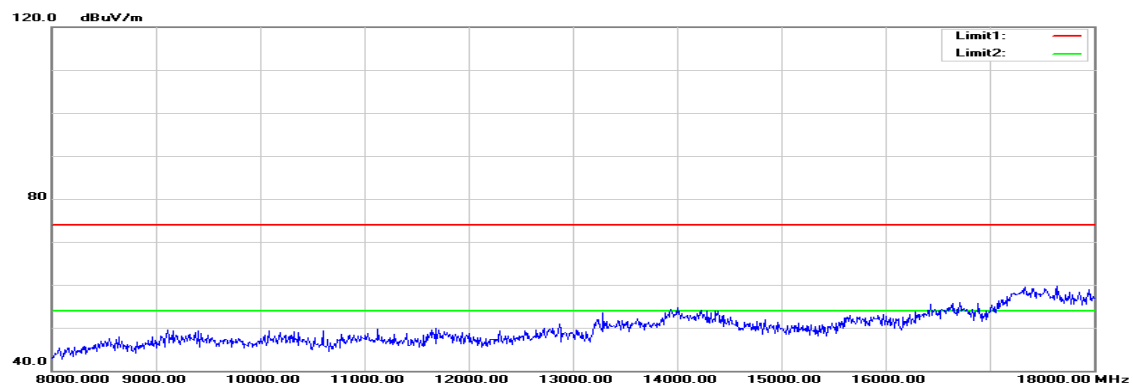
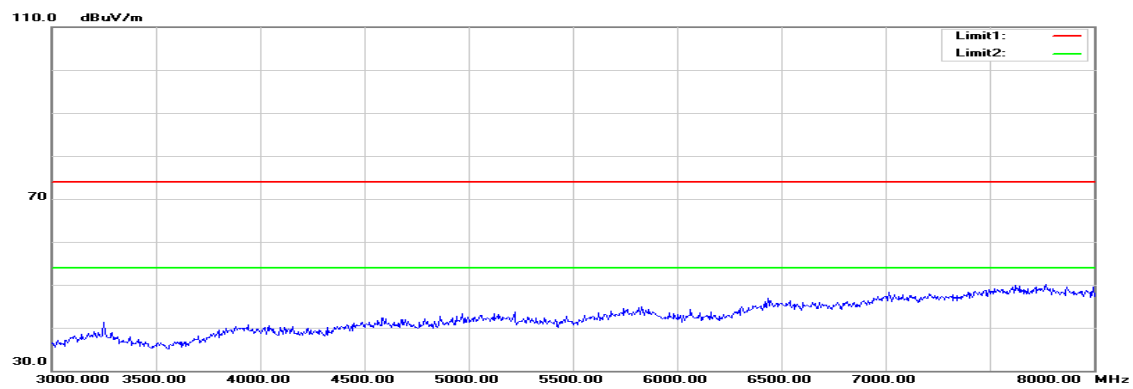
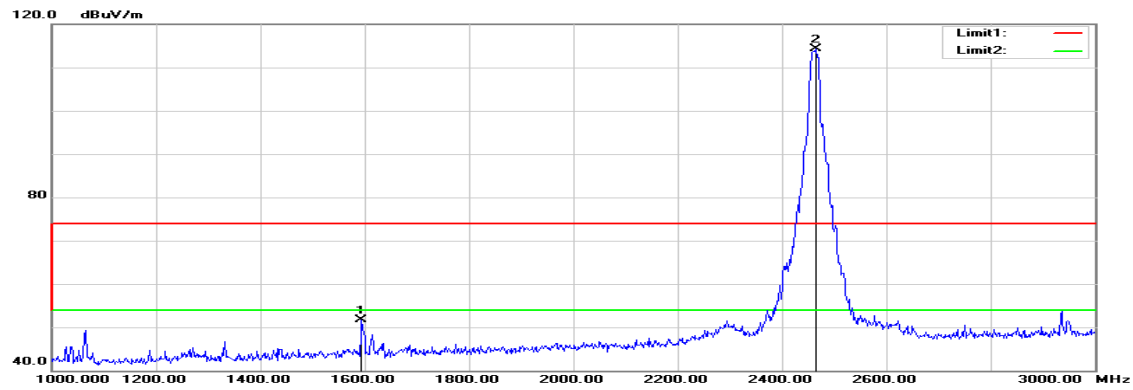


Operation Mode: TX / IEEE 802.11g / CH High**Test Date:** December 20, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1176.000	56.57	-7.32	49.25	74.00	-24.75	peak	V
N/A							
1594.000	57.44	-5.70	51.74	74.00	-22.26	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

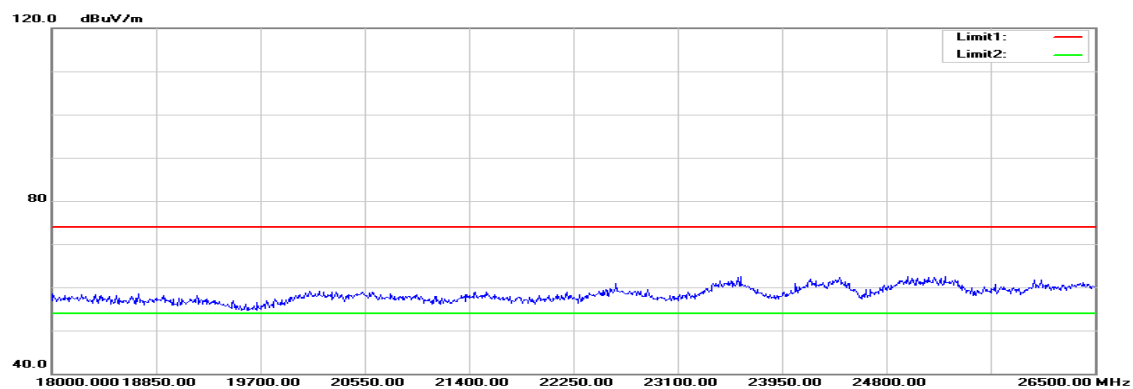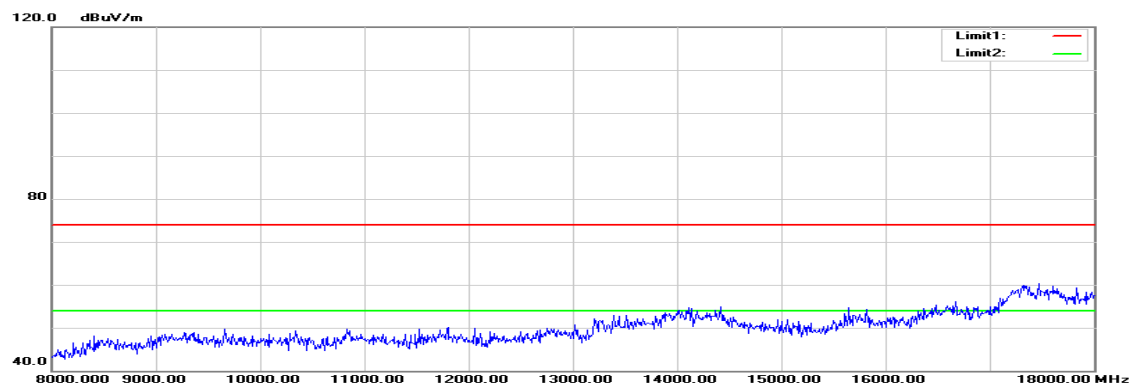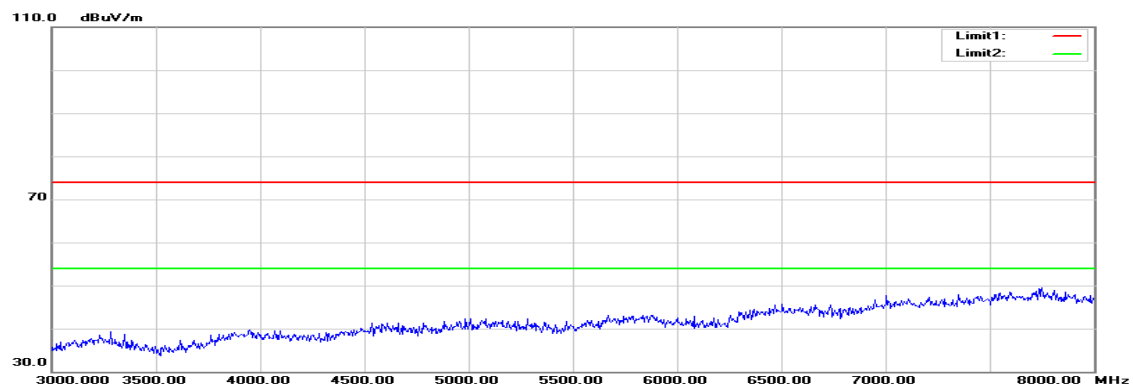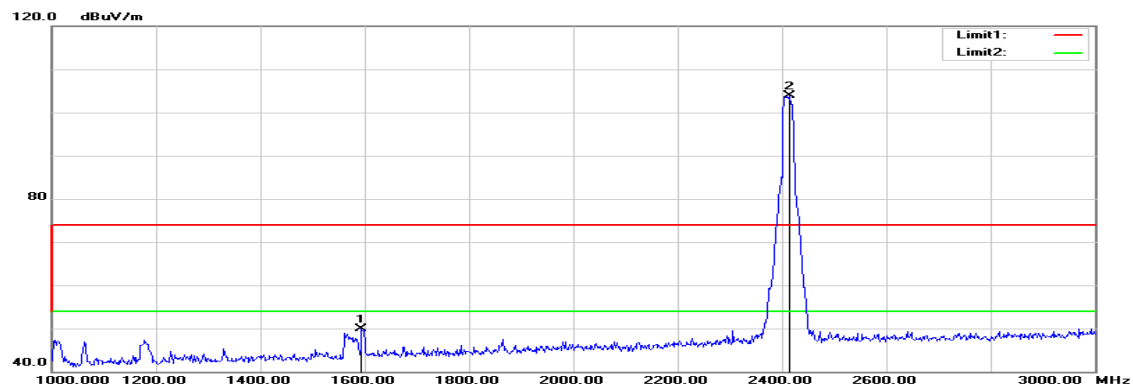TX / IEEE 802.11n HT 20 MHz mode / CH Low**Polarity: Vertical**

Polarity: Horizontal

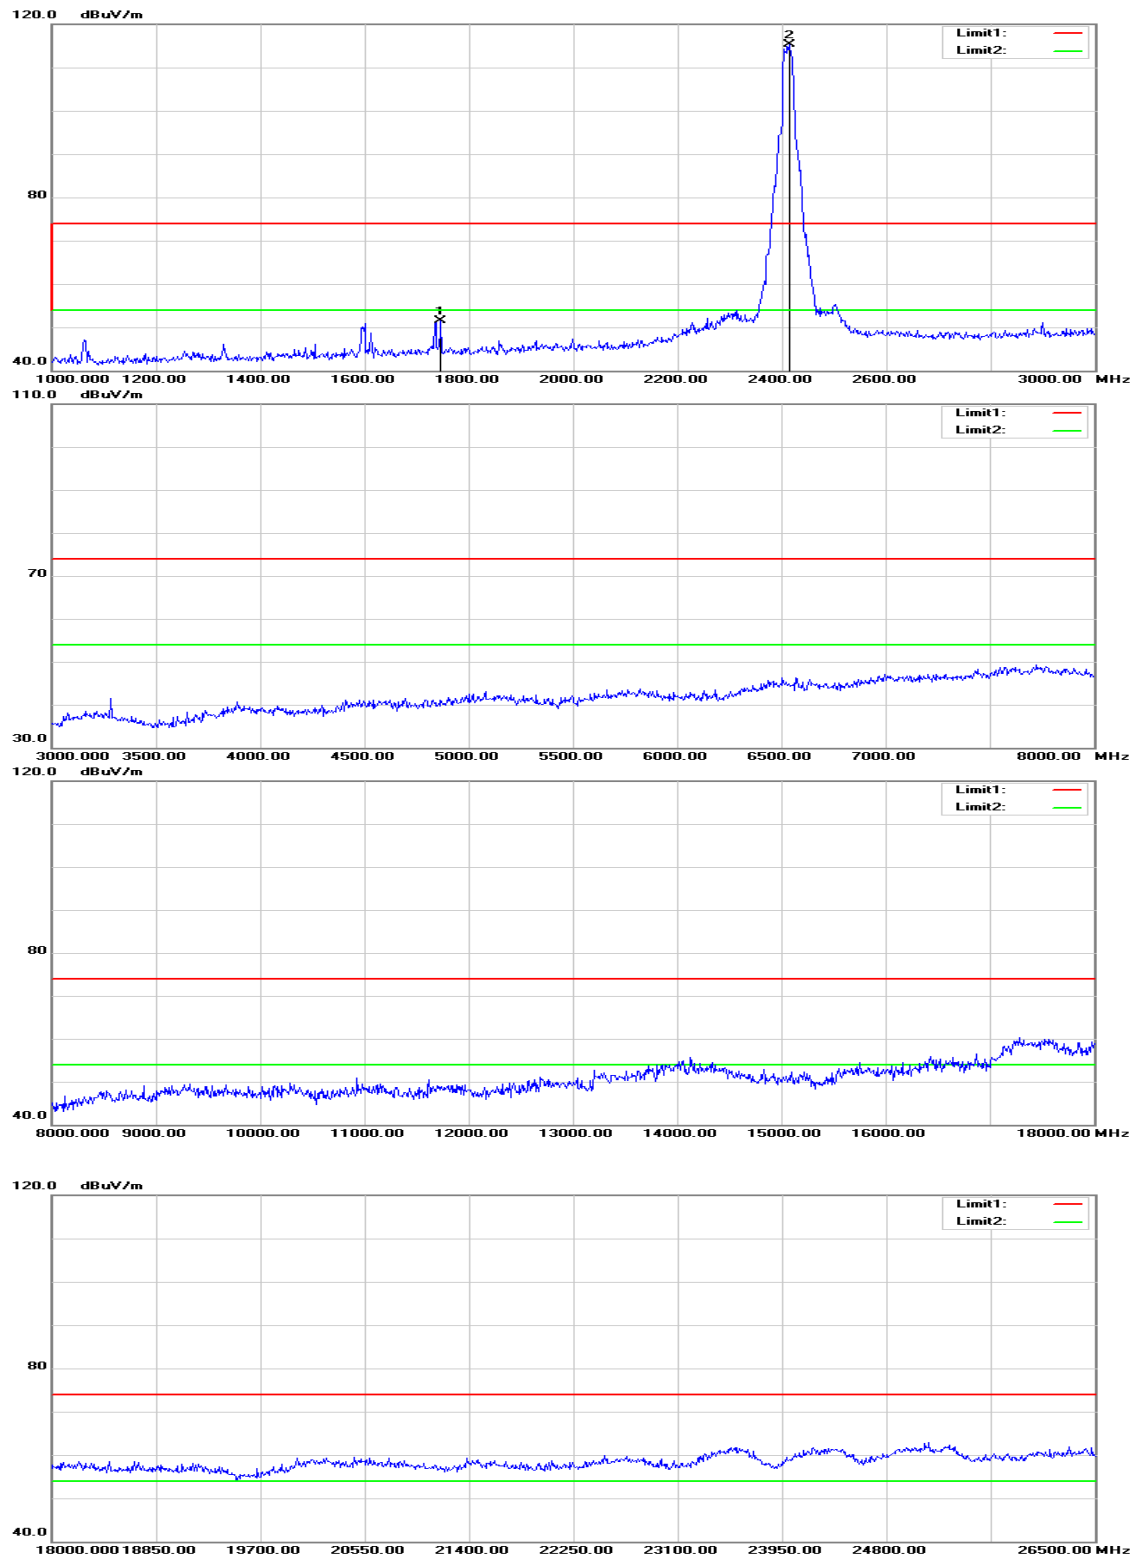

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode /
CH Low

Test Date: December 20, 2015

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1594.000	55.61	-5.70	49.91	74.00	-24.09	peak	V
N/A							
1746.000	56.37	-4.92	51.45	74.00	-22.55	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz mode / CH Mid

Polarity: Vertical

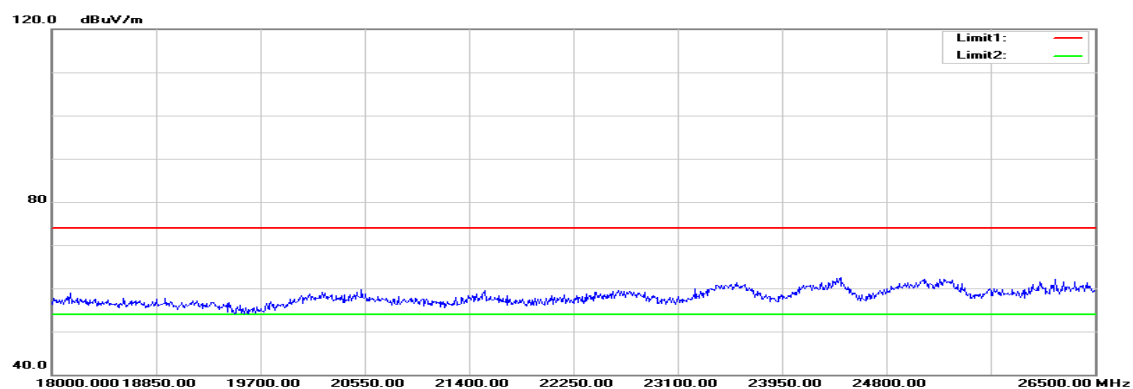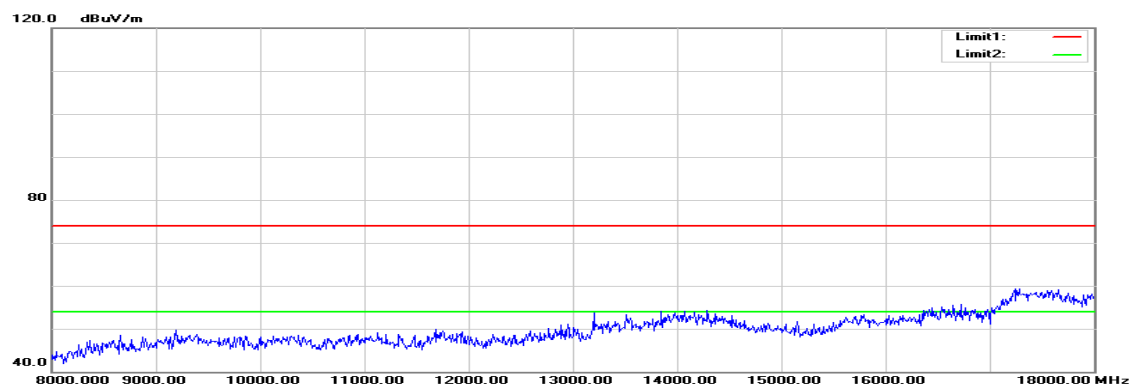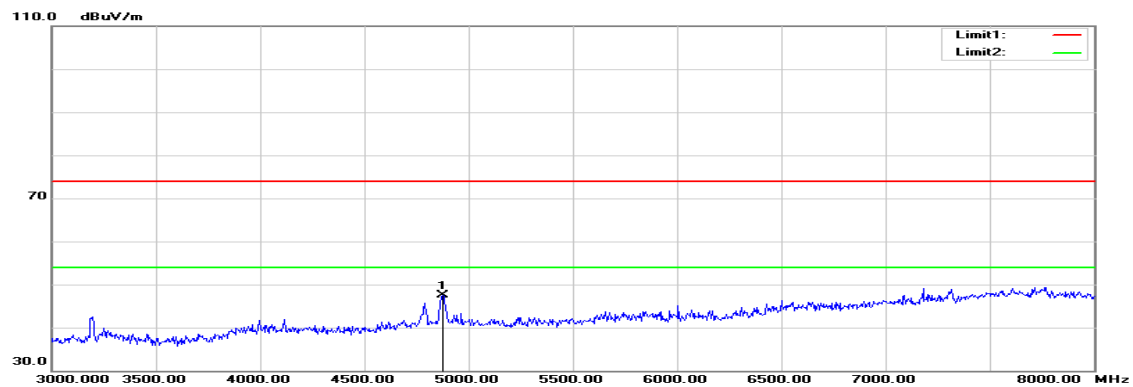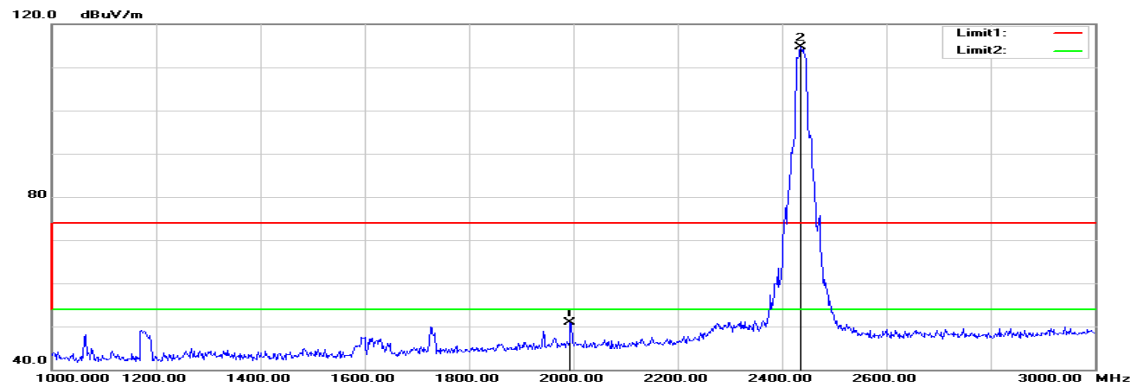

Polarity: Horizontal

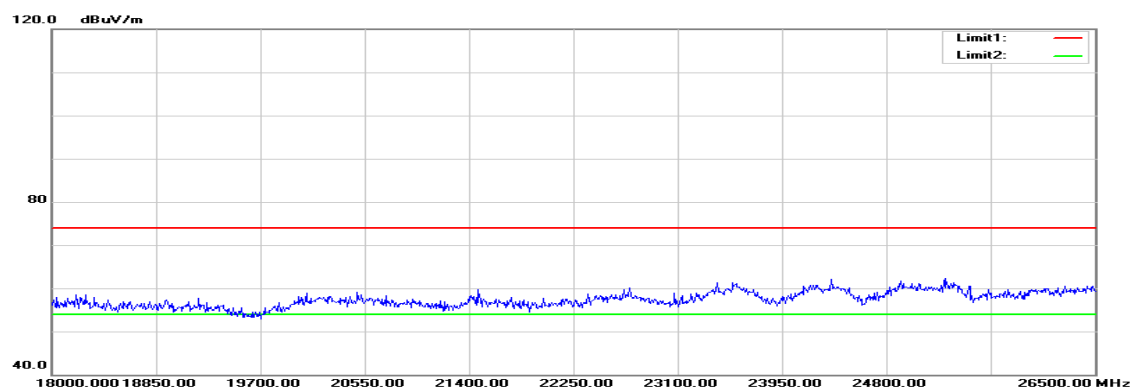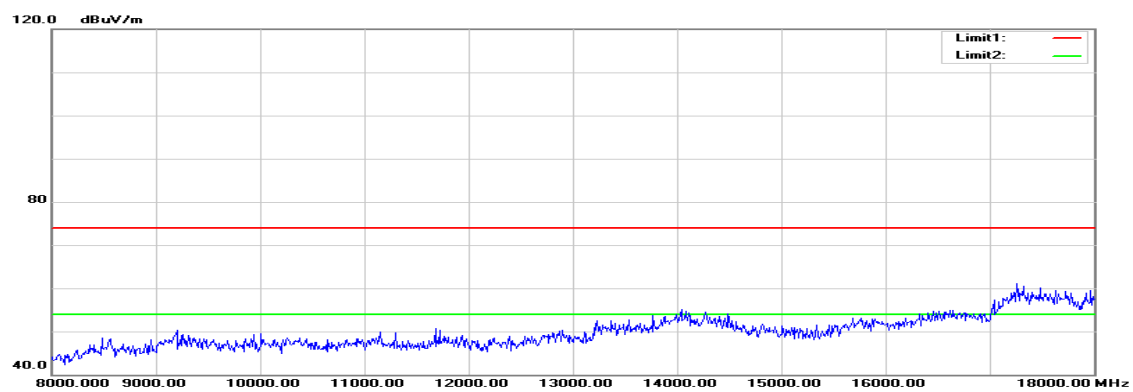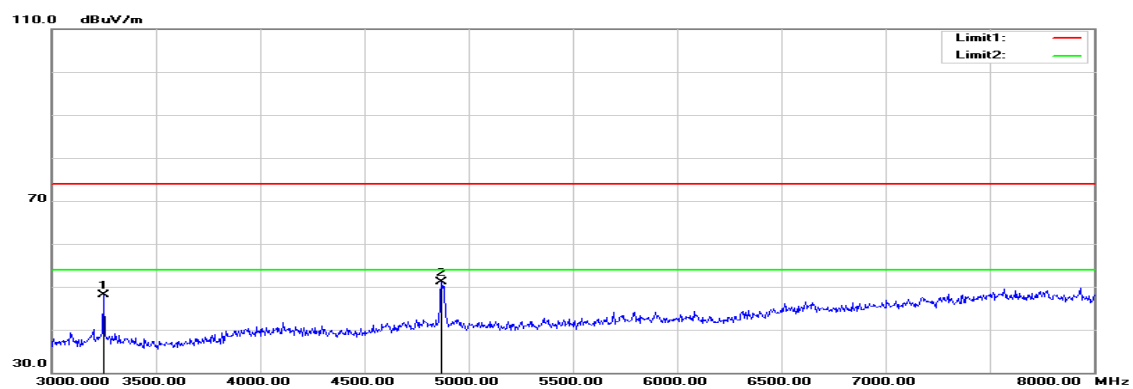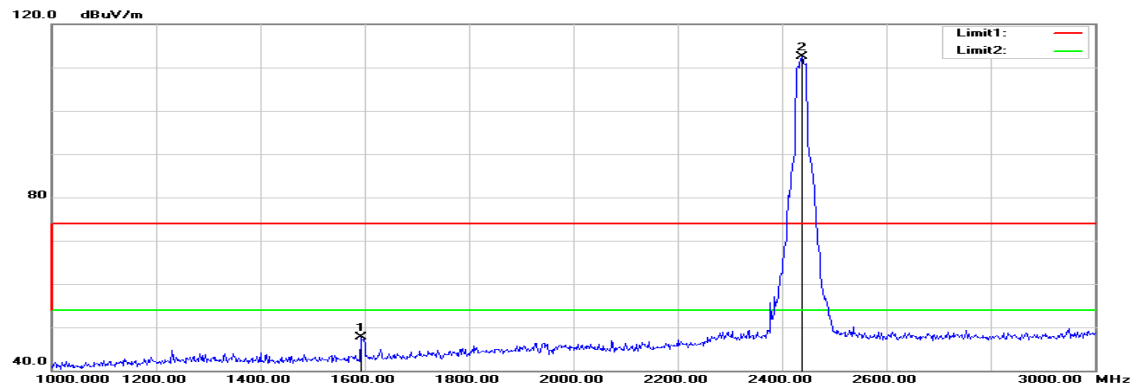

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode /
CH Mid

Test Date: December 20, 2015

Temperature: 27°C

Tested by: Jason Lu





Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1994.000	54.61	-3.63	50.98	74.00	-23.02	peak	V
4875.000	42.20	5.24	47.44	74.00	-26.56	peak	V
N/A							
1592.000	53.45	-5.71	47.74	74.00	-26.26	peak	H
3250.000	48.03	-0.01	48.02	74.00	-25.98	peak	H
4870.000	45.87	5.22	51.09	74.00	-22.91	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

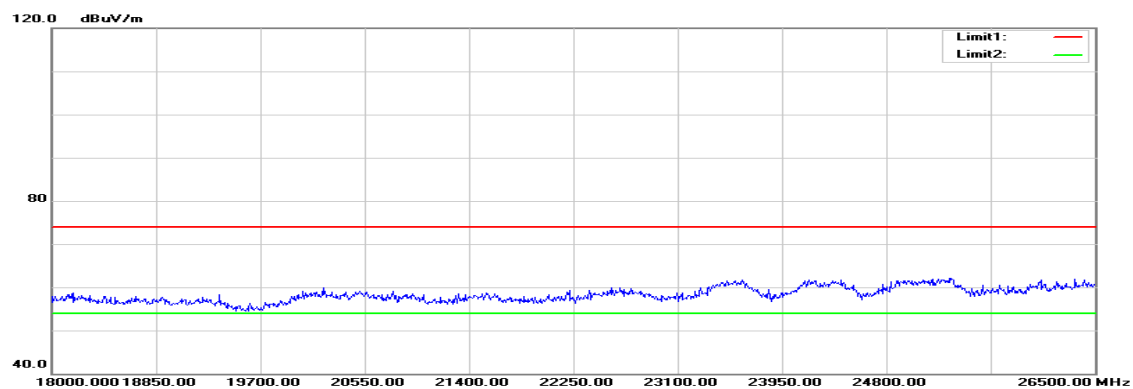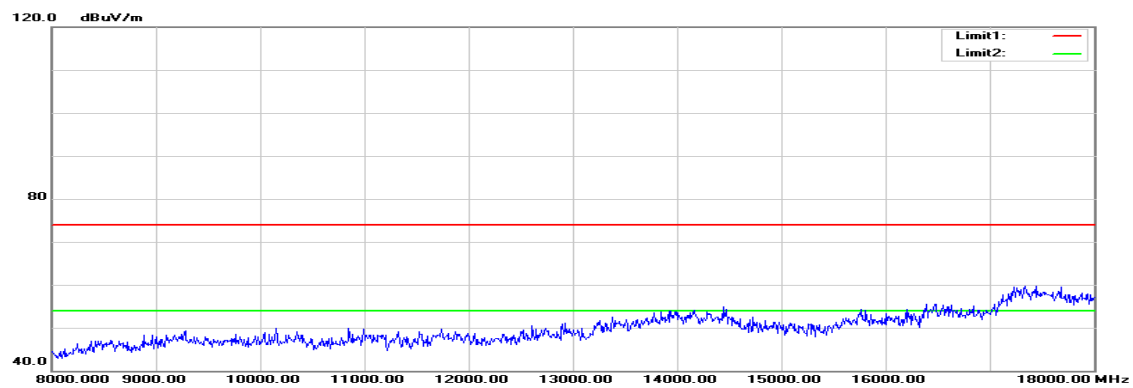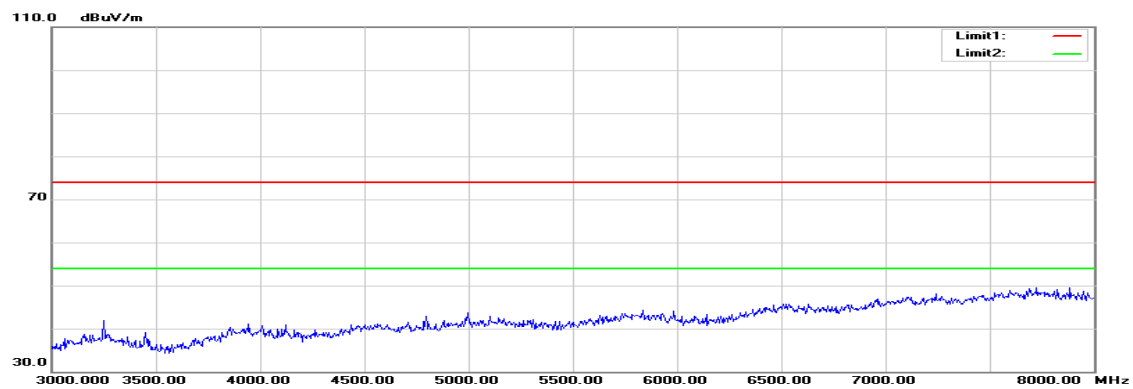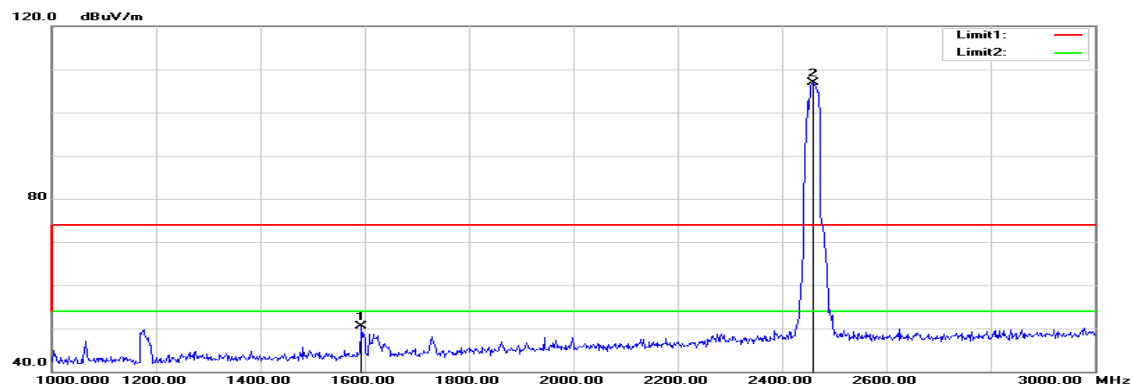TX / IEEE 802.11n HT 20 MHz mode / CH High**Polarity: Vertical**

Polarity: Horizontal

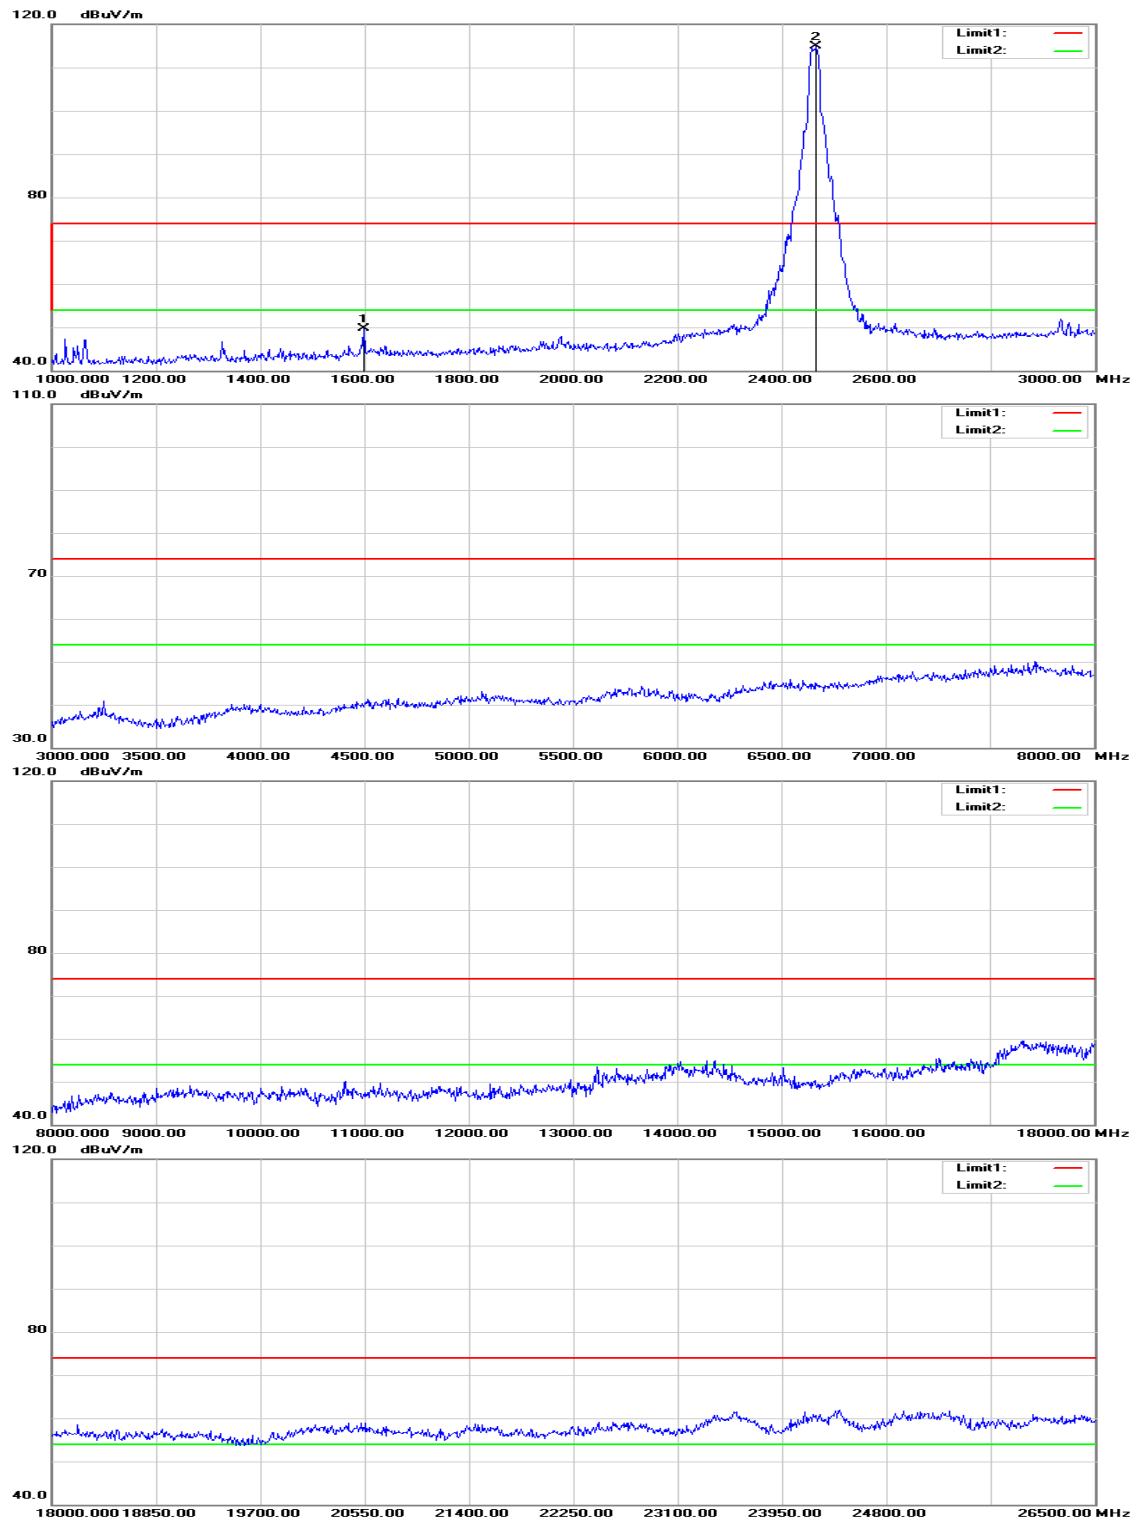

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode /
CH High

Test Date: December 20, 2015

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1594.000	56.16	-5.70	50.46	74.00	-23.54	peak	V
N/A							
1598.000	55.43	-5.68	49.75	74.00	-24.25	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 40 MHz mode / CH Low

Polarity: Vertical

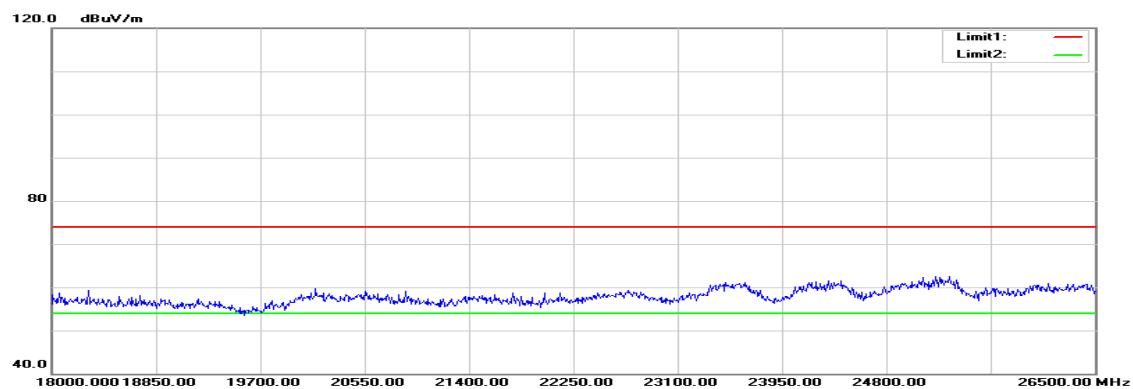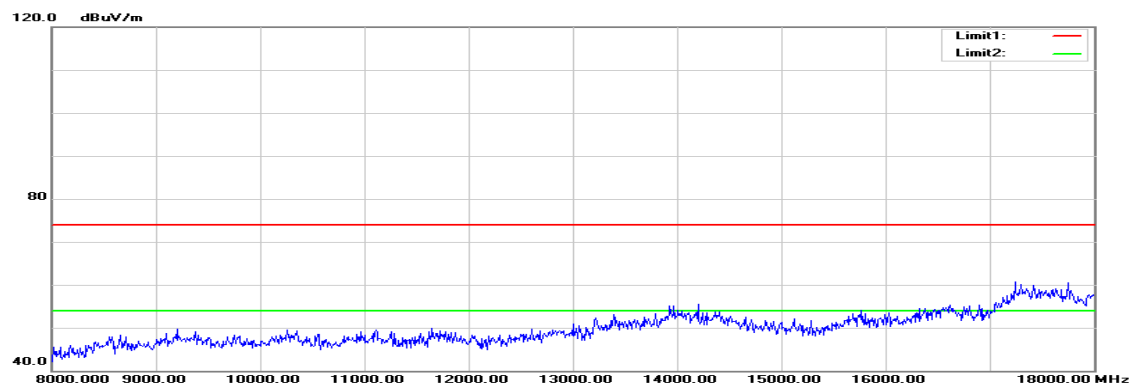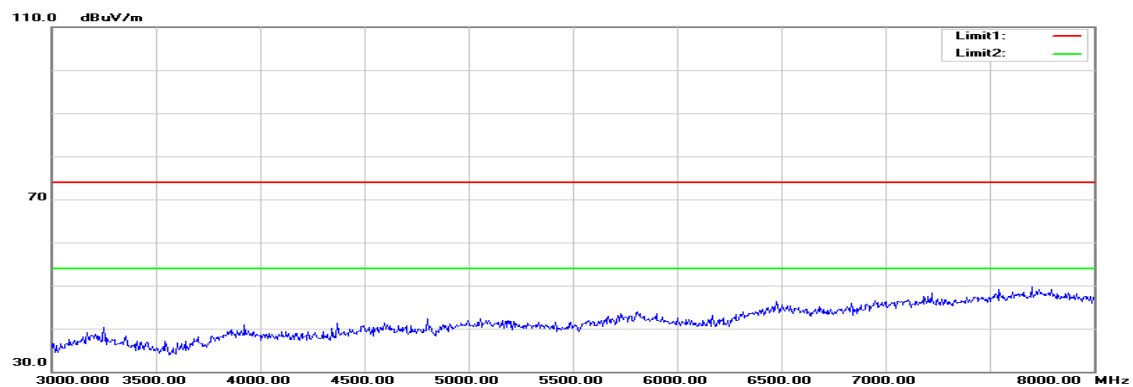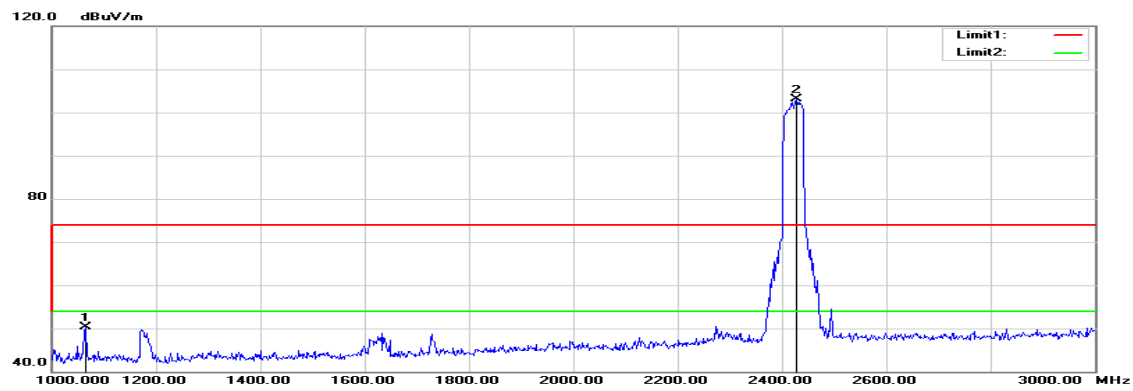

Polarity: Horizontal

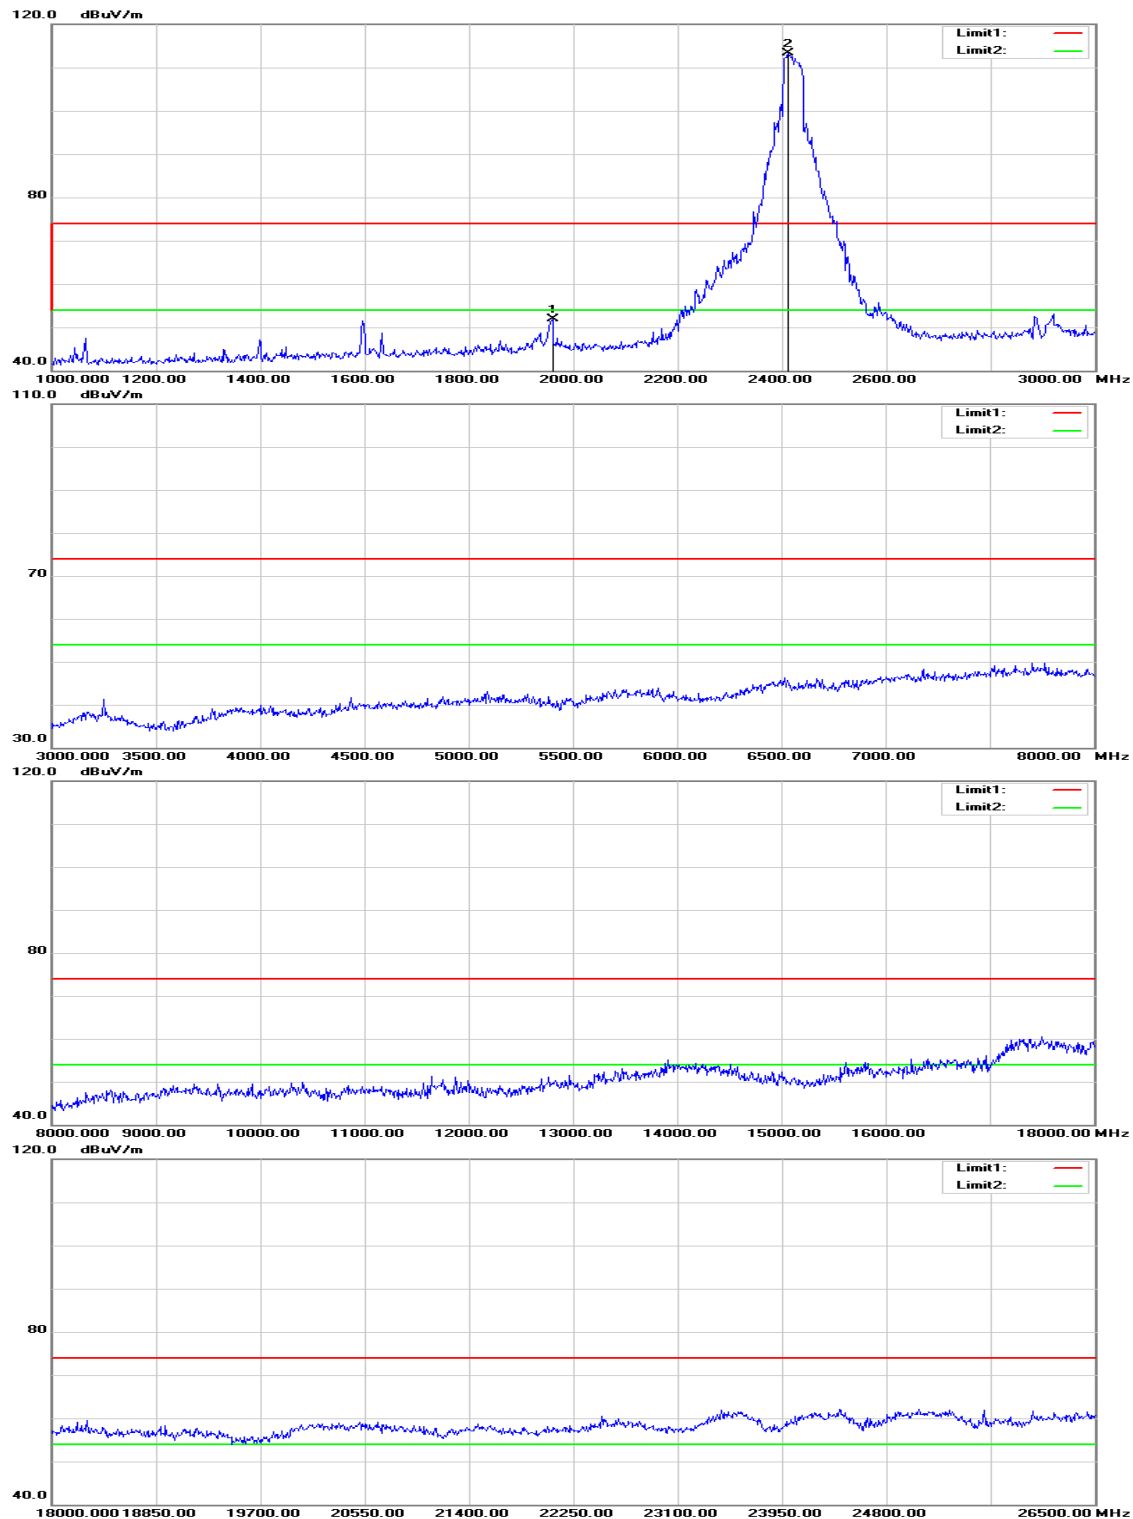

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Low

Test Date: December 20, 2015

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1064.000	58.09	-7.72	50.37	74.00	-23.63	peak	V
N/A							
1960.000	55.75	-3.81	51.94	74.00	-22.06	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 40 MHz mode / CH Mid

Polarity: Vertical

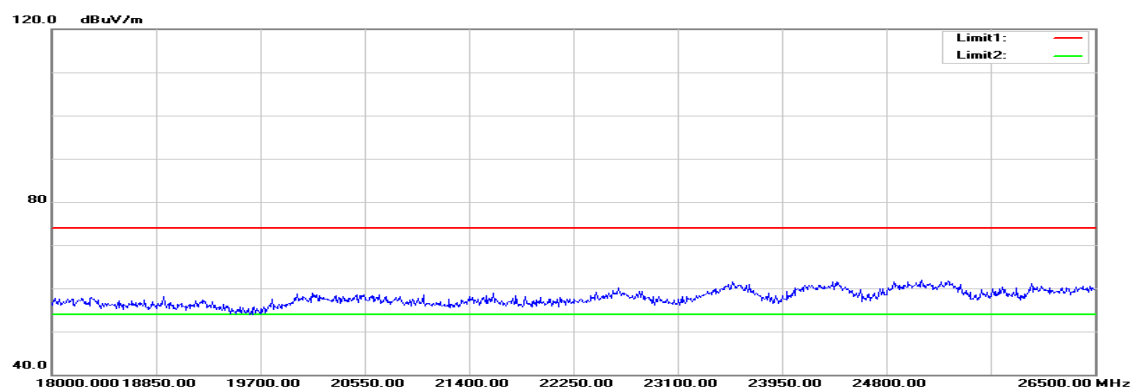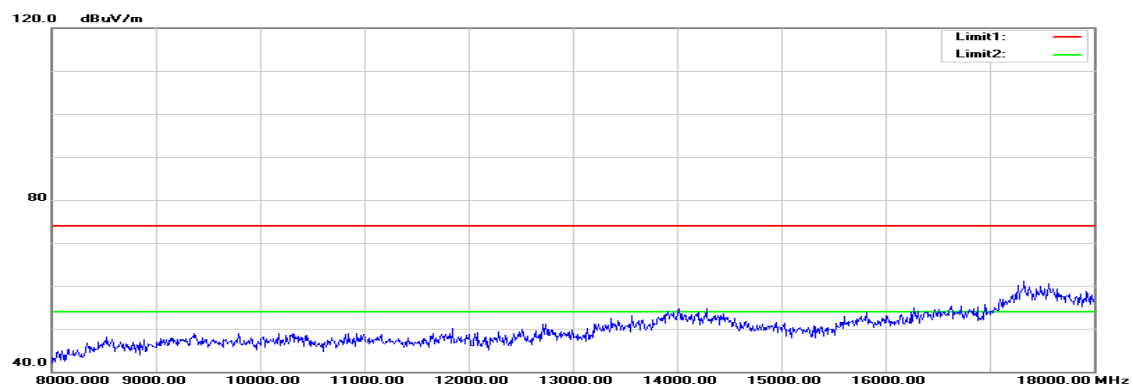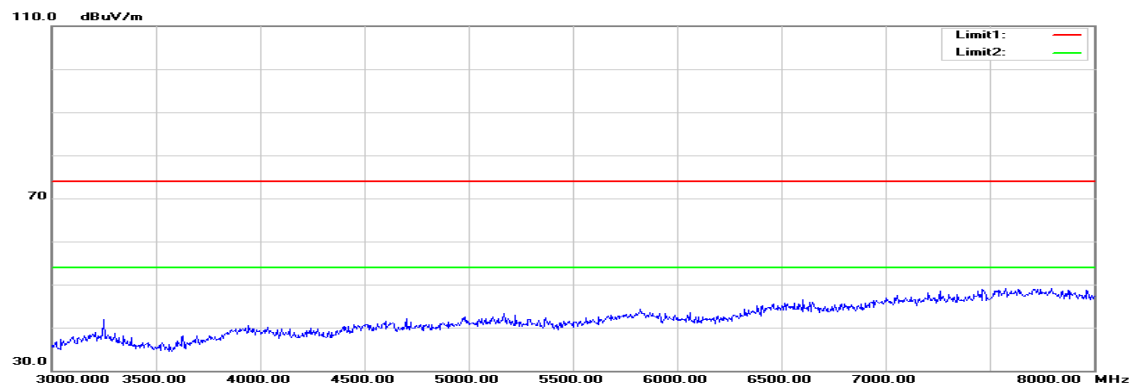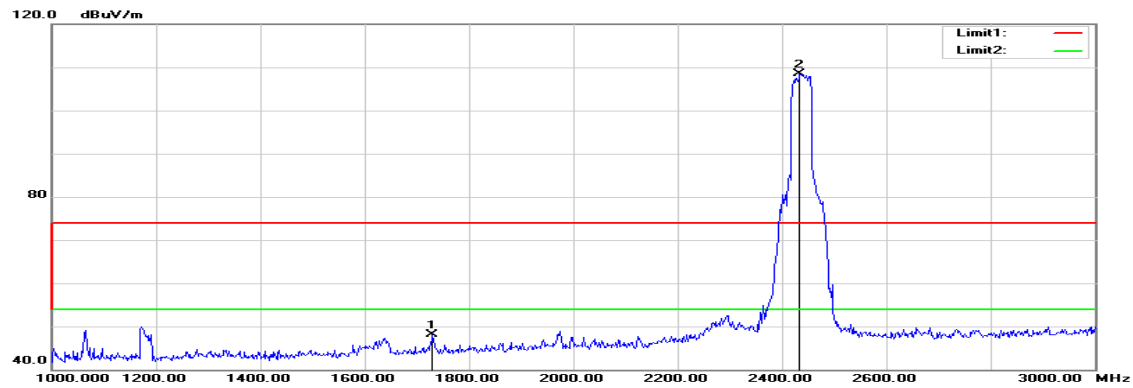

Polarity: Horizontal

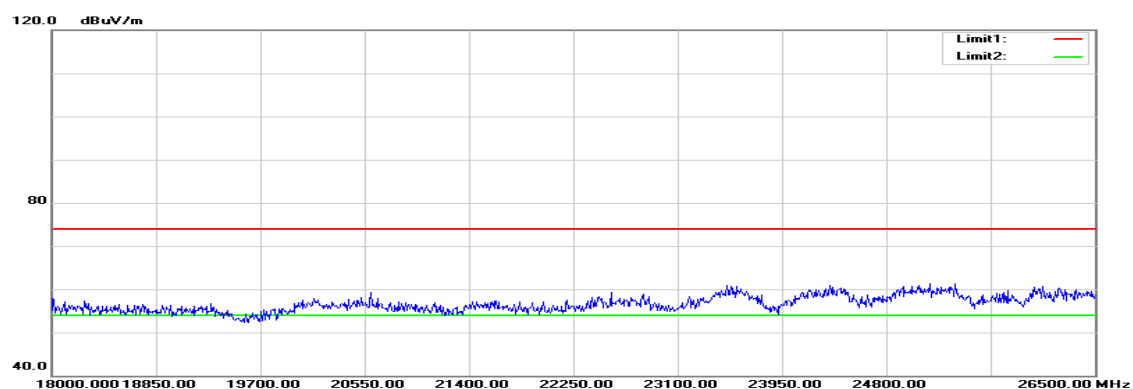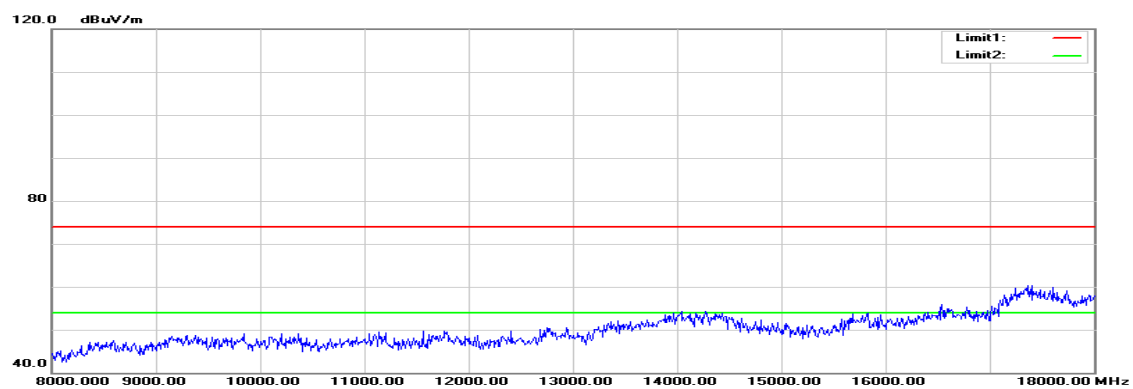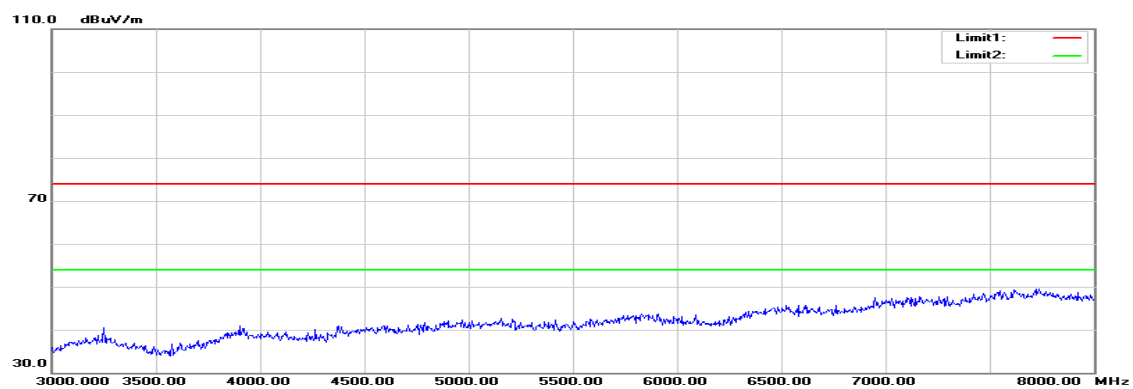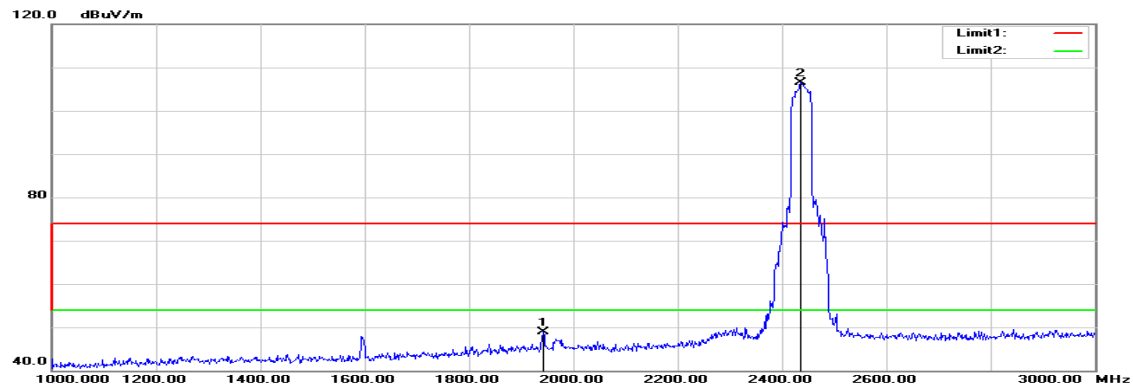

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Mid

Test Date: December 20, 2015

Temperature: 27°C

Tested by: Jason Lu





Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1730.000	53.16	-5.00	48.16	74.00	-25.84	peak	V
N/A							
1942.000	52.88	-3.90	48.98	74.00	-25.02	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

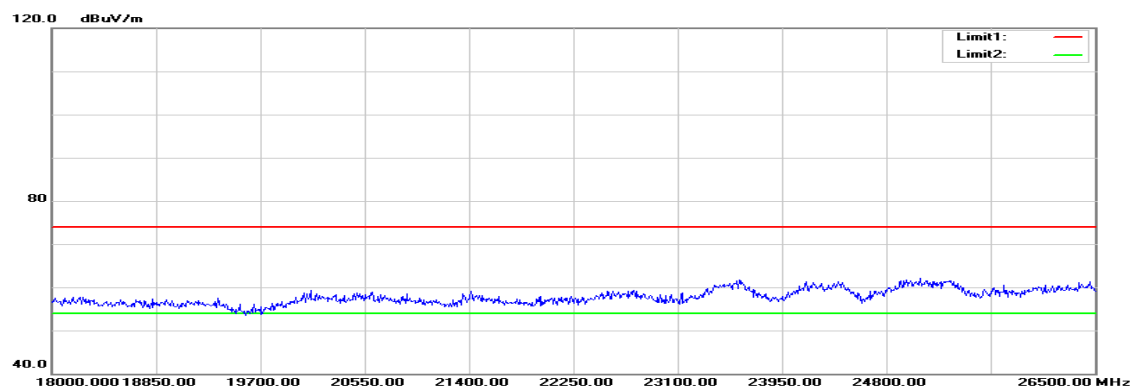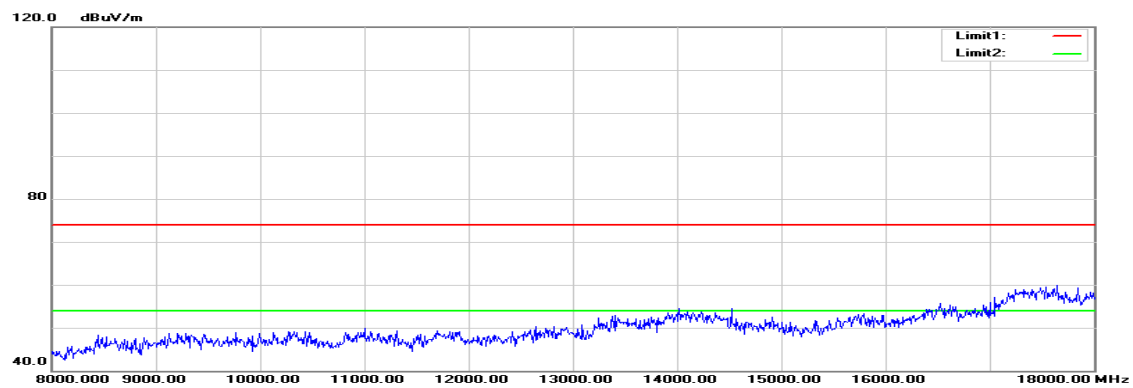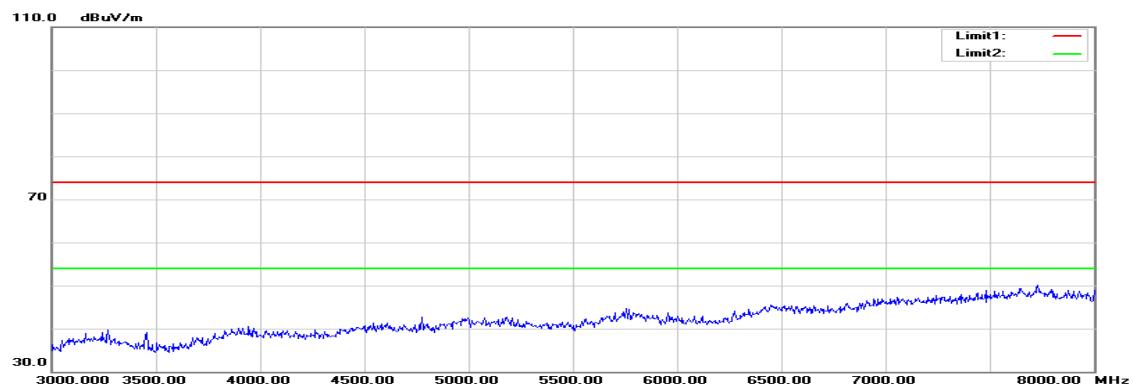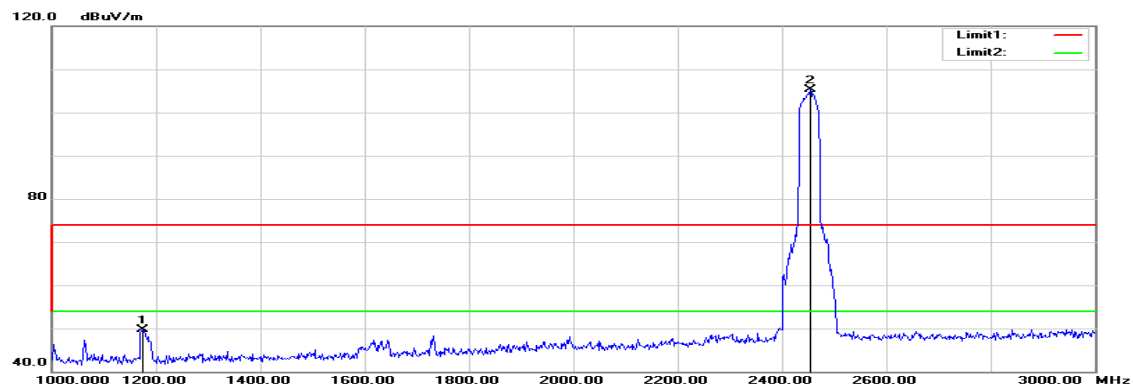TX / IEEE 802.11n HT 40 MHz mode / CH High**Polarity: Vertical**

Polarity: Horizontal

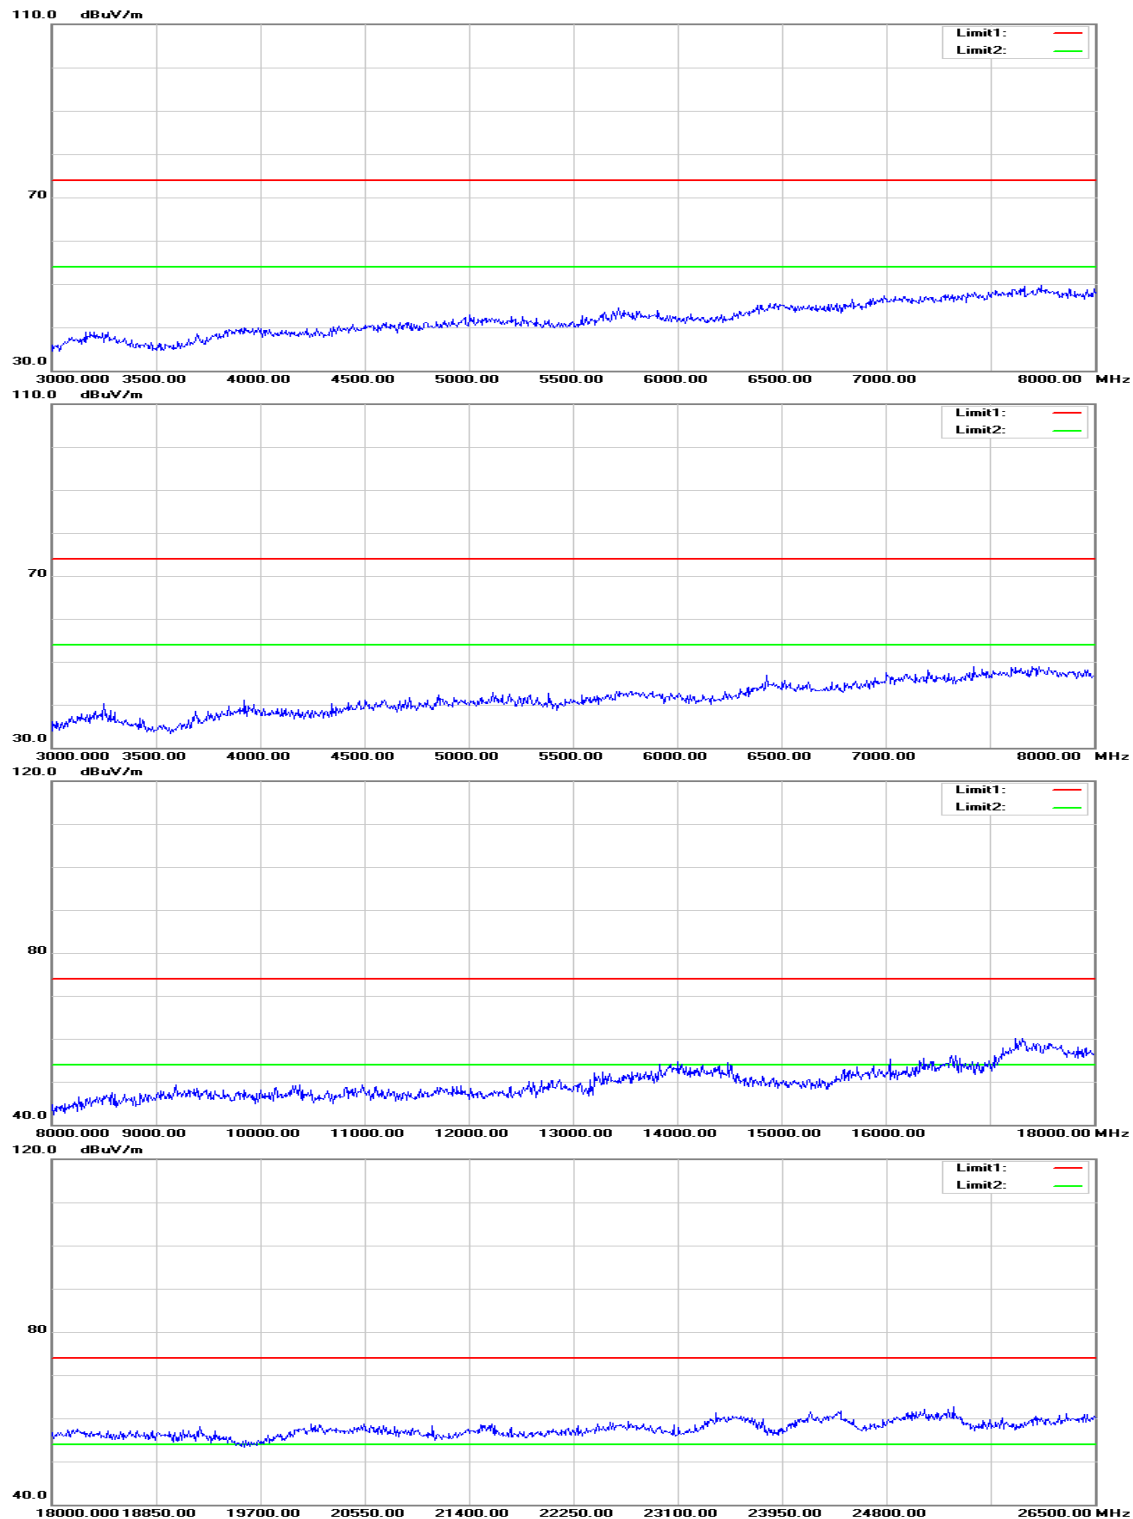

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH High

Test Date: December 20, 2015

Temperature: 27°C

Tested by: Jason Lu


Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1174.000	57.12	-7.33	49.79	74.00	-24.21	peak	V
N/A							
1732.000	53.63	-4.99	48.64	74.00	-25.36	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

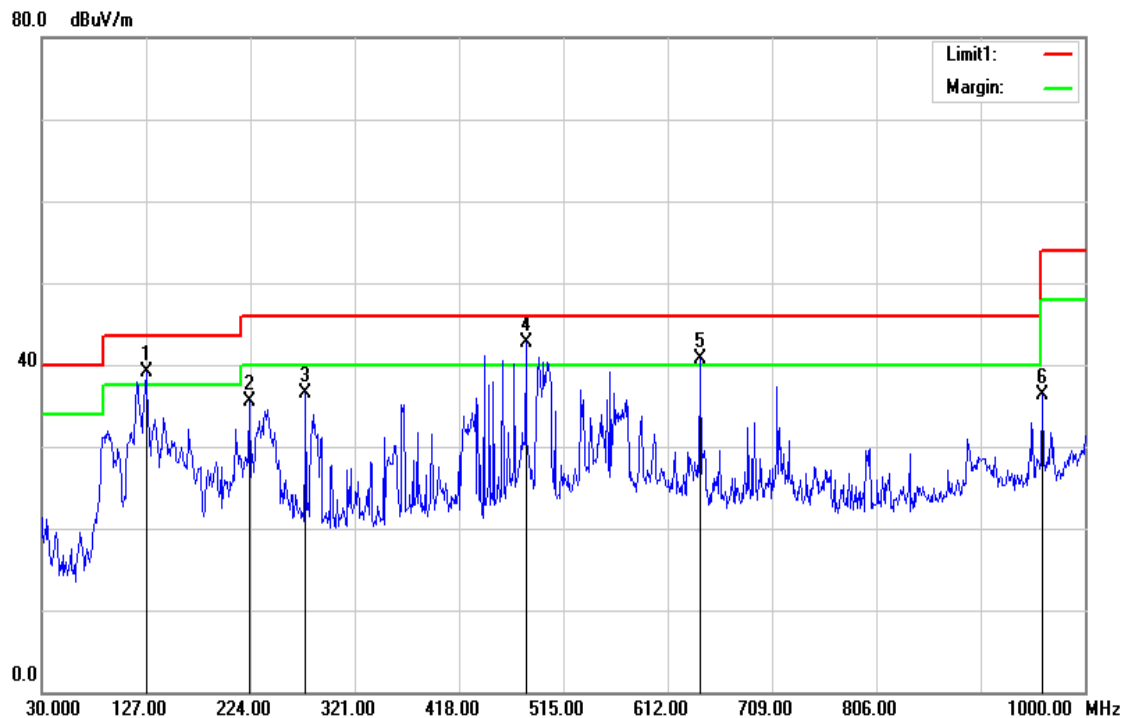For Dipole Antenna**Below 1GHz****Operation Mode:** Normal Link**Test Date:** January 20, 2016**Temperature:** 27 °C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
127.0000	54.71	-15.60	39.11	43.50	-4.39	peak	V
223.0300	52.45	-16.89	35.56	46.00	-10.44	peak	V
275.4100	51.27	-14.70	36.57	46.00	-9.43	peak	V
480.0800	52.39	-9.62	42.77	46.00	-3.23	peak	V
642.0700	47.54	-6.76	40.78	46.00	-5.22	peak	V
960.2300	38.45	-2.23	36.22	54.00	-17.78	peak	V

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

Operation Mode: Normal Link


Test Date: January 20, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH





Polarity: Hor.

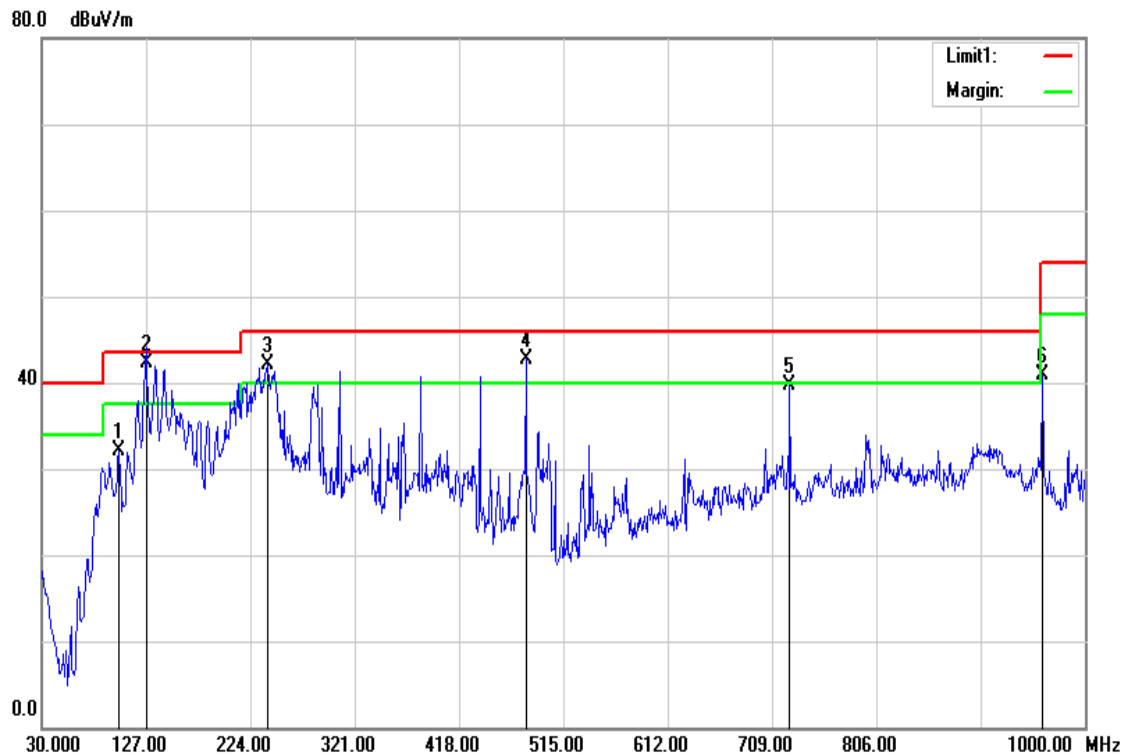





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
101.7800	50.88	-18.72	32.16	43.50	-11.34	peak	H
127.0000	57.98	-15.60	42.38	43.50	-1.12	QP	H
240.4900	58.69	-16.50	42.19	46.00	-3.81	peak	H
480.0800	52.27	-9.62	42.65	46.00	-3.35	peak	H
725.4900	45.21	-5.48	39.73	46.00	-6.27	peak	H
960.2300	43.17	-2.23	40.94	54.00	-13.06	peak	H

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. $\text{Margin (dB)} = \text{Result (dBuV/m)} - \text{Limit (dBuV/m)}$.

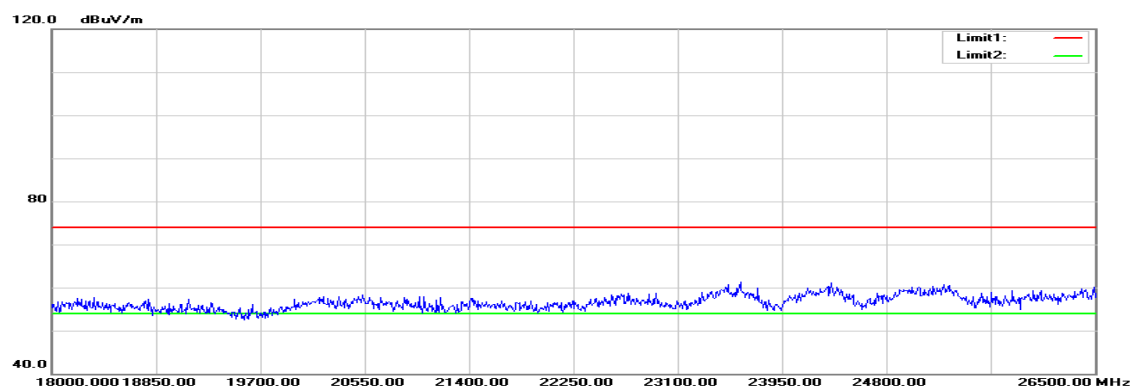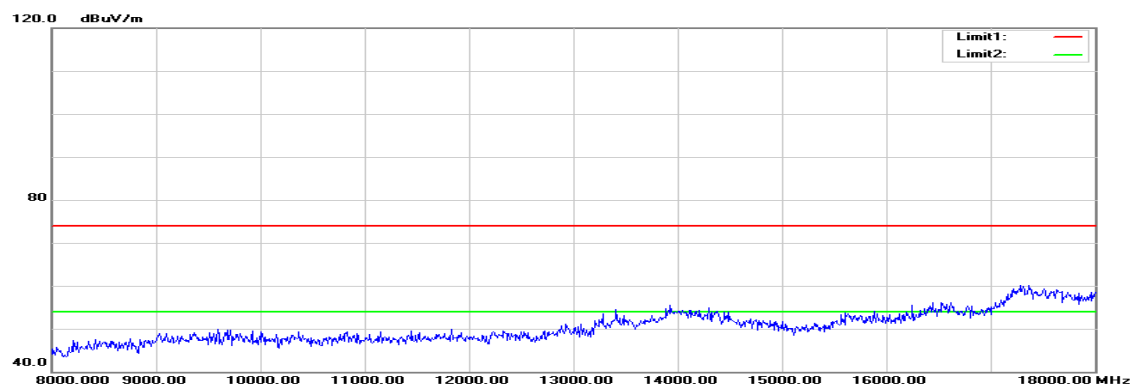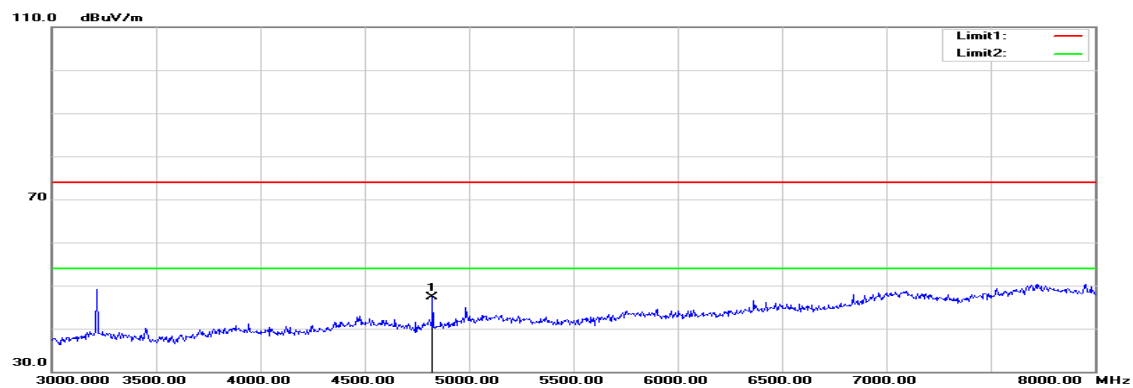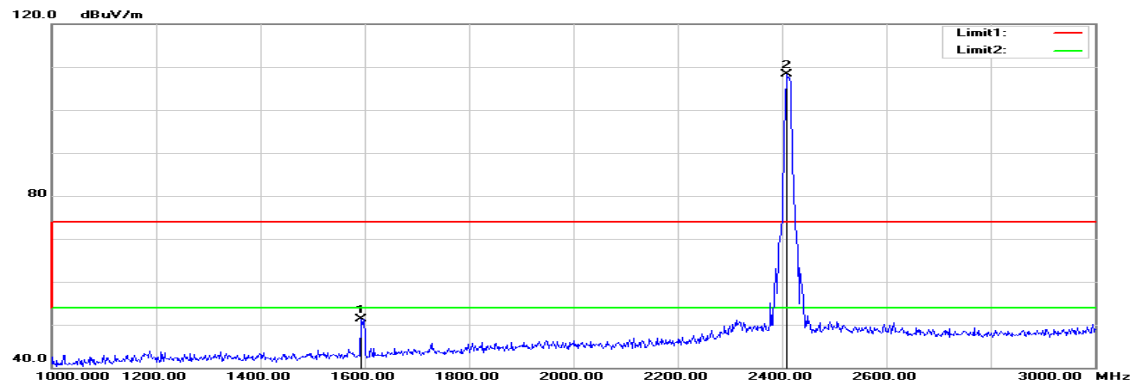Above 1 GHz**TX / IEEE 802.11b / CH Low****Polarity: Vertical**

Polarity: Horizontal

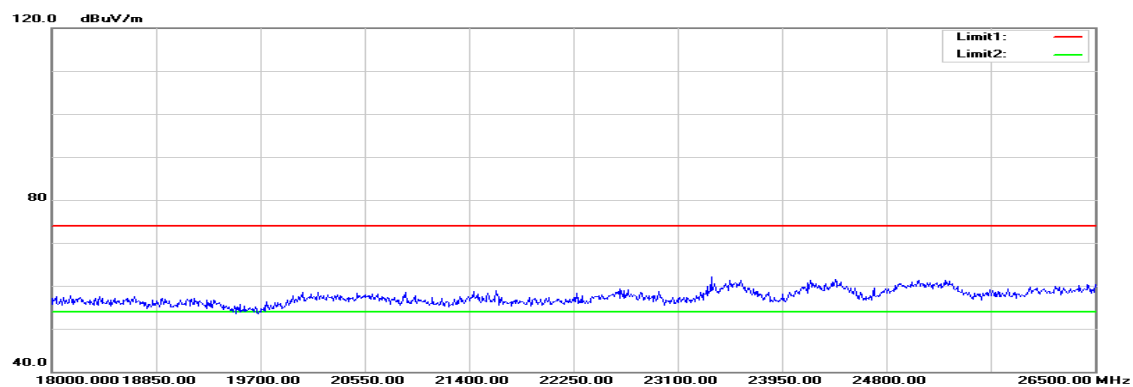
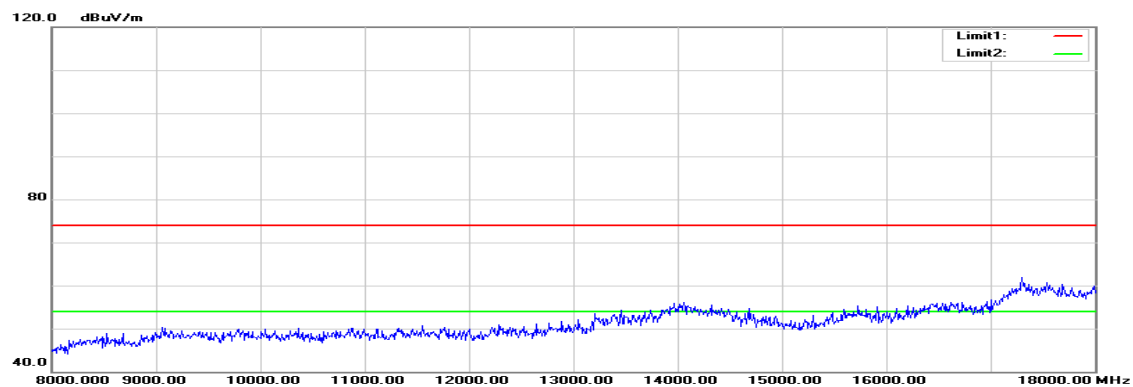
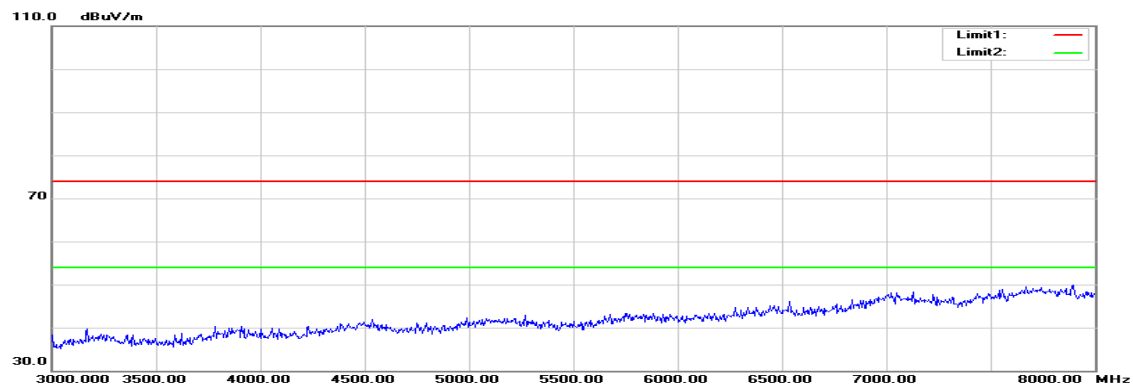
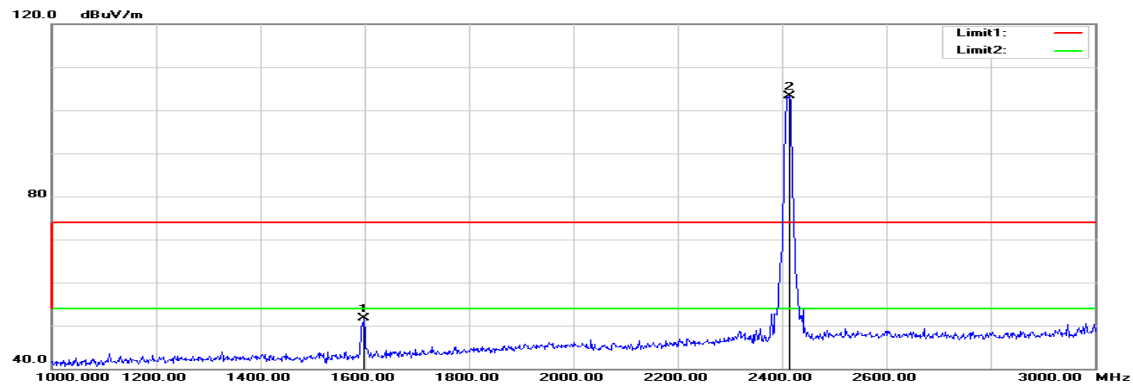


Above 1 GHz**Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** January 14, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1592.000	57.03	-5.71	51.32	74.00	-22.68	peak	V
4825.000	42.24	5.10	47.34	74.00	-26.66	peak	V
N/A							
1598.000	57.38	-5.68	51.70	74.00	-22.30	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.

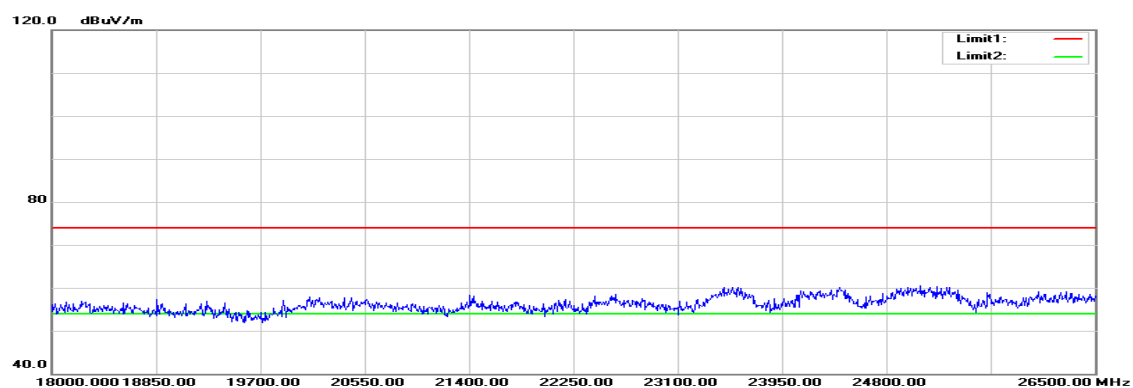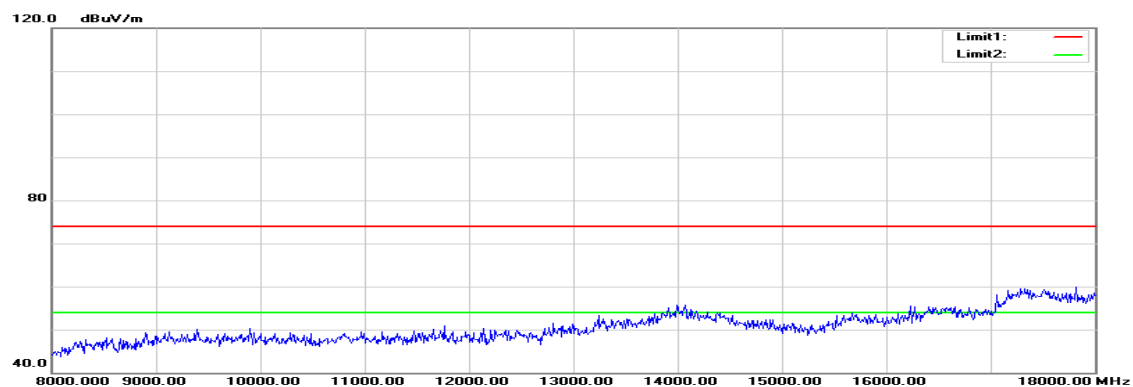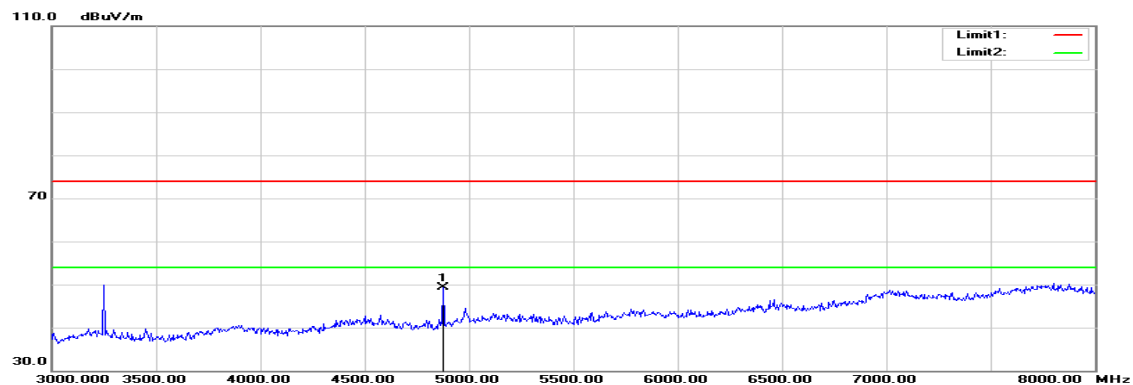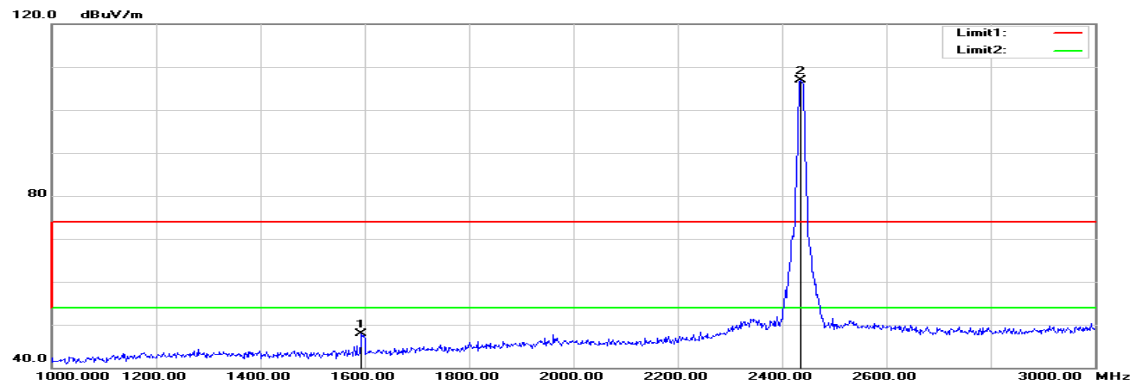TX / IEEE 802.11b / CH Mid**Polarity: Vertical**

Polarity: Horizontal




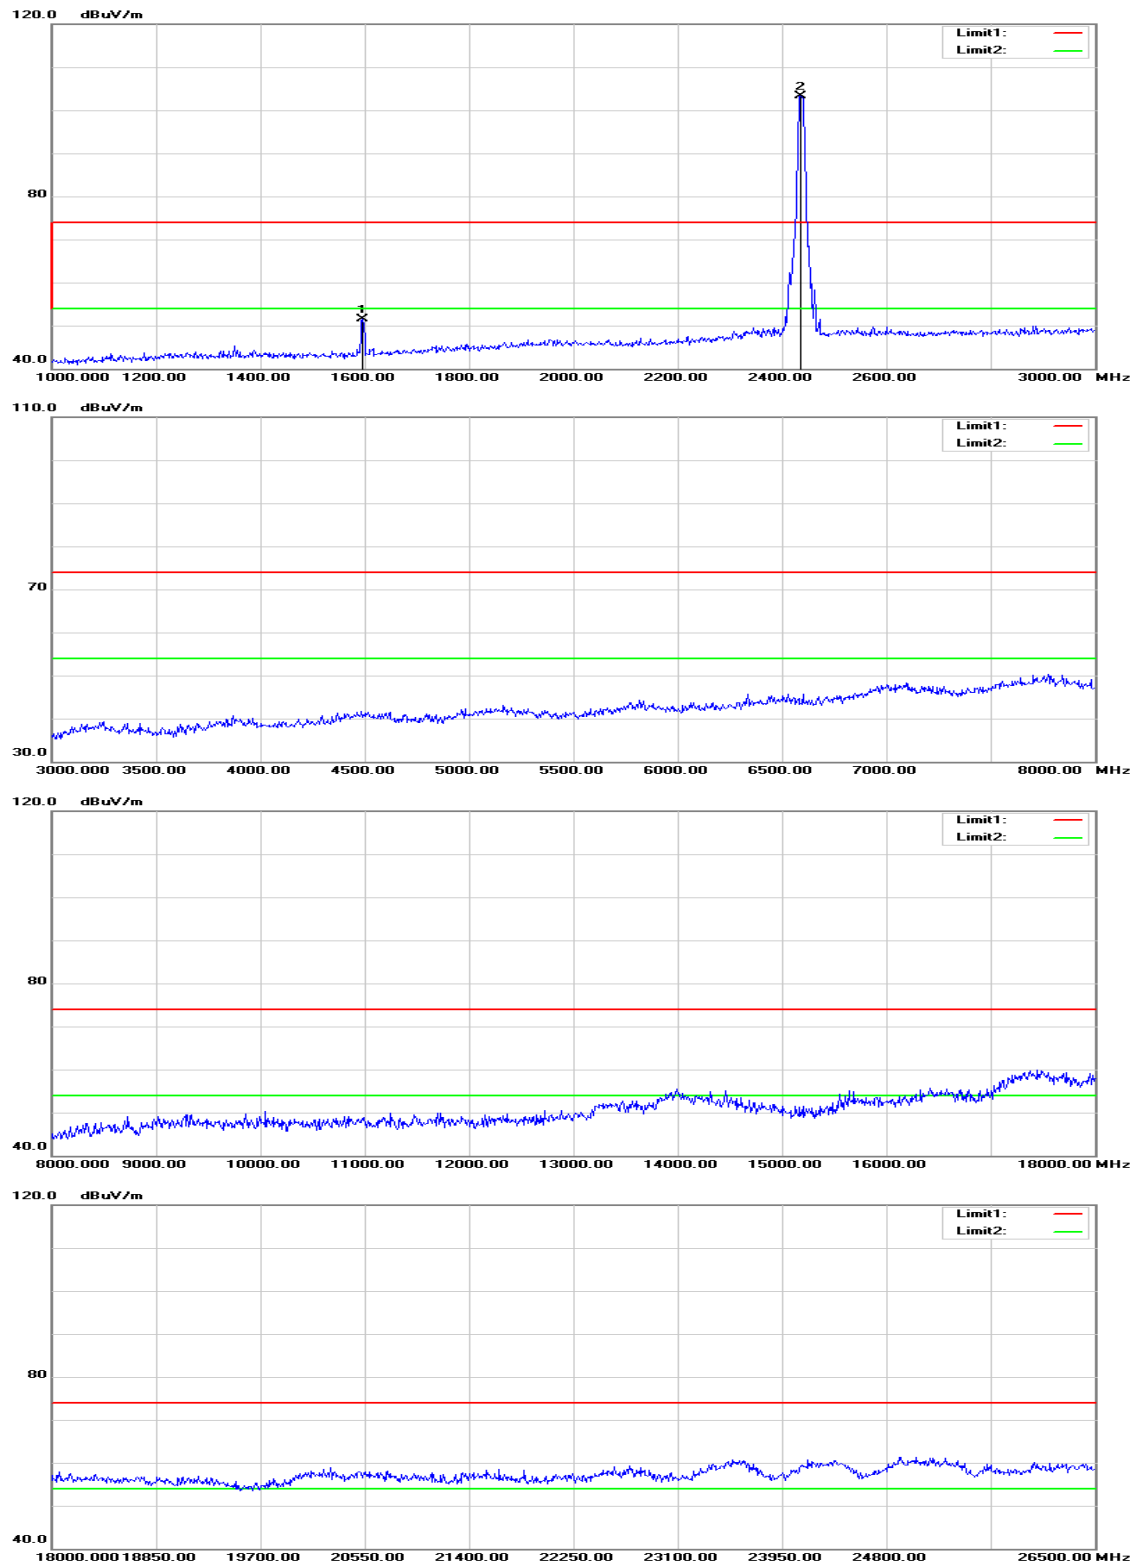


Operation Mode: TX / IEEE 802.11b / CH Mid**Test Date:** January 14, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1594.000	53.51	-5.70	47.81	74.00	-26.19	peak	V
4875.000	44.09	5.24	49.33	74.00	-24.67	peak	V
N/A							
1596.000	57.21	-5.69	51.52	74.00	-22.48	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

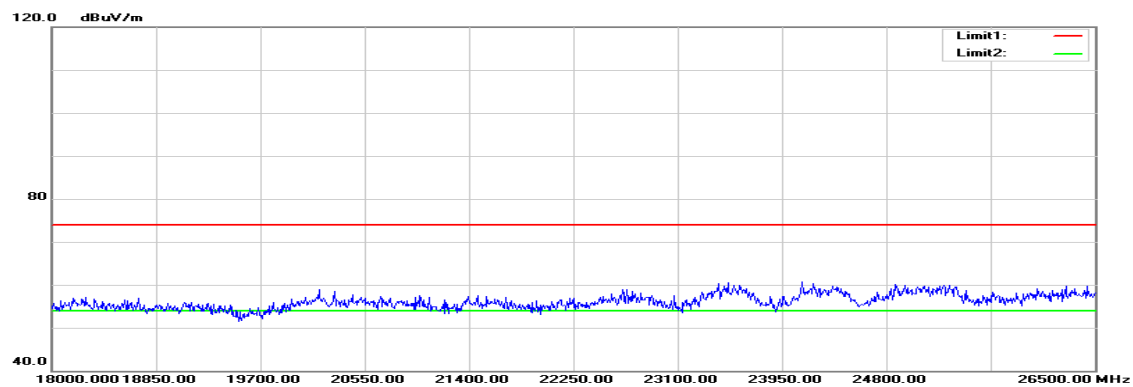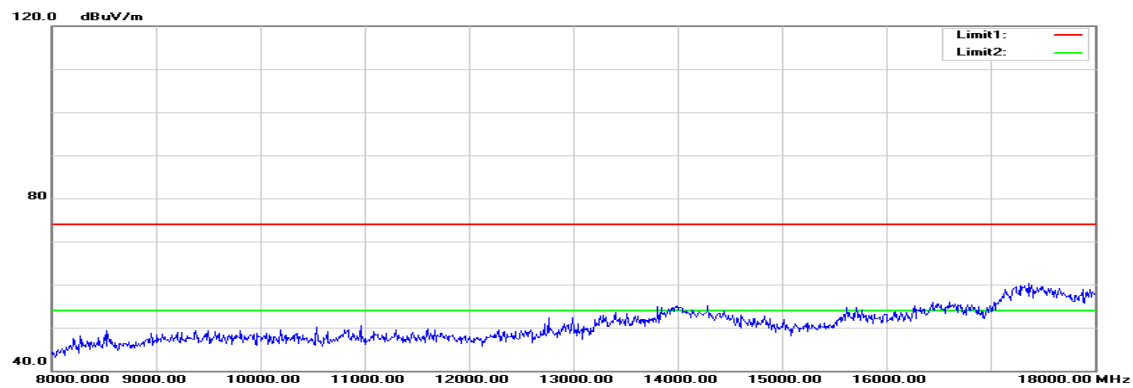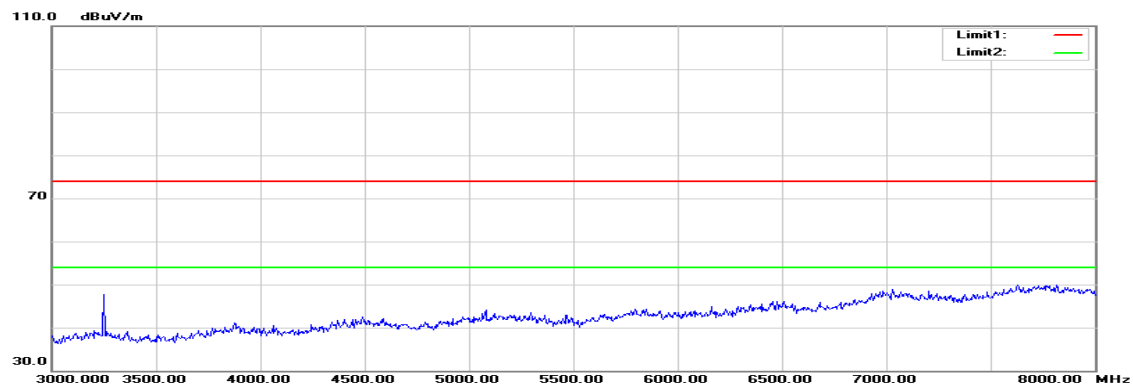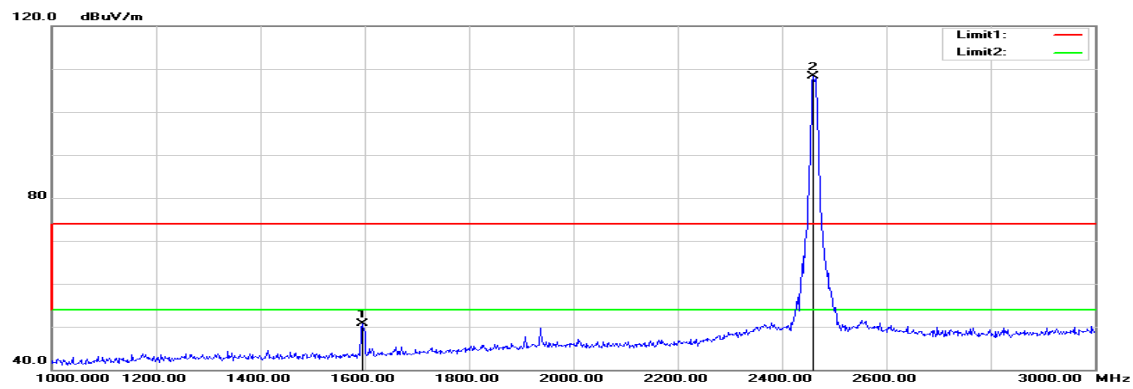TX / IEEE 802.11b / CH High**Polarity: Vertical**

Polarity: Horizontal

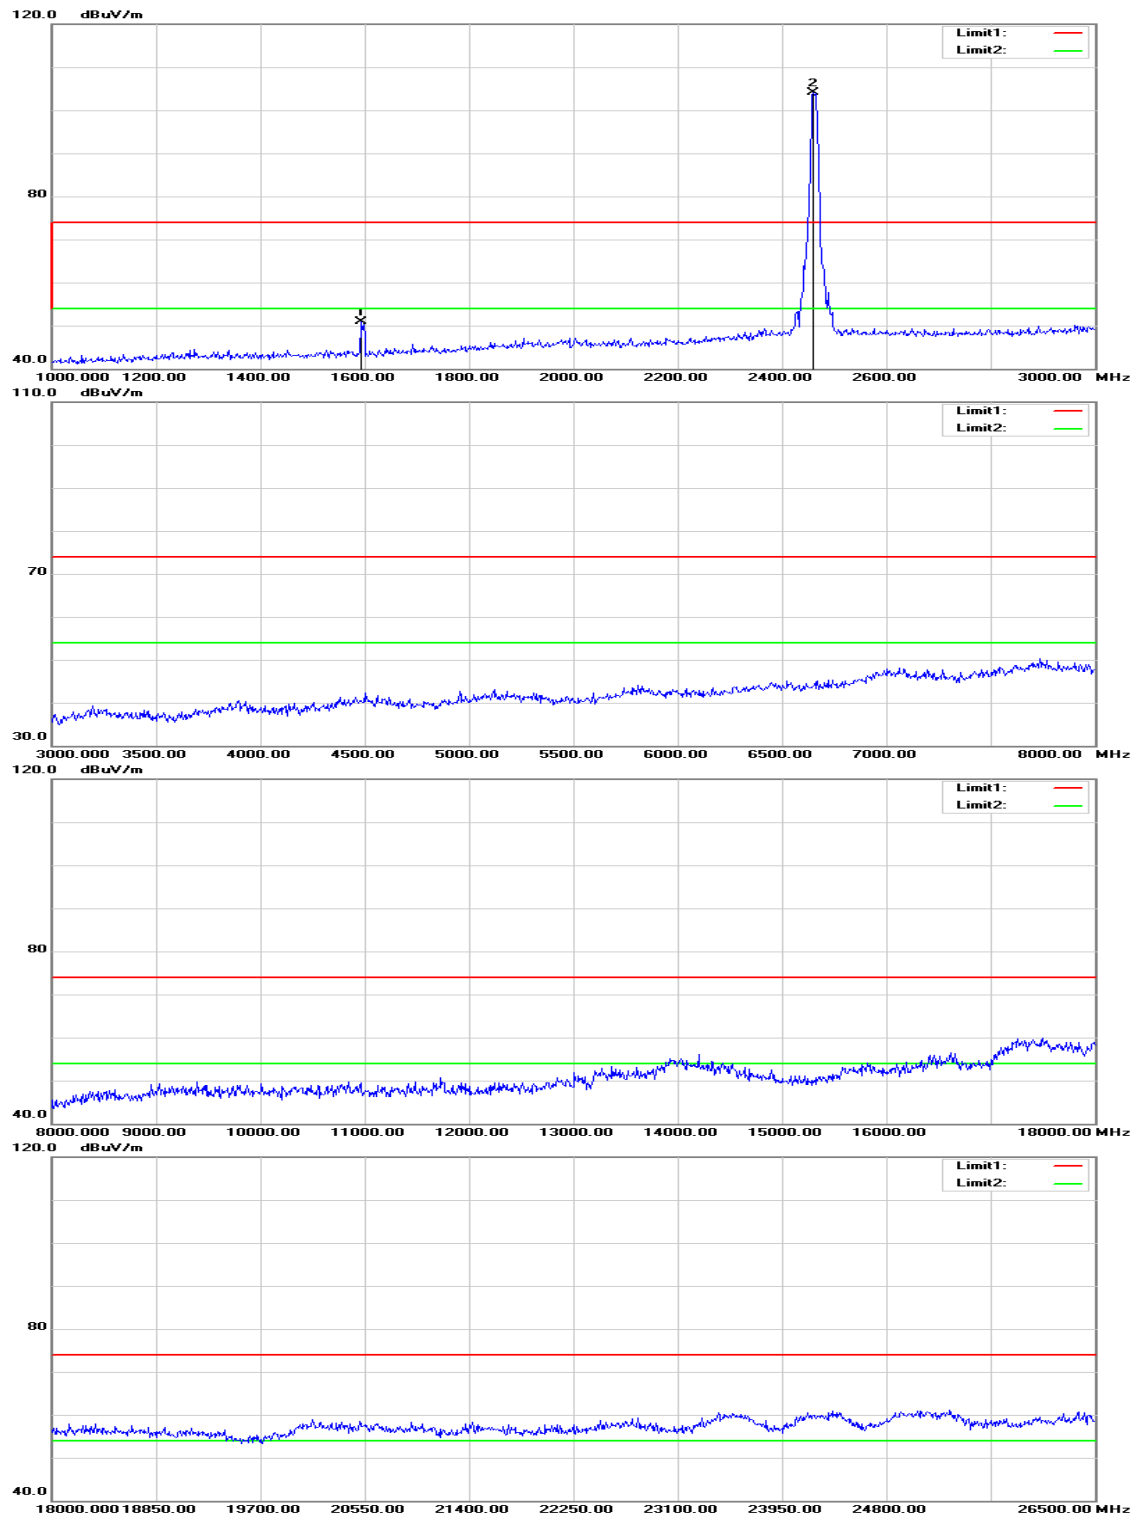

Operation Mode: TX / IEEE 802.11b / CH High**Test Date:** January 14, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1596.000	56.42	-5.69	50.73	74.00	-23.27	peak	V
N/A							
1594.000	56.52	-5.70	50.82	74.00	-23.18	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11g / CH Low

Polarity: Vertical

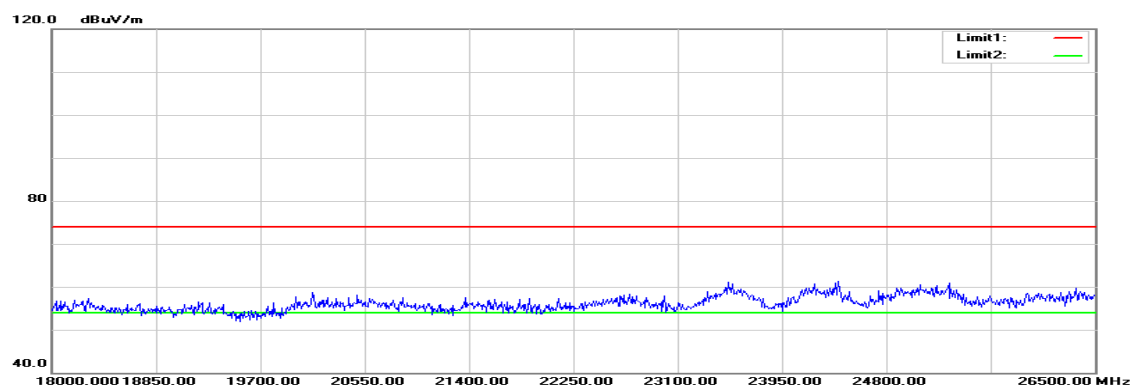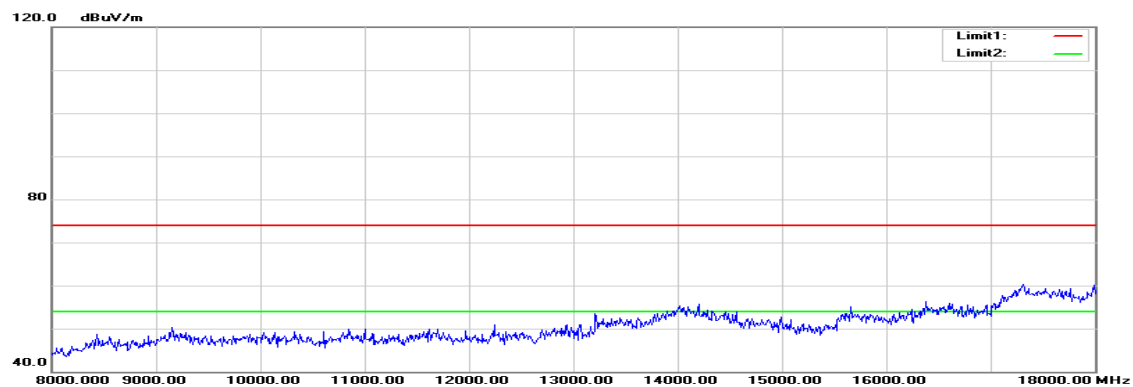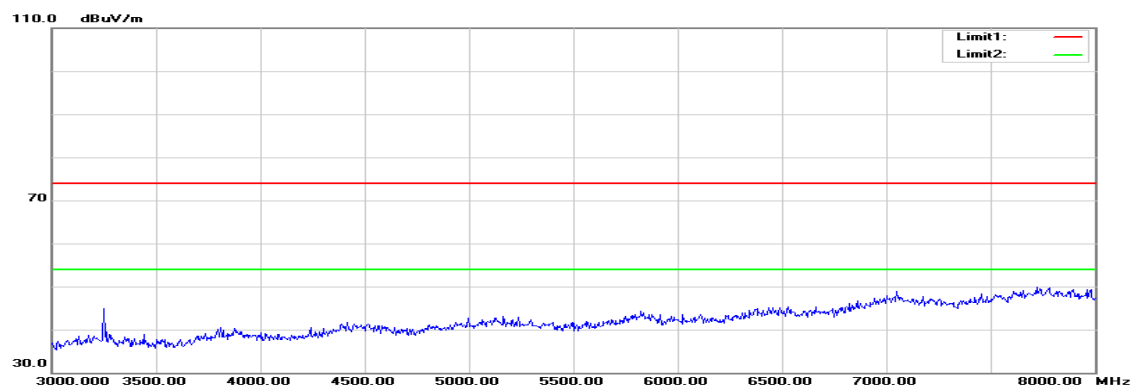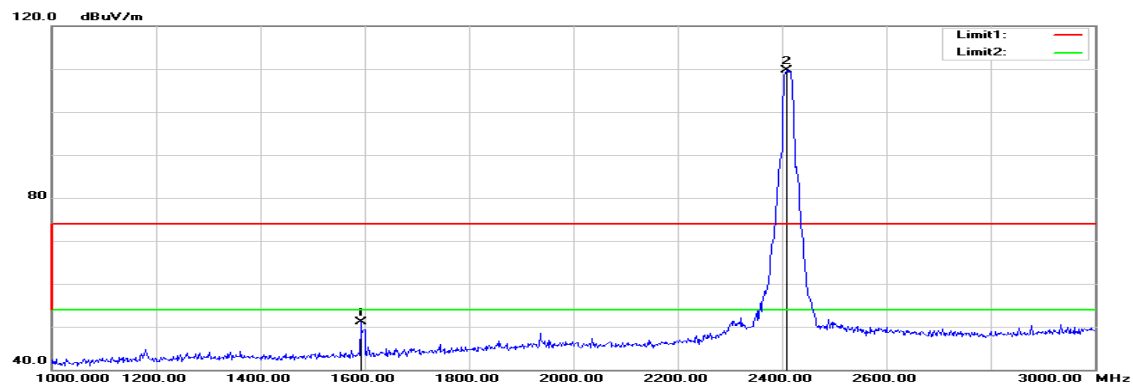

Polarity: Horizontal

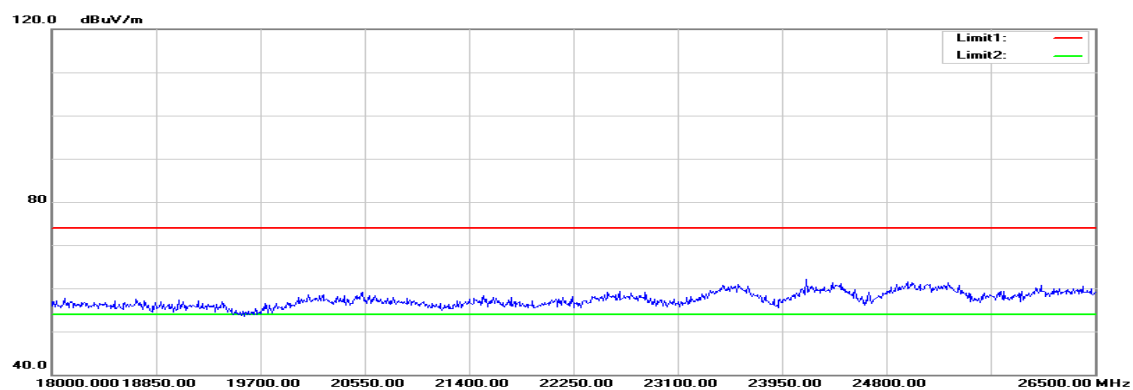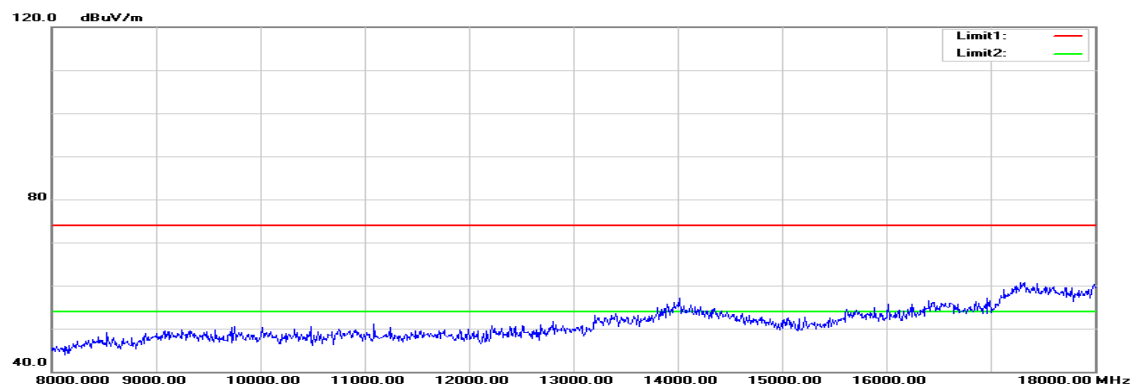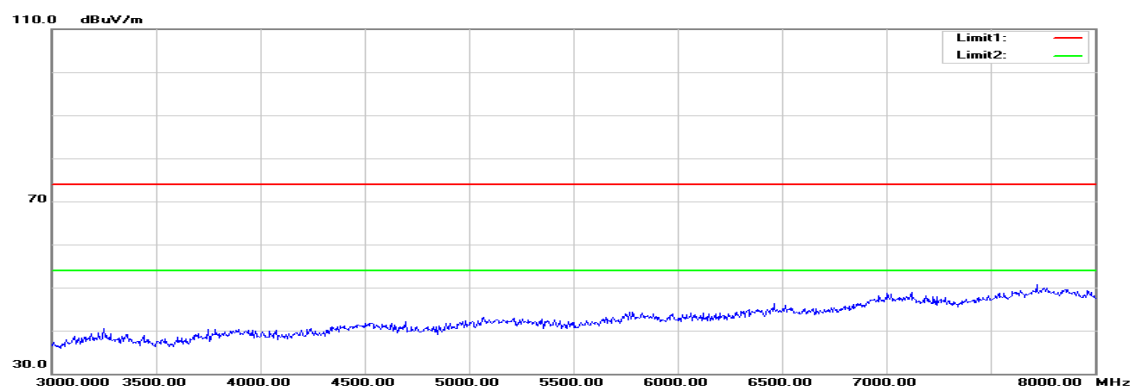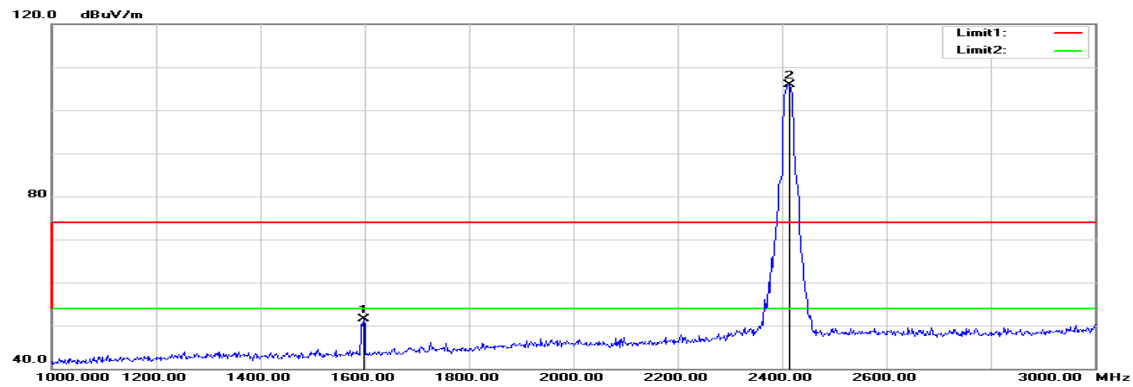

Operation Mode: TX / IEEE 802.11g / CH Low**Test Date:** January 14, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1592.000	56.86	-5.71	51.15	74.00	-22.85	peak	V
N/A							
1598.000	57.25	-5.68	51.57	74.00	-22.43	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11g / CH Mid

Polarity: Vertical

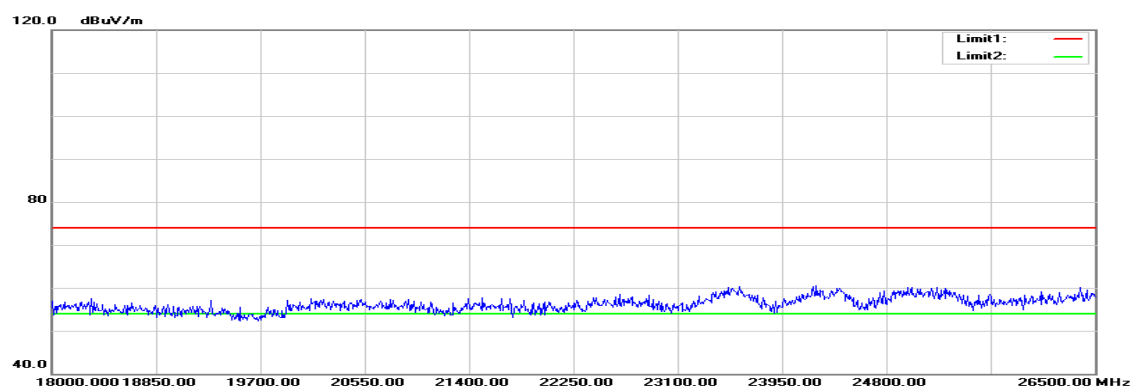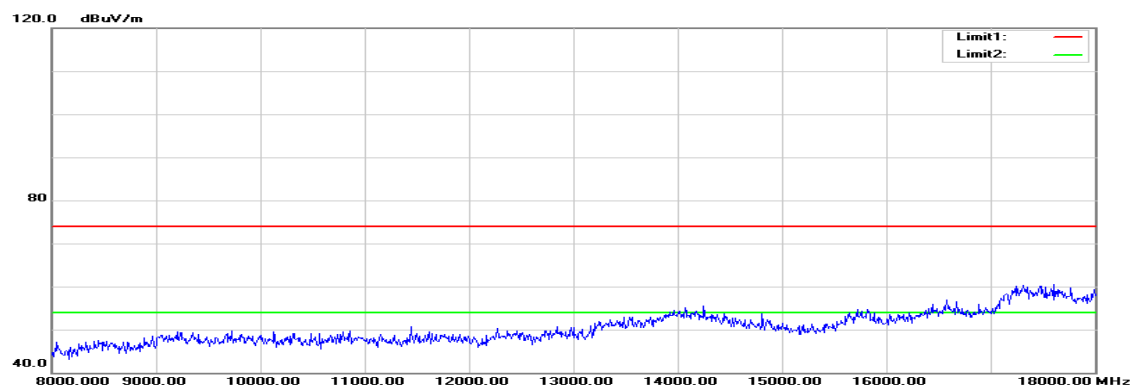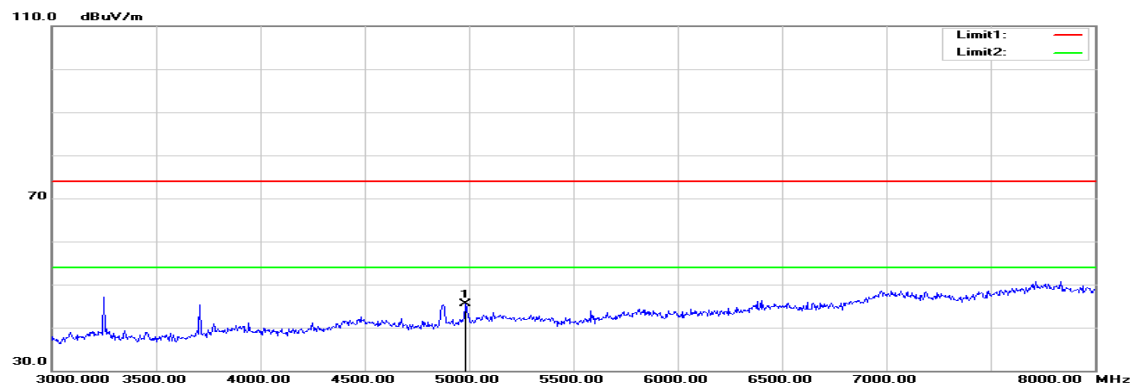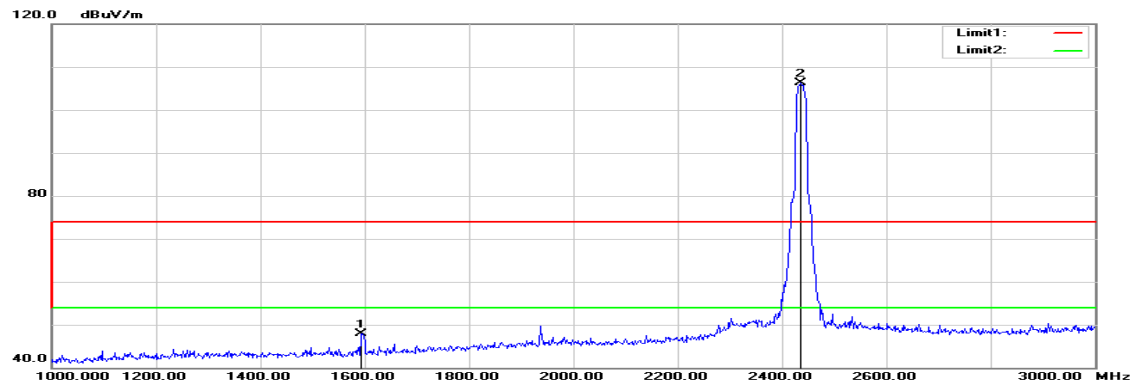

Polarity: Horizontal

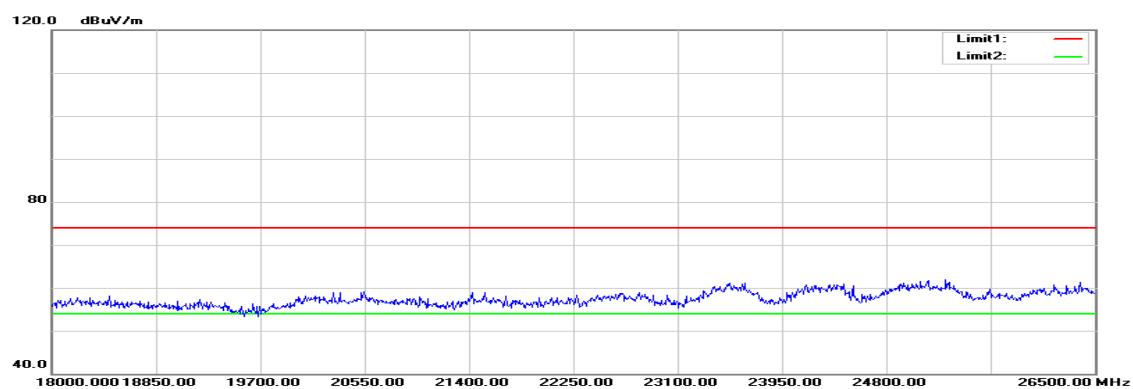
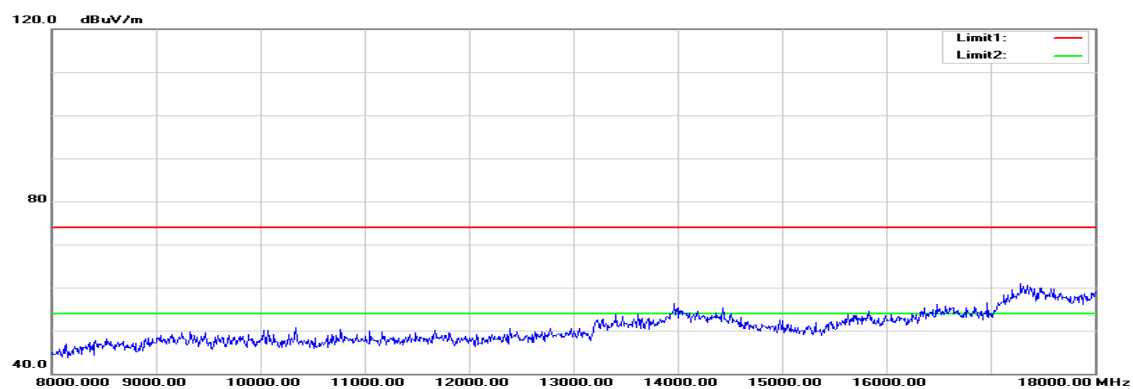
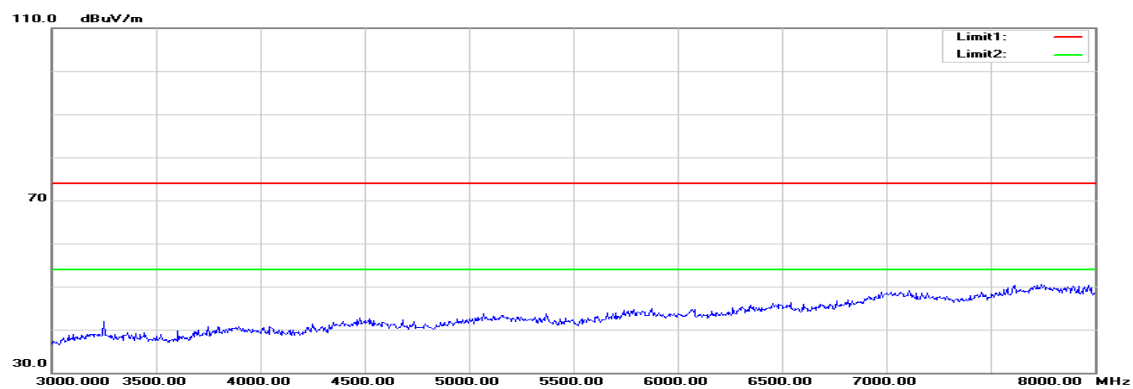
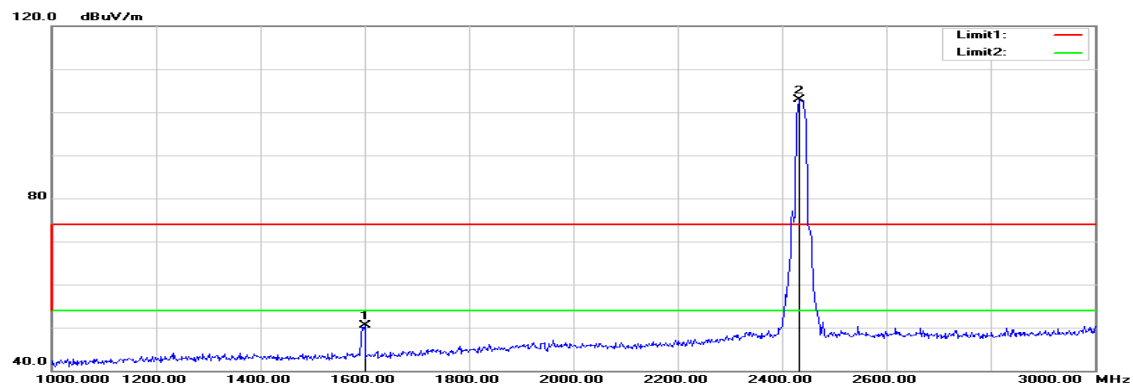


Operation Mode: TX / IEEE 802.11g / CH Mid**Test Date:** January 14, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1594.000	53.64	-5.70	47.94	74.00	-26.06	peak	V
4985.000	39.88	5.53	45.41	74.00	-28.59	peak	V
N/A							
1600.000	56.13	-5.67	50.46	74.00	-23.54	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

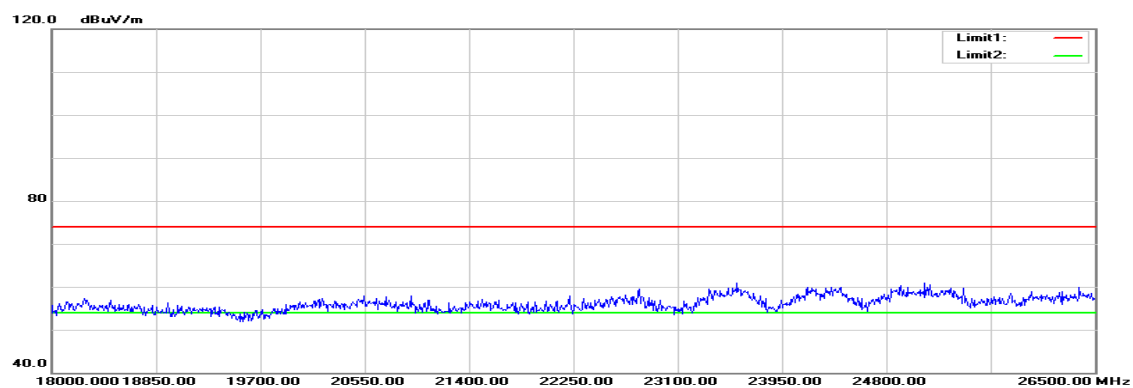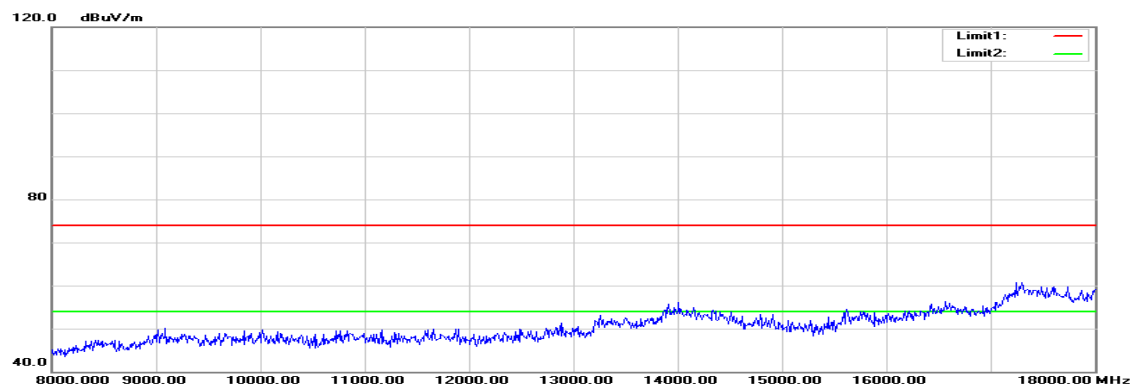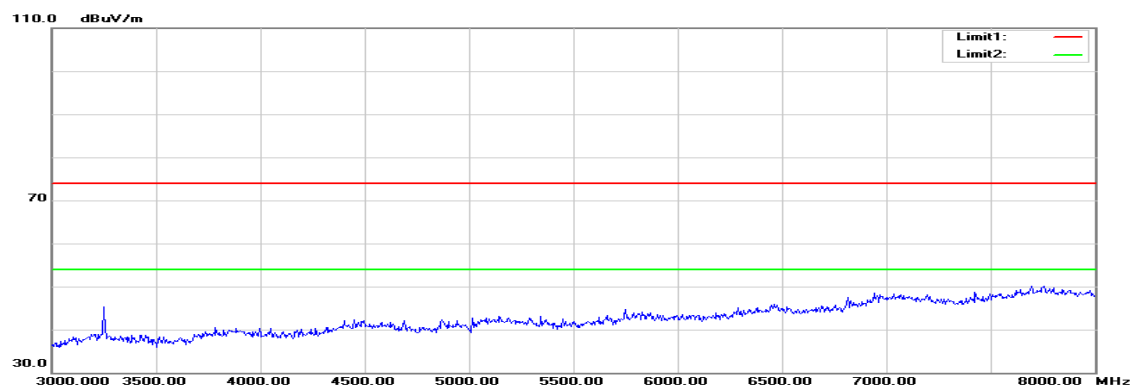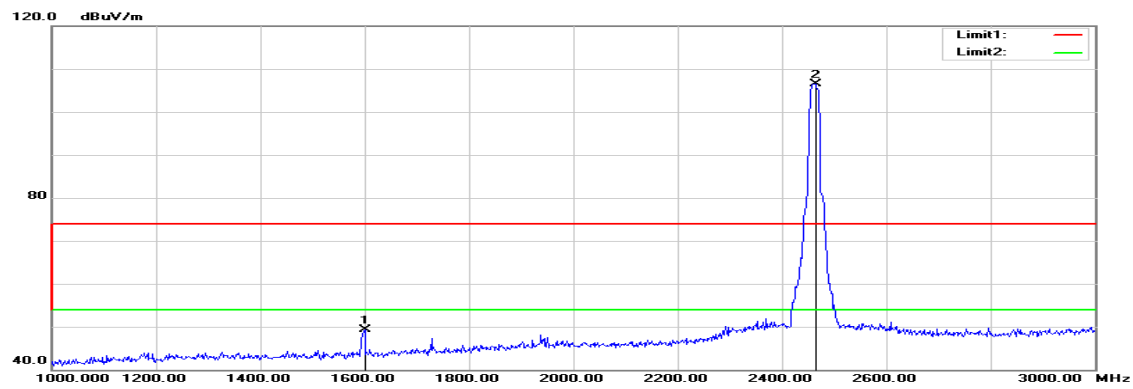TX / IEEE 802.11g / CH High**Polarity: Vertical**

Polarity: Horizontal

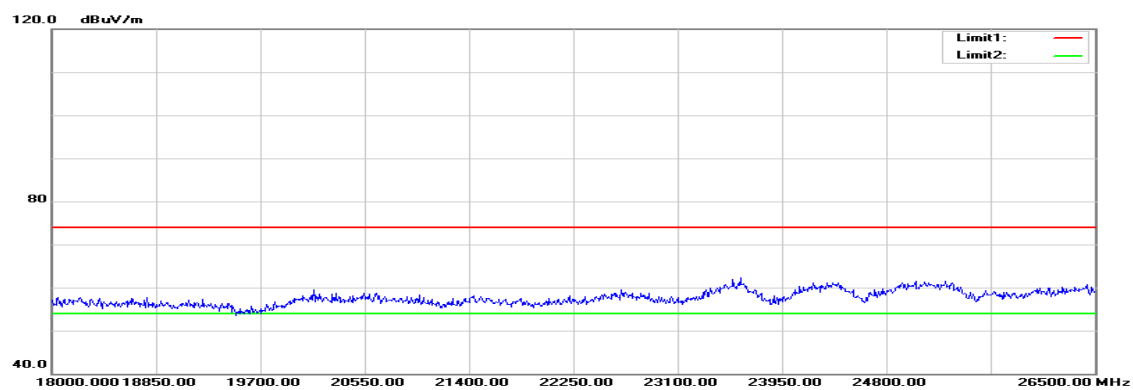
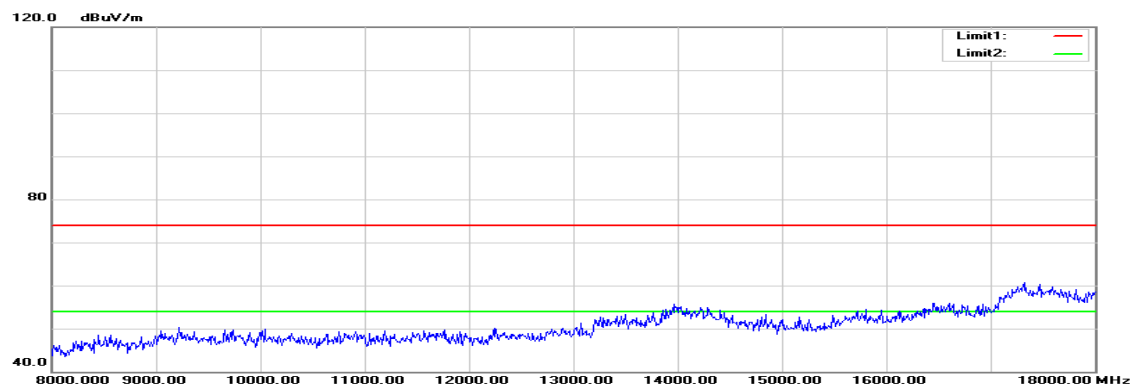
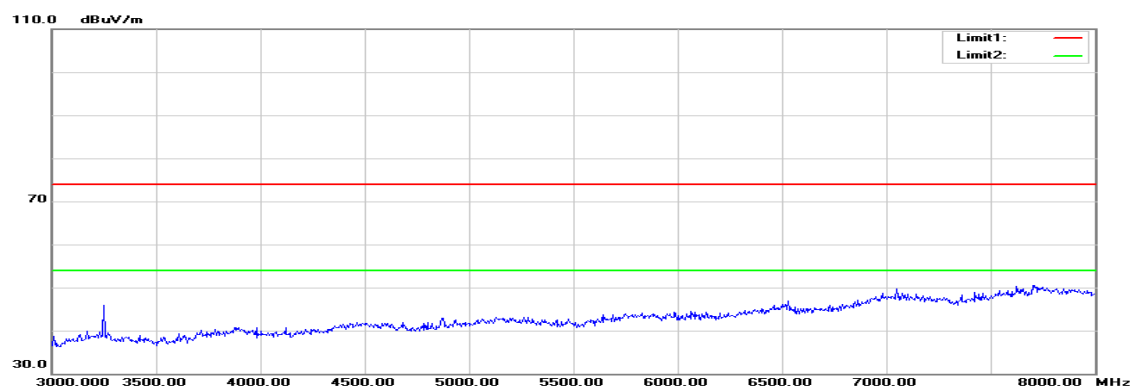
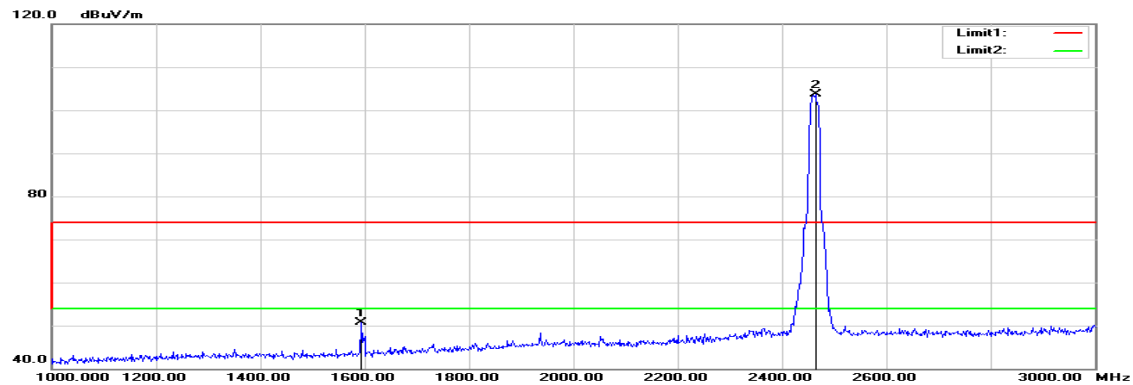


Operation Mode: TX / IEEE 802.11g / CH High**Test Date:** January 14, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1600.000	54.90	-5.67	49.23	74.00	-24.77	peak	V
N/A							
1594.000	56.42	-5.70	50.72	74.00	-23.28	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

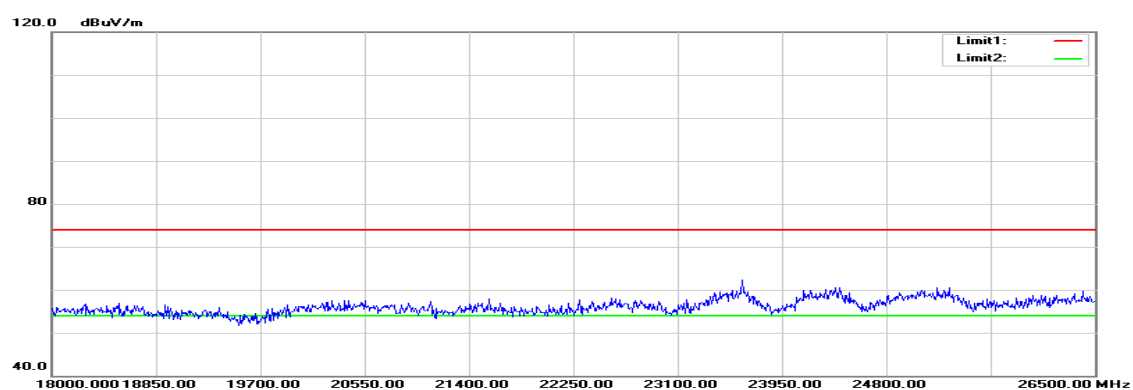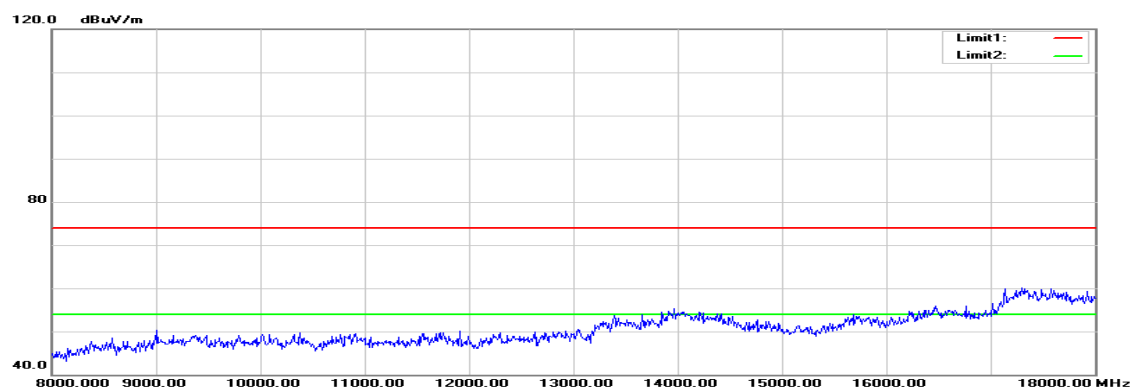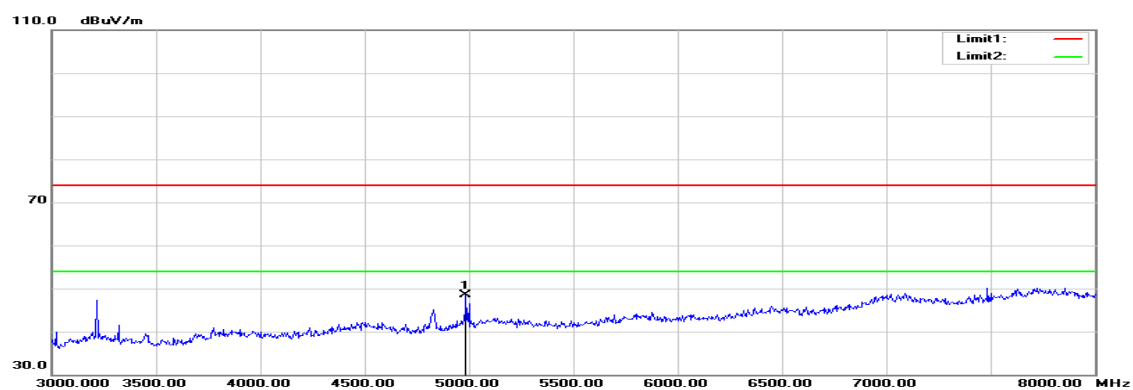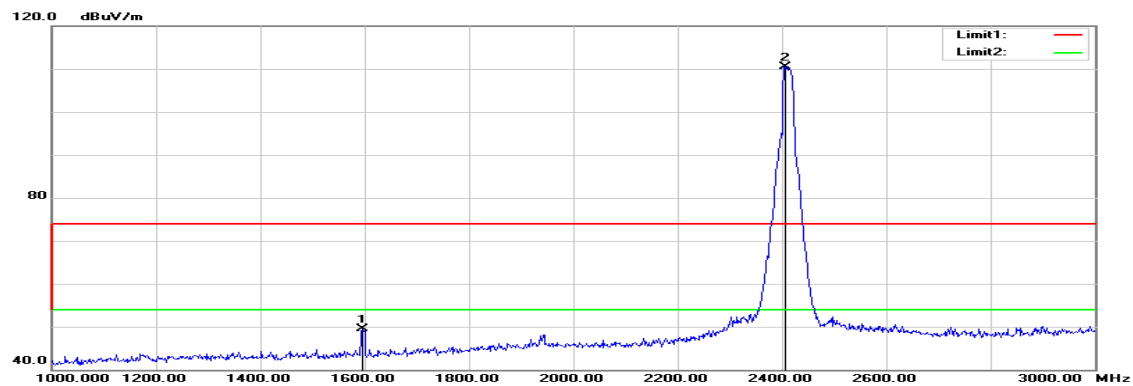TX / IEEE 802.11n HT 20 MHz mode / CH Low**Polarity: Vertical**

Polarity: Horizontal

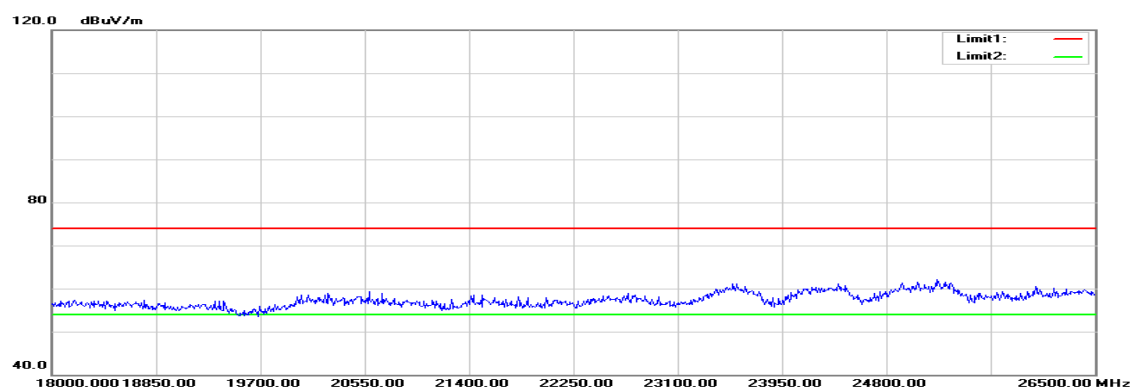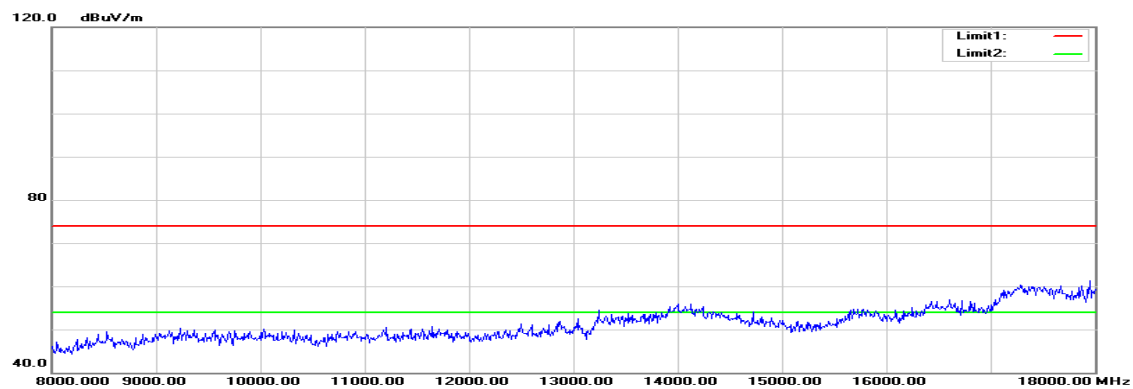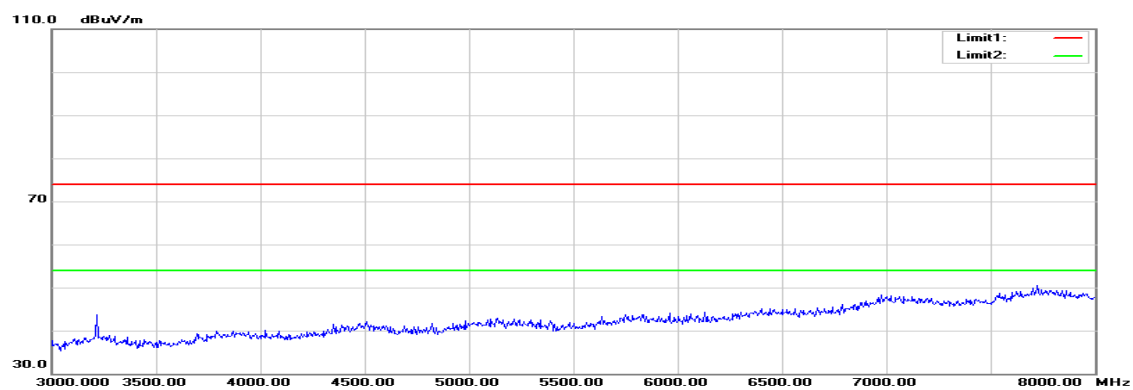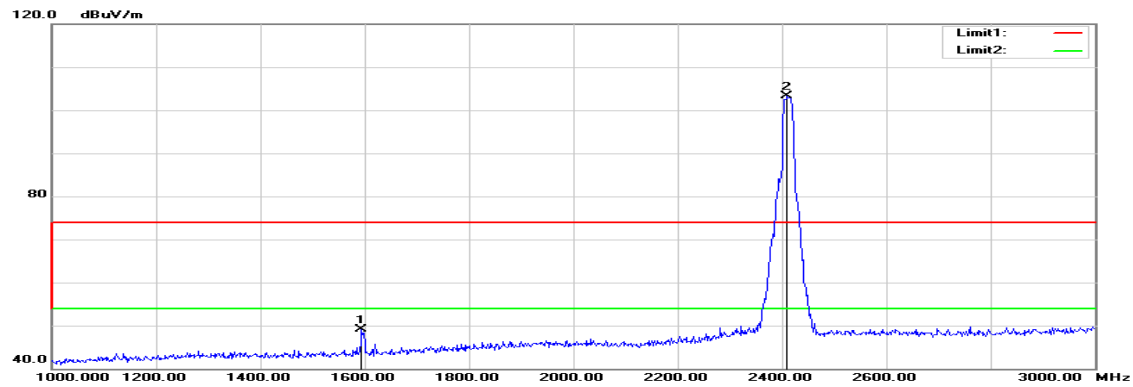

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** January 14, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1596.000	55.12	-5.69	49.43	74.00	-24.57	peak	V
4985.000	43.02	5.53	48.55	74.00	-25.45	peak	V
N/A							
1594.000	54.87	-5.70	49.17	74.00	-24.83	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz mode / CH Mid

Polarity: Vertical

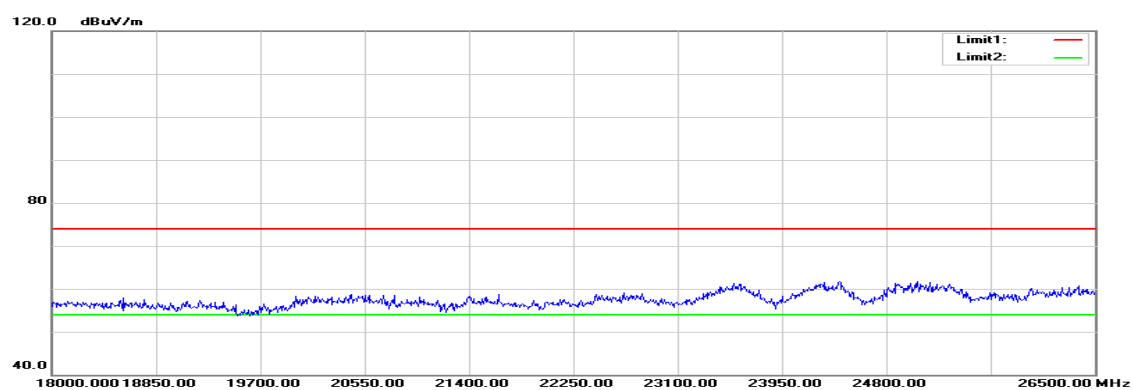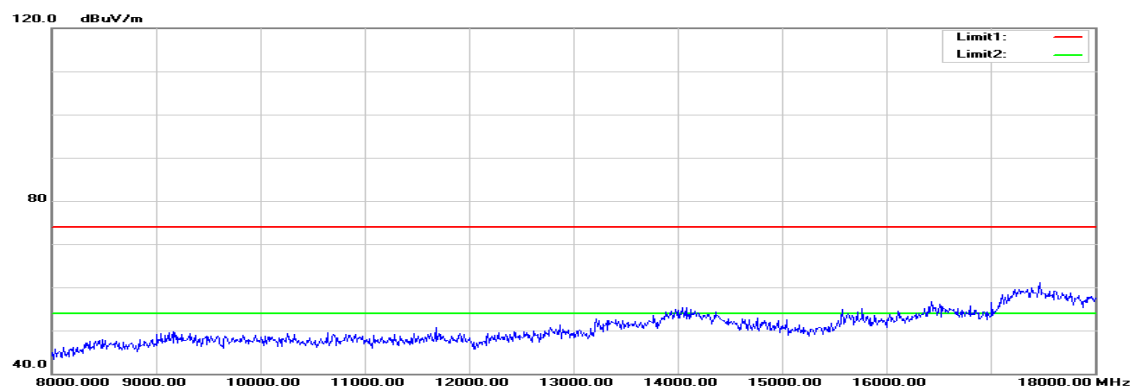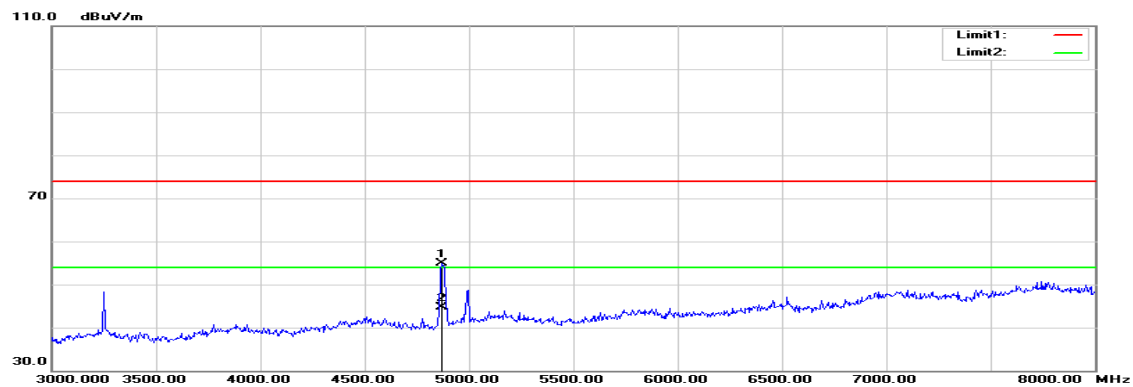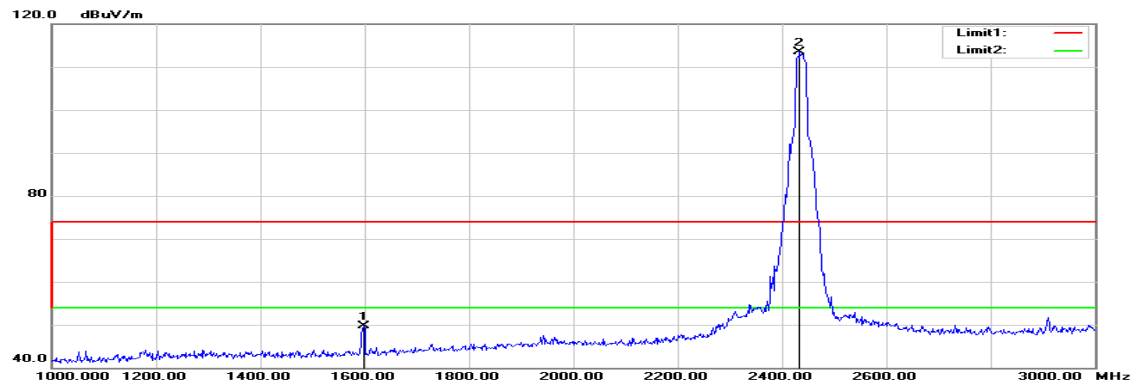

Polarity: Horizontal

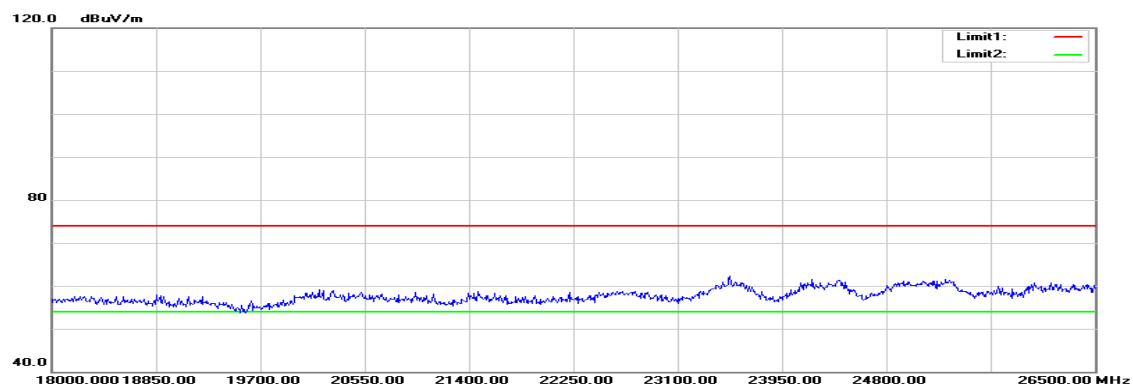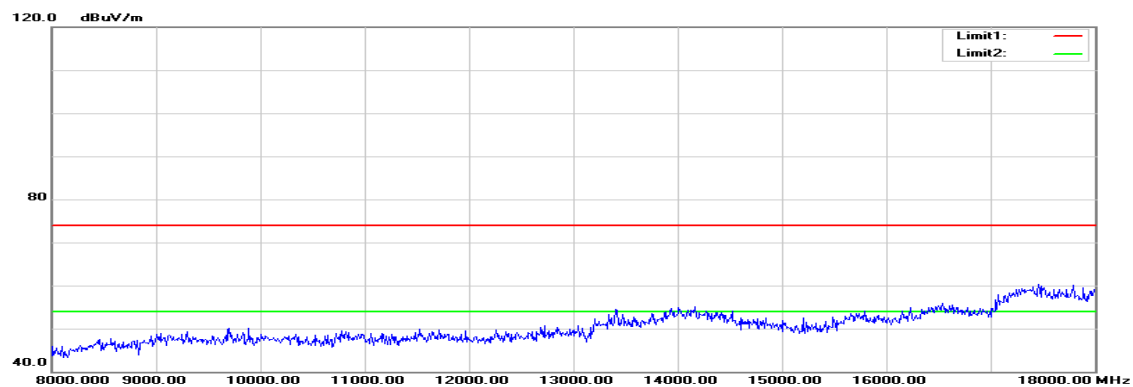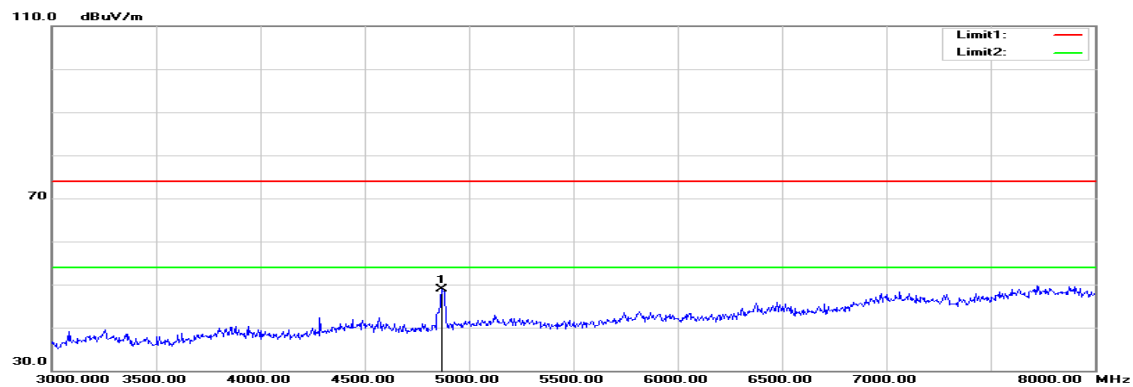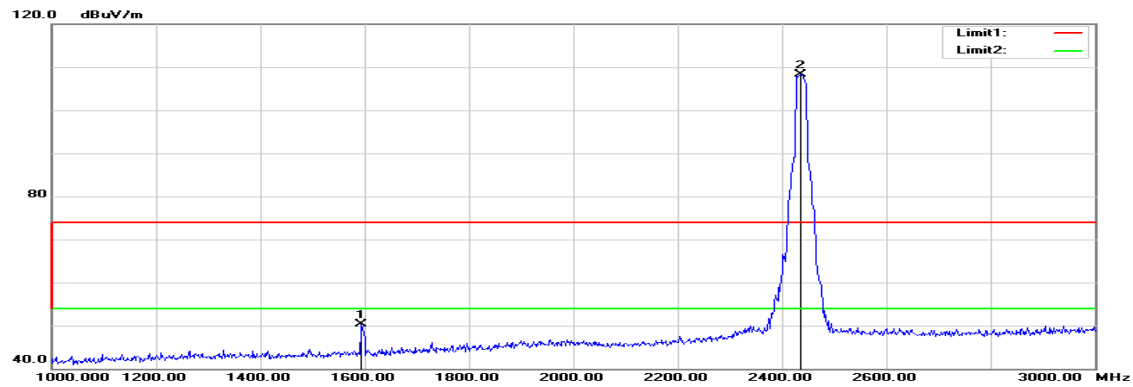

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode /
CH Mid

Test Date: January 14, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1598.000	55.42	-5.68	49.74	74.00	-24.26	peak	V
4870.000	49.62	5.22	54.84	74.00	-19.16	peak	V
4870.000	39.54	5.22	44.76	54.00	-9.24	AVG	V
N/A							
1594.000	55.98	-5.70	50.28	74.00	-23.72	peak	H
4870.000	43.68	5.22	48.90	74.00	-25.10	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz mode / CH High

Polarity: Vertical

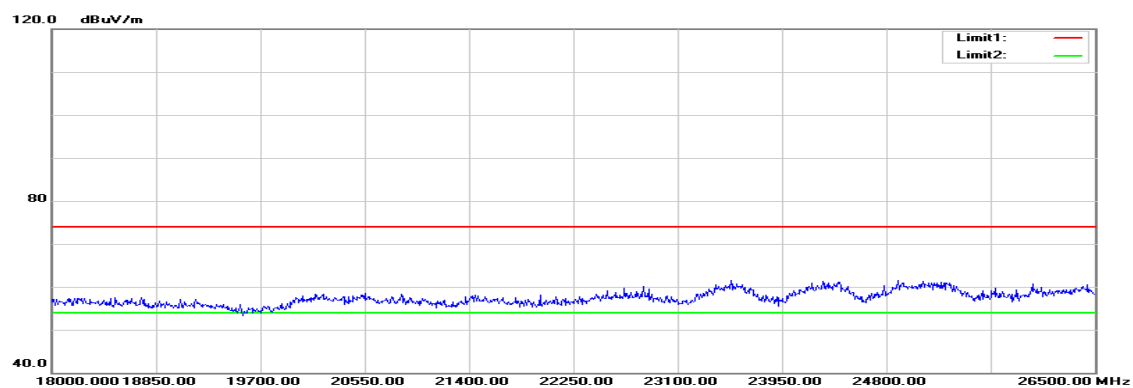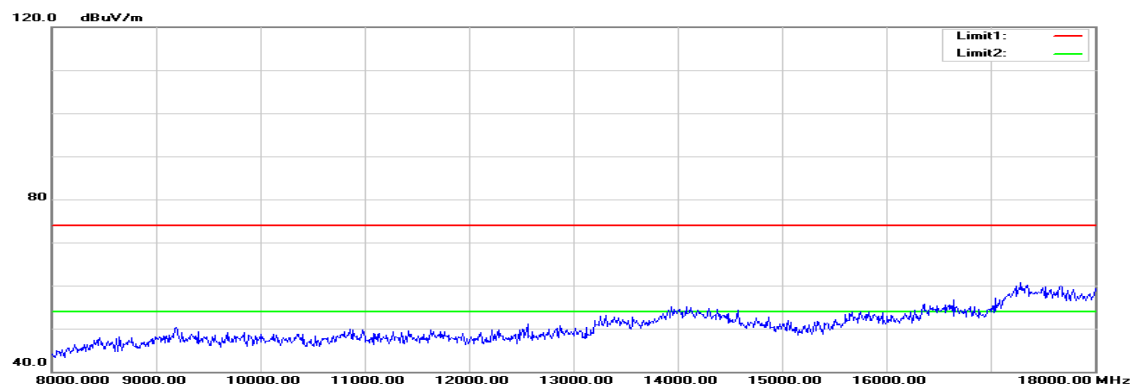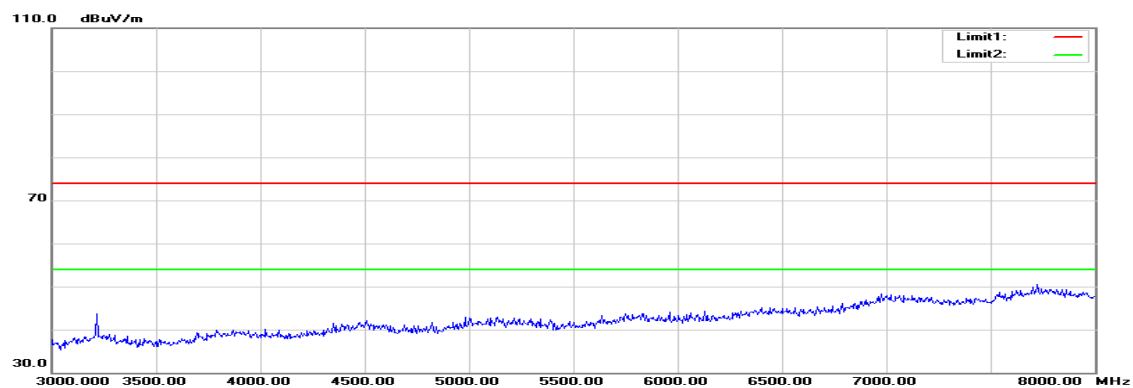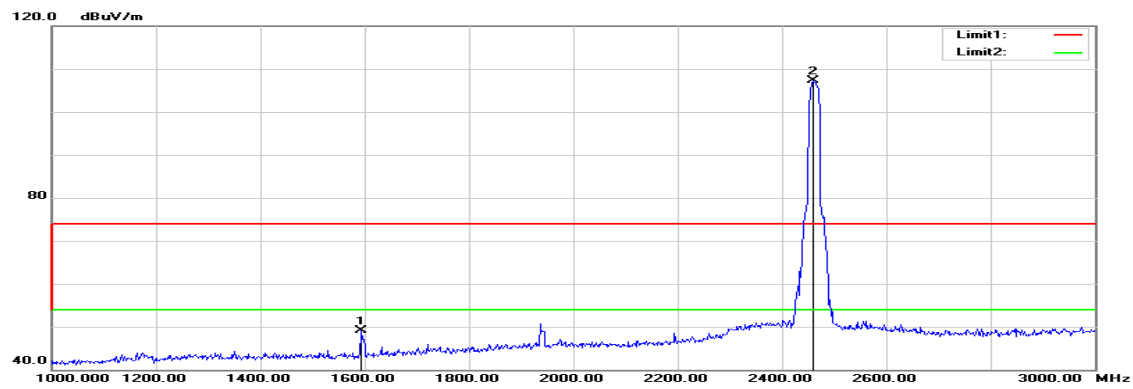

Polarity: Horizontal

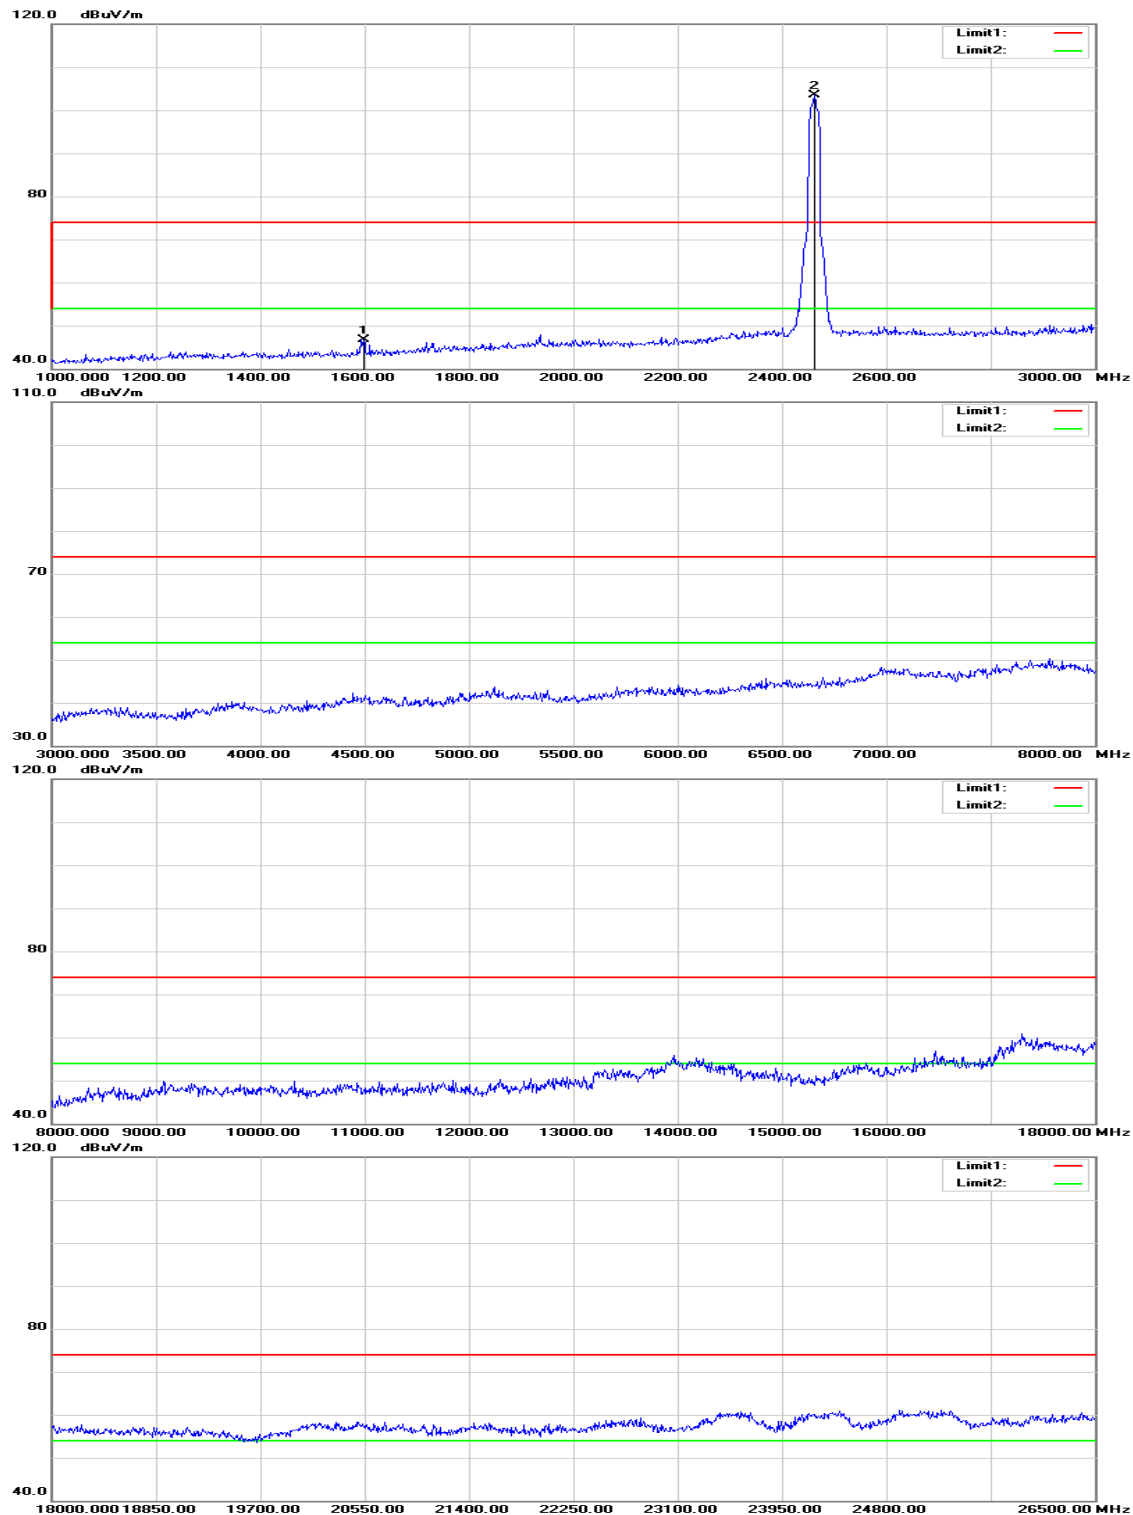

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode /
CH High

Test Date: January 14, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1594.000	54.84	-5.70	49.14	74.00	-24.86	peak	V
N/A							
1598.000	52.44	-5.68	46.76	74.00	-27.24	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.

TX / IEEE 802.11n HT 40 MHz mode / CH Low

Polarity: Vertical

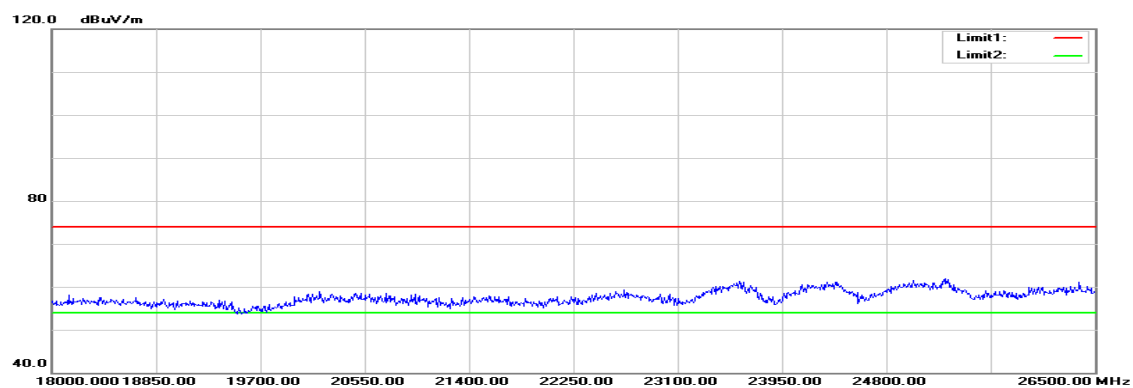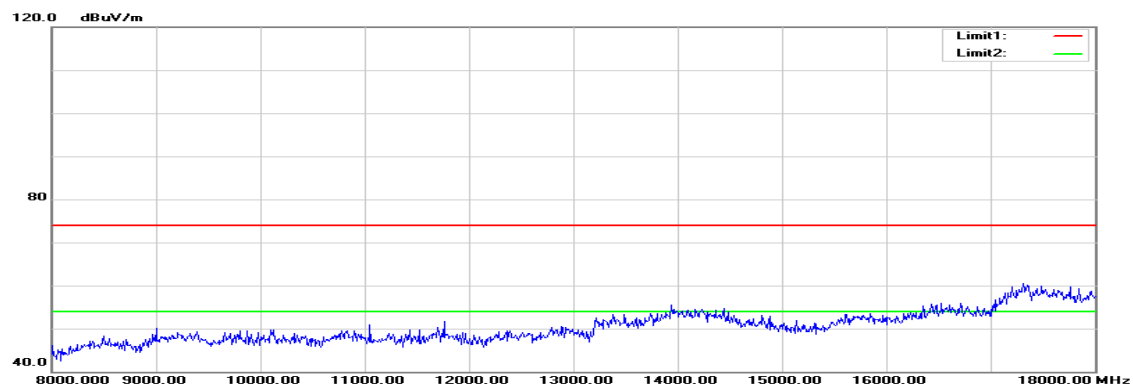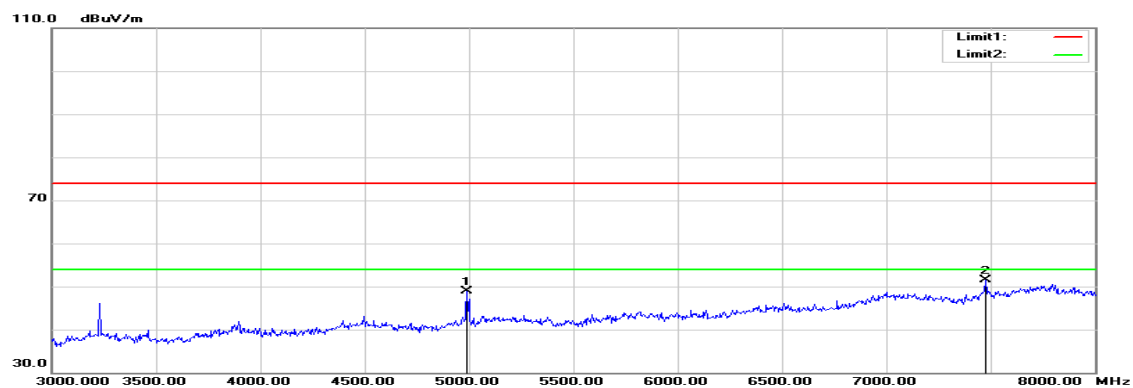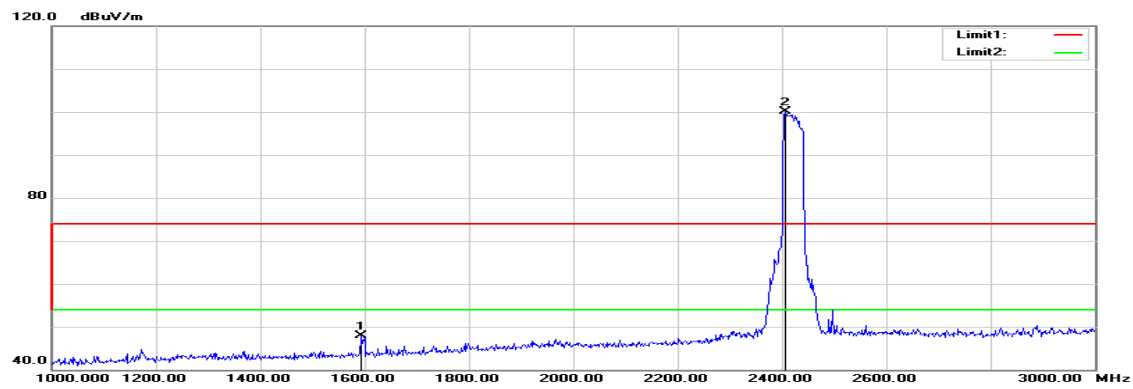

Polarity: Horizontal

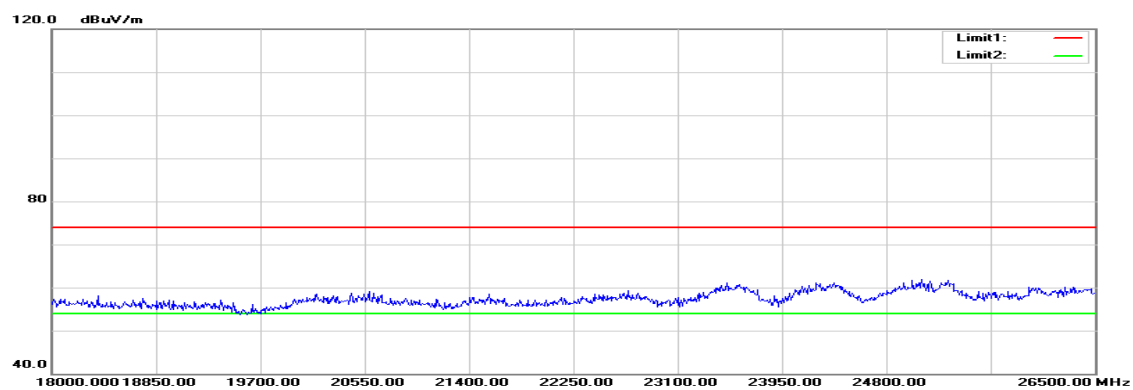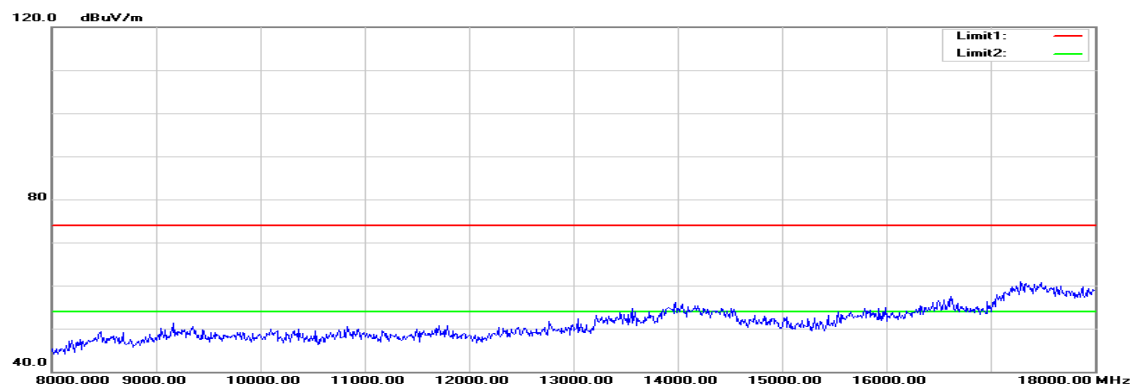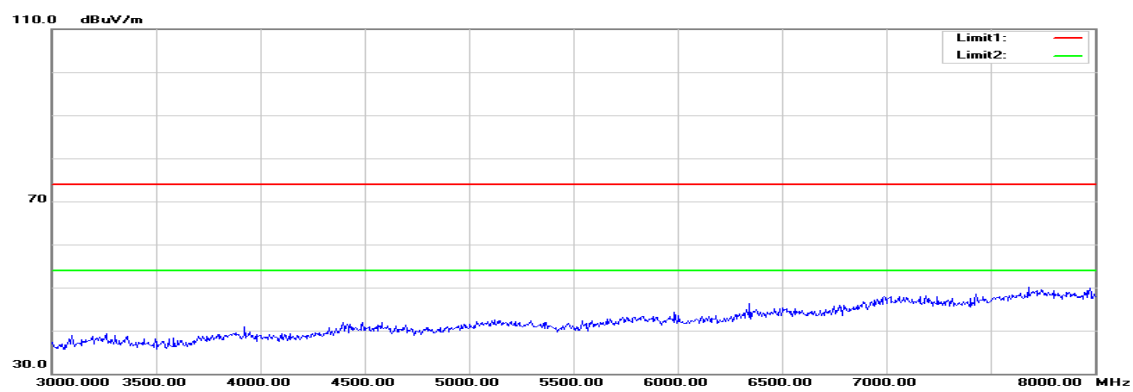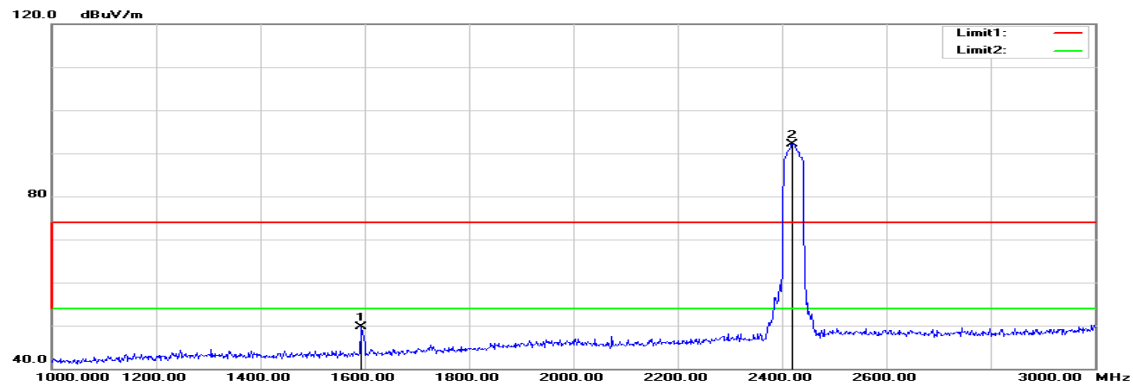

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Low

Test Date: January 14, 2016

Temperature: 27°C

Tested by: Jason Lu





Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1594.000	53.65	-5.70	47.95	74.00	-26.05	peak	V
4990.000	43.27	5.54	48.81	74.00	-25.19	peak	V
7475.000	38.12	13.43	51.55	74.00	-22.45	peak	V
N/A							
1594.000	55.34	-5.70	49.64	74.00	-24.36	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

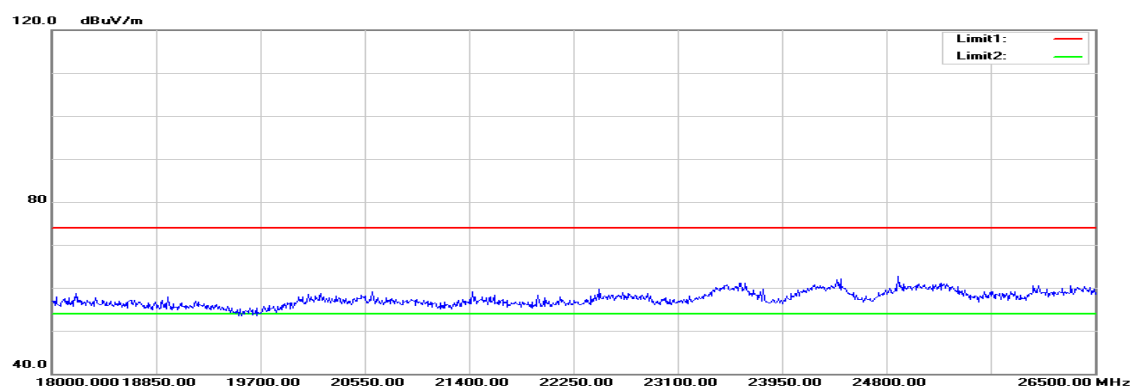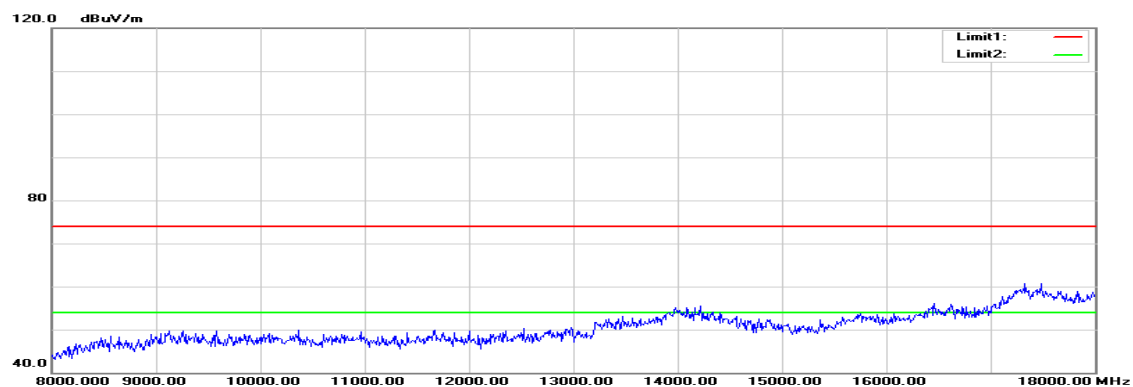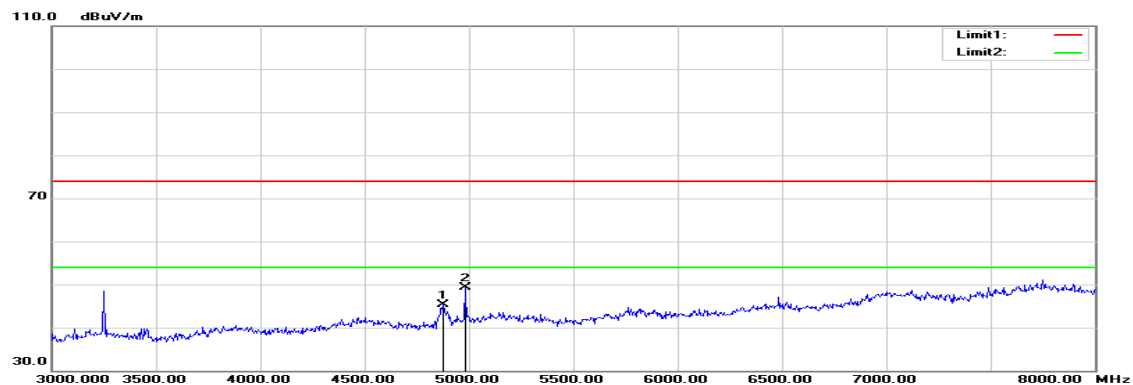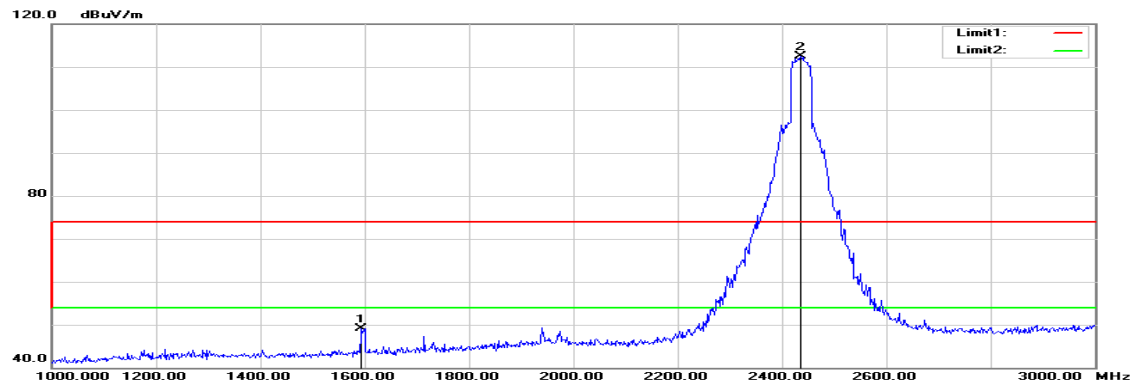TX / IEEE 802.11n HT 40 MHz mode / CH Mid**Polarity: Vertical**

Polarity: Horizontal

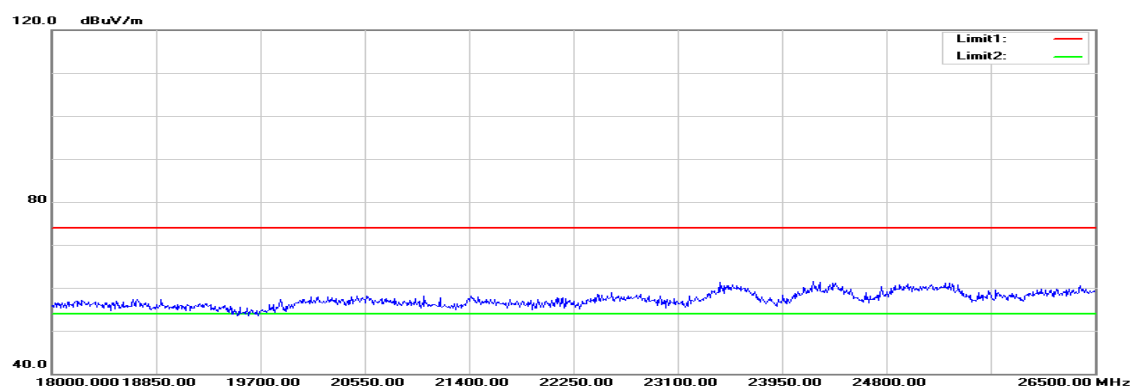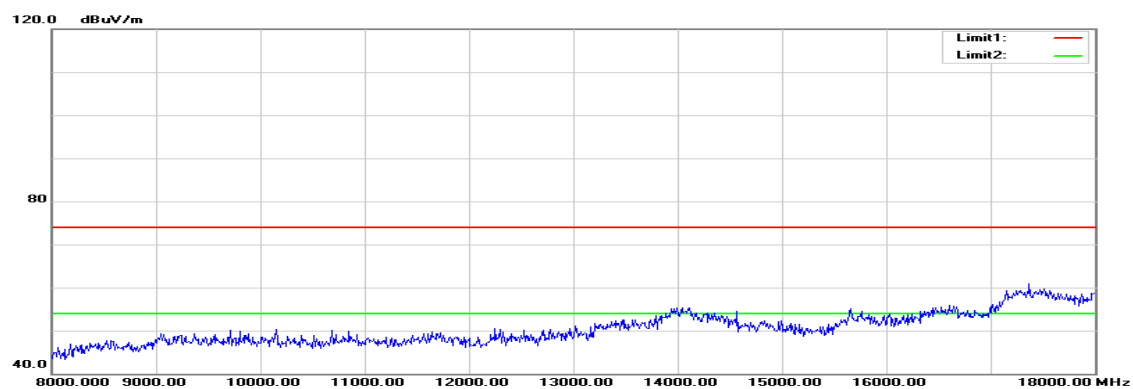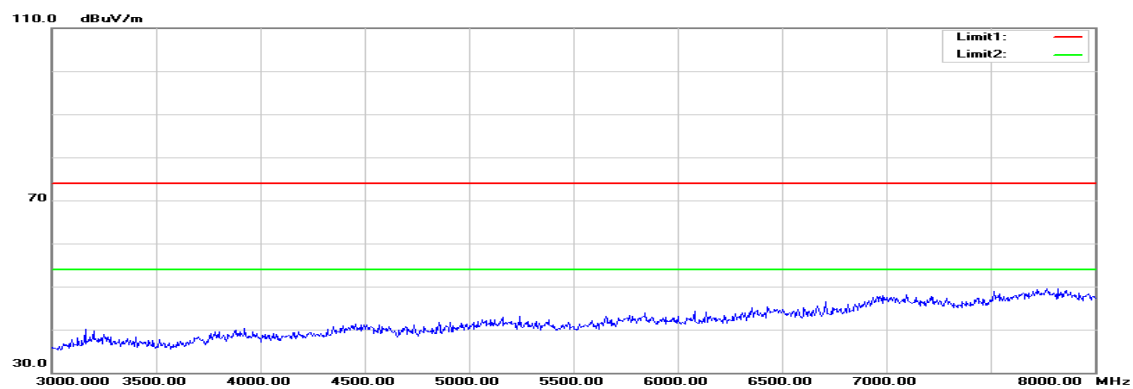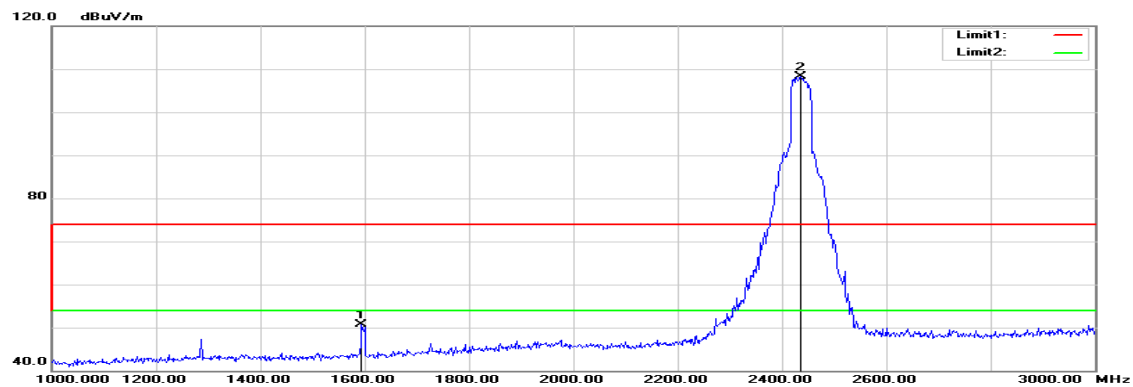

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Mid

Test Date: January 14, 2016

Temperature: 27°C

Tested by: Jason Lu





Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1594.000	54.79	-5.70	49.09	74.00	-24.91	peak	V
4875.000	40.10	5.24	45.34	74.00	-28.66	peak	V
4980.000	43.80	5.52	49.32	74.00	-24.68	peak	V
N/A							
1594.000	56.36	-5.70	50.66	74.00	-23.34	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

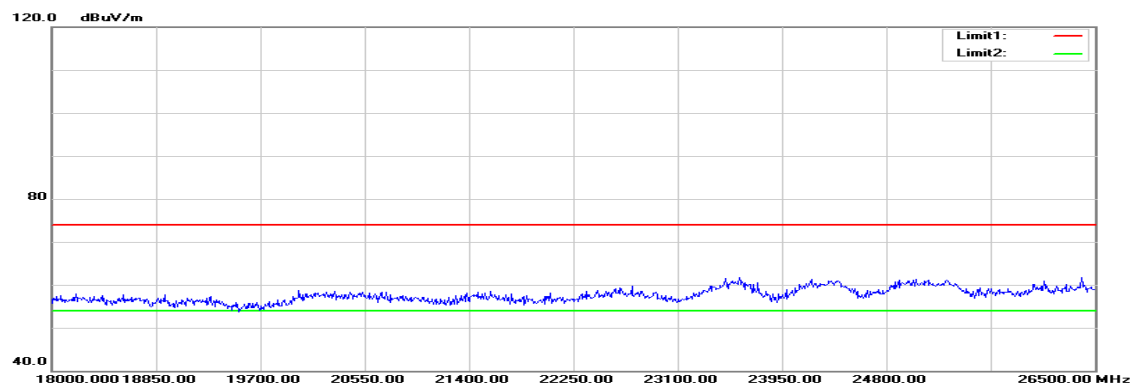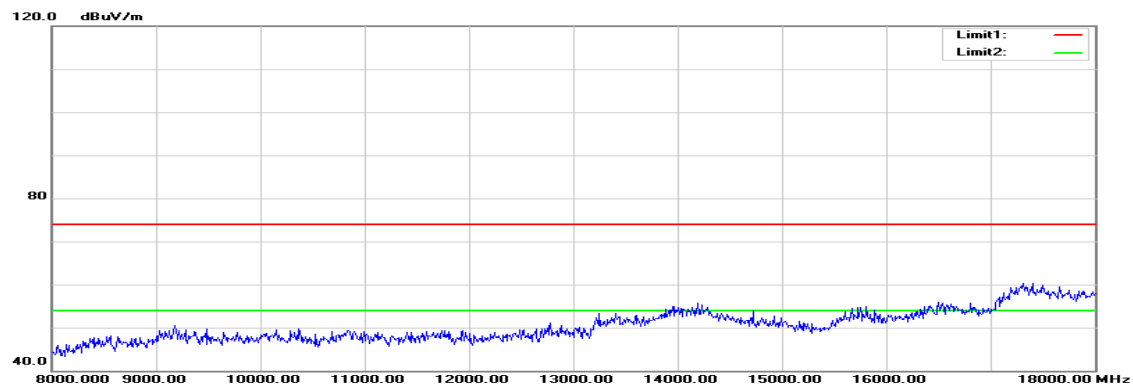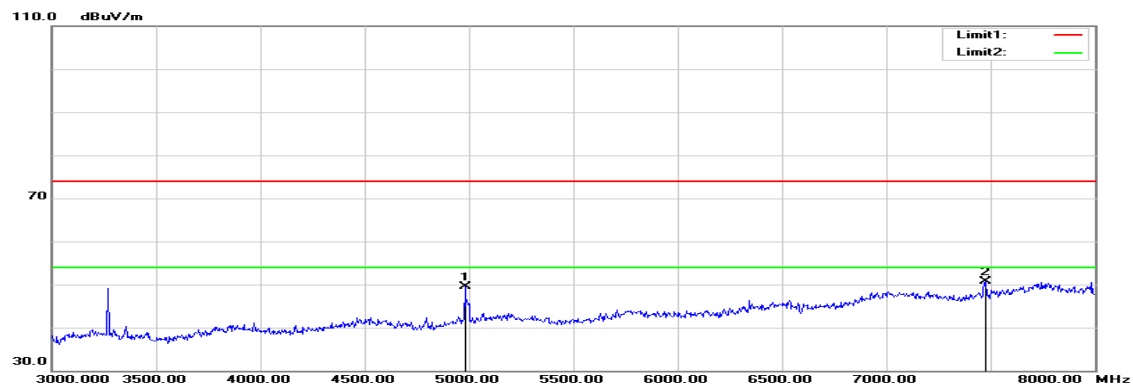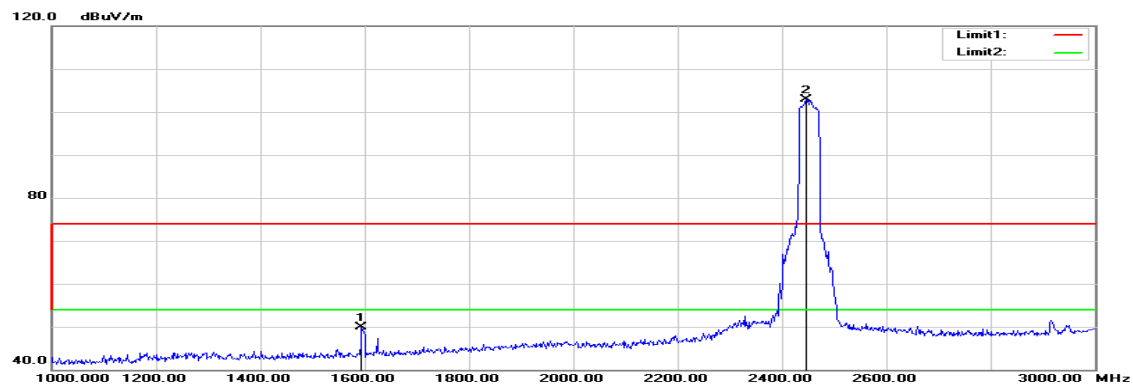TX / IEEE 802.11n HT 40 MHz mode / CH High**Polarity: Vertical**

Polarity: Horizontal

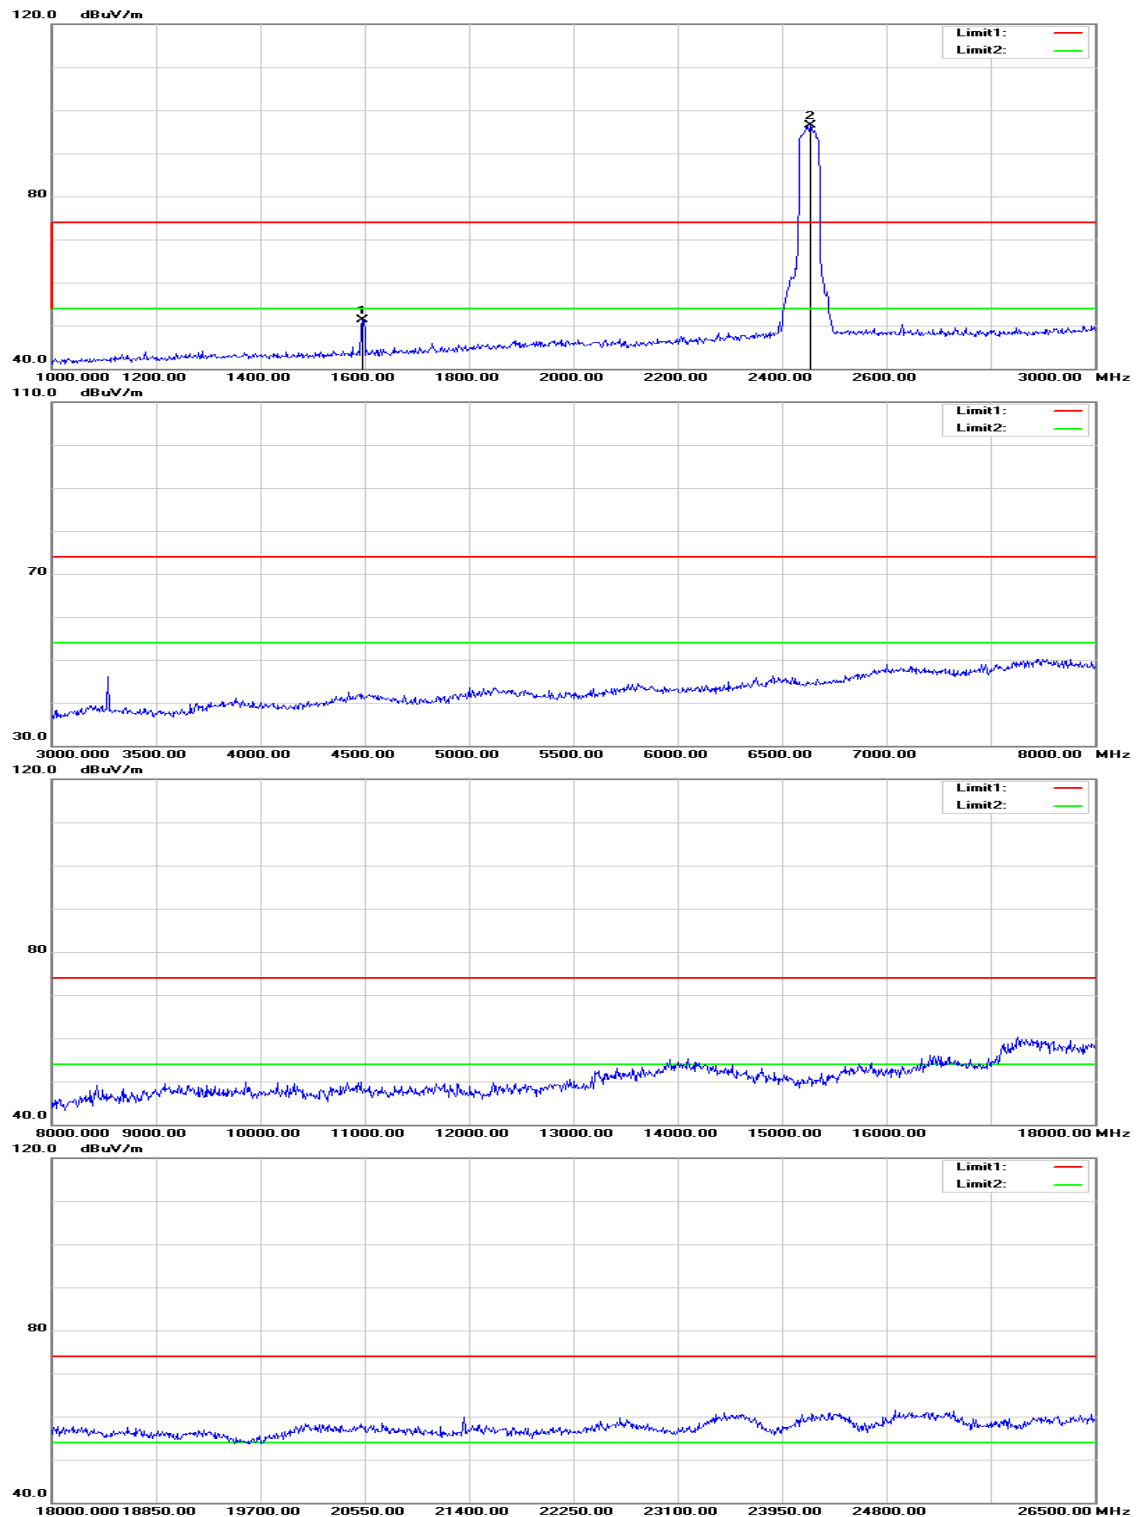

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH High**Test Date:** January 14, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1594.000	55.58	-5.70	49.88	74.00	-24.12	peak	V
4980.000	43.97	5.52	49.49	74.00	-24.51	peak	V
7475.000	37.35	13.43	50.78	74.00	-23.22	peak	V
N/A							
1596.000	57.02	-5.69	51.33	74.00	-22.67	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a) & RSS-Gen §7.2.4, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** January 5, 2016
Temperature: 24 °C **Tested by:** Zeus Chen
Humidity: 56% RH


Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1660	41.08	41.08	9.69	50.77	50.77	65.15	55.16	-14.38	-4.39	L1
0.2980	34.85	34.85	9.68	44.53	44.53	60.30	50.30	-15.77	-5.77	L1
1.7340	29.09	29.09	9.96	39.05	39.05	56.00	46.00	-16.95	-6.95	L1
3.8140	32.88	32.88	9.82	42.70	42.70	56.00	46.00	-13.30	-3.30	L1
6.0140	33.71	33.71	9.86	43.57	43.57	60.00	50.00	-16.43	-6.43	L1
9.1340	36.41	36.41	9.92	46.33	46.33	60.00	50.00	-13.67	-3.67	L1
0.1700	40.98	40.98	9.64	50.62	50.62	64.96	54.96	-14.34	-4.34	L2
0.1900	39.24	39.24	9.64	48.88	48.88	64.03	54.04	-15.15	-5.16	L2
0.2980	36.91	36.91	9.64	46.55	46.55	60.30	50.30	-13.75	-3.75	L2
1.7780	29.02	29.02	9.89	38.91	38.91	56.00	46.00	-17.09	-7.09	L2
8.9020	35.95	35.95	9.89	45.84	45.84	60.00	50.00	-14.16	-4.16	L2
9.6500	35.69	35.69	9.91	45.60	45.60	60.00	50.00	-14.40	-4.40	L2

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

Test Plots

Conducted emissions (Line 1)

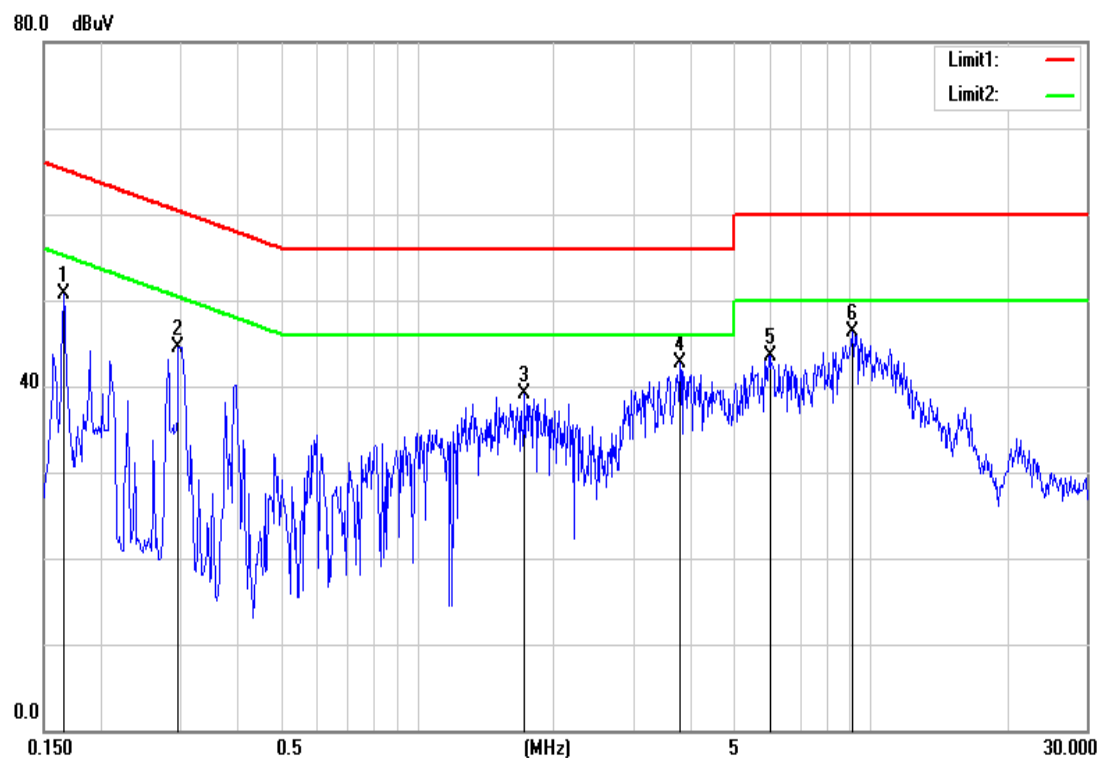

Conducted emissions (Line 2)

