

FCC 47 CFR PART 15 SUBPART C**TEST REPORT****For****WLAN + BT Combo Module****Model: WCBN4511R****Trade Name: LITE-ON***Issued to***Lite-On Technology Corp.****Bldg. C, 90, Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C***Issued by***Compliance Certification Services Inc.****No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)****<http://www.ccsrf.com>****service@ccsrf.com****Issued Date: July 19, 2016**

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	July 19, 2016	Initial Issue	ALL	Doris Chu
01	August 24, 2016	1. Added Product SW/HW version, Radio SW/HW version, Test SW Version. 2. Added the worst case power setting parameter. 3. Added 99% bandwidth. 4. Modify frequency separation's test procedure.	P.5, P.9, P.15 ~ P.19, P.45	Doris Chu
02	August 26, 2016	1. Modify Frequency.	P.54	Doris Chu

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.5 DESCRIPTION OF TEST MODES.....	8
3.6 THE WORST CASE POWER SETTING PARAMETER	9
4. INSTRUMENT CALIBRATION	10
4.1 MEASURING INSTRUMENT CALIBRATION	10
4.2 MEASUREMENT EQUIPMENT USED	10
4.3 MEASUREMENT UNCERTAINTY	11
5. FACILITIES AND ACCREDITATIONS.....	12
5.1 FACILITIES	12
5.2 EQUIPMENT	12
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	13
6. SETUP OF EQUIPMENT UNDER TEST.....	14
6.1 SETUP CONFIGURATION OF EUT	14
6.2 SUPPORT EQUIPMENT.....	14
7. FCC PART 15.247 REQUIREMENTS	15
7.1 99% BANDWIDTH	15
7.2 20 DB BANDWIDTH.....	20
7.3 PEAK POWER	25
7.4 AVERAGE POWER	26
7.5 BAND EDGES MEASUREMENT.....	27
7.6 FREQUENCY SEPARATION.....	45
7.7 NUMBER OF HOPPING FREQUENCY	51
7.8 TIME OF OCCUPANCY (DWELL TIME).....	53
7.9 RADIATED EMISSIONS	55
7.10 POWERLINE CONDUCTED EMISSIONS	73
APPENDIX I PHOTOGRAPHS OF TEST SETUP	76

1. TEST RESULT CERTIFICATION

Applicant: Lite-On Technology Corp.
Bldg. C, 90, Chien 1 Road, Chung Ho, New Taipei City
23585, Taiwan, R.O.C

Equipment Under Test: WLAN + BT Combo Module

Model Number: WCBN4511R

Trade Name: LITE-ON

Date of Test: June 15 ~ July 19, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

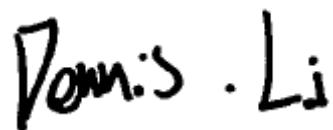
The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements set forth in the above standards. The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:



Miller Lee
Manager
Compliance Certification Services Inc.

Tested by:



Dennis Li
Engineer
Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product	WLAN + BT Combo Module
Model Number	WCBN4511R
Trade Name	LITE-ON
Received Date	June 8, 2016
Power Supply	Powered from host device.
Frequency Range	2402 ~ 2480 MHz
Transmit Power	9.06 dBm
Modulation Technique	GFSK for 1Mbps; $\pi/4$ -DQPSK for 2Mbps; 8DPSK for 3Mbps
Number of Channels	79 Channels
Antenna Specification	Walsin / RFMTA400536IMAB301 PIFA Antenna / Gain: 3.79dBi
Product SW/HW version	V02/V02
Radio SW version	V02/V02
Radio HW version	V1.0.3.19

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC: **PPQ-WCBN4511R** filing to comply with FCC Part 15C, Section 15.207, 15.209.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209, 15.247, DA00-705 and KDB 558074 D01 DTS Meas Guidance v03r05.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

According to the requirements in ANSI C63.10: 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2013.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: WCBN4511R) had been tested under operating condition.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode and receiving radiated spurious emission above 1GHz, which worst case was in CH Mid mode only.

Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) with 1Mbps data rate was chosen for full testing.

During the preliminary test, GFSK, $\pi/4$ -QPSK & 8DPSK with DH1 were pre-tested and found that 8DPSK emits the highest output power. Then the tests were carried on with DH1 compare to DH3 & DH5 and found that 8DPSK with DH5 emit the highest output power, and therefore had been tested under operating condition.

Following channels were selected for the radiated emission testing only as listed below:

Tested Channel	Modulation Type	Packet Type	Date Rate
Low, Mid, High	GFSK	DH 5	1
Low, Mid, High	8DPSK	DH 5	3

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

3.6 THE WORST CASE POWER SETTING PARAMETER

For GFSK / DH5

Channel	Frequency (MHz)	RF power setting in TEST SW
Low	2402	9
Mid	2441	9
High	2480	9

For 8DPSK / DH5

Channel	Frequency (MHz)	RF power setting in TEST SW
Low	2402	9
Mid	2441	9
High	2480	9

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
DC Power Supplies	GW Instek	SPS-3610	GPE880163	01/19/2016	01/18/2017
Power Meter	Anritsu	ML2495A	1012009	07/04/2016	07/03/2017
Power Sensor	Anritsu	MA2411B	917072	07/04/2016	07/03/2017
Signal Analyzer	R&S	FSV 40	101073	07/20/2015	07/19/2016
Spectrum Analyzer	Agilent	E4446A	US42510268	02/15/2016	02/14/2017
Thermostatic/Hygrosstatic Chamber	TAICHY	MHG-150LF	930619	10/08/2015	10/07/2016
Vector Signal Generator	R&S	SMU 200A	102239	03/10/2016	03/09/2017
AC Power Source	EXTECH	6205	1140845	N.C.R	N.C.R

Wugu 966 Chamber A					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Bilog Antenna	Sunol Sciences	JB3	A030105	08/06/2015	08/05/2016
EMI Test Receiver	R&S	ESCI	100064	05/31/2016	05/30/2017
Horn Antenna	EMCO	3117	55165	02/24/2016	02/23/2017
Horn Antenna	EMCO	3116	26370	01/15/2016	01/14/2017
K Type Cable	Huber+Suhner	SUCOFLEX 102	29406/2	01/12/2016	01/11/2017
K Type Cable	Huber+Suhner	SUCOFLEX 102	22470/2	01/12/2016	01/11/2017
Pre-Amplifier	MITEQ	AMF-6F-260400-40-8P	985646	01/14/2016	01/13/2017
Pre-Amplifier	EMCI	EMC 012635	980151	06/23/2016	06/22/2017
Pre-Amplifier	EMCI	EM330	N/A	06/08/2016	06/07/2017
Spectrum Analyzer	Agilent	E4446A	US42510252	12/08/2015	12/07/2016
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	EZ-EMC (CCS-3A1RE)				

Conducted Emission Room # B					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EMI Test Receiver	R&S	ESCI	101073	09/09/2015	09/08/2016
LISN	SCHWARZBECK	NSLK 8127	8127-541	11/23/2015	11/22/2016
LISN	R&S	ENV216	101054	05/11/2016	05/10/2017
Capacitive Voltage Probe	FCC	F-CVP-1	100185	03/09/2016	03/08/2017
Test S/W	CCS-3A1-CE				

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, ridged waveguide, horn and/or Loop. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-247, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	ASUS	M5200AE	5BN0AG019631	PD9WM3B2100	N/A	AC I/P: Unshielded, 1.8m with a core DC O/P: Unshielded, 1.8m

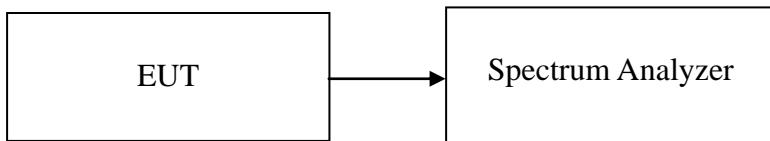
Remark:

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

7. FCC PART 15.247 REQUIREMENTS

7.1 99% BANDWIDTH

Test Configuration



TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold.

TEST RESULTS

No non-compliance noted.

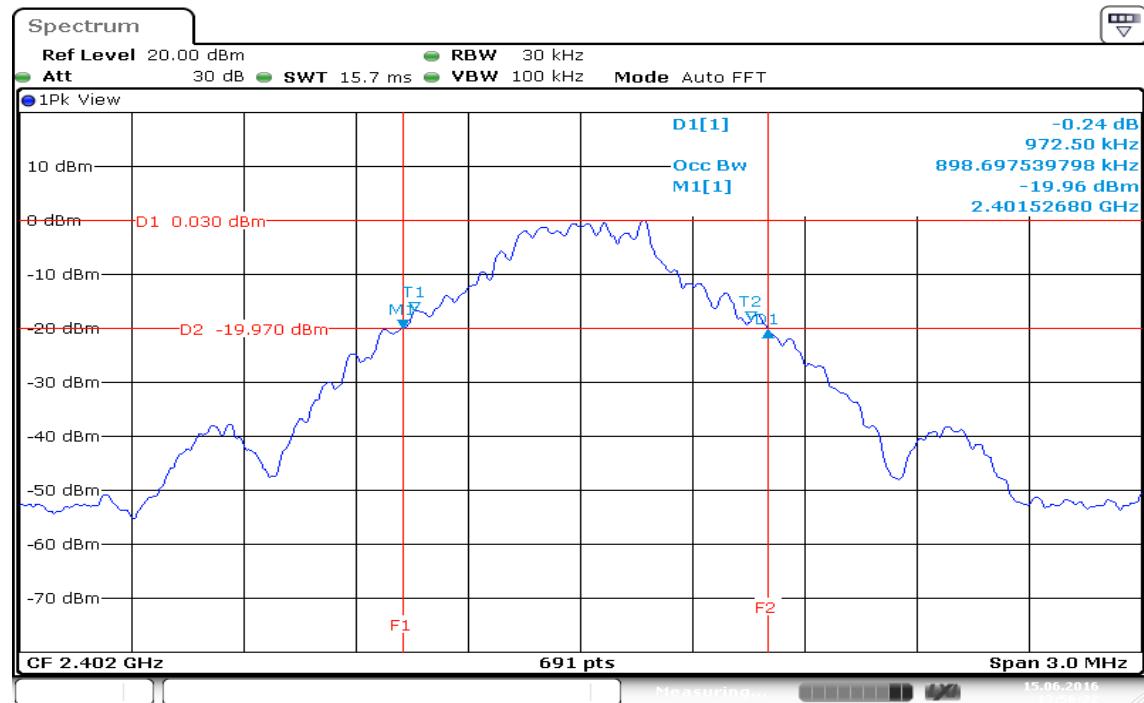
Test Data

For GFSK

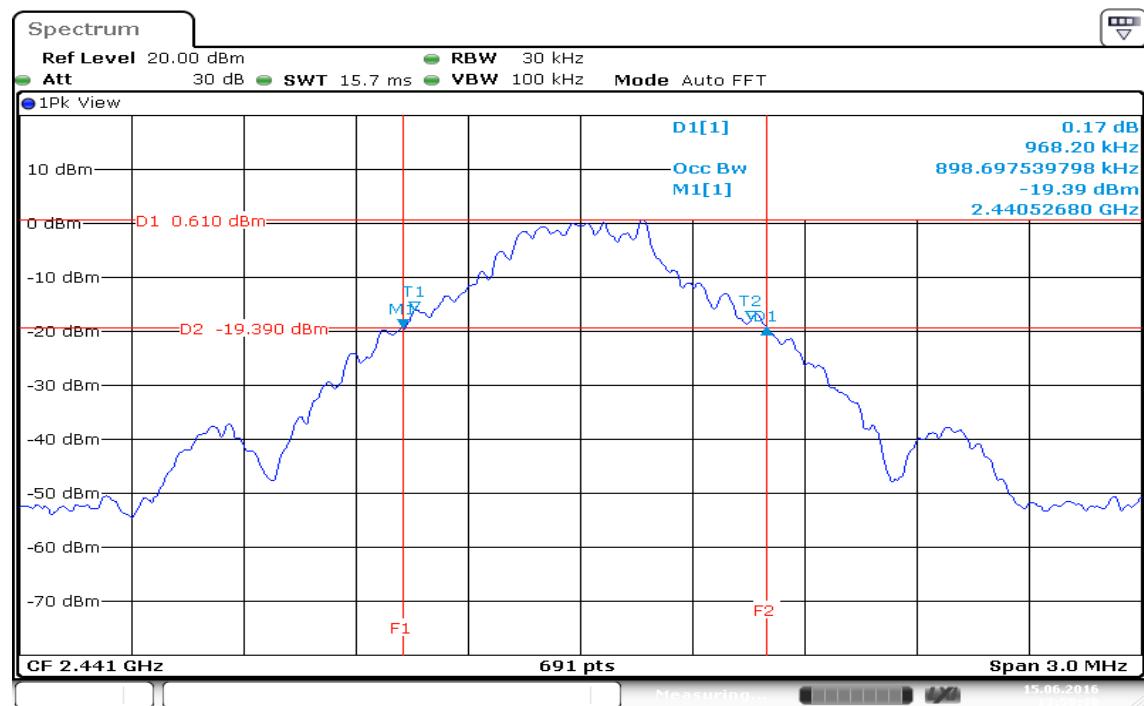
Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	0.8986
Mid	2441	0.8986
High	2480	0.8986

For 8DPSK

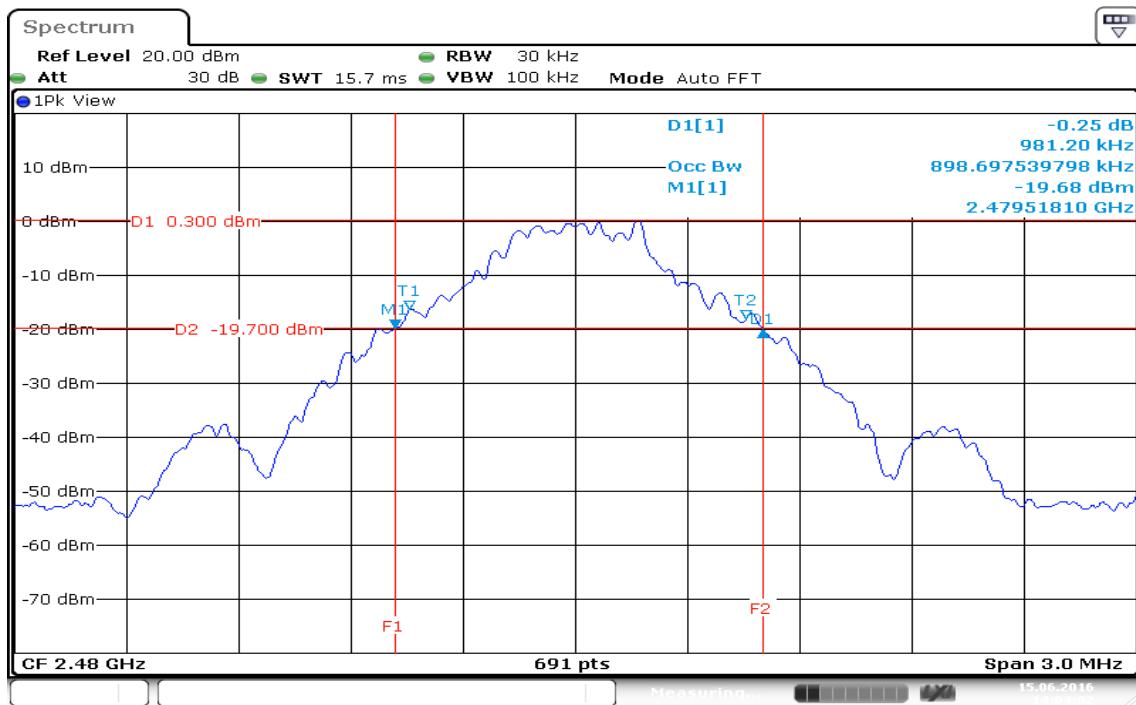
Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.1808
Mid	2441	1.1895
High	2480	1.1852

Test Plot**For GFSK / DH5****99% Bandwidth (CH Low)**

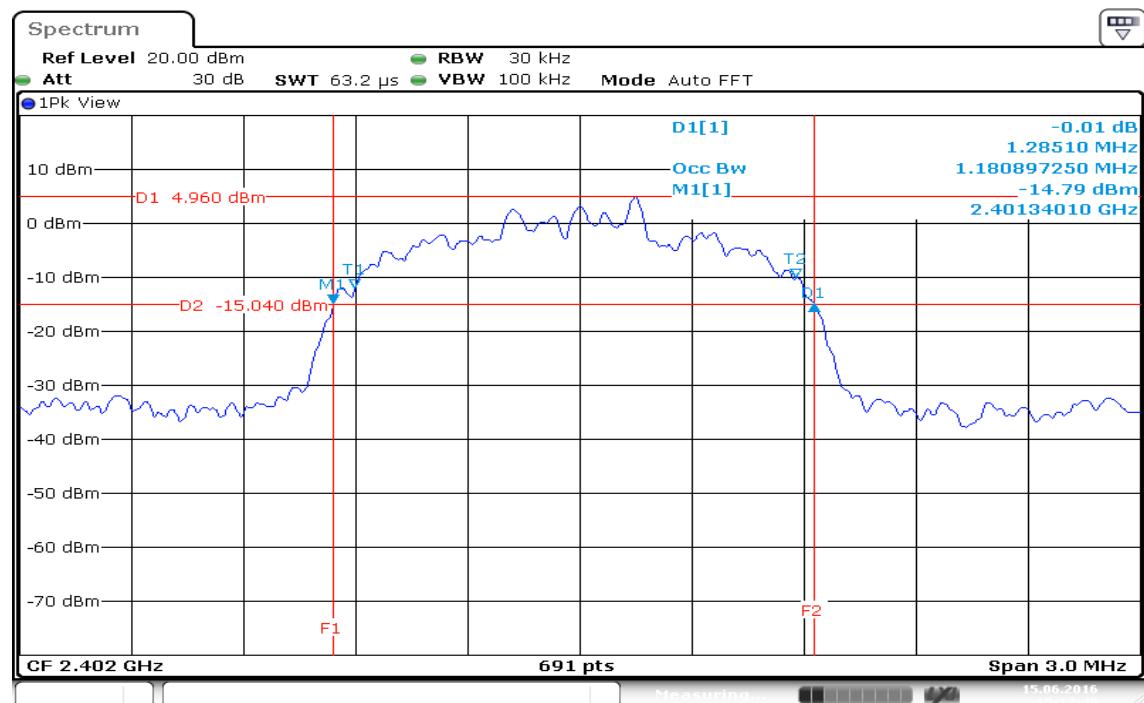
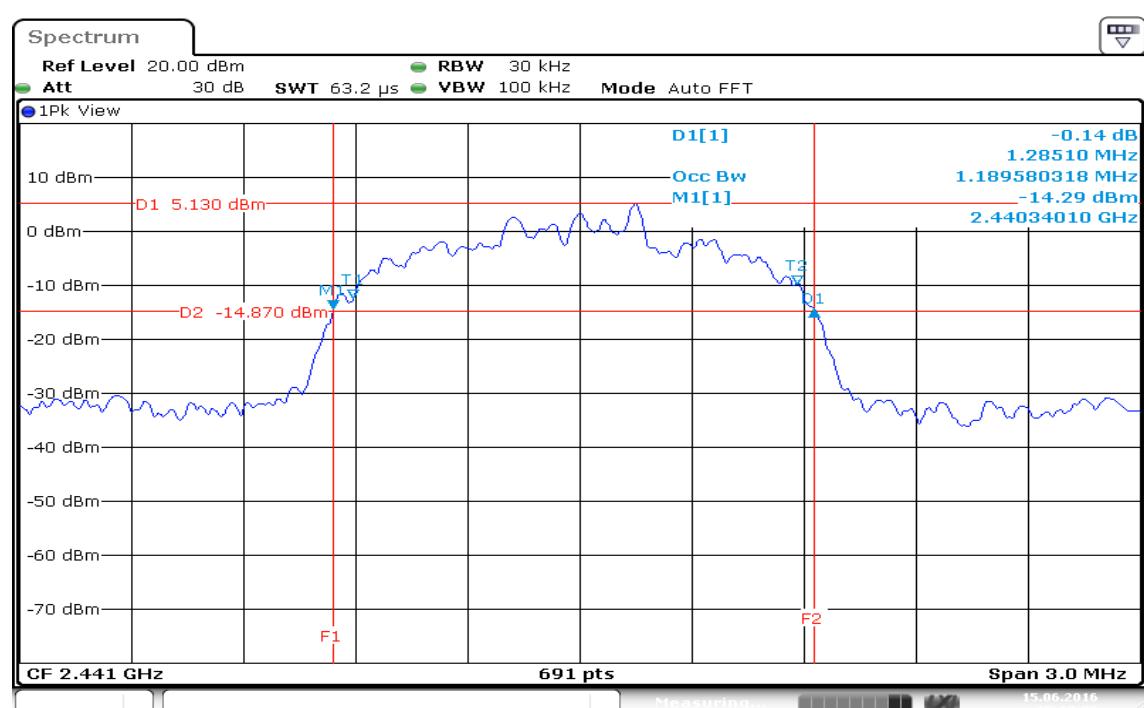
Date: 15.JUN.2016 13:56:22

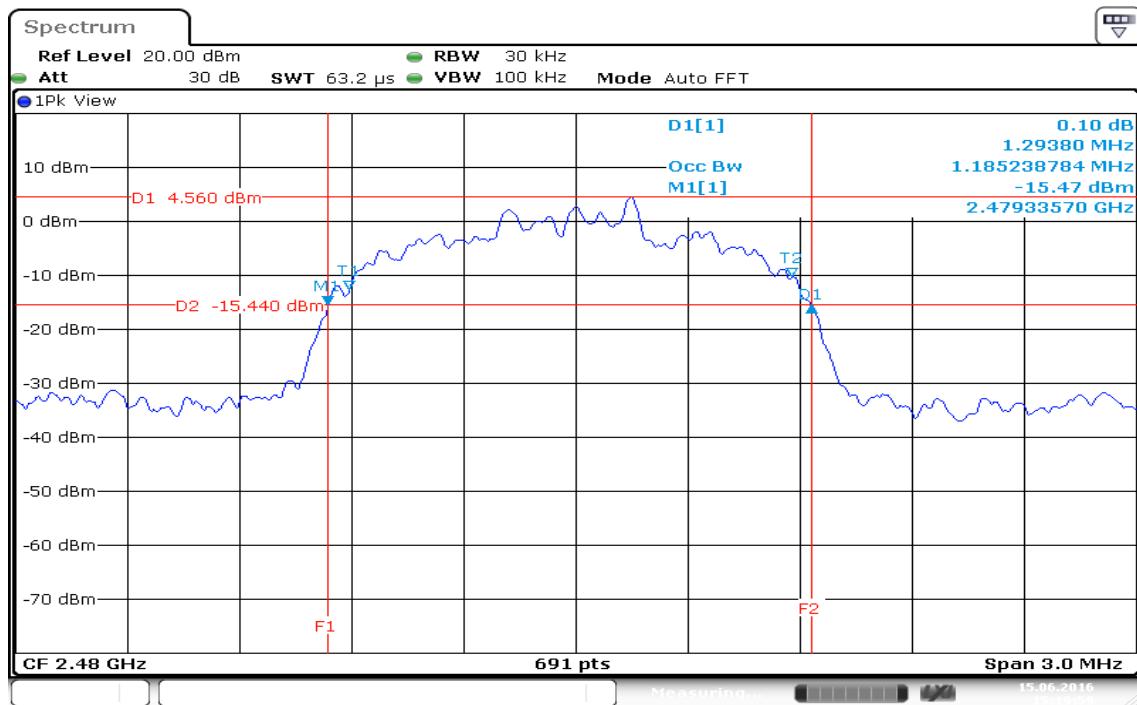
99% Bandwidth (CH Mid)

Date: 15.JUN.2016 13:59:38

99% Bandwidth (CH High)

Date: 15.JUN.2016 14:04:01

For 8DPSK / DH5**99% Bandwidth (CH Low)****99% Bandwidth (CH Mid)**

99% Bandwidth (CH High)

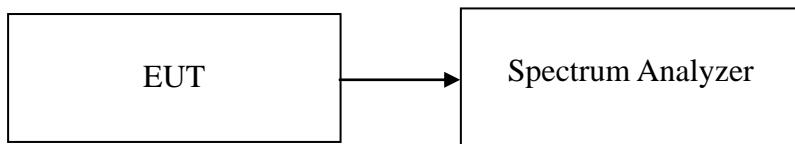
Date: 15.JUN.2016 15:19:59

7.2 20 dB Bandwidth

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30 kHz, VBW = 100 kHz, Sweep = 3.2 ms.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted.

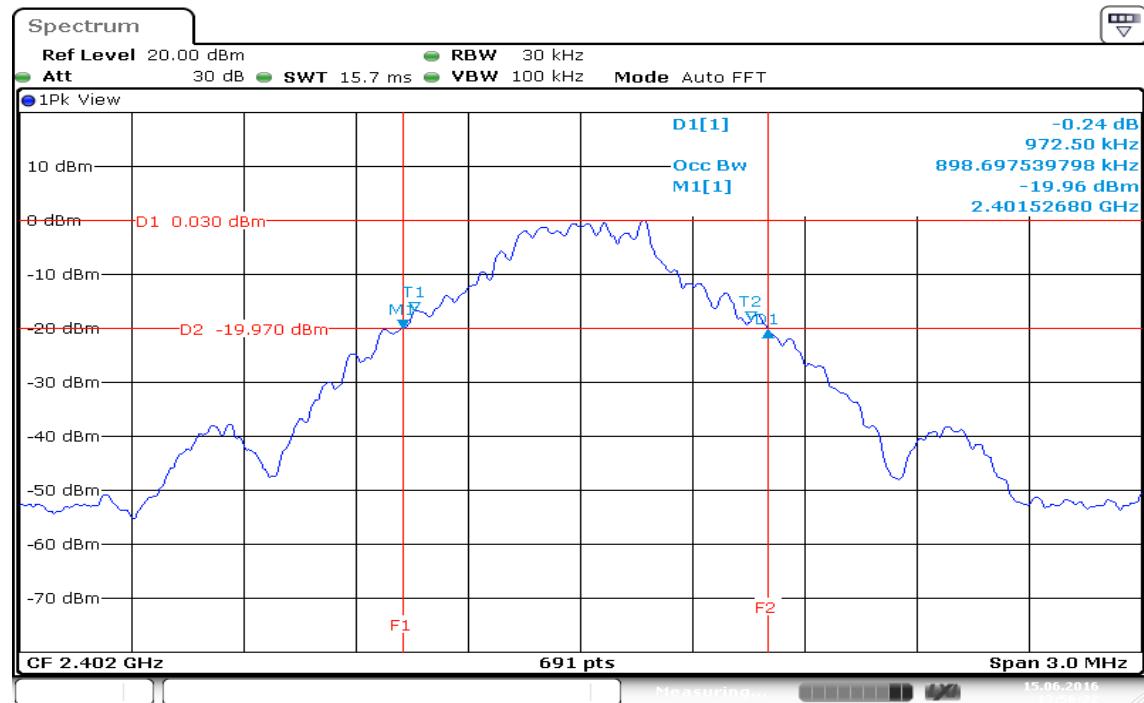
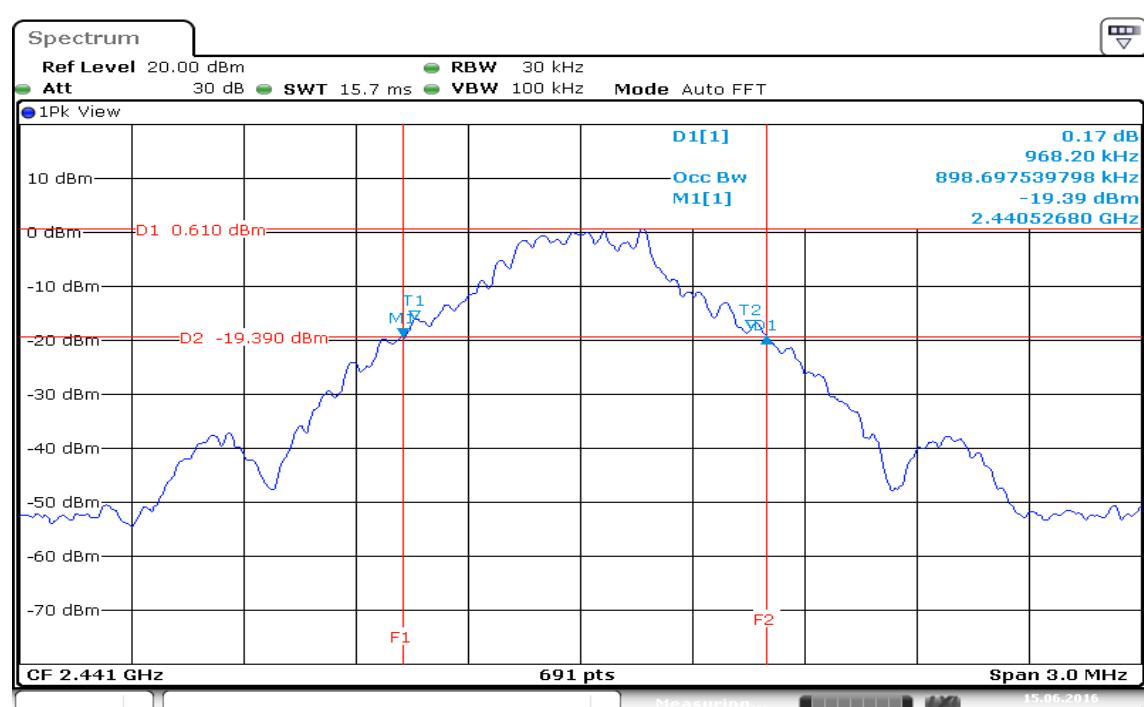
Test Data

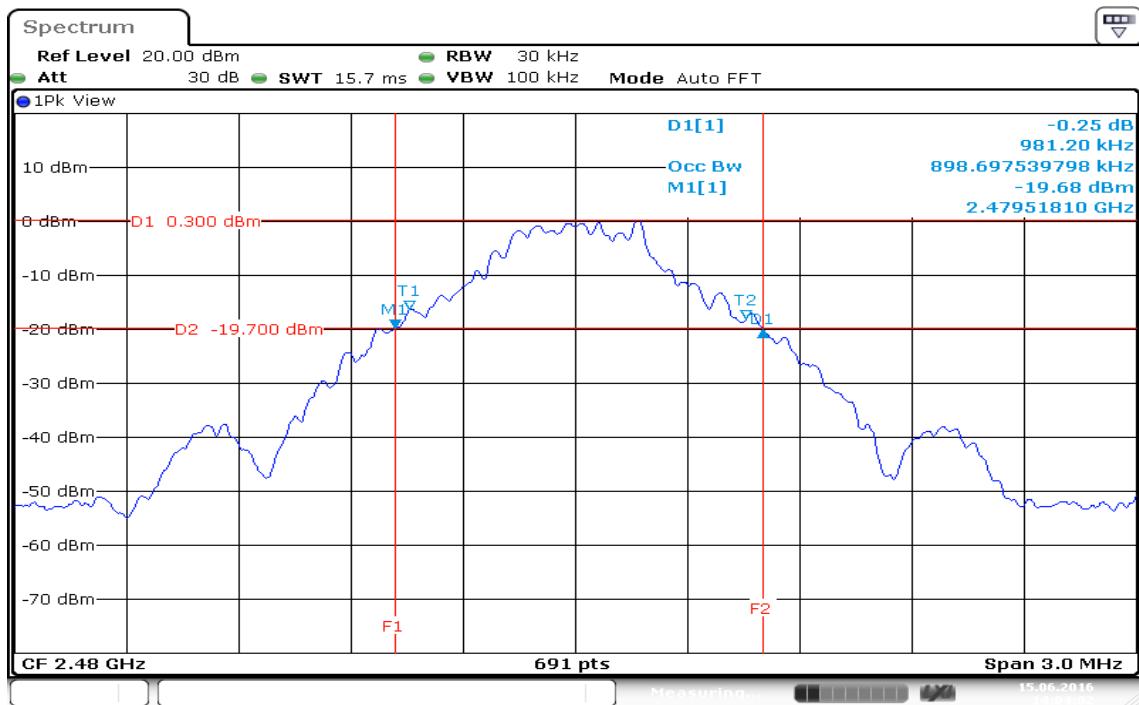
For GFSK / DH5

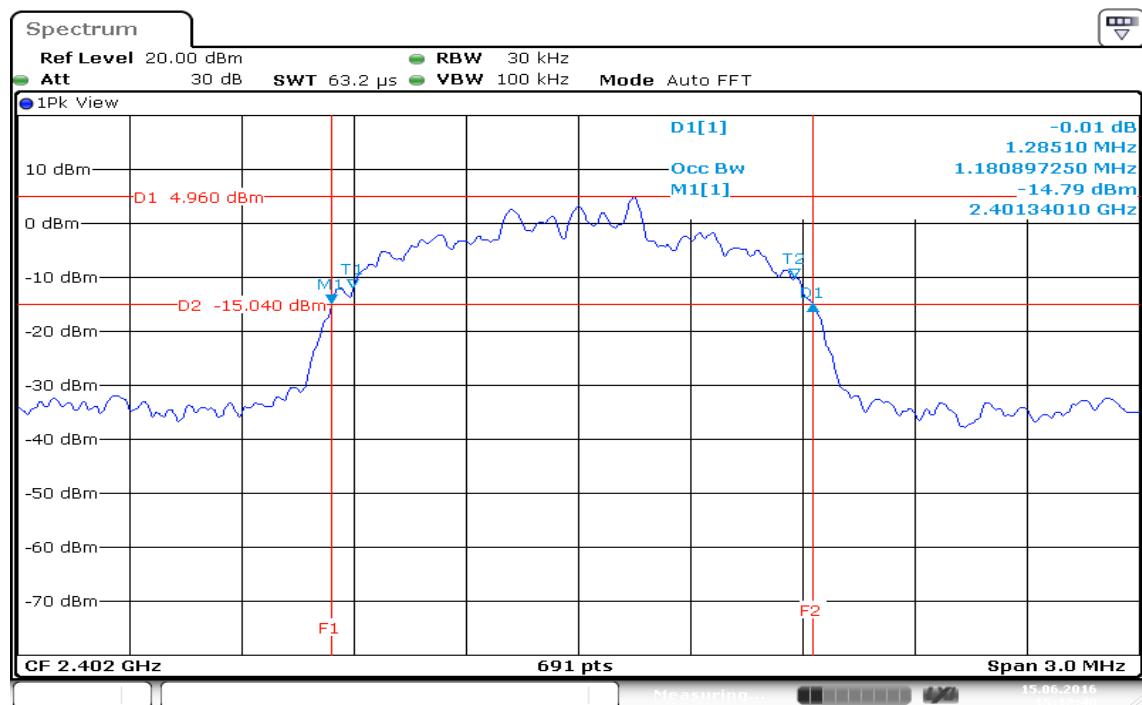
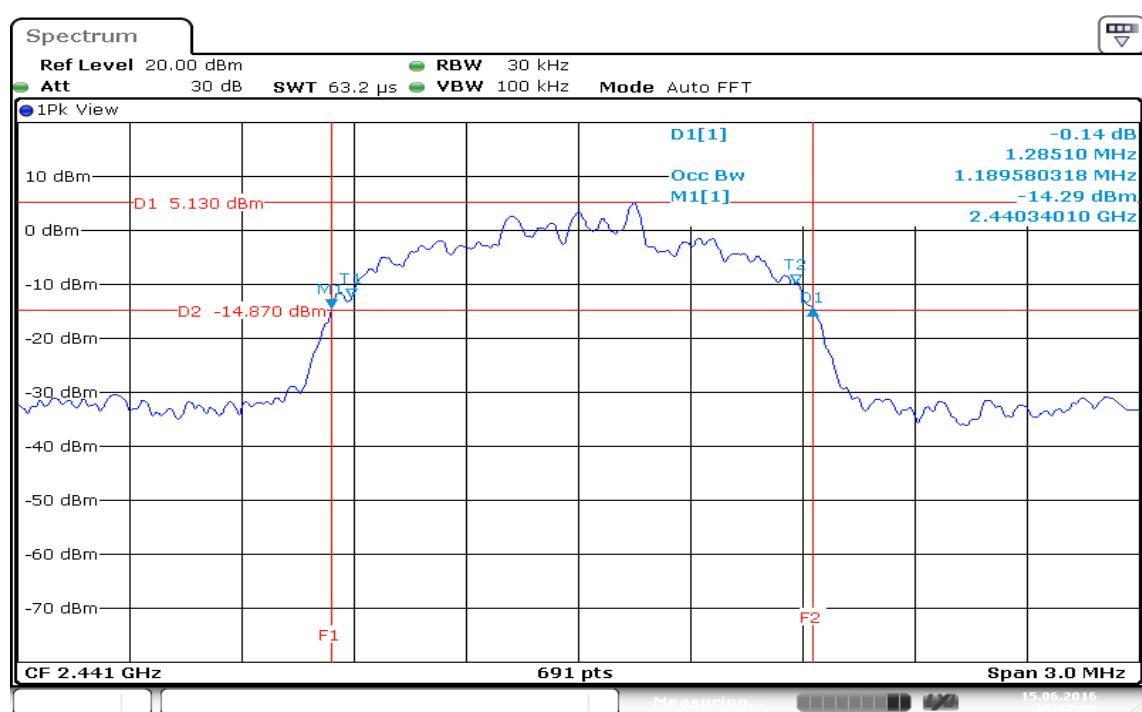
Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	0.9725
Mid	2441	0.9682
High	2480	0.9812

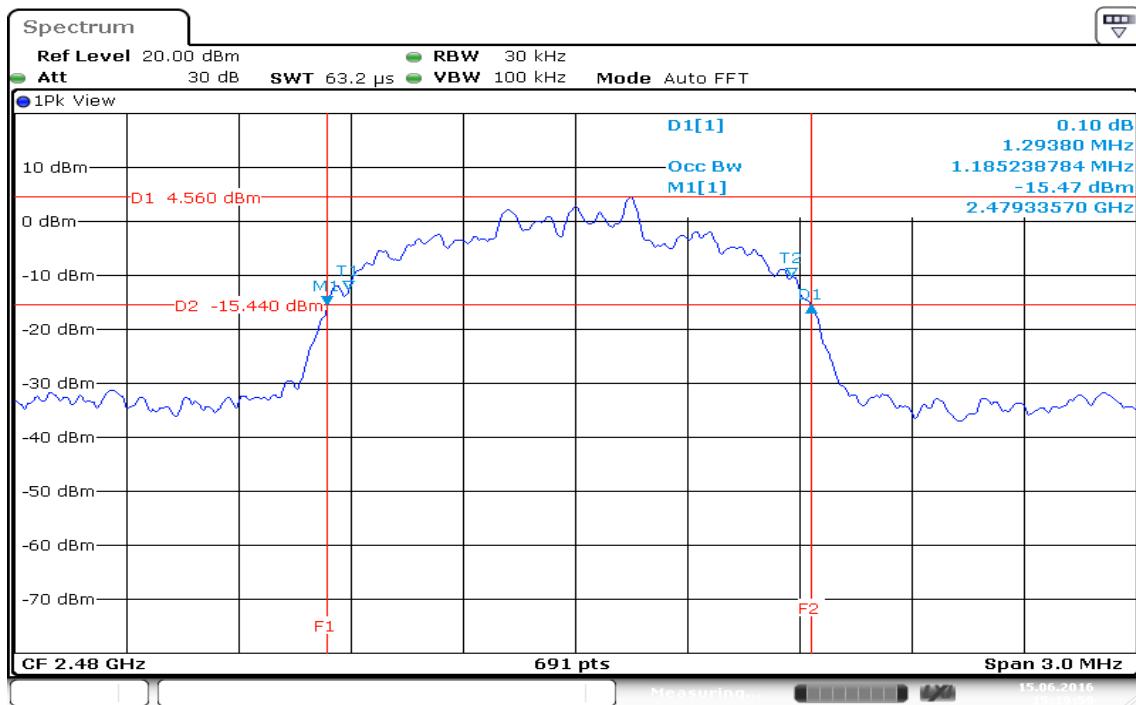
For 8DPSK / DH5

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.2851
Mid	2441	1.2851
High	2480	1.2938

Test Plot**For GFSK / DH5****20dB Bandwidth (CH Low)****20dB Bandwidth (CH Mid)**

20dB Bandwidth (CH High)

For 8DPSK / DH5**20dB Bandwidth (CH Low)****20dB Bandwidth (CH Mid)**

20dB Bandwidth (CH High)

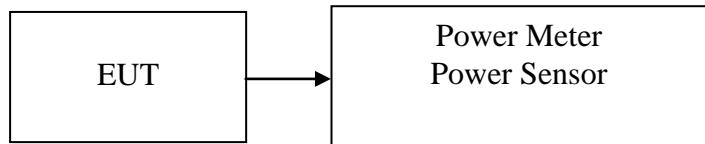
7.3 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted.

Test Data

For GFSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	8.13	0.0065	0.125	PASS
Mid	2441	8.26	0.0067		PASS
High	2480	7.65	0.0058		PASS

For 8DPSK / DH5

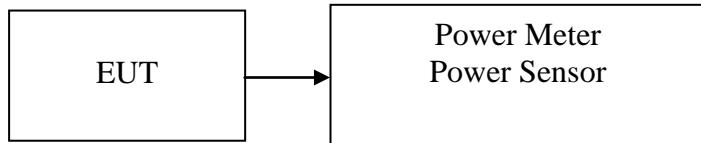
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	8.98	0.0079	0.125	PASS
Mid	2441	*9.06	0.0081		PASS
High	2480	8.47	0.0070		PASS

7.4 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

For GFSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	7.56	0.0057
Mid	2441	8.22	0.0066
High	2480	7.61	0.0058

For 8DPSK / DH5

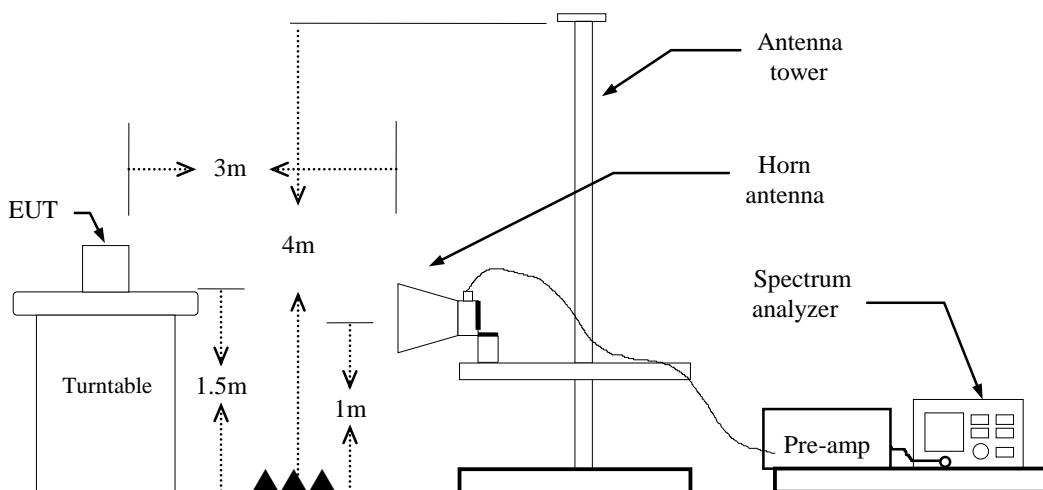
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	6.88	0.0049
Mid	2441	7.06	0.0051
High	2480	6.50	0.0045

7.5 BAND EDGES MEASUREMENT

LIMIT

According to §15.407(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

For Radiated

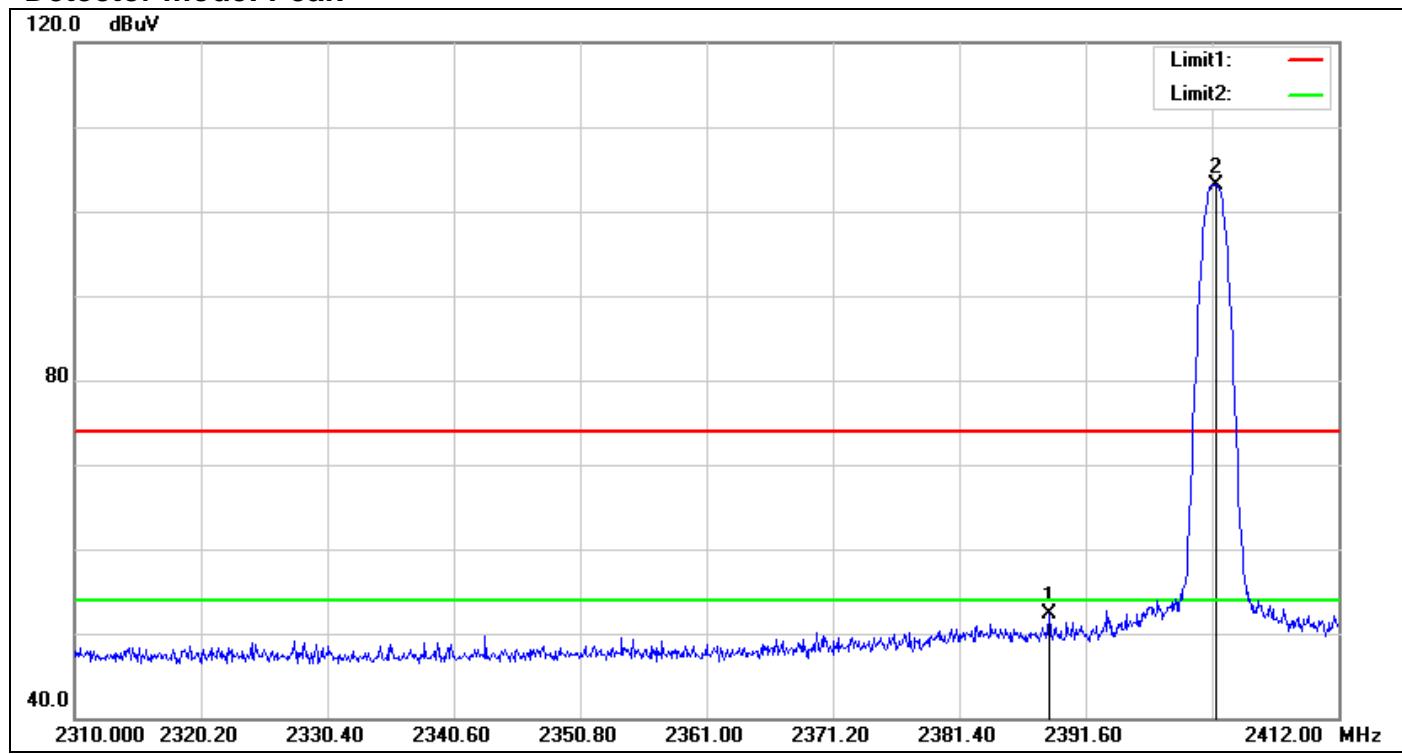
1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz,
if duty cycle \geq 98%, VBW=10Hz.
if duty cycle < 98% VBW=1/T.
BT: = 59%, VBW= 360Hz
EDR = 59%, VBW= 360Hz
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.
6. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

For Un-restricted Band Emissions

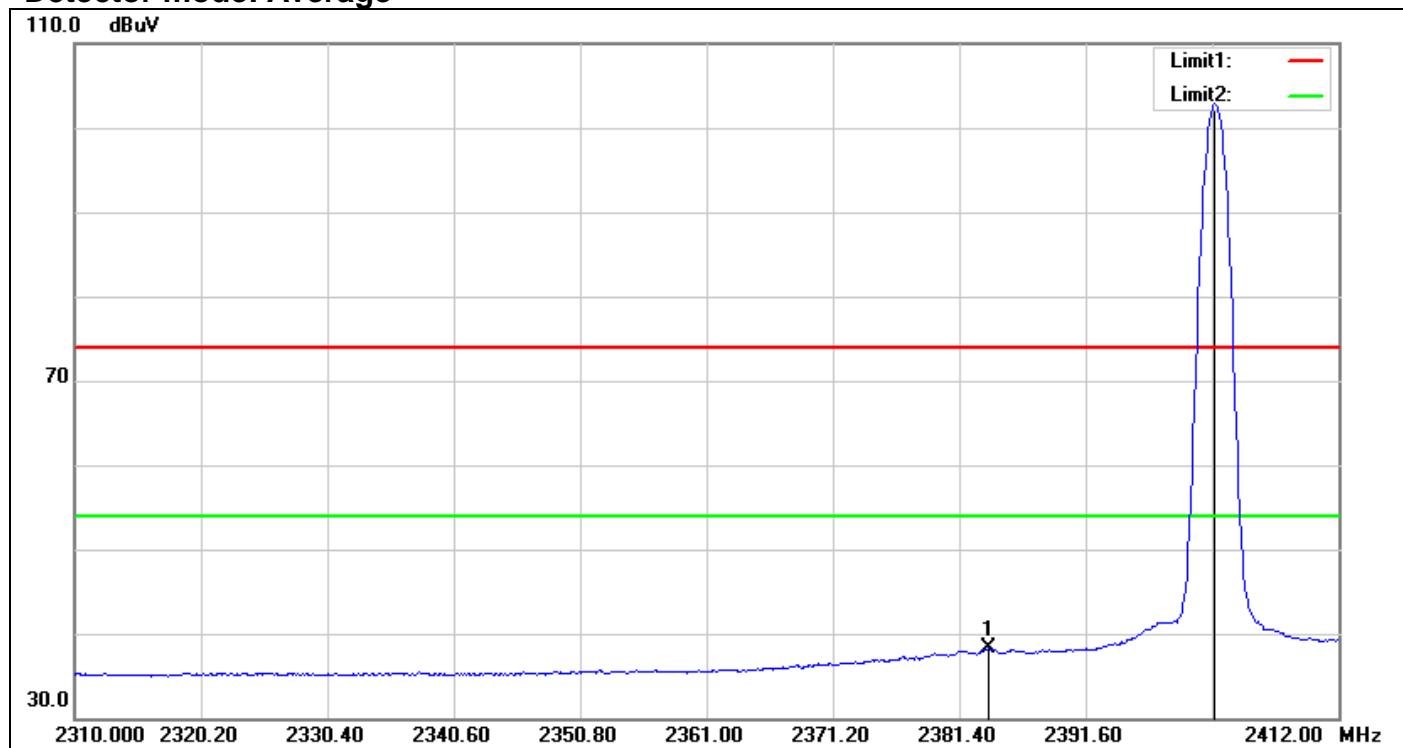
The peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

TEST RESULTS

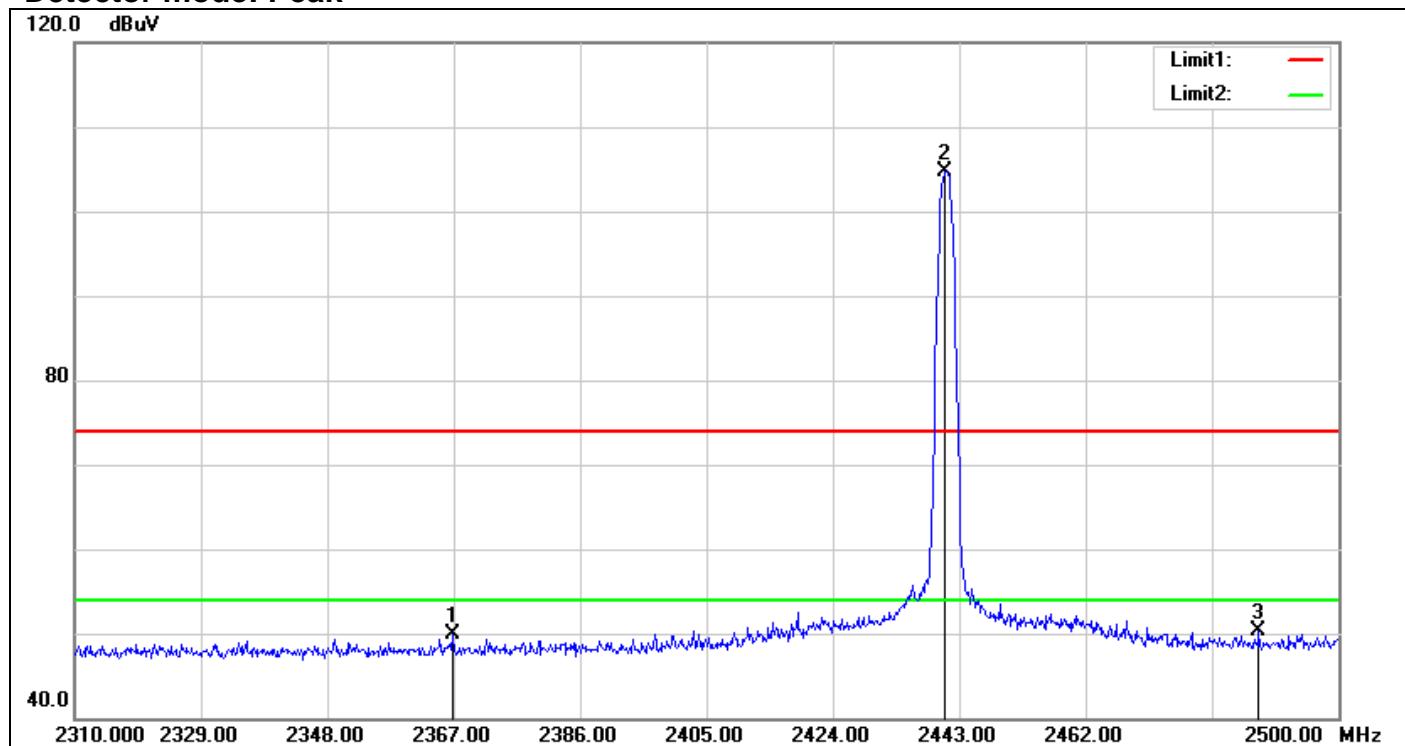
Refer to attach spectrum analyzer data chart.

For GFSK / DH5**Band Edges (CH Low)****Detector mode: Peak**

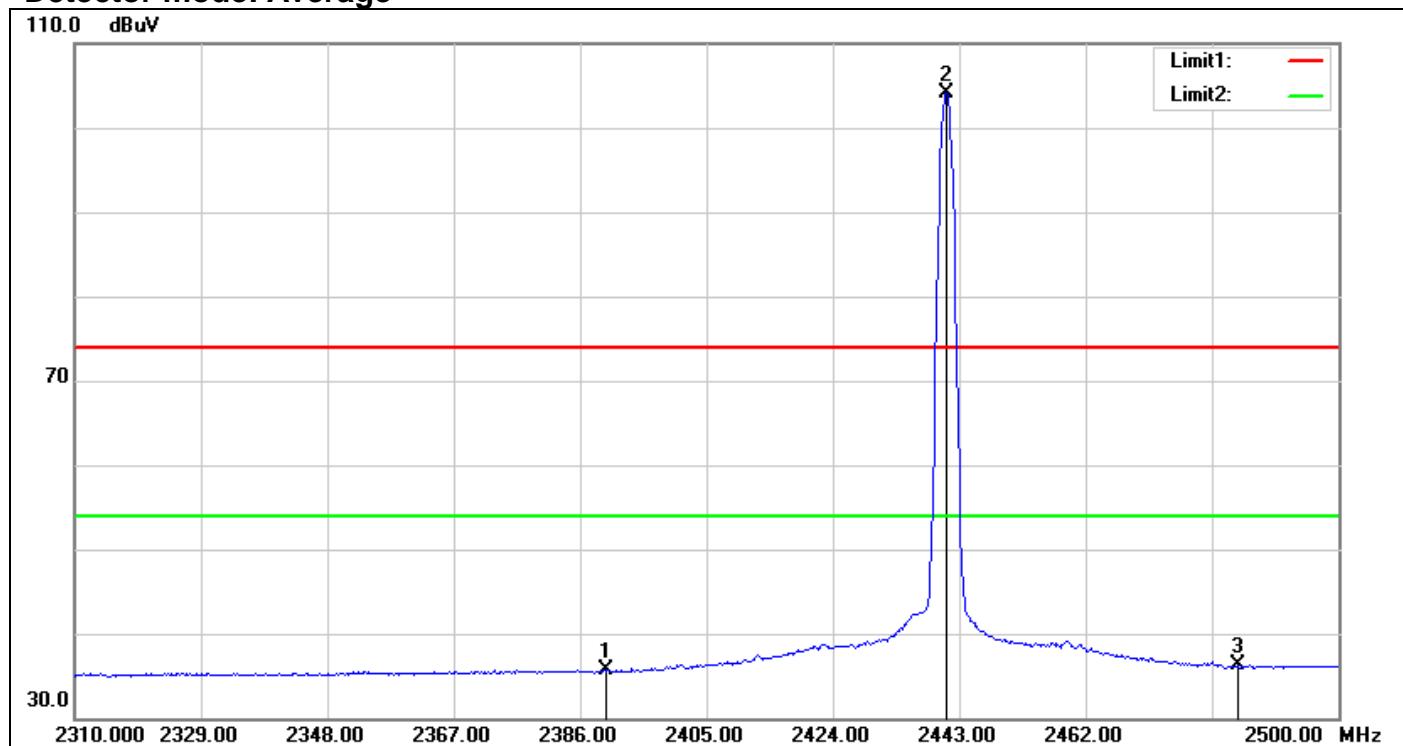
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2388.642	54.74	-2.50	52.24	74.00	-21.76	peak
2	2402.106	105.58	-2.41	103.17	-	-	peak

Detector mode: Average

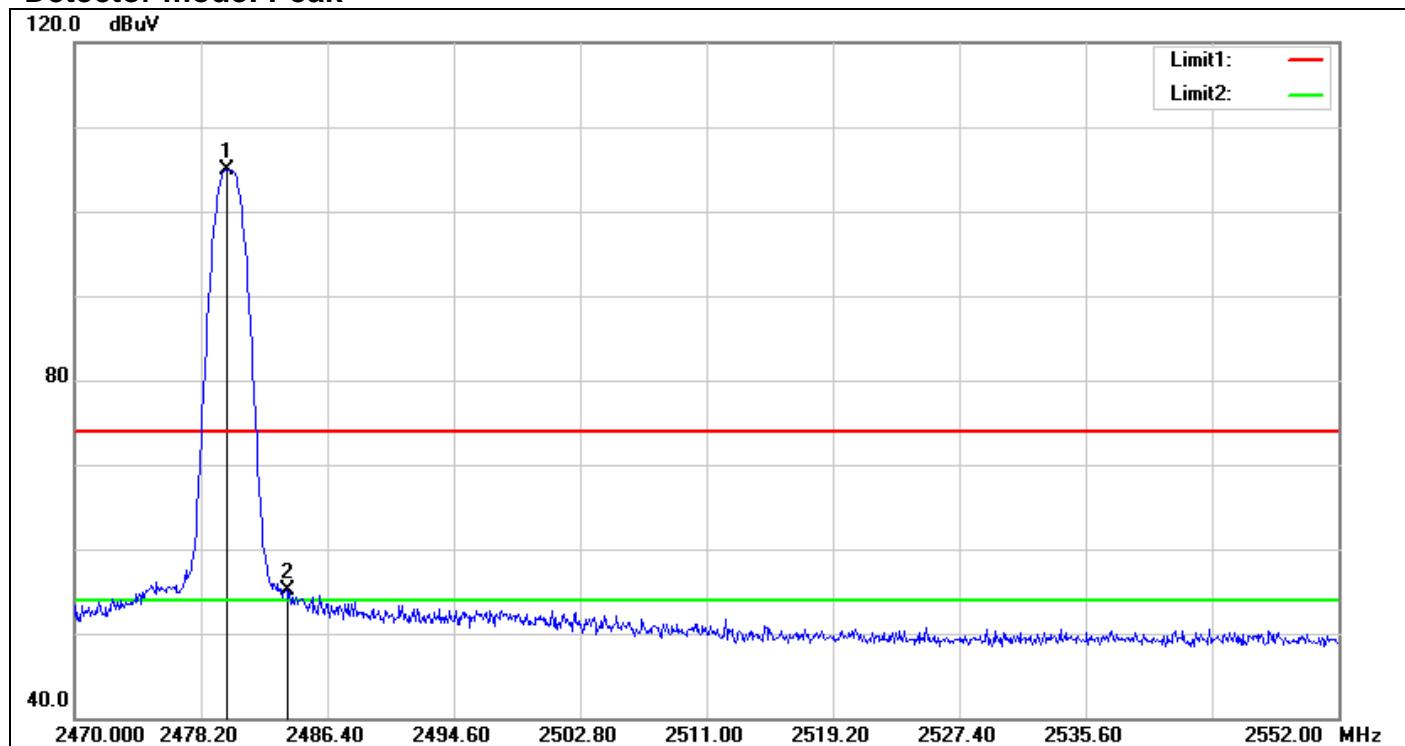
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2383.746	40.78	-2.55	38.23	54.00	-15.77	AVG
2	2402.004	105.22	-2.41	102.81	-	-	AVG

Band Edges (CH Mid)**Detector mode: Peak**

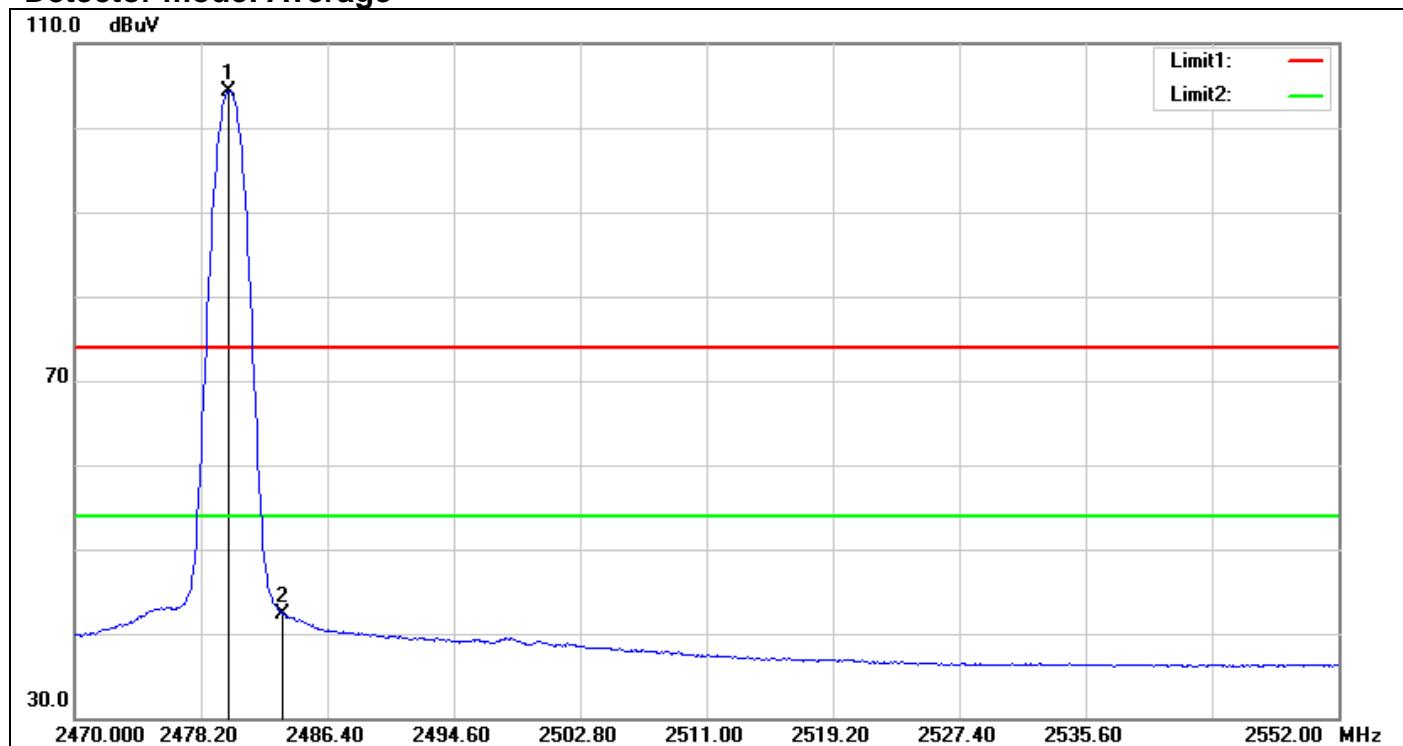
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2366.810	52.59	-2.70	49.89	74.00	-24.11	peak
2	2440.910	106.84	-2.21	104.63	-	-	peak
3	2488.030	52.22	-1.95	50.27	74.00	-23.73	peak

Detector mode: Average

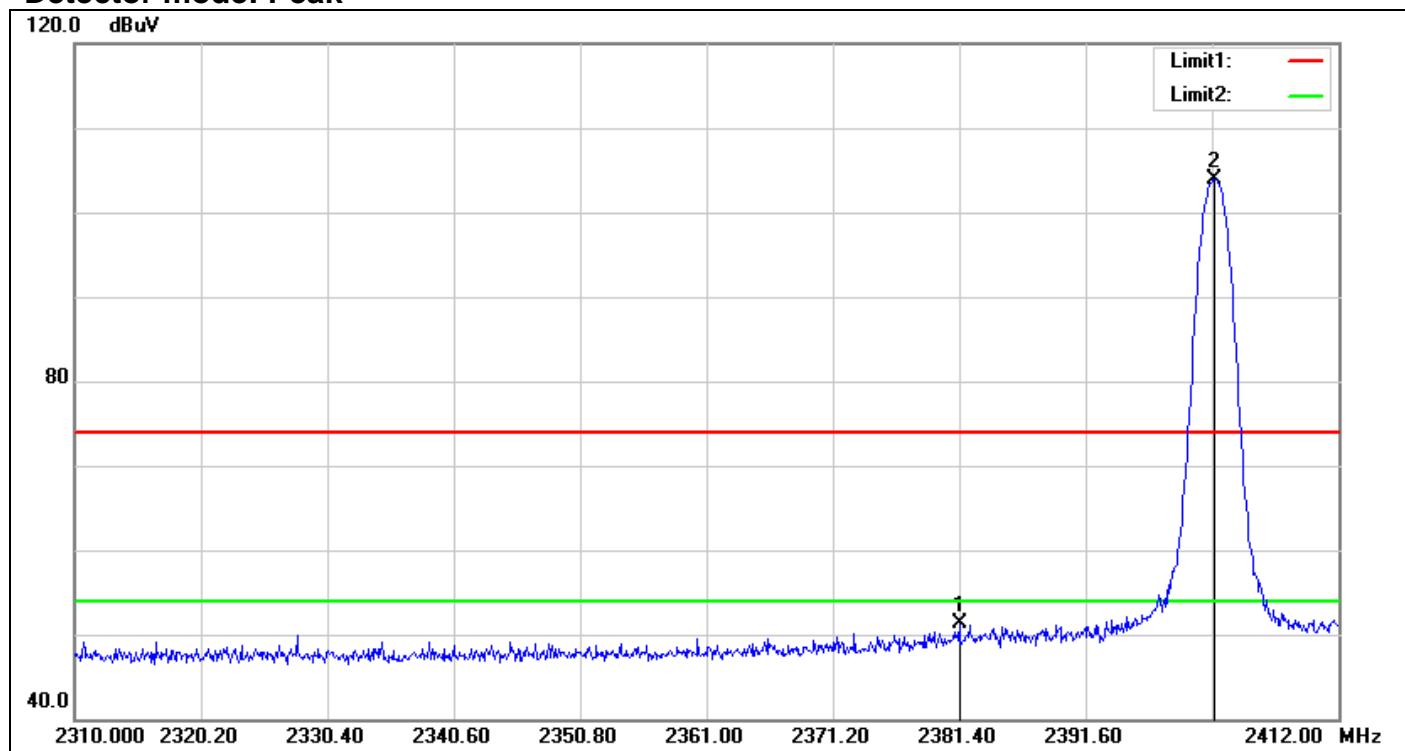
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2390.000	38.15	-2.49	35.66	54.00	-18.34	AVG
2	2441.100	106.32	-2.20	104.12	-	-	AVG
3	2484.800	38.21	-1.98	36.23	54.00	-17.77	AVG

Band Edges (CH High)**Detector mode: Peak**

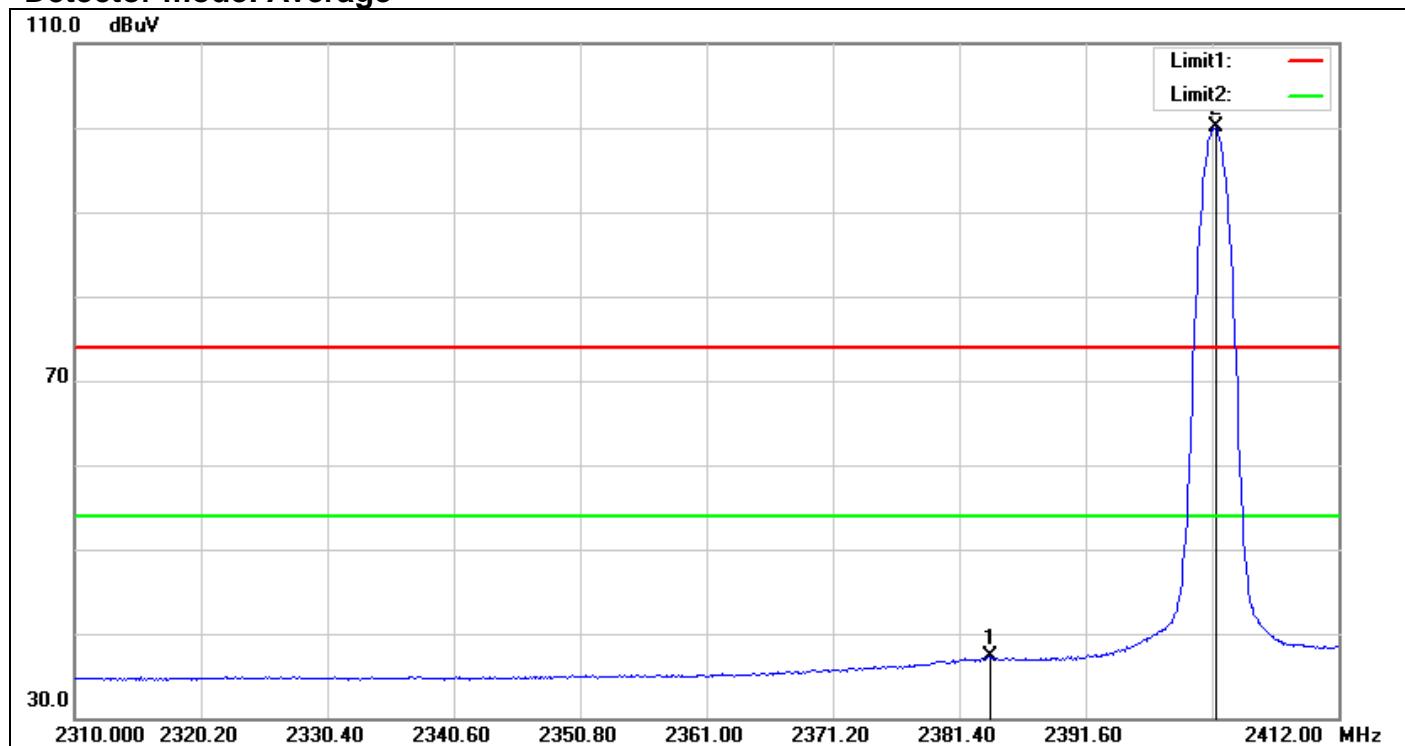
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2479.840	106.98	-2.03	104.95	-	-	peak
2	2483.776	57.05	-1.99	55.06	74.00	-18.94	peak

Detector mode: Average

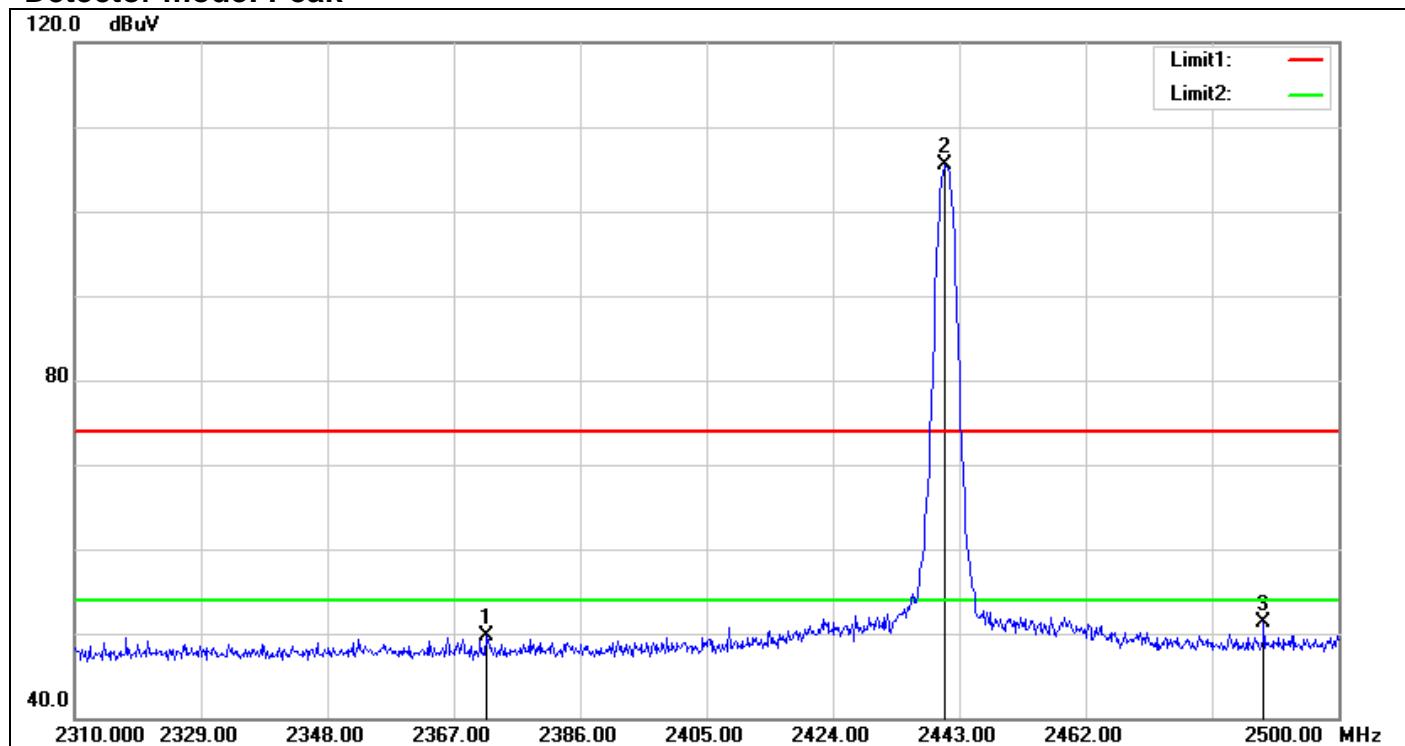
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2480.004	106.37	-2.03	104.34	-	-	AVG
2	2483.530	44.35	-1.99	42.36	54.00	-11.64	AVG

For 8DPSK**Band Edges (CH Low)****Detector mode: Peak**

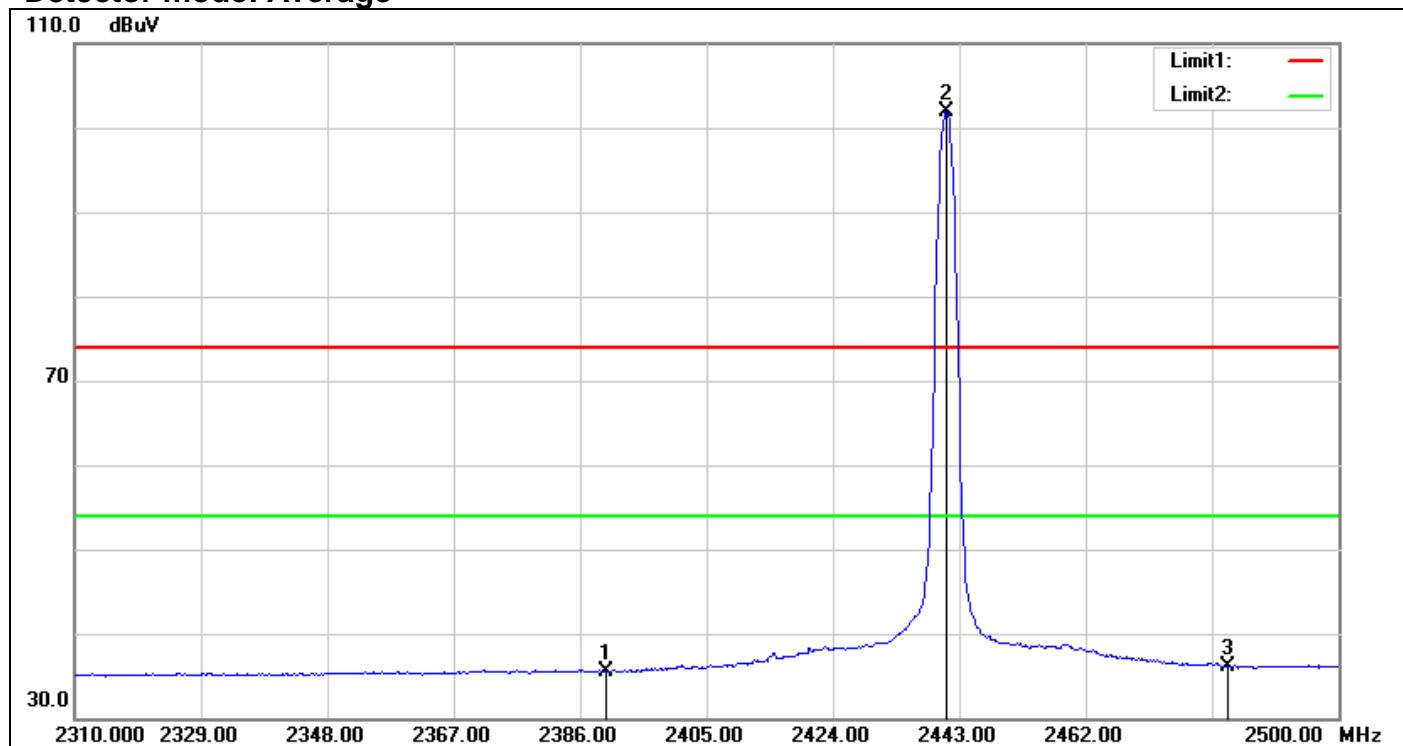
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2381.400	53.86	-2.57	51.29	74.00	-22.71	peak
2	2402.004	106.40	-2.41	103.99	-	-	peak

Detector mode: Average

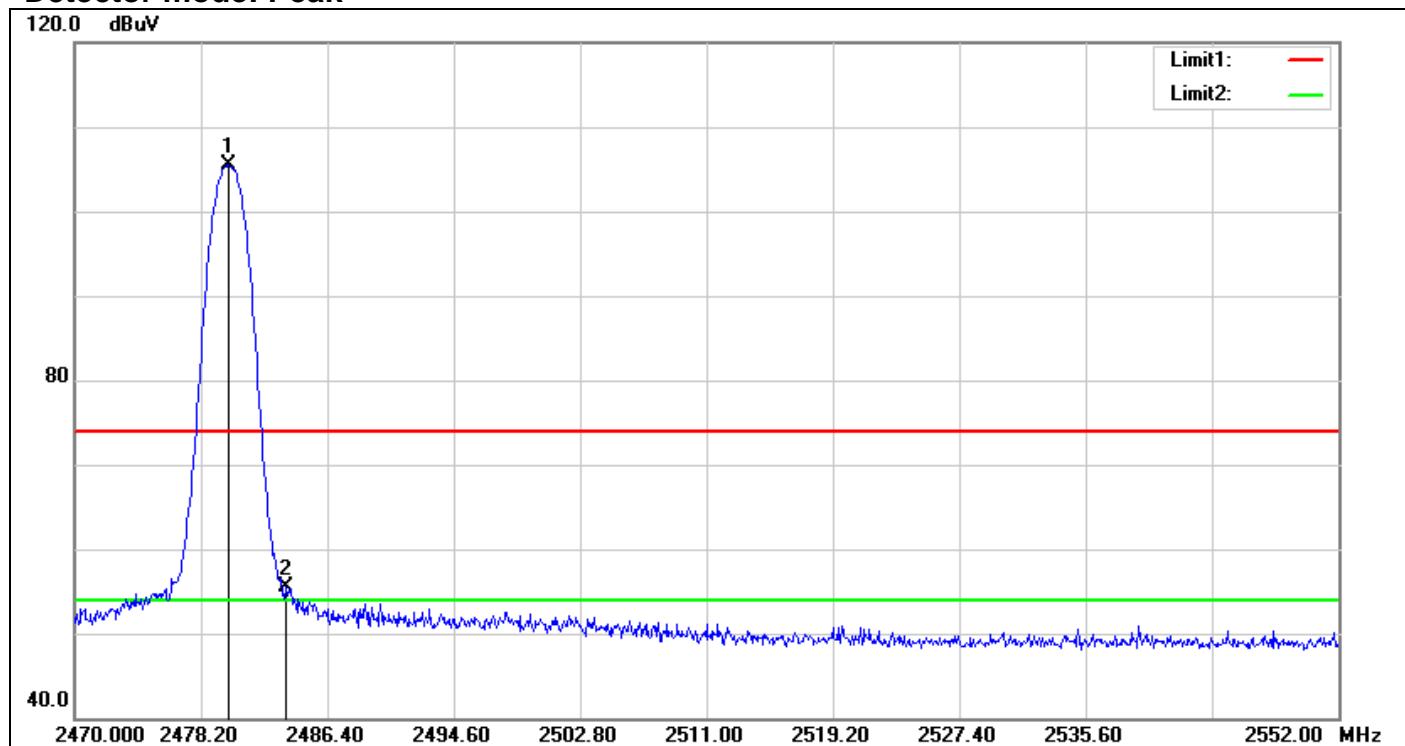
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2383.848	39.79	-2.55	37.24	54.00	-16.76	AVG
2	2402.106	102.44	-2.41	100.03	-	-	AVG

Band Edges (CH Mid)**Detector mode: Peak**

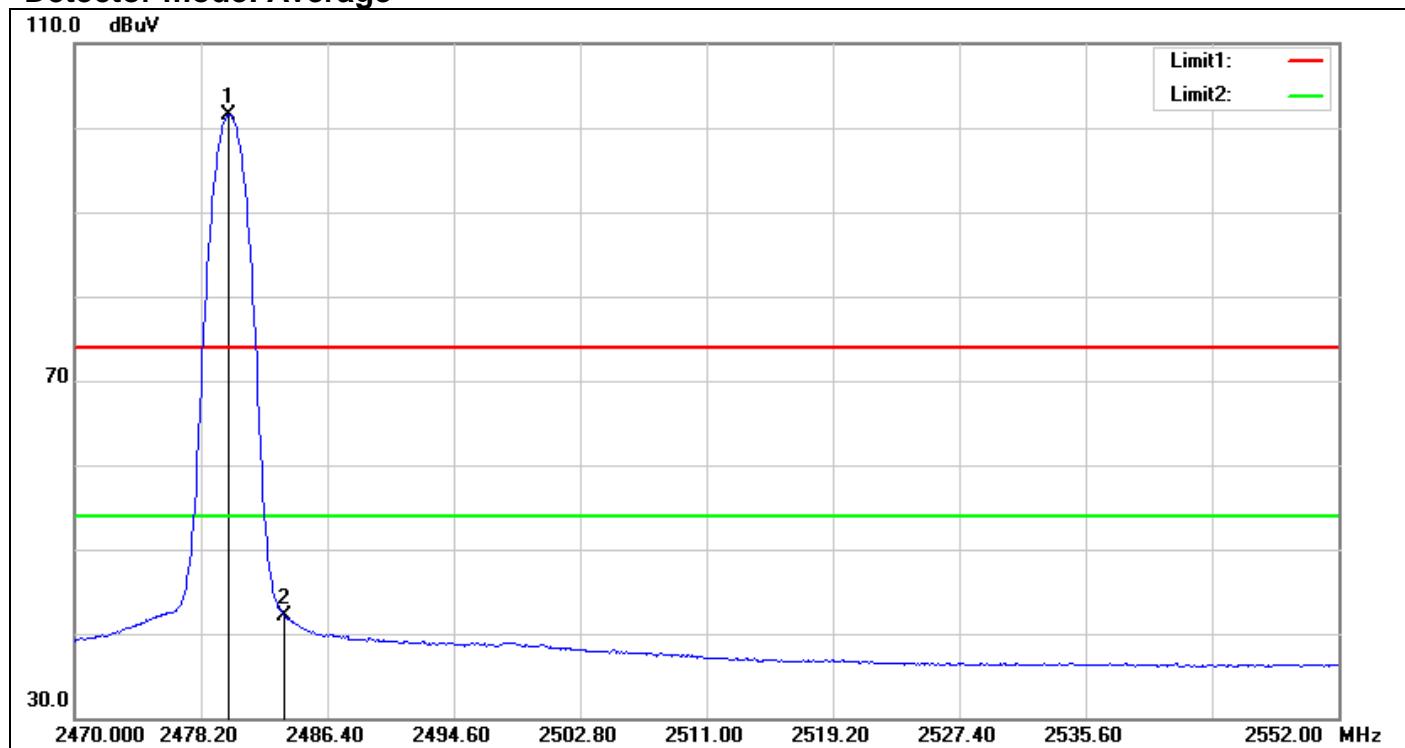
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2371.940	52.37	-2.64	49.73	74.00	-24.27	peak
2	2440.910	107.65	-2.21	105.44	-	-	peak
3	2488.790	53.30	-1.94	51.36	74.00	-22.64	peak

Detector mode: Average

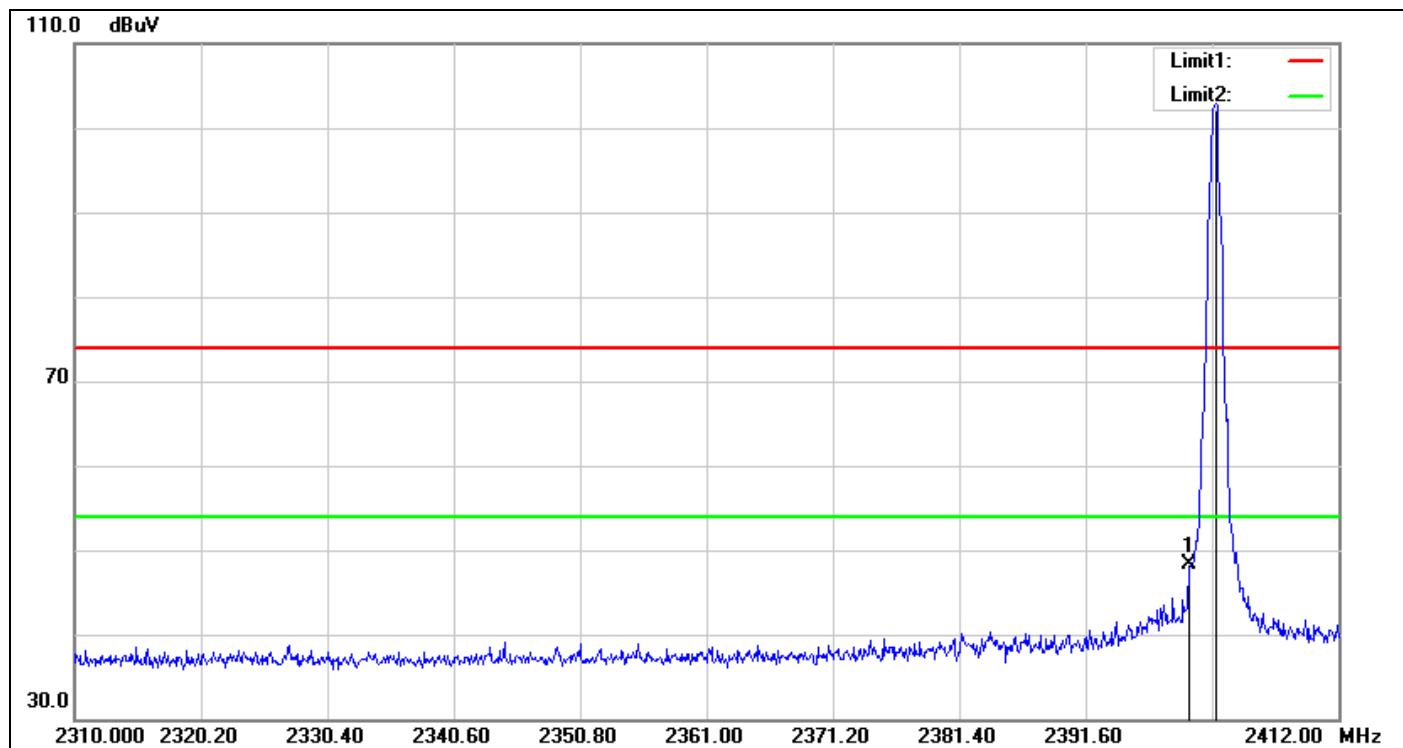
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2390.000	37.90	-2.49	35.41	54.00	-18.59	AVG
2	2441.100	104.12	-2.20	101.92	-	-	AVG
3	2483.500	38.06	-1.99	36.07	54.00	-17.93	AVG

Band Edges (CH High)**Detector mode: Peak**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2480.004	107.51	-2.03	105.48	-	-	peak
2	2483.694	57.40	-1.99	55.41	74.00	-18.59	peak

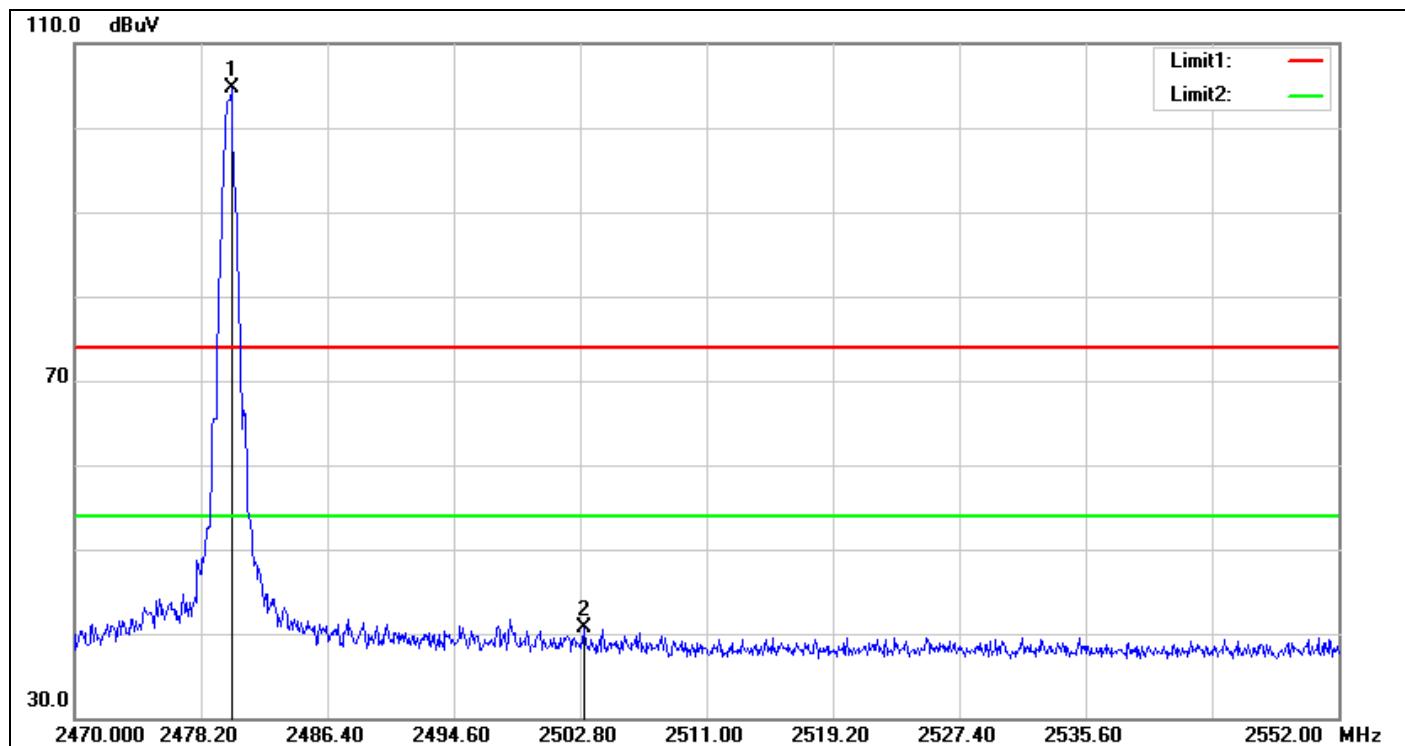
Detector mode: Average

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2480.004	103.54	-2.03	101.51	-	-	AVG
2	2483.612	44.14	-1.99	42.15	54.00	-11.85	AVG

Test Plot**For GFSK****Un-restricted Band Emissions / CH Low**

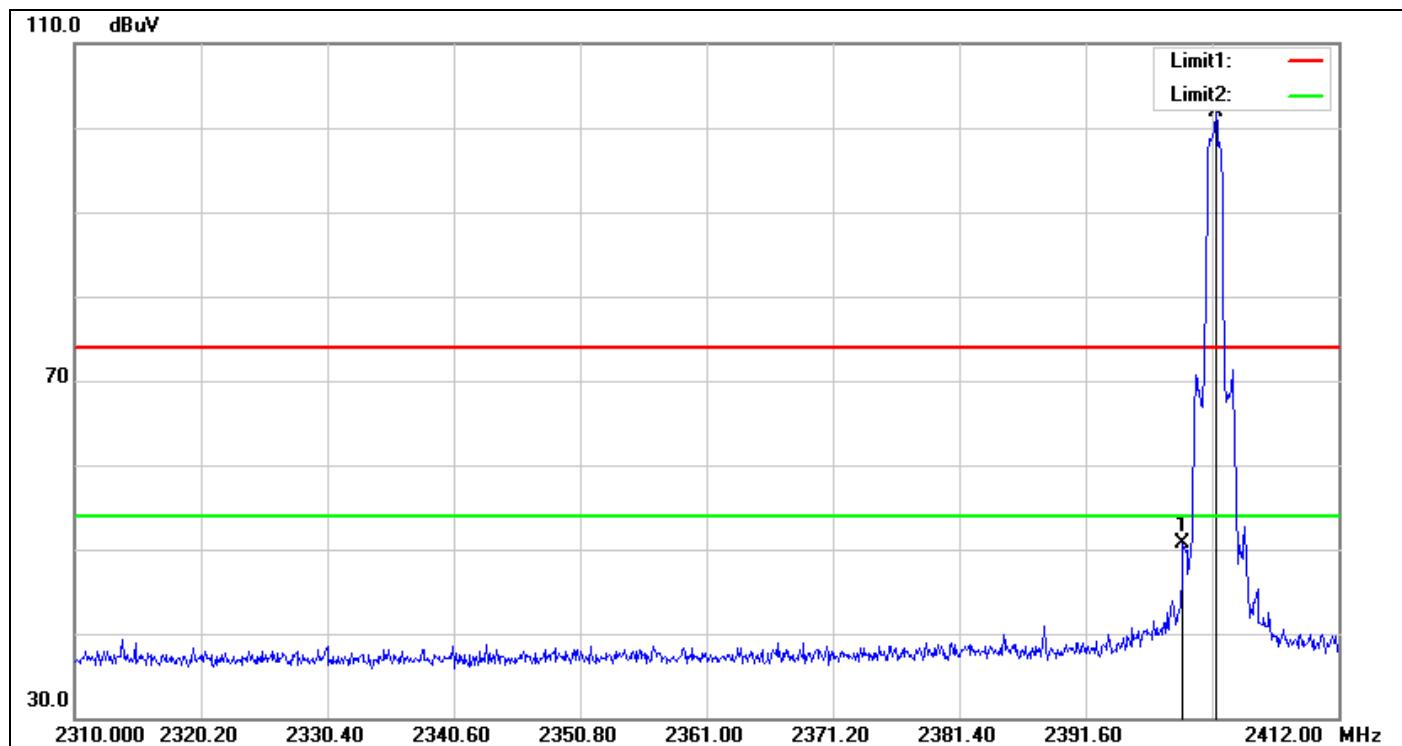
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Remark
1	2400.000	50.77	-2.41	48.36	peak
2	2402.106	105.26	-2.41	102.85	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

Un-restricted Band Emissions / CH High

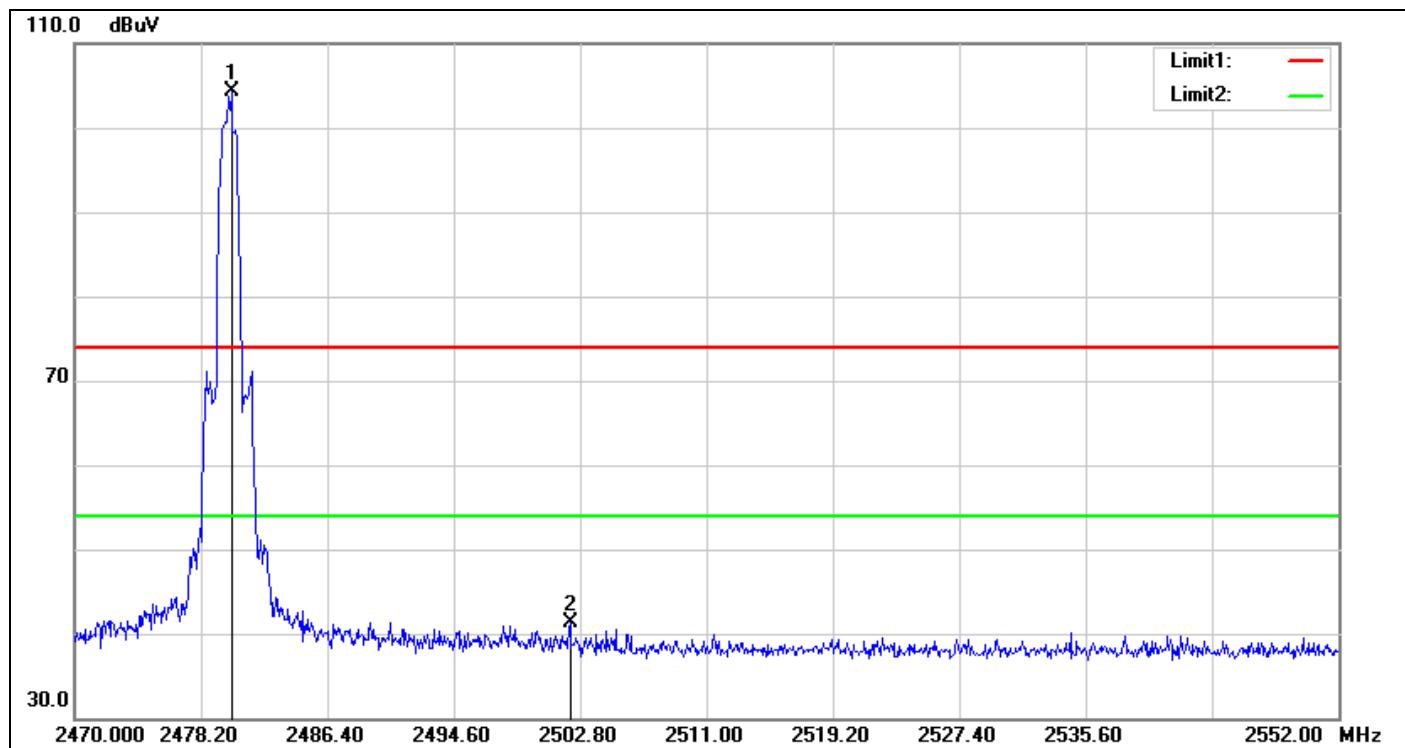
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Remark
1	2480.168	106.68	-2.03	104.65	peak
2	2503.046	42.50	-1.85	40.65	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

For 8DPSK**Un-restricted Band Emissions / CH Low**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Remark
1	2399.454	53.03	-2.41	50.62	peak
2	2402.106	104.30	-2.41	101.89	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

Un-restricted Band Emissions / CH High

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Remark
1	2480.168	106.30	-2.03	104.27	peak
2	2502.144	43.25	-1.85	41.40	peak

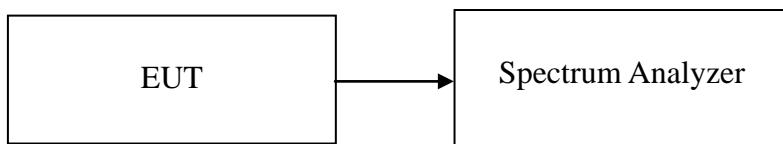
Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

7.6 FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.
5. Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

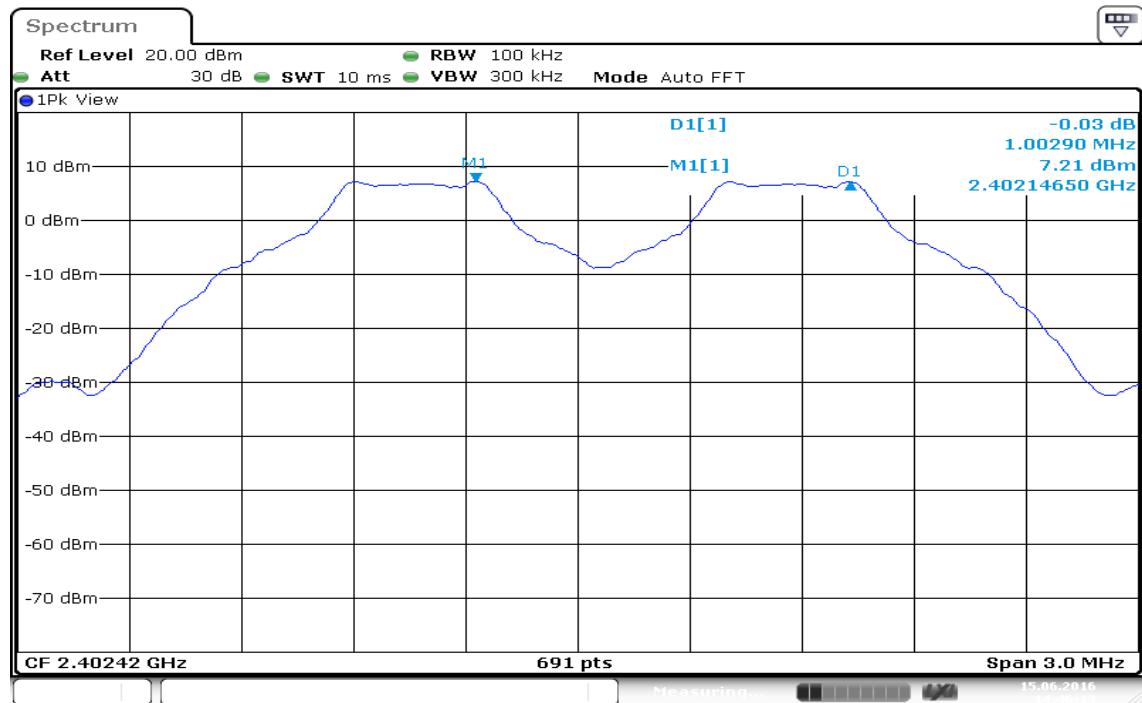
Test Data

For GFSK

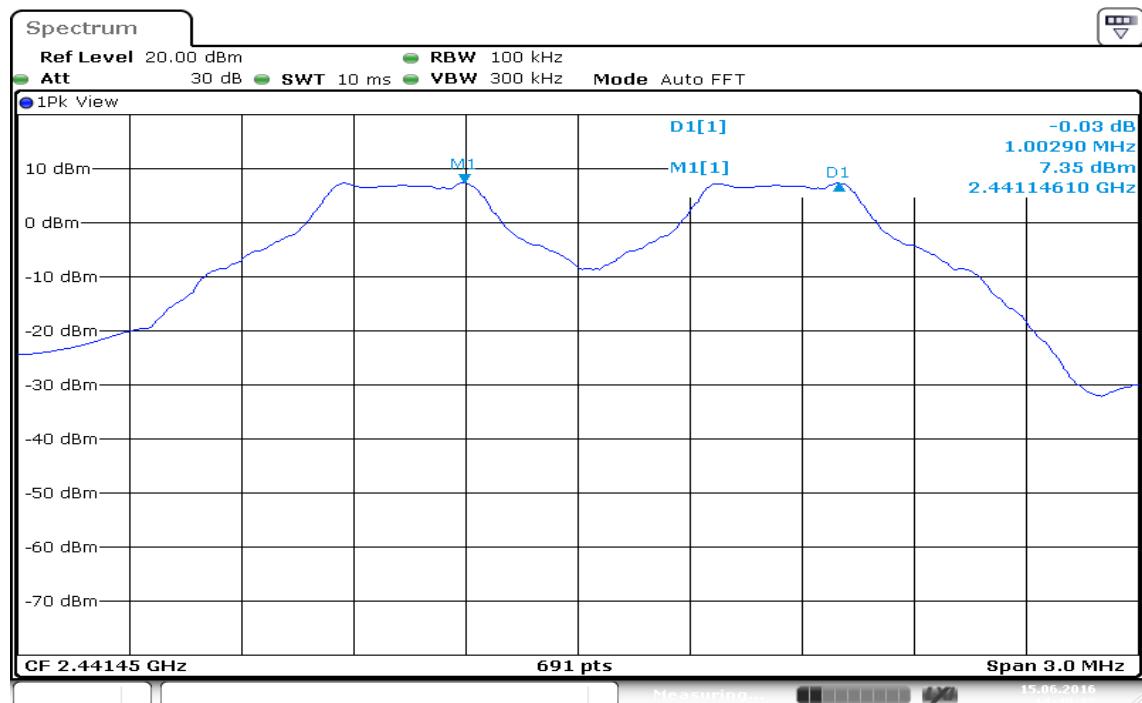
Channel	Channel Separation (MHz)	two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
Low	1.0029	0.648	> two-thirds of the 20 dB bandwidth	Pass
Mid	1.0029	0.645	> two-thirds of the 20 dB bandwidth	Pass
High	1.0029	0.654	> two-thirds of the 20 dB bandwidth	Pass

For 8DPSK

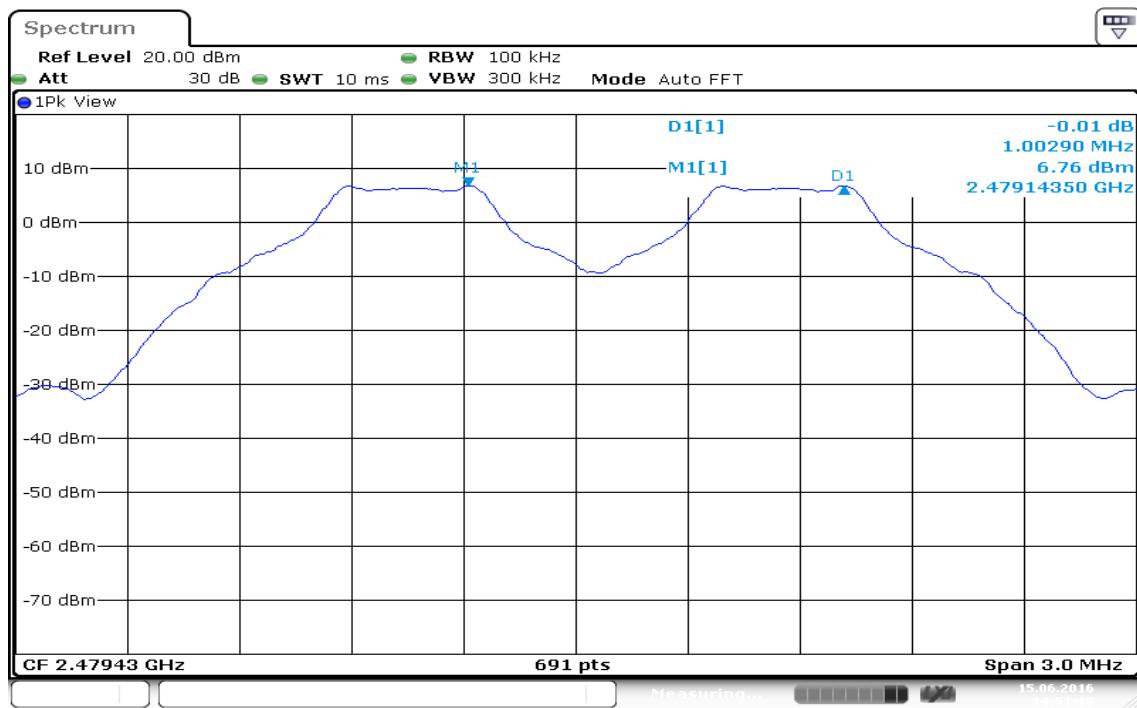
Channel	Channel Separation (MHz)	two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
Low	1.0029	0.857	> two-thirds of the 20 dB bandwidth	Pass
Mid	1.0029	0.857	> two-thirds of the 20 dB bandwidth	Pass
High	1.0029	0.863	> two-thirds of the 20 dB bandwidth	Pass

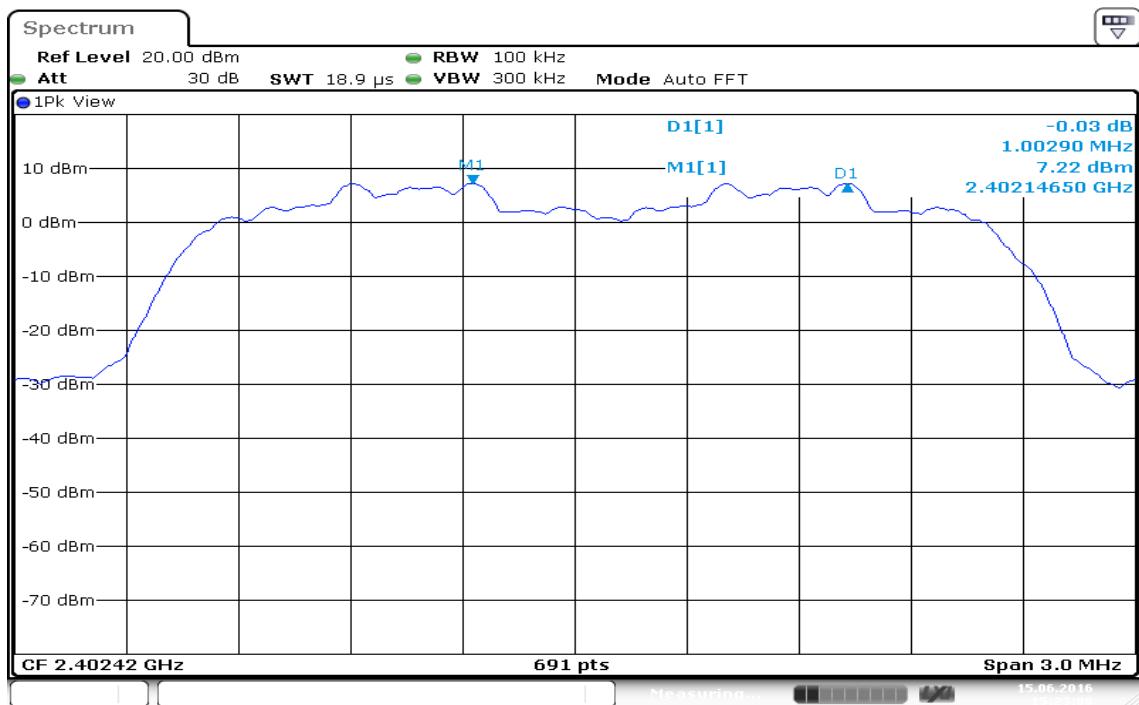
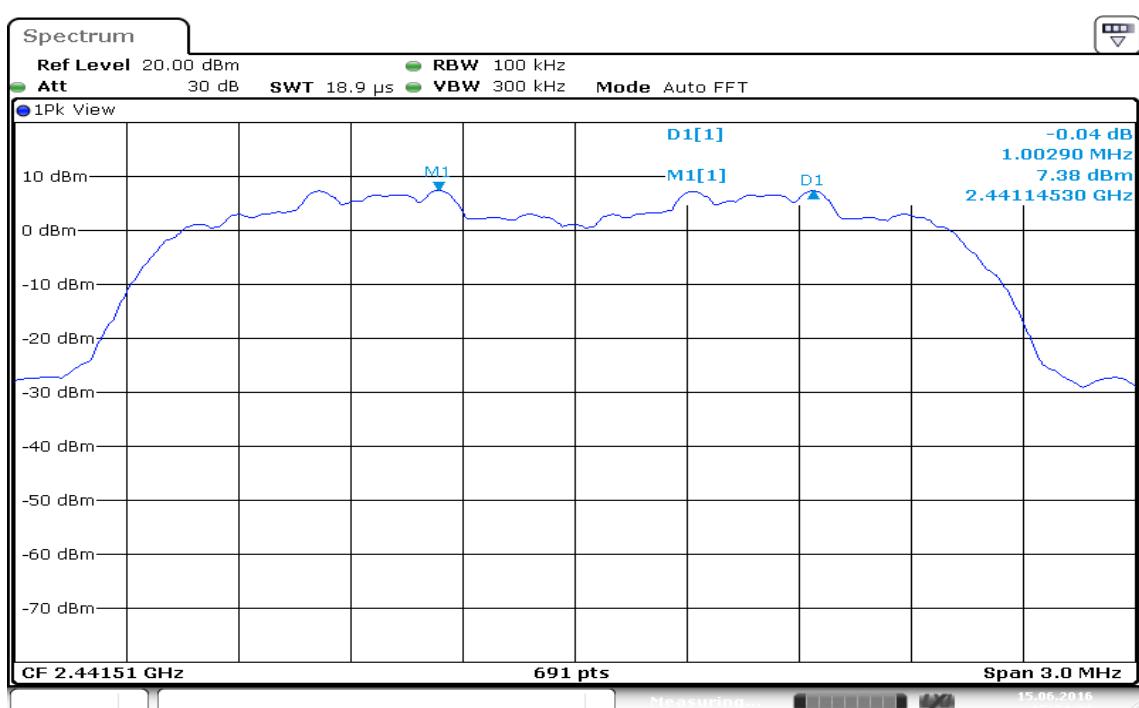
Test Plot**For GFSK / DH5****Measurement of Channel Separation / (CH Low)**

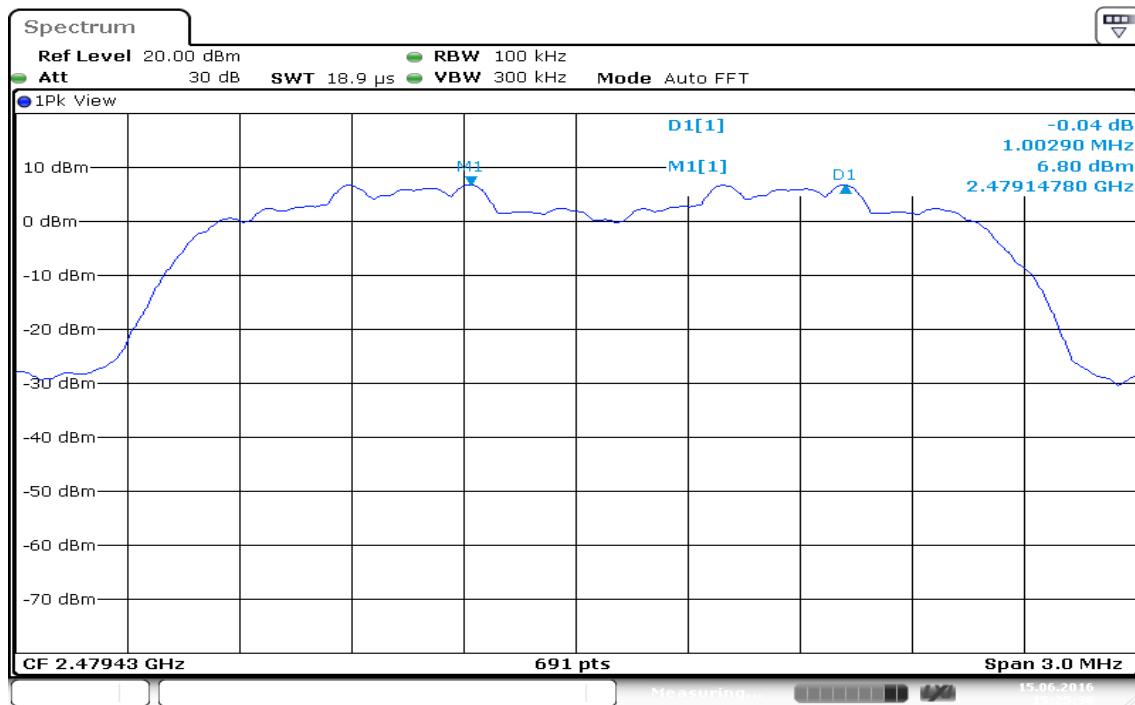
Date: 15.JUN.2016 14:46:13

Measurement of Channel Separation / (CH Mid)

Date: 15.JUN.2016 14:49:32

Measurement of Channel Separation / (CH High)

For 8DPSK / DH5**Measurement of Channel Separation / (CH Low)****Measurement of Channel Separation / (CH Mid)**

Measurement of Channel Separation / (CH High)

Date: 15.JUN.2016 15:25:38

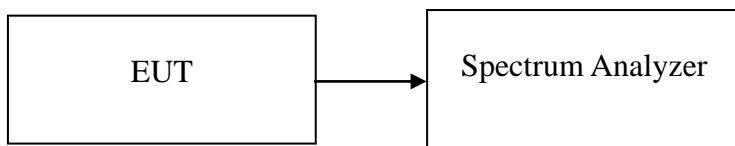
7.7 NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2430.5MHz, Sweep = auto Start=2430.5MHz, Stop = 2460.5MHz, Sweep = auto and Start=2460.5MHz, Stop = 2485.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=510kHz.
5. Max hold, view and count how many channel in the band.

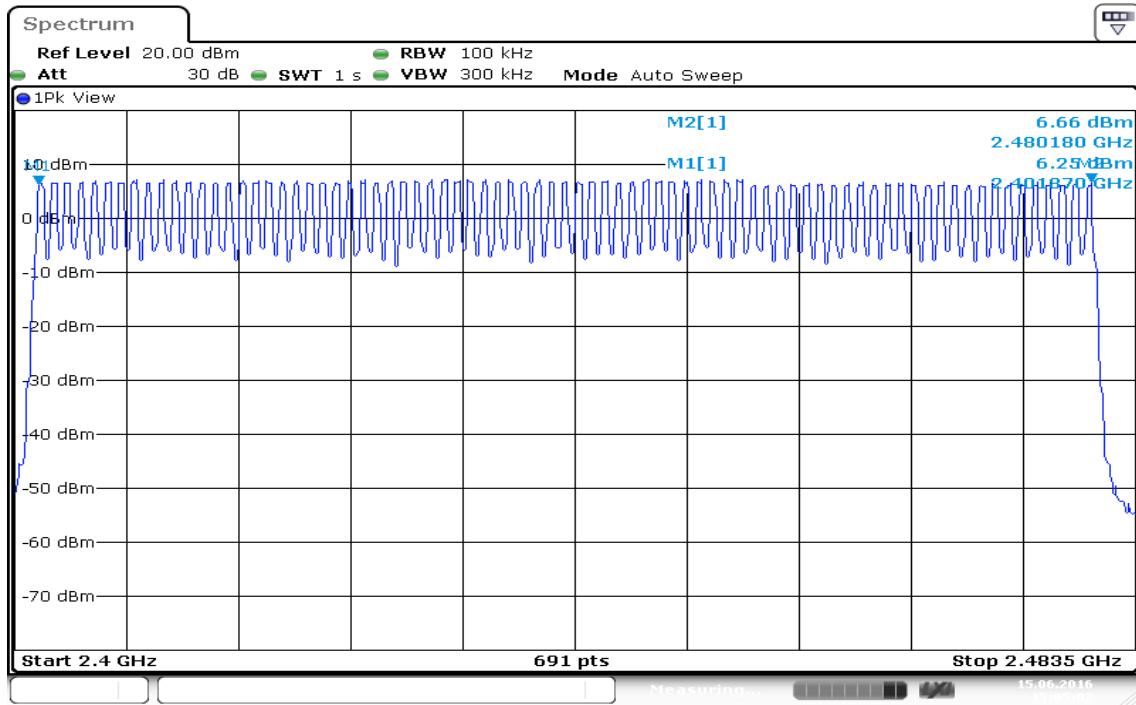
TEST RESULTS

No non-compliance noted

Test Data

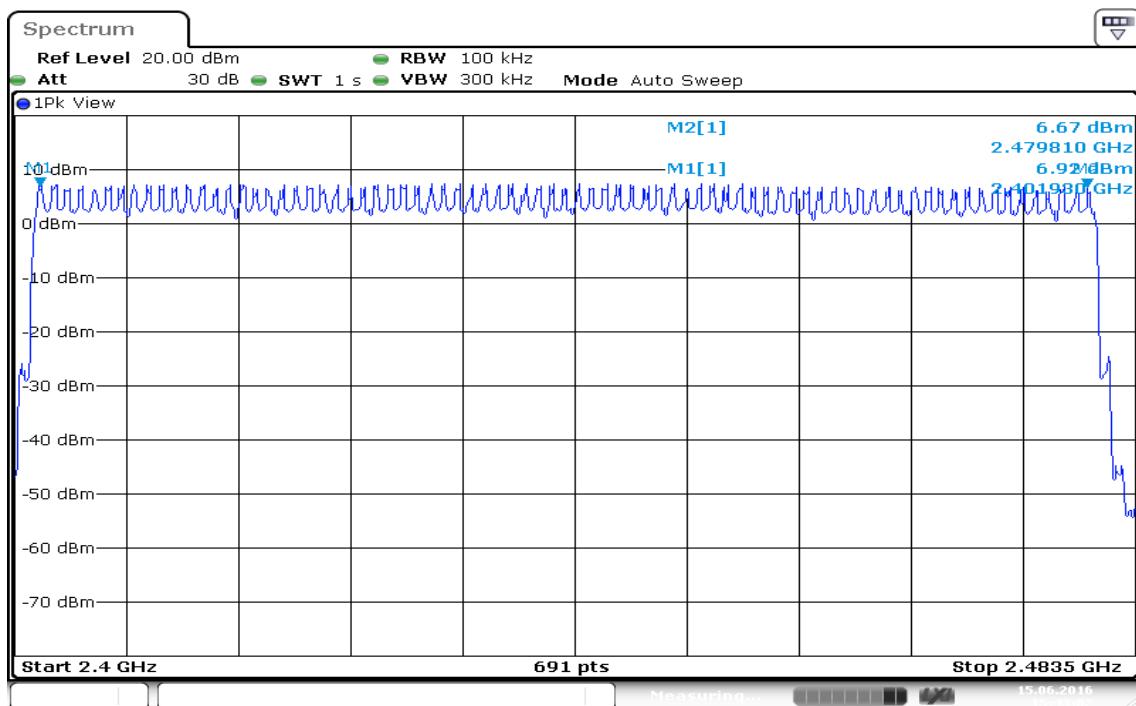
Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

Test Plot
For GFSK
Channel Number



Date: 15.JUN.2016 15:05:02

For 8DPSK
Channel Number



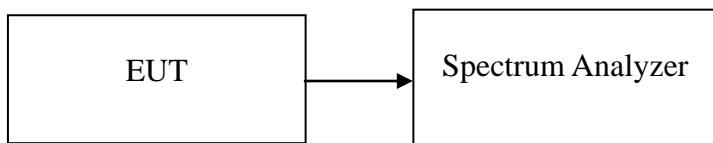
Date: 15.JUN.2016 15:43:02

7.8 TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration



TEST PROCEDURE

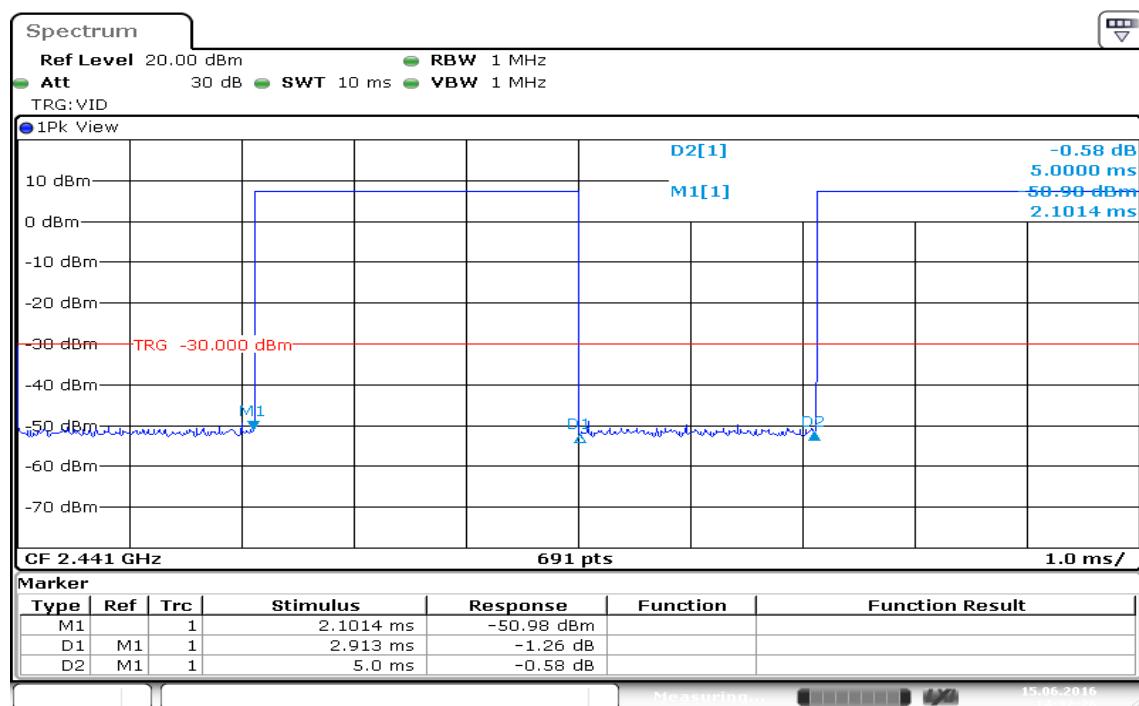
1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms.
5. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

No non-compliance noted

Test Data

Time of Occupancy (Dwell Time)								
Mode	Frequency (MHz)	Pulse Time Per Hopping (ms)	Minimum Number of Hopping Freq.	Number of pulse in	Dwell Time IN	Dwell Time Limits (s)	Result	
				(0.4 * N sec)	(0.4 * N sec)			
BR-1Mbps	2441	2.913	79	106.67	0.3107	0.4	Pass	
EDR-3Mbps	2441	2.913	79	106.67	0.3107	0.4		
AFH: DH5	2441	2.913	20	53.33	0.1554	0.4		
Non-AFH: DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 * 0.4 * 79 = 106.6$								
AFH: DH5 Packet permit maximum $800 / 20 / 6 = 6.666$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $6.666 * 0.4 * 20 = 53.33$								



7.9 RADIATED EMISSIONS

limit

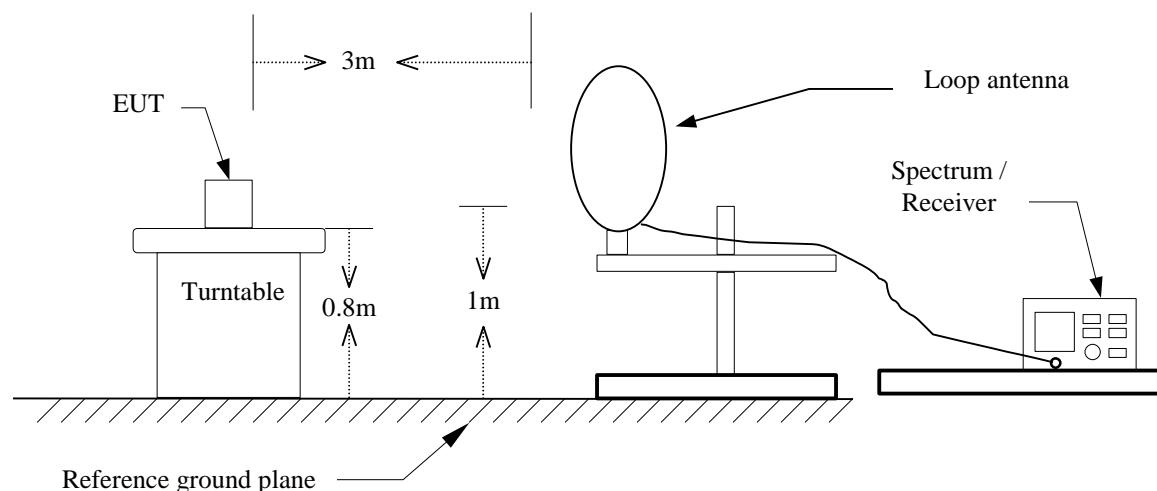
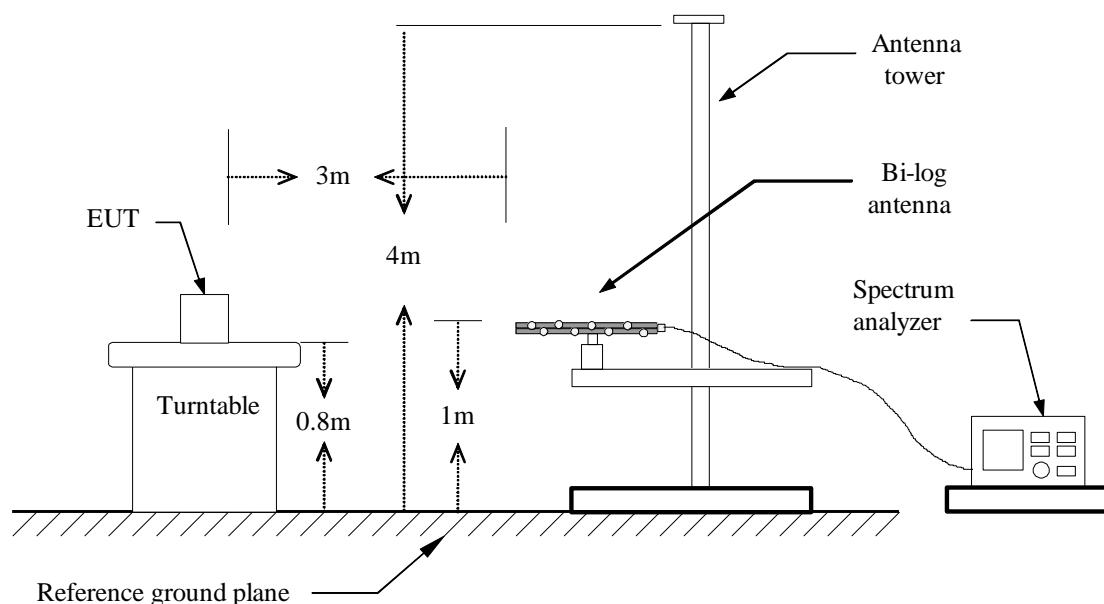
- According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

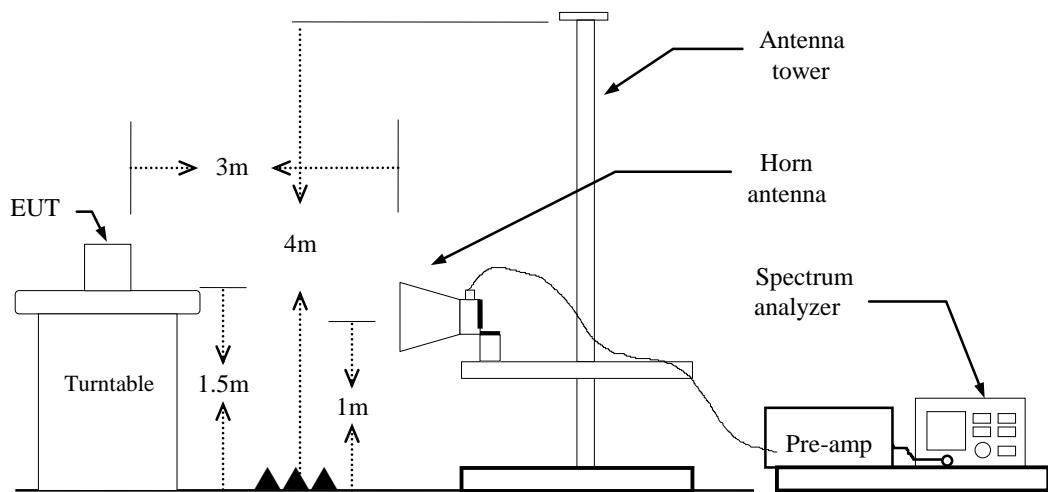
Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

- In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
0.009 - 0.490	$2400/F(\text{kHz}) + 80$	$20\text{LOG}((2400/F(\text{kHz}))+80)$
0.490 - 1.705	$24000/F(\text{kHz}) + 40$	$20\text{LOG}((24000/F(\text{kHz}))+40)$
1.705 – 30.0	30	69.54
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration**9kHz ~ 30MHz****30MHz ~ 1GHz**

Above 1 GHz

TEST PROCEDURE

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m high and below 1 GHz is 0.8m high above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz,
if duty cycle $\geq 98\%$, VBW=10Hz.

if duty cycle $< 98\%$ VBW=1/T.

BT: = 59%, VBW= 360Hz

EDR = 59%, VBW= 360Hz

7. Repeat above procedures until the measurements for all frequencies are complete.
8. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

Note: We checked every harmonics frequencies from Fundamental frequencies with reduced VBW, and we mark a point to prove pass or not if we find any emission. For this case, there are no emissions hidden in the noise floor.

TEST RESULTS

Below 1GHz

Operation Mode: Normal Link

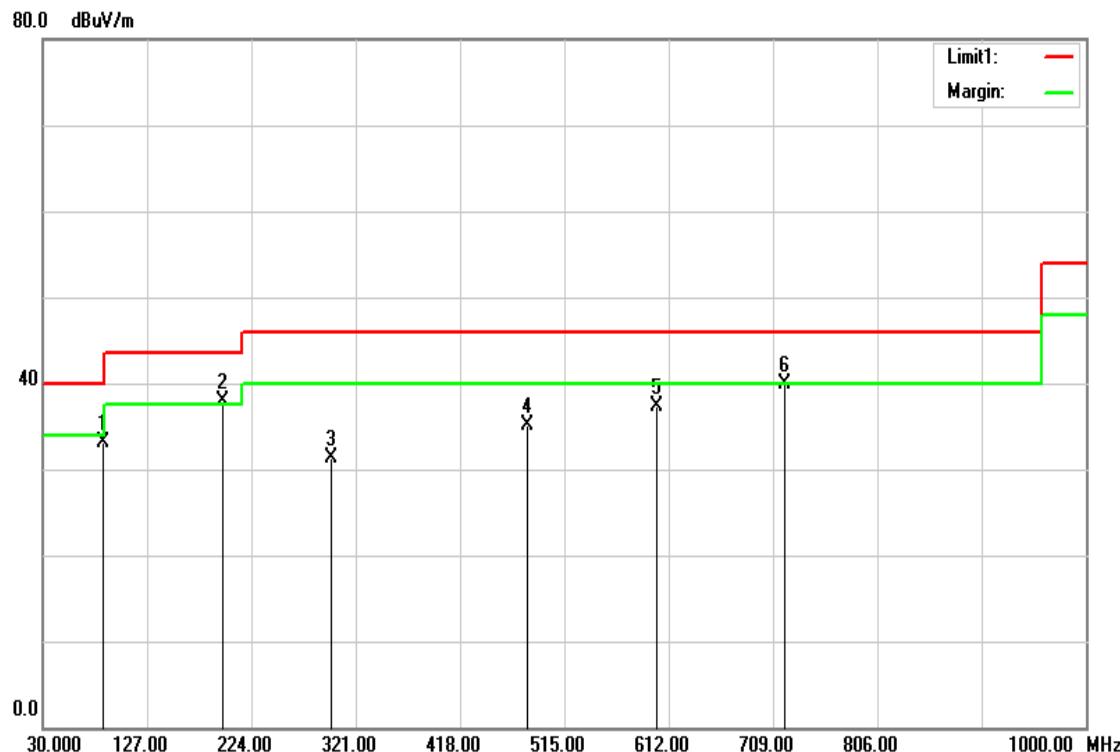
Test Date: July 15, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Ver.



Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
86.2600	54.58	-21.41	33.17	40.00	-6.83	peak	V
196.8400	53.64	-15.83	37.81	43.50	-5.69	peak	V
298.6900	45.58	-14.26	31.32	46.00	-14.68	peak	V
480.0800	44.63	-9.62	35.01	46.00	-10.99	peak	V
600.3600	45.03	-7.75	37.28	46.00	-8.72	peak	V
719.6700	45.61	-5.62	39.99	46.00	-6.01	peak	V

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

Operation Mode:

Normal Link

Test Date:

July 15, 2016

Temperature:

27°C

Tested by:

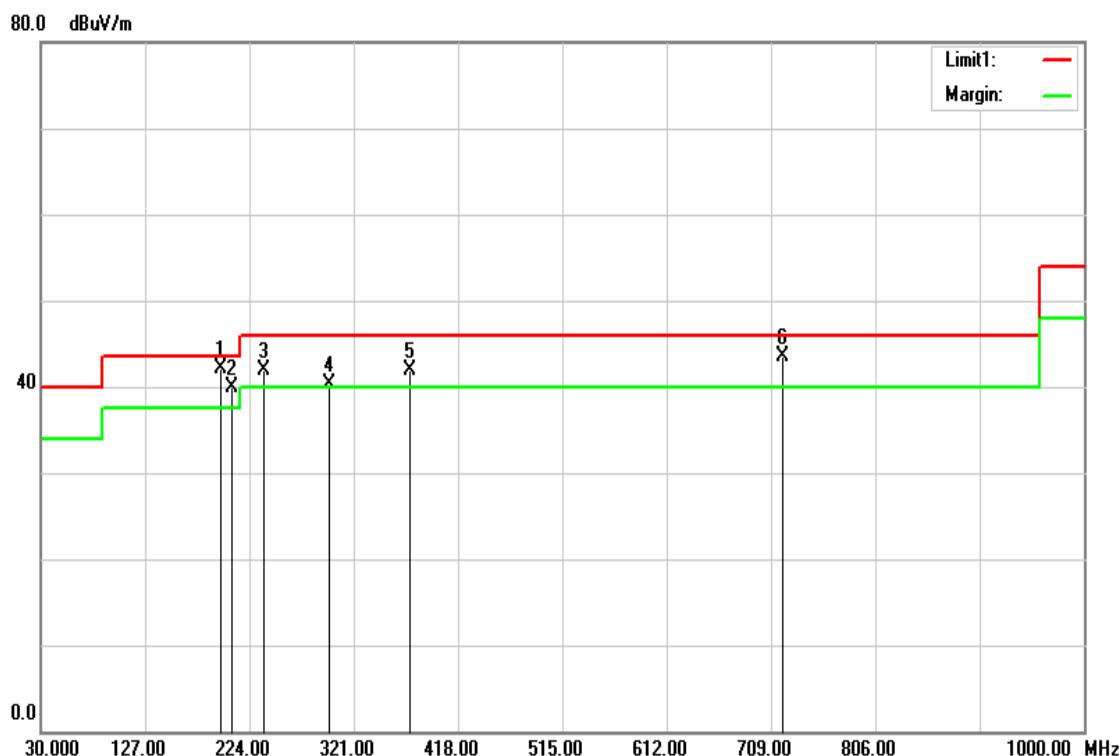
Dennis Li

Humidity:

53% RH

Polarity:

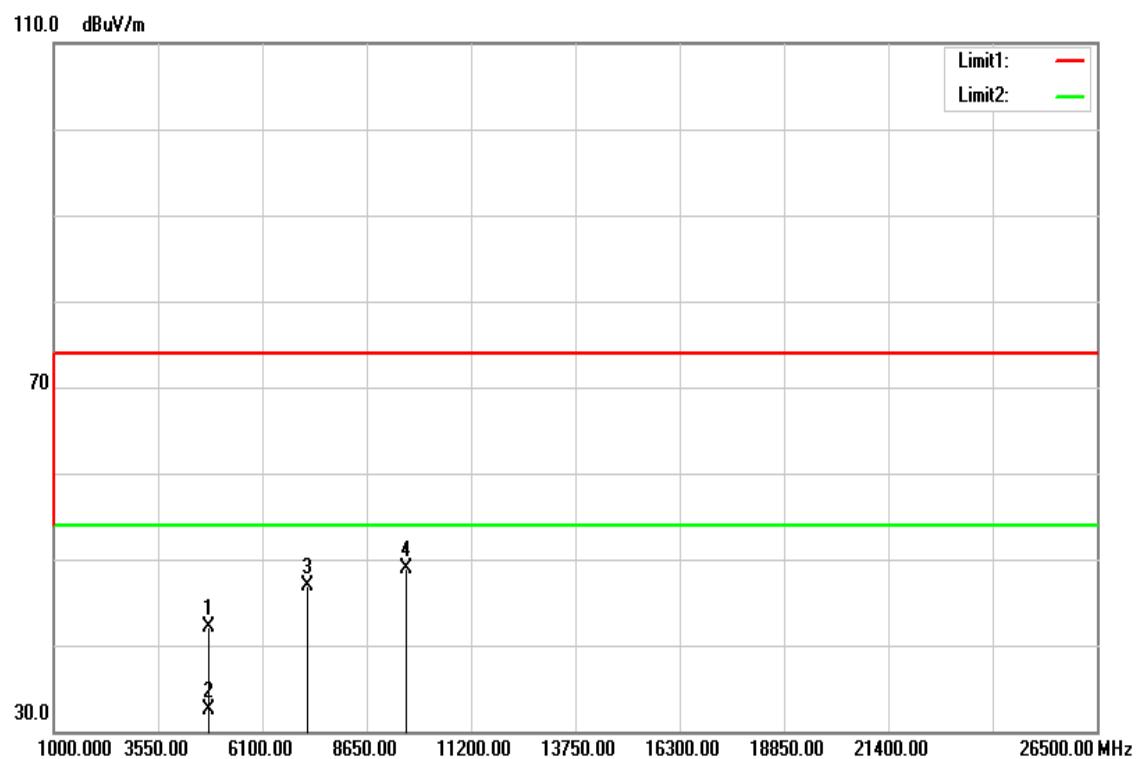
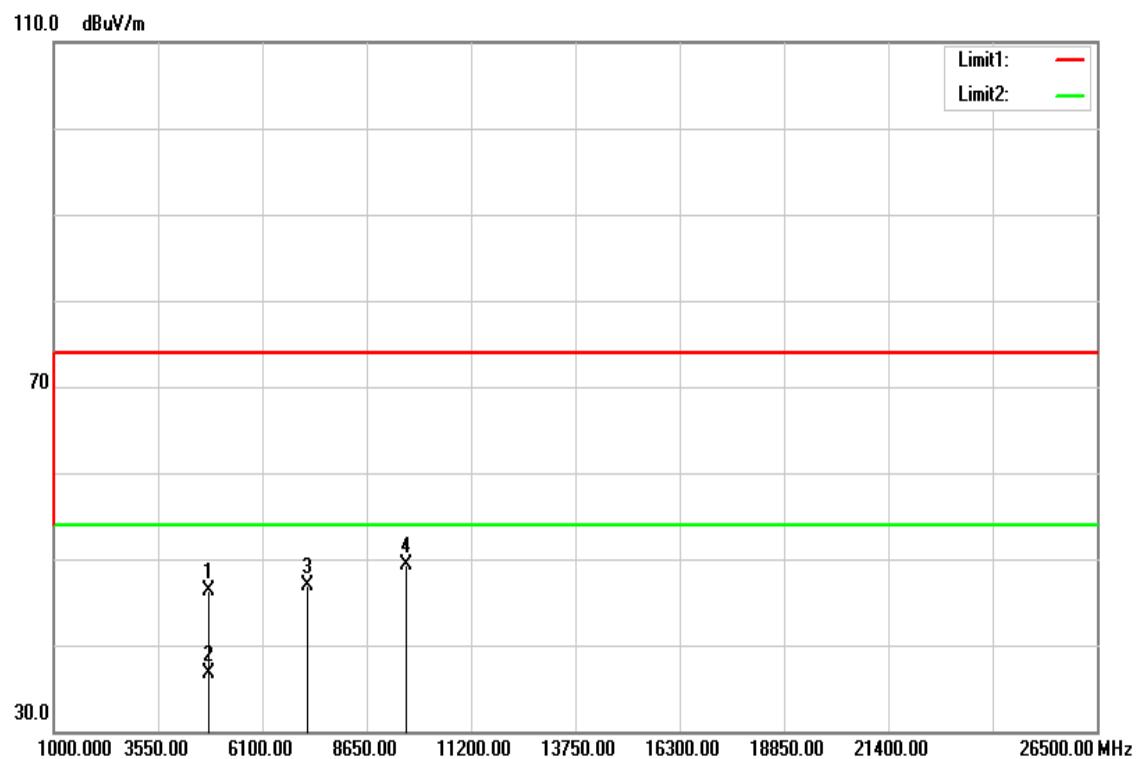
Hor.



Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
196.8400	57.88	-15.83	42.05	43.50	-1.45	QP	H
207.5100	55.99	-16.08	39.91	43.50	-3.59	QP	H
237.5800	58.42	-16.56	41.86	46.00	-4.14	QP	H
298.6900	54.49	-14.26	40.23	46.00	-5.77	peak	H
373.3800	54.29	-12.33	41.96	46.00	-4.04	peak	H
719.6700	49.08	-5.62	43.46	46.00	-2.54	QP	H

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

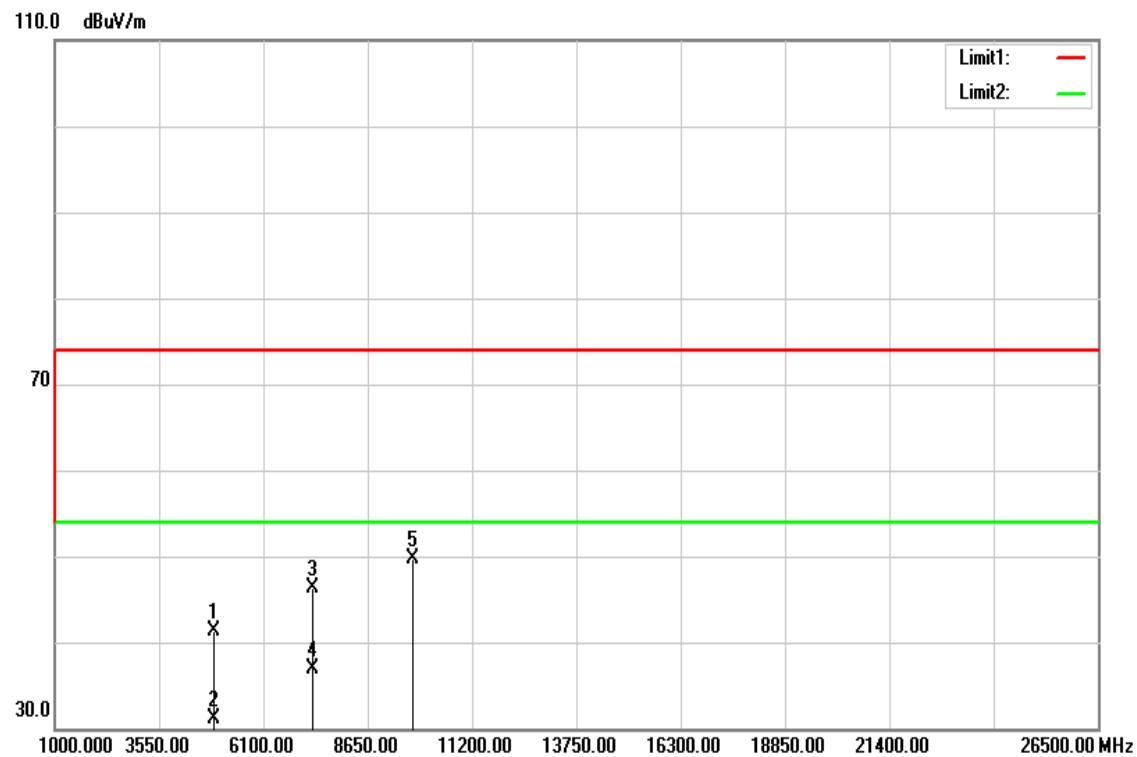
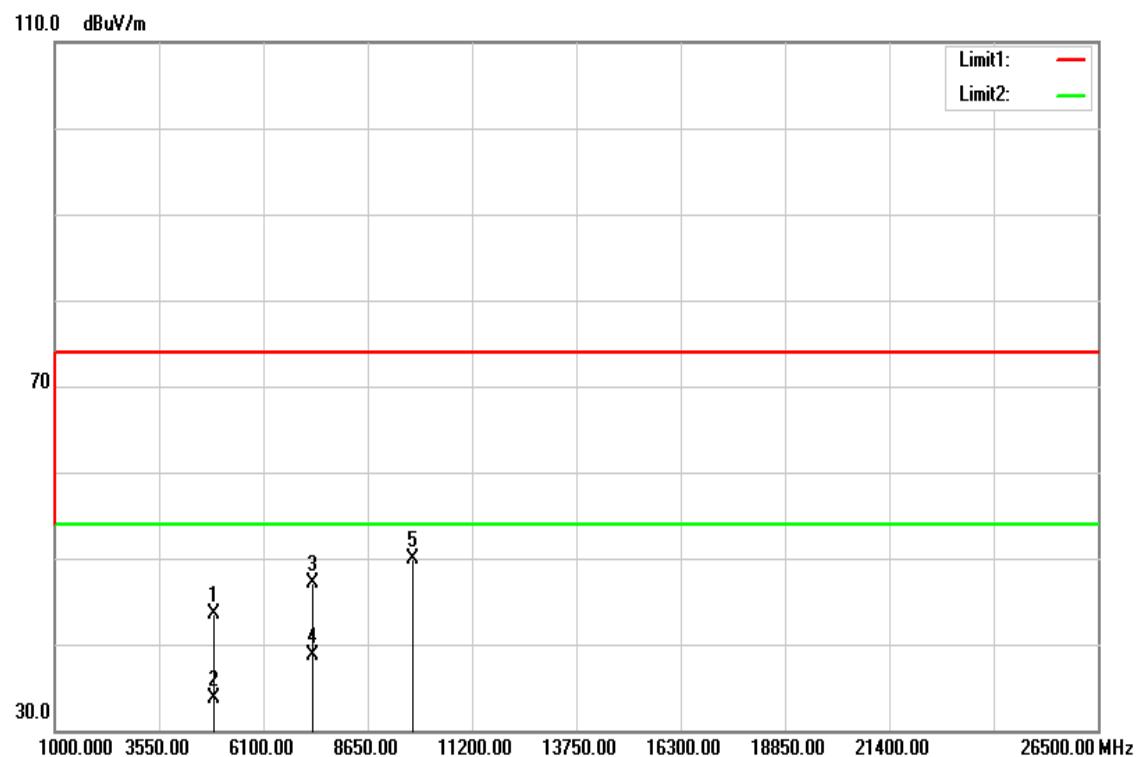
Above 1 GHz**TX / GFSK / DH5 / CH Low****Polarity: Vertical****Polarity: Horizontal**

Above 1 GHz**Operation Mode:** TX / GFSK / DH5 / CH Low**Test Date:** July 19, 2016**Temperature:** 27°C**Tested by:** Dennis Li**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
4804.000	37.00	5.04	42.04	74.00	-31.96	peak	V
4804.000	27.47	5.04	32.51	54.00	-21.49	AVG	V
7206.000	34.21	12.62	46.83	74.00	-27.17	peak	V
9608.000	31.36	17.60	48.96	74.00	-25.04	peak	V
N/A							
4804.000	41.30	5.04	46.34	74.00	-27.66	peak	H
4804.000	31.74	5.04	36.78	54.00	-17.22	AVG	H
7206.000	34.33	12.62	46.95	74.00	-27.05	peak	H
9608.000	31.67	17.60	49.27	74.00	-24.73	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit .
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / GFSK / DH5 / CH Mid**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / GFSK / DH5 / CH Mid

Test Date: July 19, 2016

Temperature: 26°C

Tested by: Dennis Li

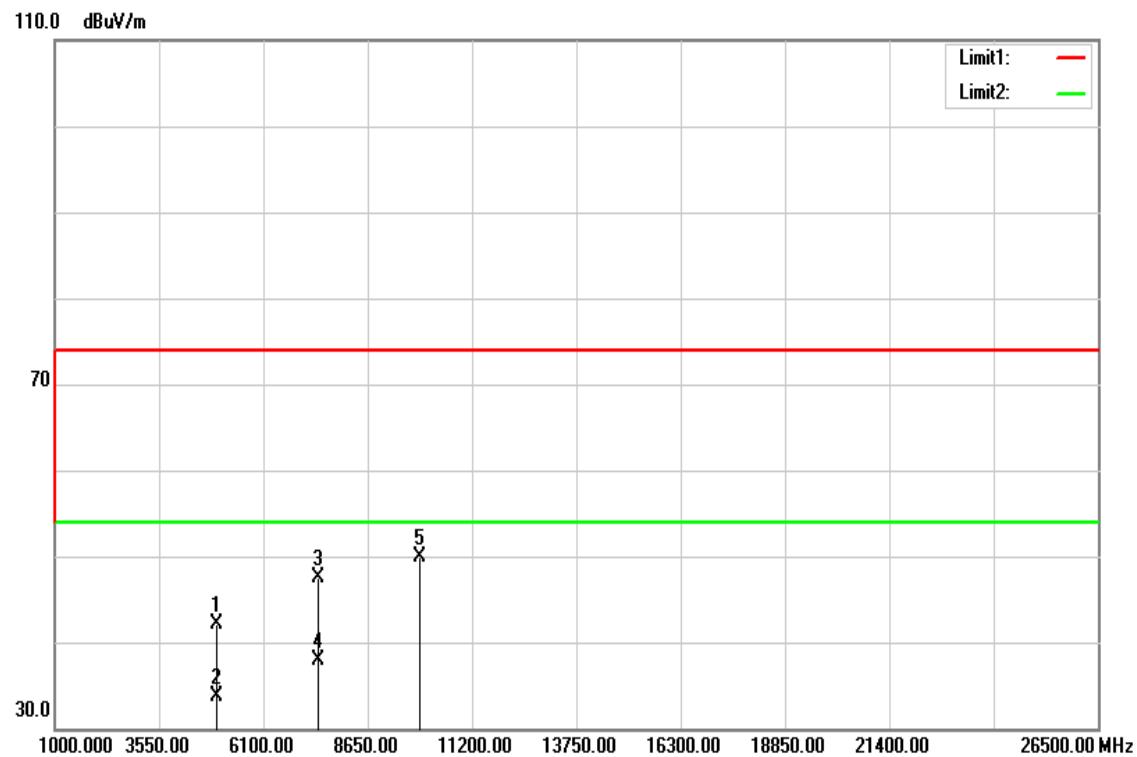
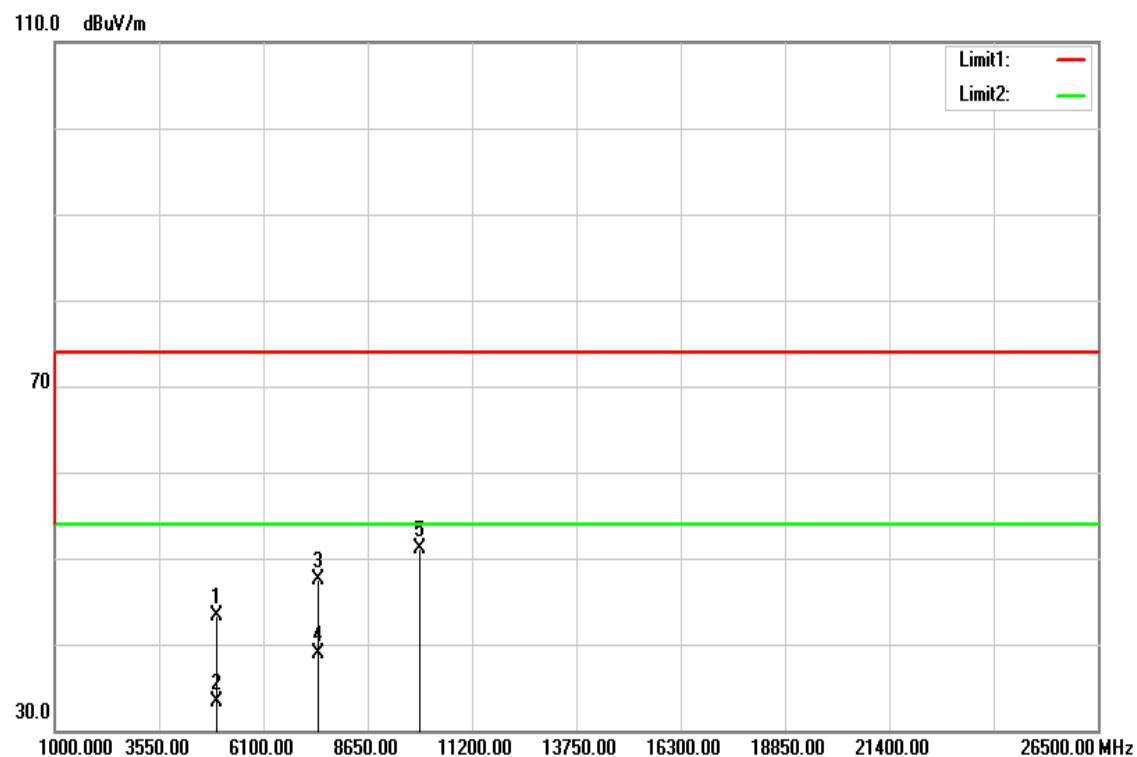
Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
4880.000	36.02	5.25	41.27	74.00	-32.73	peak	V
4880.000	25.93	5.25	31.18	54.00	-22.82	AVG	V
7320.000	33.27	12.97	46.24	74.00	-27.76	peak	V
7320.000	24.01	12.97	36.98	54.00	-17.02	AVG	V
9760.000	32.20	17.60	49.80	74.00	-24.20	peak	V
N/A							
4880.000	38.24	5.25	43.49	74.00	-30.51	peak	H
4880.000	28.43	5.25	33.68	54.00	-20.32	AVG	H
7320.000	34.22	12.97	47.19	74.00	-26.81	peak	H
7320.000	25.72	12.97	38.69	54.00	-15.31	AVG	H
9760.000	32.32	17.60	49.92	74.00	-24.08	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

TX / GFSK / DH5 / CH High**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / GFSK / DH5 / CH High

Test Date: July 19, 2016

Temperature: 26°C

Tested by: Dennis Li

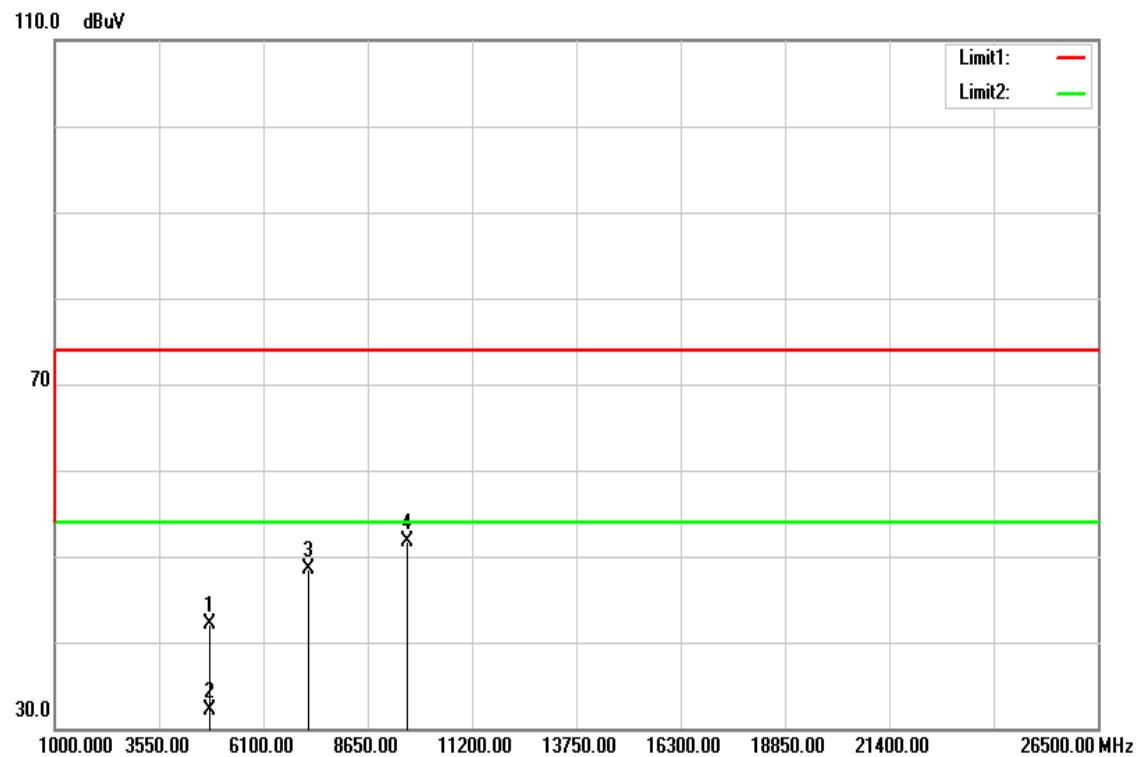
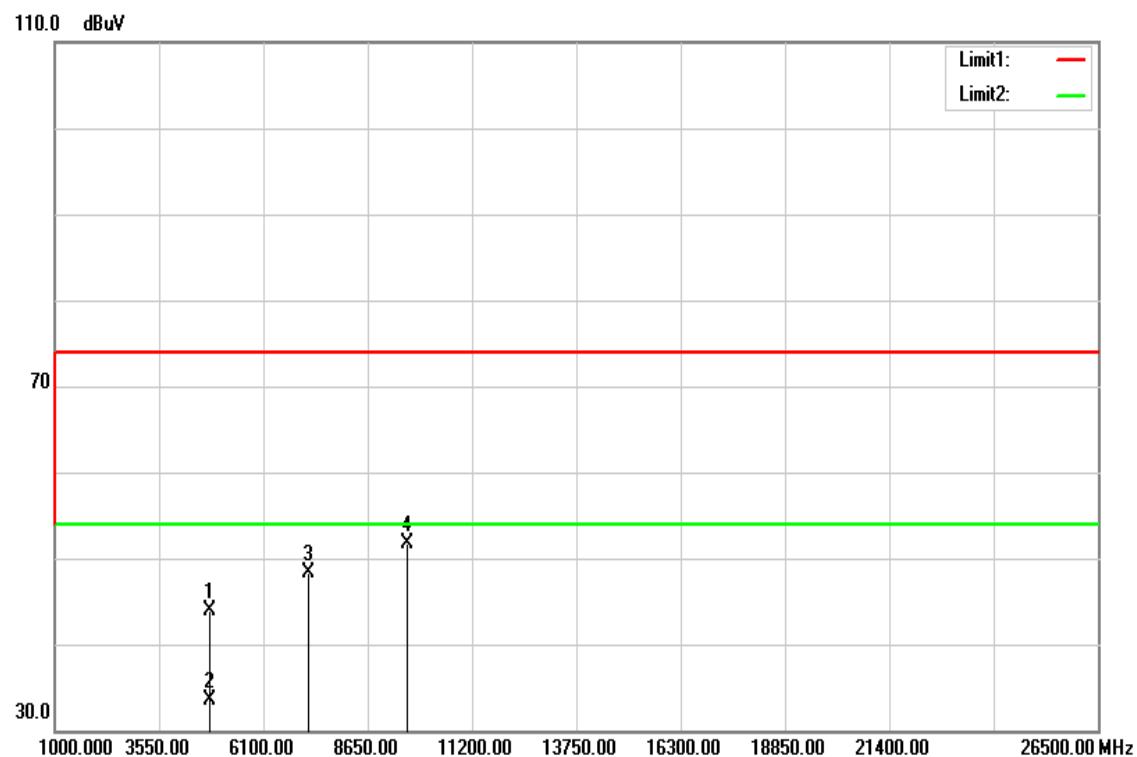
Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
4960.000	36.71	5.46	42.17	74.00	-31.83	peak	V
4960.000	28.19	5.46	33.65	54.00	-20.35	AVG	V
7440.000	34.22	13.33	47.55	74.00	-26.45	peak	V
7440.000	24.65	13.33	37.98	54.00	-16.02	AVG	V
9920.000	32.29	17.60	49.89	74.00	-24.11	peak	V
N/A							
4960.000	37.88	5.46	43.34	74.00	-30.66	peak	H
4960.000	27.91	5.46	33.37	54.00	-20.63	AVG	H
7440.000	34.16	13.33	47.49	74.00	-26.51	peak	H
7440.000	25.65	13.33	38.98	54.00	-15.02	AVG	H
9920.000	33.53	17.60	51.13	74.00	-22.87	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

TX / 8DPSK / DH5 / CH Low**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / 8DPSK / DH5 / CH Low

Test Date: July 15, 2016

Temperature: 26°C

Tested by: Dennis Li

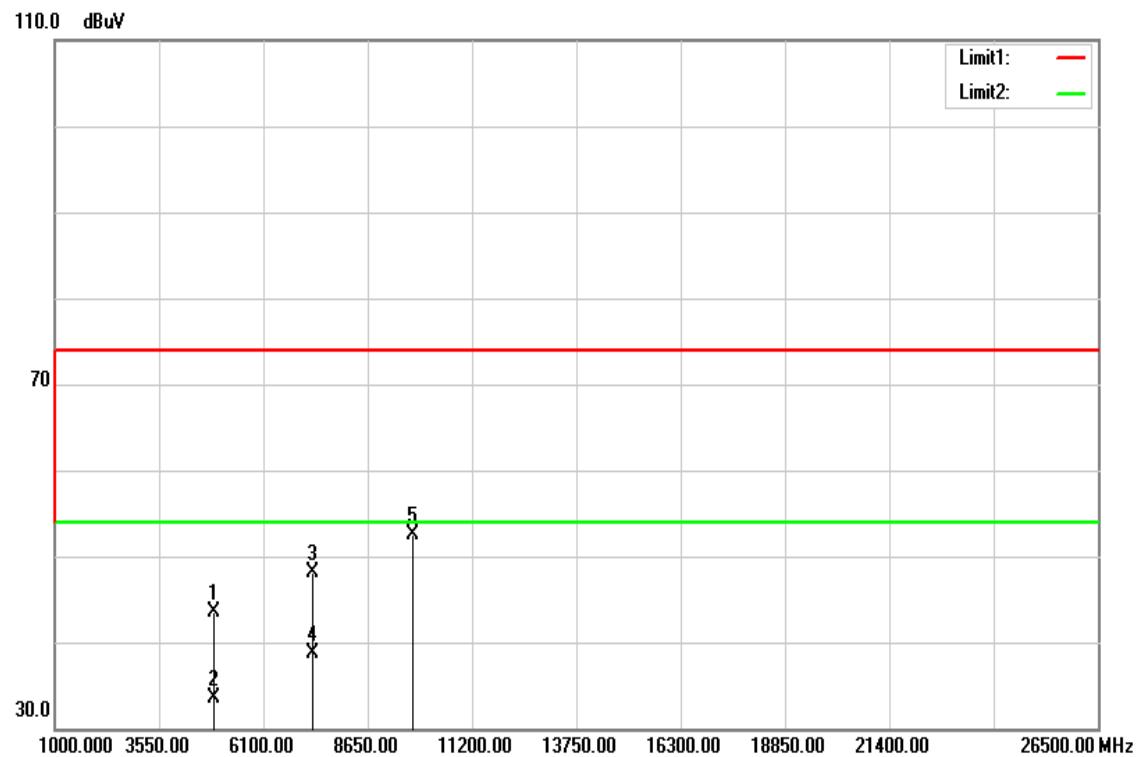
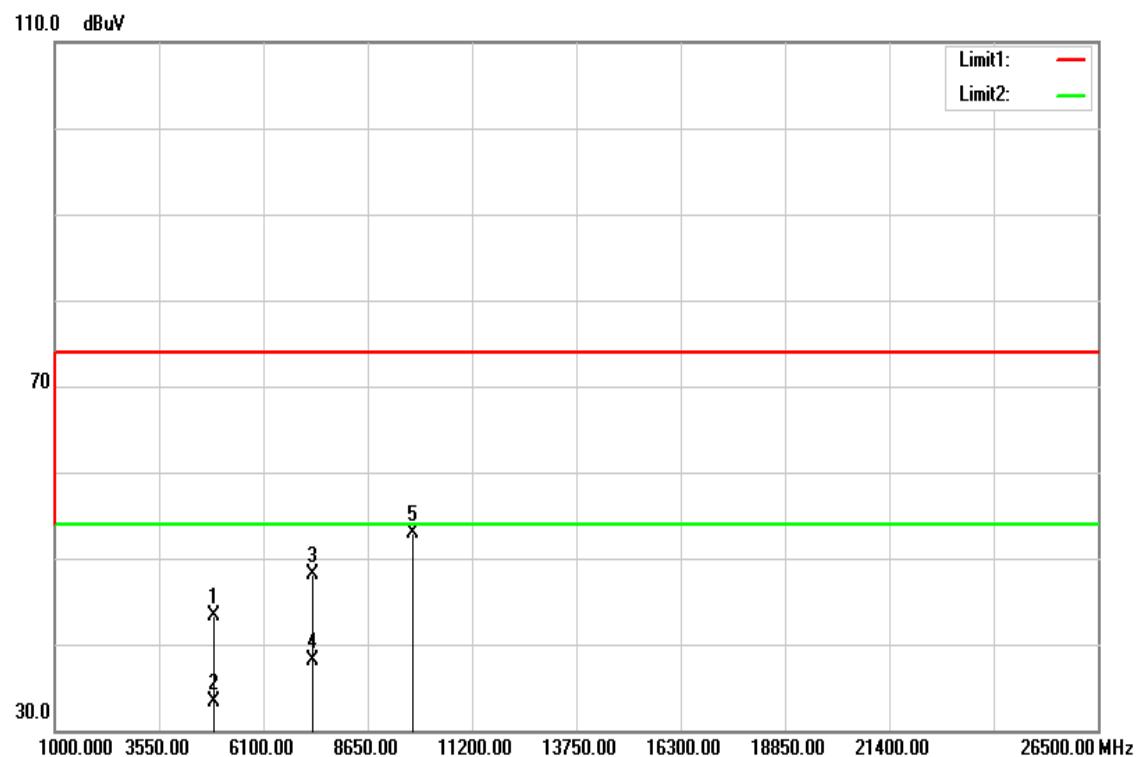
Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
4804.000	38.11	4.04	42.15	74.00	-31.85	peak	V
4804.000	28.07	4.04	32.11	54.00	-21.89	AVG	V
7206.000	37.90	10.61	48.51	74.00	-25.49	peak	V
9608.000	37.58	14.15	51.73	74.00	-22.27	peak	V
N/A							
4804.000	39.80	4.04	43.84	74.00	-30.16	peak	H
4804.000	29.50	4.04	33.54	54.00	-20.46	AVG	H
7206.000	37.66	10.61	48.27	74.00	-25.73	peak	H
9608.000	37.49	14.15	51.64	74.00	-22.36	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / 8DPSK / DH5 / CH Mid**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / 8DPSK / DH5 / CH Mid

Test Date: July 15, 2016

Temperature: 26°C

Tested by: Dennis Li

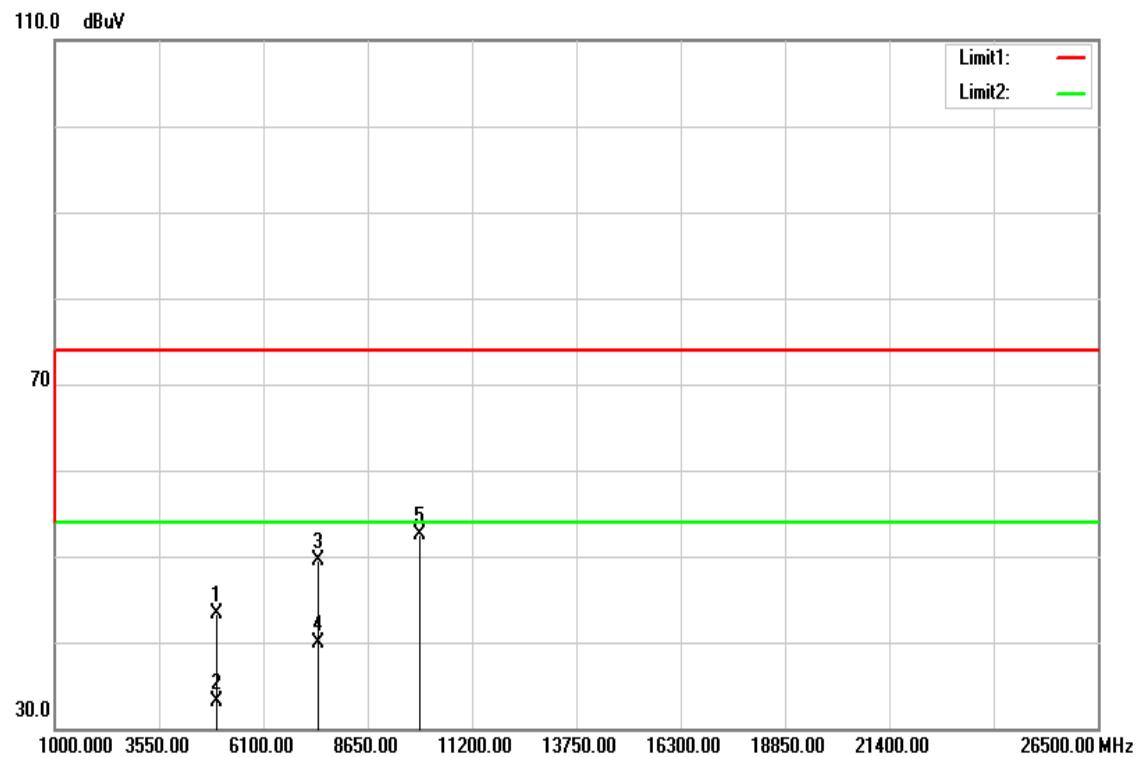
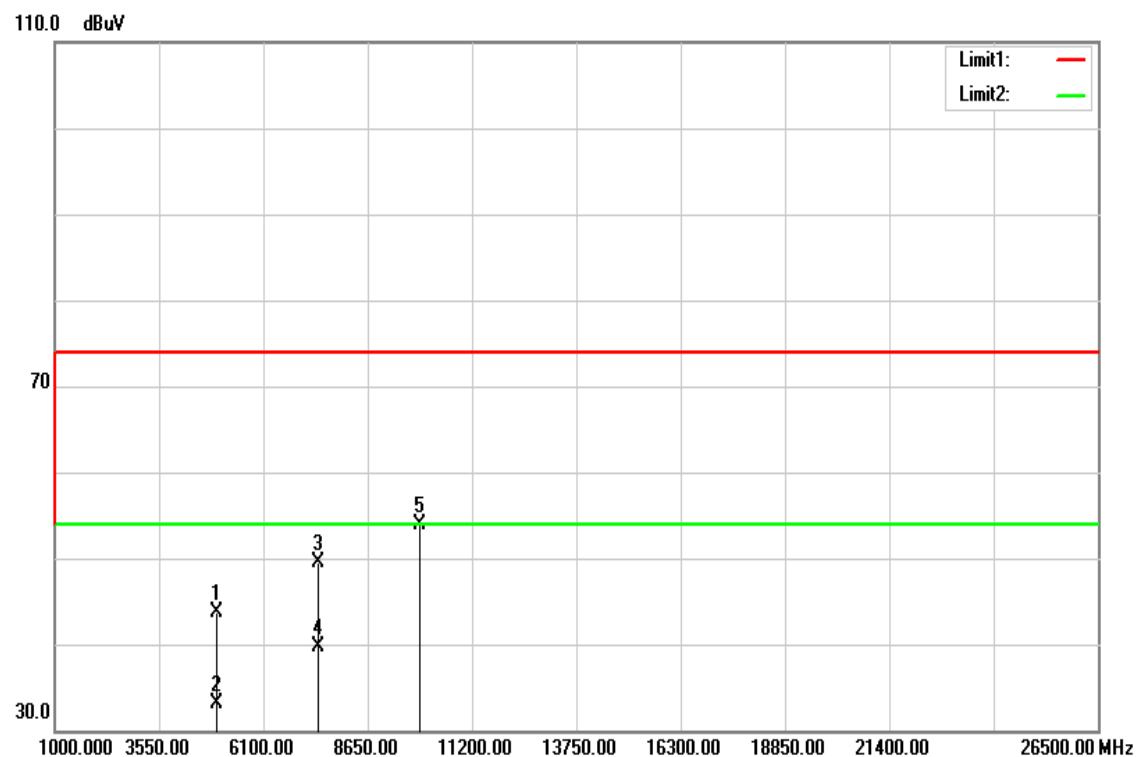
Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
4880.000	39.58	3.91	43.49	74.00	-30.51	peak	V
4880.000	29.58	3.91	33.49	54.00	-20.51	AVG	V
7320.000	37.43	10.72	48.15	74.00	-25.85	peak	V
7320.000	27.98	10.72	38.70	54.00	-15.30	AVG	V
9760.000	38.06	14.43	52.49	74.00	-21.51	peak	V
N/A							
4880.000	39.32	3.91	43.23	74.00	-30.77	peak	H
4880.000	29.34	3.91	33.25	54.00	-20.75	AVG	H
7320.000	37.37	10.72	48.09	74.00	-25.91	peak	H
7320.000	27.47	10.72	38.19	54.00	-15.81	AVG	H
9760.000	38.54	14.43	52.97	74.00	-21.03	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

TX / 8DPSK / DH5 / CH High**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / 8DPSK / DH5 / CH High

Test Date: July 15, 2016

Temperature: 26°C

Tested by: Dennis Li

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
4960.000	39.29	3.93	43.22	74.00	-30.78	peak	V
4960.000	29.21	3.93	33.14	54.00	-20.86	AVG	V
7440.000	38.64	10.84	49.48	74.00	-24.52	peak	V
7440.000	29.01	10.84	39.85	54.00	-14.15	AVG	V
9920.000	37.70	14.74	52.44	74.00	-21.56	peak	V
N/A							
4960.000	39.86	3.93	43.79	74.00	-30.21	peak	H
4960.000	29.24	3.93	33.17	54.00	-20.83	AVG	H
7440.000	38.71	10.84	49.55	74.00	-24.45	peak	H
7440.000	28.93	10.84	39.77	54.00	-14.23	AVG	H
9920.000	39.10	14.74	53.84	74.00	-20.16	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

7.10 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode:	Normal Link	Test Date:	July 6, 2016
Temperature:	24°C	Tested by:	Dennis Li
Humidity:	56% RH		

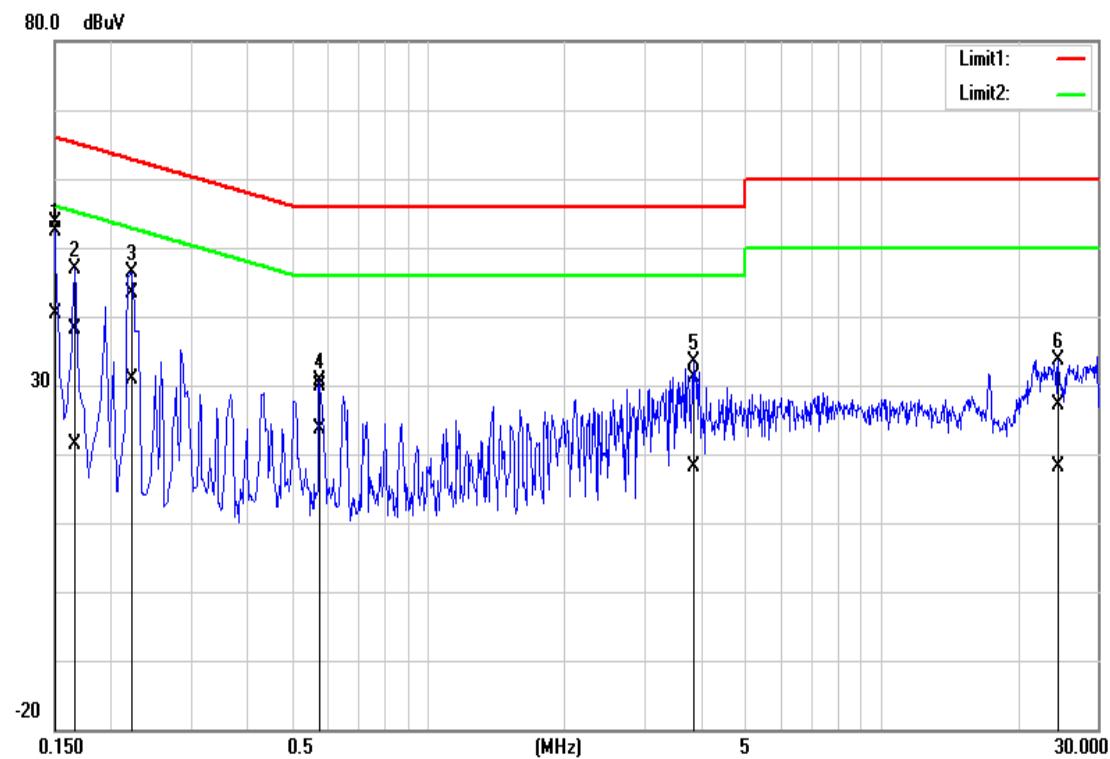
Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1500	43.90	30.72	9.71	53.61	40.43	66.00	56.00	-12.39	-15.57	L1
0.1660	28.46	11.57	9.71	38.17	21.28	65.16	55.16	-26.99	-33.88	L1
0.2220	33.57	21.20	9.70	43.27	30.90	62.74	52.74	-19.47	-21.84	L1
0.5780	20.18	13.94	9.70	29.88	23.64	56.00	46.00	-26.12	-22.36	L1
3.8780	21.39	8.34	9.74	31.13	18.08	56.00	46.00	-24.87	-27.92	L1
24.5540	17.31	8.34	9.83	27.14	18.17	60.00	50.00	-32.86	-31.83	L1
0.1700	27.84	9.88	9.78	37.62	19.66	64.96	54.96	-27.34	-35.30	L2
0.2220	33.94	22.10	9.77	43.71	31.87	62.74	52.74	-19.03	-20.87	L2
0.3700	22.19	13.24	9.76	31.95	23.00	58.50	48.50	-26.55	-25.50	L2
0.6580	20.91	15.78	9.76	30.67	25.54	56.00	46.00	-25.33	-20.46	L2
3.6620	16.40	2.97	9.82	26.22	12.79	56.00	46.00	-29.78	-33.21	L2
29.9220	19.39	11.12	10.38	29.77	21.50	60.00	50.00	-30.23	-28.50	L2

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

Test Plots

Conducted emissions (Line 1)



Conducted emissions (Line 2)

