

# **User MANUAL**

## **802.11b/g/n 2Tx2R + BT5.0 USB WLAN Module**

**Model Name: WCBN4606L**

**Brand: LITE-ON**



## CONTENT

|                                              |           |
|----------------------------------------------|-----------|
| <b>PRODUCT FEATURES .....</b>                | <b>7</b>  |
| BT FEATURE: .....                            | 7         |
| WI-FI FEATURE:.....                          | 7         |
| <b>PRODUCT SPECIFICATIONS.....</b>           | <b>8</b>  |
| MAIN CHIPSET .....                           | 8         |
| FUNCTIONAL SPECIFICATIONS .....              | 8         |
| <b>RECOMMENDED OPERATION CONDITIONS.....</b> | <b>11</b> |
| <b>DC CHARACTERISTICS.....</b>               | <b>11</b> |
| <b>RESET TIMING SPEC.....</b>                | <b>11</b> |
| <b>PIN ASSIGMENT.....</b>                    | <b>12</b> |
| <b>USB CONNECTOR SPEC.....</b>               | <b>12</b> |
| <b>MECHANICAL .....</b>                      | <b>13</b> |
| <b>I-PEX CONNECTOR SPEC.....</b>             | <b>14</b> |
| <b>MODULE PHOTO .....</b>                    | <b>15</b> |
| <b>EEPROM INFORMATION .....</b>              | <b>15</b> |
| WI-FI/BT .....                               | 15        |
| <b>ENVIRONMENTAL .....</b>                   | <b>15</b> |
| OPERATING .....                              | 15        |
| STORAGE.....                                 | 15        |



**FCC Statement:**

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible. This device and its antenna(s) must not be co-located with any other transmitters except in accordance with FCC multi transmitter product procedures. Referring to the multi transmitter policy, multiple transmitter(s) and module(s) can be operated simultaneously without C2PC.

IMPORTANT NOTE: FCC Radiation Exposure Statement: This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

IMPORTANT NOTE: This module is intended for OEM integrator. The OEM integrator is responsible for the compliance to all the rules that apply to the product into which this certified RF module is integrated. Additional testing and certification may be necessary when multiple modules are used.

20 cm minimum distance has to be able to be maintained between the antenna and the users for the host this module is integrated into. Under such configuration, the FCC radiation exposure limits set forth for an population/uncontrolled environment can be satisfied.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

#### USERS MANUAL OF THE END PRODUCT:

In the user's manual of the end product, the end user has to be informed to keep at least 20 cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the FCC radio frequency exposure guidelines for an uncontrolled environment can be satisfied. The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment. If the size of the end product is smaller than 8x10cm, then additional FCC part 15.19 statement is required to be available in the user's manual: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains FCC ID: PPQ-WCBN4606L ". If the size of the end product is larger than 8x10cm, then the following FCC part 15.19 statement has to also be available on the label: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### OEM Integrator Checklist

The party below will implement the LITE-ON Module in host systems in accordance with the instructions specified in this document and the documents referenced herein.

- 1.The OEM integrator will ensure the Module is integrated in a host systems using only the approved antenna model(s) described in this document.
- 2.The OEM integrator will ensure the antenna placement inside the host system will maintain the required spacing to end user for RF Exposure compliance, as specified in this document.
- 3.If other radios are integrated inside the host with the LITE-ON Module, the OEM integrator will contact its test lab, TCB or LITE-ON to determine if additional FCC compliance evaluation is required to meet FCC collocation rules.
- 4.The OEM integrator will ensure end user documentation will contain the specified regulatory wording and ensure the host system and the Module itself are labeled as specified in this document.

5. The OEM integrator will ensure the Module is programmed in the factory with compliant transmit power not exceeding the levels specified in this document. LITE-ON requests that the OEM integrator acknowledge its receipt of this document and the above instructions. You may contact LITE-ON with any questions concerning this document or the responsibilities of the OEM integrator

## PRODUCT FEATURES

### BT FEATURE:

- Bluetooth V5.0 system  
Backwards compatible with BT version of 1.1, 1.2, 2.0, 2.1, 3.0+HS and 4.0LE
- Bluetooth Class I transmission power
- Support all packet types in basic rate and enhance data rate
- Support Secure Simple Pairing
- Support multiple low energy states
- Fast AGC control to improve receiving dynamic range
- Support Wake On Bluetooth

### Wi-Fi FEATURE:

- Operate at ISM frequency Band (2.4GHz)
- IEEE Standards Support, 802.11b, 802.11g, 802.11n
- Support for both 20 MHz, 40MHz channel width in 2.4GHz band
- Enterprise level security supporting: WAPI, WPA, WPA2
- Support 2 transmission and 2 receiving, transmission rate can up to 300Mbps (Physical Rate) in downstream and upstream
- QoS support of WFA WMM, WMMPS
- Wi-Fi Direct support wireless peer to peer application
- Channel management and co-existence
- Support Wake On WLAN via Magic packets and wake-up frame
  
- RTL8725A is a single chip integrated IEEE 802.11 b/g/n and Bluetooth 5.0 with a single USB interface
- Enhanced BT/Wi-Fi coexistence control to improve transmission quality in different profiles
- Fully compliance with USB v2.0 specification
- RoHS compliance
- Low Halogen compliance

## PRODUCT SPECIFICATIONS

### MAIN CHIPSET

Realtek RTL8725A

### FUNCTIONAL SPECIFICATIONS

| BT Function           |                                                                                                                                                                        |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard              | Bluetooth V5.0LE                                                                                                                                                       |
| Bus Interface         | USB2.0                                                                                                                                                                 |
| Data Rate             | 1 Mbps, 2Mbps and Up to 3Mbps                                                                                                                                          |
| Modulation Scheme     | GFSK, $\pi/4$ -DQPSK and 8-DPSK                                                                                                                                        |
| Frequency Range       | 2.402~2.480 GHz                                                                                                                                                        |
| Transmit Output Power | +4 ≤ Output Power ≤ +10dBm; Class I Device                                                                                                                             |
| Receiver Sensitivity  | < 0.1% BER at -88dBm                                                                                                                                                   |
| Wi-Fi Function        |                                                                                                                                                                        |
| Standard              | IEEE802.11b; IEEE 802.11g; IEEE 802.11n.                                                                                                                               |
| Bus Interface         | USB2.0                                                                                                                                                                 |
| Data Rate             | <b>802.11b:</b><br>11, 5.5, 2, 1 Mbps<br><b>802.11g:</b><br>54, 48, 36, 24, 18, 12, 9, 6 Mbps<br><b>802.11n:</b><br>MCS 0 to 15 for HT20MHz<br>MCS 0 to 15 for HT40MHz |
| Media Access Control  | CSMA/CA with ACK                                                                                                                                                       |
| Modulation Technique  | <b>802.11b:</b><br>CCK, DQPSK, DBPSK<br><b>802.11g:</b><br>64QAM, 16QAM, QPSK, BPSK<br><b>802.11n:</b><br>64QAM, 16QAM, QPSK, BPSK                                     |
| Network Architecture  | Ad-hoc mode (Peer-to-Peer)<br>Infrastructure mode                                                                                                                      |
| Operation Channel     | <b>2.4GHz</b><br>11: (Ch. 1-11) – United States<br>13: (Ch. 1-13) – Europe<br>14: (Ch. 1-14) – Japan                                                                   |
| Frequency Range       | <b>802.11bg</b><br>2.400 ~ 2.4835 GHz                                                                                                                                  |
| EVM                   | CCK < 35%<br>OFDM < -25dB<br>MCS0(HT20/40MHz) < -5dB                                                                                                                   |

MCS7(HT20/40MHz) < -28dB  
MCS0(VHT20/40/80MHz) < -5dB  
MCS7(VHT 20/40/80MHz) < -27dB

|                         |                                                     |
|-------------------------|-----------------------------------------------------|
| <b>Frequency Offset</b> | <b>2.4GHz</b><br>-20ppm < Center Frequency < +20ppm |
|-------------------------|-----------------------------------------------------|

**Transmit Output Power - single chain @ant;**  
**Tolerance: ±1.5dBm@2.4GHz**

|                     |              |              |                |               |
|---------------------|--------------|--------------|----------------|---------------|
| <b>802.11b</b>      | <b>1Mbps</b> | <b>2Mbps</b> | <b>5.5Mbps</b> | <b>11Mbps</b> |
| <b>Tgtpwr (dBm)</b> | 17           | 17           | 17             | 17            |

|                     |                 |               |               |               |
|---------------------|-----------------|---------------|---------------|---------------|
| <b>802.11g</b>      | <b>6~24Mbps</b> | <b>36Mbps</b> | <b>48Mbps</b> | <b>54Mbps</b> |
| <b>Tgtpwr (dBm)</b> | 17              | 16            | 16            | 16            |

|                     |             |             |             |             |             |
|---------------------|-------------|-------------|-------------|-------------|-------------|
| <b>802.11n HT20</b> | <b>MCS0</b> | <b>MCS1</b> | <b>MCS2</b> | <b>MCS3</b> | <b>MCS4</b> |
| <b>Tgtpwr (dBm)</b> | 16          | 16          | 16          | 15          | 15          |
|                     | <b>MCS5</b> | <b>MCS6</b> | <b>MCS7</b> | <b>MCS8</b> | <b>MCS9</b> |
|                     | 14          | 14          | 14          |             |             |

|                     |             |             |             |             |             |
|---------------------|-------------|-------------|-------------|-------------|-------------|
| <b>802.11n HT40</b> | <b>MCS0</b> | <b>MCS1</b> | <b>MCS2</b> | <b>MCS3</b> | <b>MCS4</b> |
| <b>Tgtpwr (dBm)</b> | 16          | 16          | 16          | 15          | 15          |
|                     | <b>MCS5</b> | <b>MCS6</b> | <b>MCS7</b> | <b>MCS8</b> | <b>MCS9</b> |
|                     | 14          | 14          | 14          |             |             |

| <b>Receiver Sensitivity</b> |              |                  |                            |
|-----------------------------|--------------|------------------|----------------------------|
| <b>Frequency Band</b>       | <b>Rate</b>  | <b>Condition</b> | <b>Typical (1SS) (dBm)</b> |
| <b>2.4G</b>                 | 11b-1M       | PER < 8%         | -94                        |
|                             | 11b-11M      | PER < 8%         | -86                        |
|                             | 11g-6M       | PER < 10%        | -90                        |
|                             | 11g-54M      | PER < 10%        | -71                        |
|                             | 11n-HT20MCS0 | PER < 10%        | -87                        |
|                             | 11n-HT20MCS7 | PER < 10%        | -70                        |
|                             | 11n-HT40MCS0 | PER < 10%        | -84                        |
|                             | 11n-HT40MCS7 | PER < 10%        | -67                        |

|                 |                                                               |
|-----------------|---------------------------------------------------------------|
| <b>Security</b> | WPS, WPA, WPA2, WEP 64bit & 128bit, IEEE 802.1X, IEEE 802.11i |
|-----------------|---------------------------------------------------------------|

| <b>Common Function</b> |  |
|------------------------|--|
|------------------------|--|

|                          |                            |
|--------------------------|----------------------------|
| <b>Operating Voltage</b> | 5V ±10% I/O supply voltage |
|--------------------------|----------------------------|

| Power Consumption | Mode                            | Average | Peak  |
|-------------------|---------------------------------|---------|-------|
|                   | <i>TX</i>                       | 442mA   | 829mA |
|                   | <i>RX</i>                       | 185mA   | 796mA |
|                   | <i>Unassociated Idle</i>        | 31mA    |       |
|                   | <i>Standby for Wake up mode</i> | 37mA    |       |

**Antenna Type**

2x Metal Antennas for WiF; 1x U.FL connectors for BT


## RECOMMENDED OPERATION CONDITIONS

| Symbol                                                                                | Rating                    | Min  | Typ  | Max  | Units |
|---------------------------------------------------------------------------------------|---------------------------|------|------|------|-------|
| +5VCC                                                                                 | 5V Supply Voltage         | 4.5  | 5    | 5.5  | V     |
| VDD33_USB<br>VA33X<br>VR33_SYN<br>VR33_RTX_S0<br>VR33_RTX_S1<br>BT_BD33PA<br>VD33_SPS | 3.3V Supply Voltage       | 3.0  | 3.3  | 3.6  | V     |
| VA10_AFE<br>VA10_SYN<br>VR10_RTX_S0<br>VR10_RTX_S1<br>VD10D<br>VA10_USB               | 1.05V Core Supply Voltage | 1.15 | 1.25 | 1.37 | V     |
| VDD12BT<br>BT_VD12RTXBB<br>BT_BD12RTXFE<br>BT_VD12SYN                                 | 1.2V Supply Voltage       | 1.08 | 1.2  | 1.32 | V     |

## DC CHARACTERISTICS

| Symbol   | Parameter           | Min  | Typ | Max  | Units |
|----------|---------------------|------|-----|------|-------|
| $V_{IL}$ | Input Low Voltage   | -    | 0   | 0.9  | V     |
| $V_{IH}$ | Input High Voltage  | 2.0  | 3.3 | 3.63 | V     |
| $V_{OL}$ | Output Low Voltage  | 0    | -   | 0.33 |       |
| $V_{OH}$ | Output High Voltage | 2.97 | -   | 3.3  | V     |

## RESET TIMING SPEC

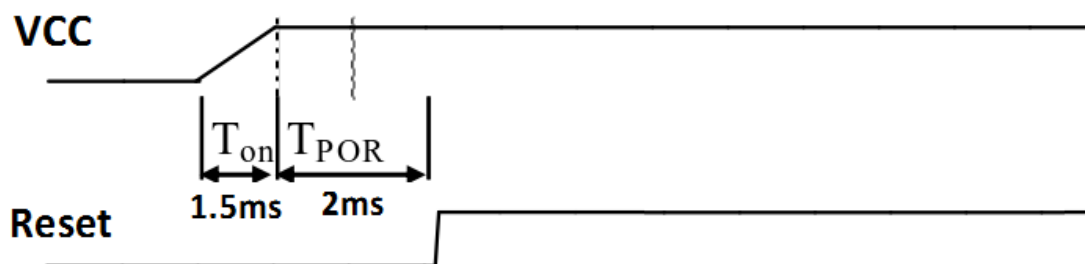

| Symbol    | Min | Typ | Max | Units |
|-----------|-----|-----|-----|-------|
| $T_{on}$  | 0.2 | 1.5 | 5   | ms    |
| $T_{POR}$ | -   | 2   | 10  | ms    |

**Noted:** Reset time 不需要特別定義時間, 只要確定有拉起來即可


## PIN ASSIGNMENT

| Pin. | Pin Define | Description                         | Status |
|------|------------|-------------------------------------|--------|
| 1    | +5V        | 5V source                           | YES    |
| 2    | +5V        | 5V source                           | YES    |
| 3    | USB_D-     | USB Data-                           | YES    |
| 4    | USB_D+     | USB Data+                           | YES    |
| 5    | GND        | Ground                              | YES    |
| 6    | RESET#     | System reset RTL8192FC, low active  | YES    |
| 7    | WoWLAN#    | Wake up system via wifi, low active | YES    |
| 8    | GND        | Ground                              | YES    |
| 9    | WoBT       | Wake up system via BT, high active  | YES    |
| 10   | GND        | Ground                              | YES    |

## USB CONNECTOR SPEC


Manufacture P/N: S1315-10RVB-SB3-KH

Thickness of gold flash printed:  $\geq 1\mu$

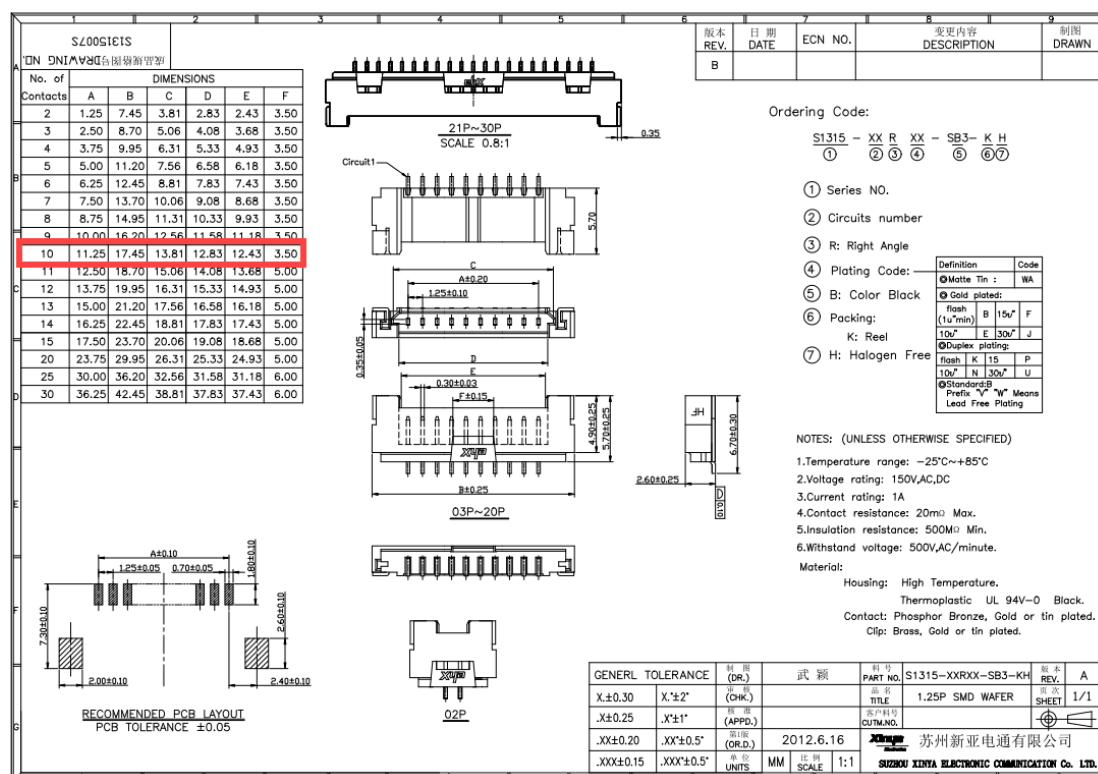

## MECHANICAL

**Weight: 3.6g**

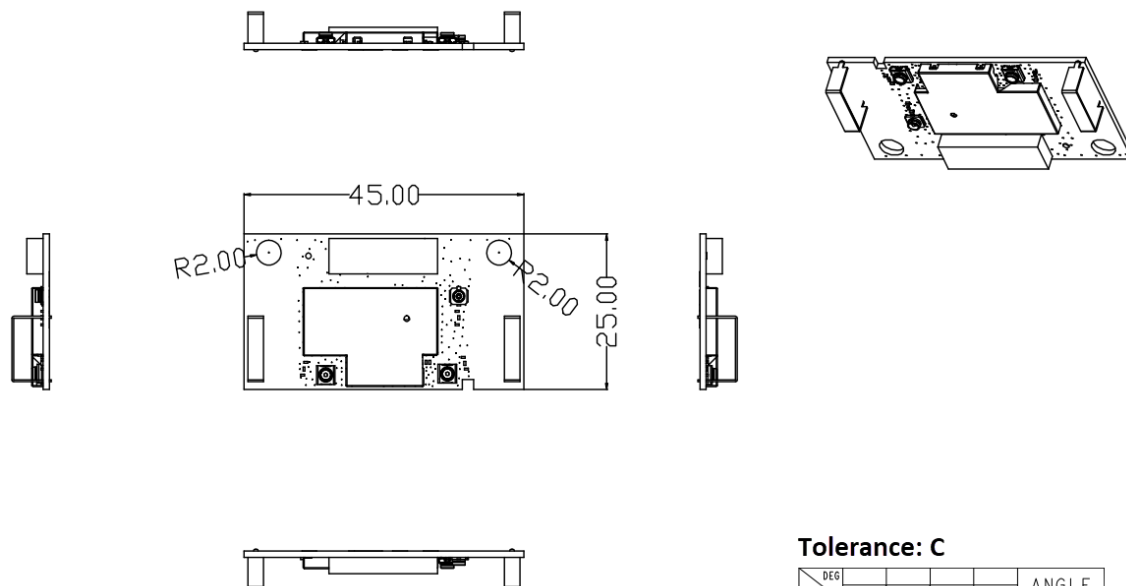

### Tolerance: C

| DIM    | DEG    | A      | B      | C | D | ANGLE         |
|--------|--------|--------|--------|---|---|---------------|
| 0-5    | ±0.02  | ±0.05  | ±0.10  |   |   | 0°-30° ±0.1°  |
| 5-10   | ±0.05  | ±0.10  | ±0.15  |   |   | 31°-60° ±0.3° |
| 10-50  | ±0.10  | ±0.15  | ±0.20  |   |   | 61°-90° ±0.5° |
| 50-100 | ±0.15  | ±0.20  | ±0.25  |   |   |               |
| 100-   | ±0.15% | ±0.20% | ±0.25% |   |   |               |

**Unit: mm**




## MODULE PHOTO

### Front Side



### Bottom Side

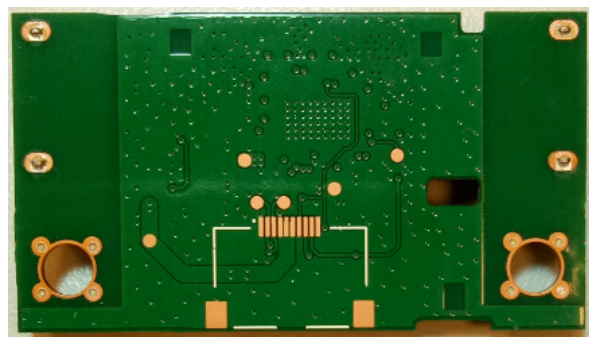

## EEPROM INFORMATION

### Wi-Fi/BT

|                   |                                                                    |
|-------------------|--------------------------------------------------------------------|
| <b>Reg Domain</b> | World Wide<br><b>2.4G</b><br>Read from registry; Control by driver |
|                   | 0x7F                                                               |
| <b>Vendor ID</b>  | 0x0BDA                                                             |
| <b>Device ID</b>  | 0xA725                                                             |

## ENVIRONMENTAL

### OPERATING

Ambient Operating Temperature: 0 to 70 °C (32 to 158 °F)

Ambient Relative Humidity: 5-90% (non-condensing)

### STORAGE

Ambient Temperature: -40 to 80 °C (-40 to 176 °F)

Ambient Relative Humidity: 5-95% (non-condensing)