




|           |   |                                |           |   |          |
|-----------|---|--------------------------------|-----------|---|----------|
| Power     | : | AC 120V / 60Hz from PoE        | Pol/Phase | : | VERTICAL |
| Test Mode | : | Mode 6, Band 1, 11ax HE40 CH46 |           | : |          |

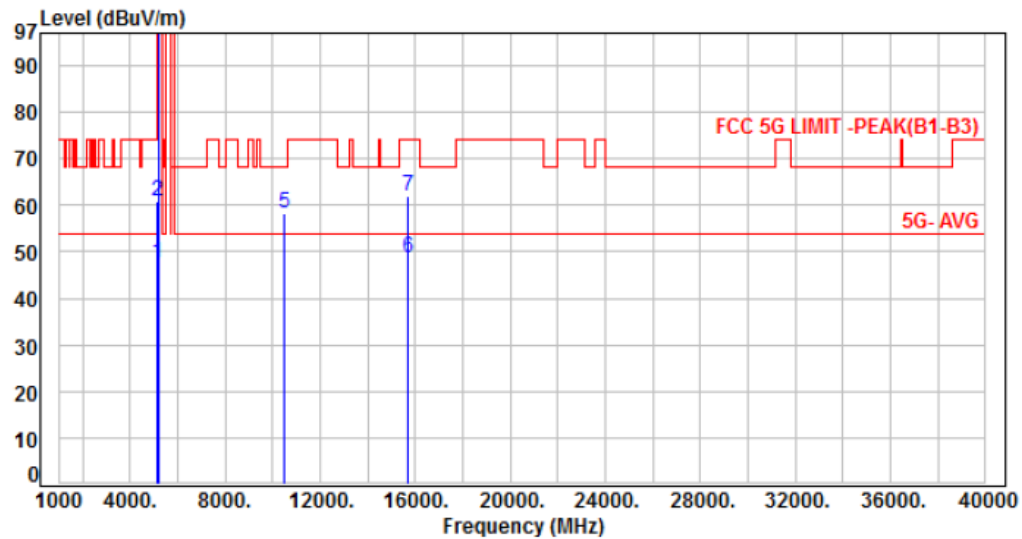

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.83          | 47.53          | 54.00          | -6.47       | Average  | 178         | 184           | P   |
| 2   | 5150.00         | 6.70        | 54.19          | 60.89          | 74.00          | -13.11      | Peak     | 178         | 184           | P   |
| 3   | 5230.00         | 6.99        | 90.18          | 97.17          | 200.00         | -102.83     | Average  | 178         | 184           | P   |
| 4   | 5230.00         | 6.99        | 101.34         | 108.33         | 200.00         | -91.67      | Peak     | 178         | 184           | P   |
| 5   | 10460.00        | 15.86       | 42.30          | 58.16          | 68.20          | -10.04      | Peak     | 100         | 176           | P   |
| 6   | 15690.00        | 19.44       | 29.28          | 48.72          | 54.00          | -5.28       | Average  | 100         | 245           | P   |
| 7   | 15690.00        | 19.44       | 42.69          | 62.13          | 74.00          | -11.87      | Peak     | 100         | 245           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                  |           |              |
|-----------|----------------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE        | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 6, Band 1, 11ax HE40 CH46 |           |              |

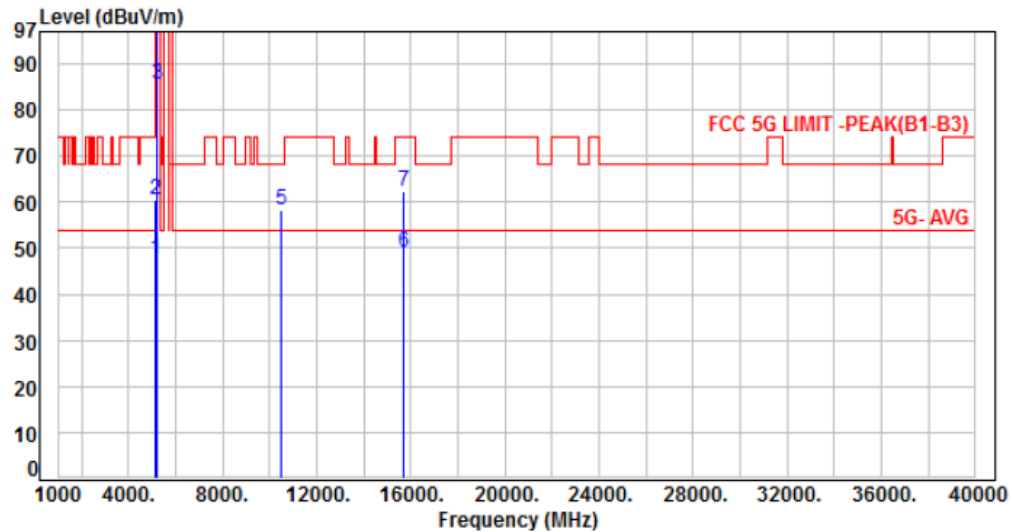

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.79          | 47.49          | 54.00          | -6.51       | Average  | 125         | 360           | P   |
| 2   | 5150.00         | 6.70        | 53.73          | 60.43          | 74.00          | -13.57      | Peak     | 125         | 360           | P   |
| 3   | 5230.00         | 6.99        | 78.66          | 85.65          | 200.00         | -114.35     | Average  | 125         | 360           | P   |
| 4   | 5230.00         | 6.99        | 90.11          | 97.10          | 200.00         | -102.90     | Peak     | 125         | 360           | P   |
| 5   | 10460.00        | 15.86       | 42.26          | 58.12          | 68.20          | -10.08      | Peak     | 100         | 315           | P   |
| 6   | 15690.00        | 19.44       | 29.63          | 49.07          | 54.00          | -4.93       | Average  | 100         | 153           | P   |
| 7   | 15690.00        | 19.44       | 42.76          | 62.20          | 74.00          | -11.80      | Peak     | 100         | 153           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                 |           |   |          |
|-----------|---|---------------------------------|-----------|---|----------|
| Power     | : | AC 120V / 60Hz from PoE         | Pol/Phase | : | VERTICAL |
| Test Mode | : | Mode 6, Band 4, 11ax HE40 CH151 |           | : |          |

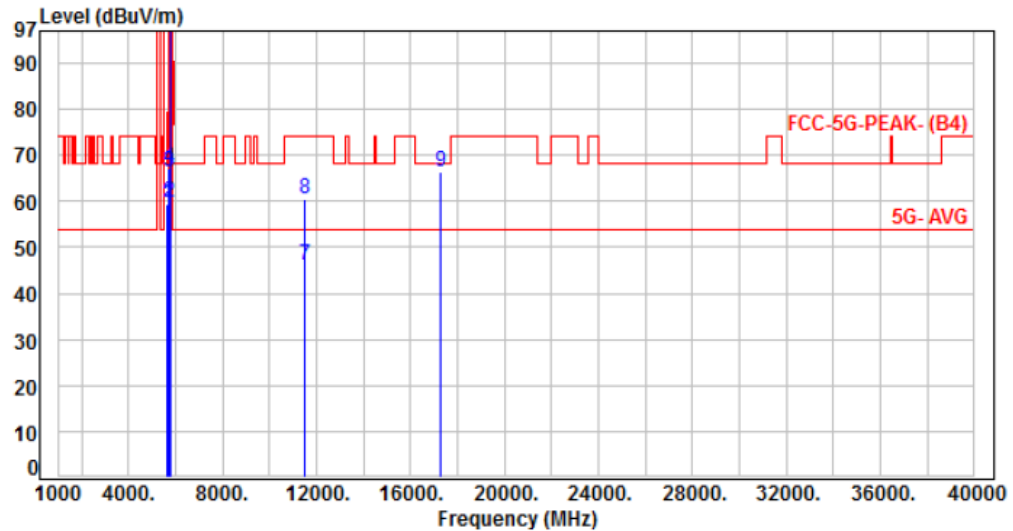

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 52.13          | 59.48          | 68.20          | -8.72       | Peak     | 117         | 28            | P   |
| 2   | 5700.00         | 7.37        | 52.40          | 59.77          | 105.20         | -45.43      | Peak     | 117         | 28            | P   |
| 3   | 5720.00         | 7.34        | 59.19          | 66.53          | 110.80         | -44.27      | Peak     | 117         | 28            | P   |
| 4   | 5725.00         | 7.33        | 59.85          | 67.18          | 122.20         | -55.02      | Peak     | 117         | 28            | P   |
| 5   | 5755.00         | 7.30        | 96.83          | 104.13         | 200.00         | -95.87      | Average  | 117         | 28            | P   |
| 6   | 5755.00         | 7.30        | 109.44         | 116.74         | 200.00         | -83.26      | Peak     | 117         | 28            | P   |
| 7   | 11510.00        | 17.79       | 28.45          | 46.24          | 54.00          | -7.76       | Average  | 100         | 227           | P   |
| 8   | 11510.00        | 17.79       | 42.85          | 60.64          | 74.00          | -13.36      | Peak     | 100         | 227           | P   |
| 9   | 17265.00        | 23.86       | 42.47          | 66.33          | 68.20          | -1.87       | Peak     | 100         | 152           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                   |           |              |
|-----------|-----------------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE         | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 6, Band 4, 11ax HE40 CH151 |           |              |

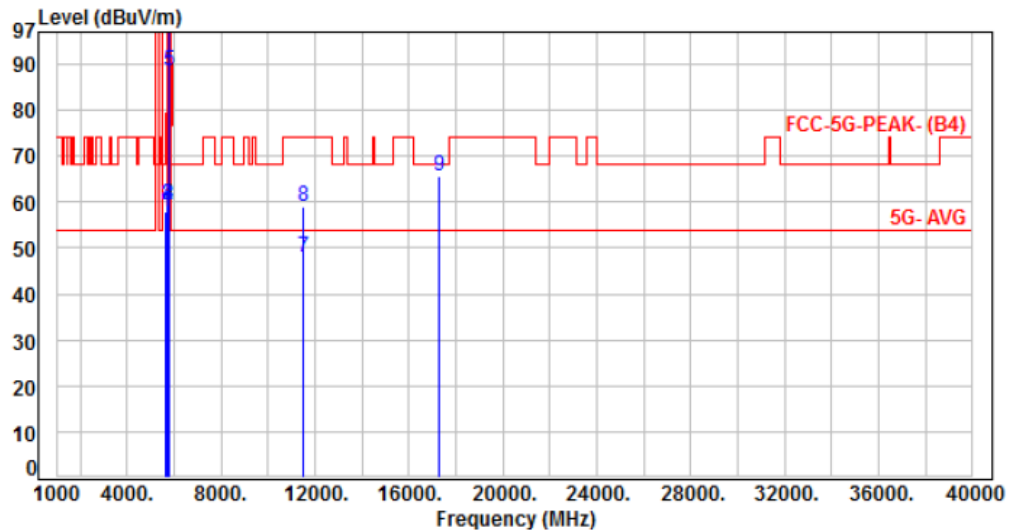

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 50.40          | 57.75          | 68.20          | -10.45      | Peak     | 100         | 335           | P   |
| 2   | 5700.00         | 7.37        | 51.86          | 59.23          | 105.20         | -45.97      | Peak     | 100         | 335           | P   |
| 3   | 5720.00         | 7.34        | 52.06          | 59.40          | 110.80         | -51.40      | Peak     | 100         | 335           | P   |
| 4   | 5725.00         | 7.33        | 52.16          | 59.49          | 122.20         | -62.71      | Peak     | 100         | 335           | P   |
| 5   | 5755.00         | 7.30        | 81.05          | 88.35          | 200.00         | -111.65     | Average  | 100         | 335           | P   |
| 6   | 5755.00         | 7.30        | 91.43          | 98.73          | 200.00         | -101.27     | Peak     | 100         | 335           | P   |
| 7   | 11510.00        | 17.79       | 30.17          | 47.96          | 54.00          | -6.04       | Average  | 100         | 223           | P   |
| 8   | 11510.00        | 17.79       | 41.31          | 59.10          | 74.00          | -14.90      | Peak     | 100         | 223           | P   |
| 9   | 17265.00        | 23.86       | 41.82          | 65.68          | 68.20          | -2.52       | Peak     | 100         | 159           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                   |           |            |
|-----------|-----------------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE         | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 6, Band 4, 11ax HE40 CH159 |           | :          |

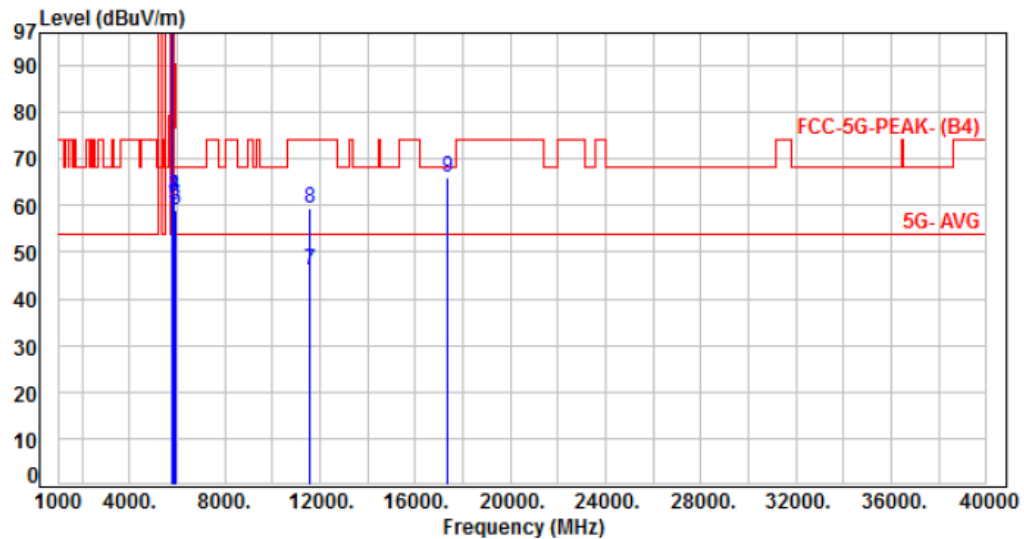

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5795.00         | 7.39        | 91.93          | 99.32          | 200.00         | -100.68     | Average  | 121         | 30            | P   |
| 2   | 5795.00         | 7.39        | 107.99         | 115.38         | 200.00         | -84.62      | Peak     | 121         | 30            | P   |
| 3   | 5850.00         | 7.43        | 54.53          | 61.96          | 122.20         | -60.24      | Peak     | 121         | 30            | P   |
| 4   | 5855.00         | 7.45        | 54.40          | 61.85          | 110.80         | -48.95      | Peak     | 121         | 30            | P   |
| 5   | 5875.00         | 7.54        | 52.55          | 60.09          | 105.20         | -45.11      | Peak     | 121         | 30            | P   |
| 6   | 5925.00         | 7.66        | 51.36          | 59.02          | 68.20          | -9.18       | Peak     | 121         | 30            | P   |
| 7   | 11590.00        | 17.95       | 28.08          | 46.03          | 54.00          | -7.97       | Average  | 100         | 237           | P   |
| 8   | 11590.00        | 17.95       | 41.43          | 59.38          | 74.00          | -14.62      | Peak     | 100         | 237           | P   |
| 9   | 17385.00        | 24.58       | 41.54          | 66.12          | 68.20          | -2.08       | Peak     | 100         | 133           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                 |           |   |            |
|-----------|---|---------------------------------|-----------|---|------------|
| Power     | : | AC 120V / 60Hz from PoE         | Pol/Phase | : | HORIZONTAL |
| Test Mode | : | Mode 6, Band 4, 11ax HE40 CH159 |           | : |            |

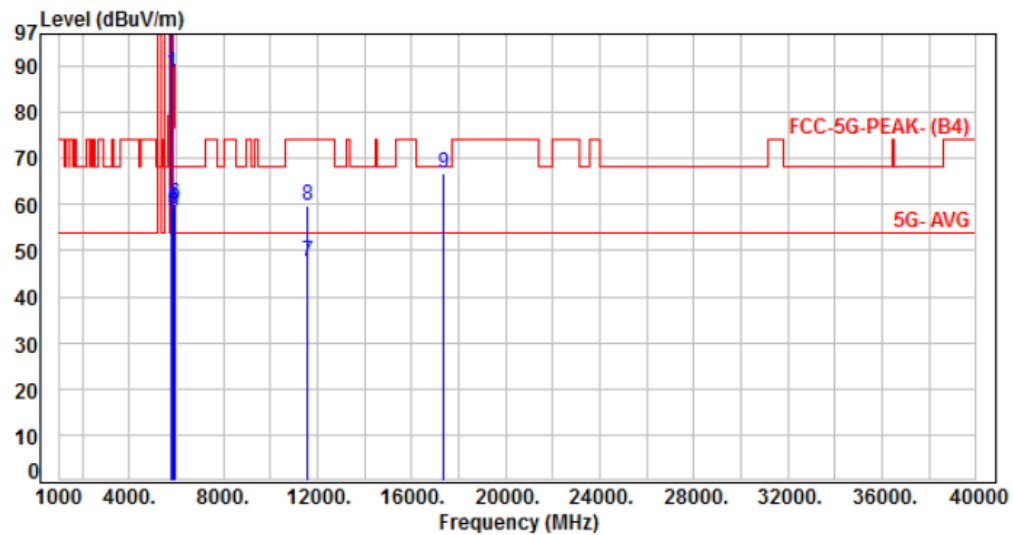

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5795.00         | 7.39        | 81.28          | 88.67          | 200.00         | -111.33     | Average  | 178         | 45            | P   |
| 2   | 5795.00         | 7.39        | 96.44          | 103.83         | 200.00         | -96.17      | Peak     | 178         | 45            | P   |
| 3   | 5850.00         | 7.43        | 50.94          | 58.37          | 122.20         | -63.83      | Peak     | 178         | 45            | P   |
| 4   | 5855.00         | 7.45        | 51.90          | 59.35          | 110.80         | -51.45      | Peak     | 178         | 45            | P   |
| 5   | 5875.00         | 7.54        | 51.57          | 59.11          | 105.20         | -46.09      | Peak     | 178         | 45            | P   |
| 6   | 5925.00         | 7.66        | 52.62          | 60.28          | 68.20          | -7.92       | Peak     | 178         | 45            | P   |
| 7   | 11590.00        | 17.95       | 29.65          | 47.60          | 54.00          | -6.40       | Average  | 100         | 236           | P   |
| 8   | 11590.00        | 17.95       | 41.65          | 59.60          | 74.00          | -14.40      | Peak     | 100         | 236           | P   |
| 9   | 17385.00        | 24.58       | 42.11          | 66.69          | 68.20          | -1.51       | Peak     | 100         | 184           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                  |           |            |
|-----------|----------------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE        | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 7, Band 1, 11ax HE80 CH42 |           | :          |

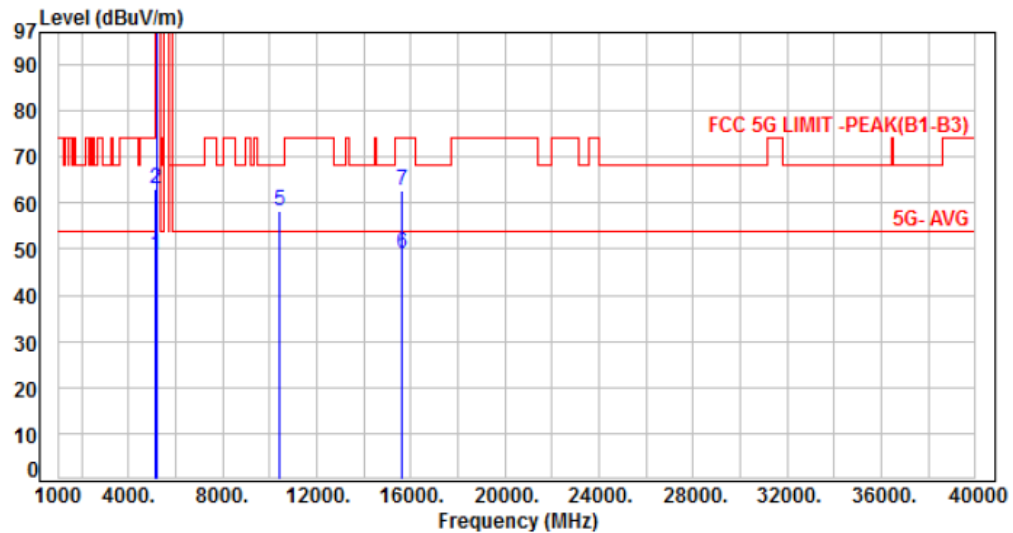

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 42.06          | 48.76          | 54.00          | -5.24       | Average  | 205         | 185           | P   |
| 2   | 5150.00         | 6.70        | 56.55          | 63.25          | 74.00          | -10.75      | Peak     | 205         | 185           | P   |
| 3   | 5210.00         | 6.97        | 91.58          | 98.55          | 200.00         | -101.45     | Average  | 205         | 185           | P   |
| 4   | 5210.00         | 6.97        | 101.56         | 108.53         | 200.00         | -91.47      | Peak     | 205         | 185           | P   |
| 5   | 10420.00        | 15.83       | 42.44          | 58.27          | 68.20          | -9.93       | Peak     | 100         | 254           | P   |
| 6   | 15630.00        | 19.57       | 29.43          | 49.00          | 54.00          | -5.00       | Average  | 100         | 153           | P   |
| 7   | 15630.00        | 19.57       | 43.27          | 62.84          | 74.00          | -11.16      | Peak     | 100         | 153           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                  |           |              |
|-----------|----------------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE        | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 7, Band 1, 11ax HE80 CH42 |           | :            |

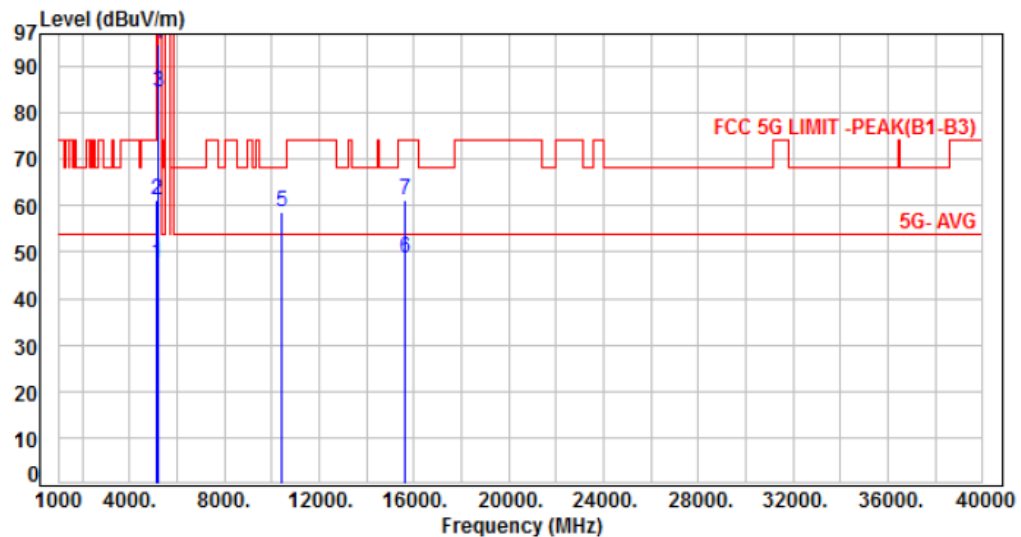

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.90          | 47.60          | 54.00          | -6.40       | Average  | 177         | 360           | P   |
| 2   | 5150.00         | 6.70        | 54.37          | 61.07          | 74.00          | -12.93      | Peak     | 177         | 360           | P   |
| 3   | 5210.00         | 6.97        | 77.48          | 84.45          | 200.00         | -115.55     | Average  | 177         | 360           | P   |
| 4   | 5210.00         | 6.97        | 87.92          | 94.89          | 200.00         | -105.11     | Peak     | 177         | 360           | P   |
| 5   | 10420.00        | 15.83       | 42.72          | 58.55          | 68.20          | -9.65       | Peak     | 100         | 158           | P   |
| 6   | 15630.00        | 19.57       | 29.12          | 48.69          | 54.00          | -5.31       | Average  | 100         | 178           | P   |
| 7   | 15630.00        | 19.57       | 41.82          | 61.39          | 74.00          | -12.61      | Peak     | 100         | 178           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                   |           |            |
|-----------|-----------------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE         | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 7, Band 4, 11ax HE80 CH155 |           | :          |

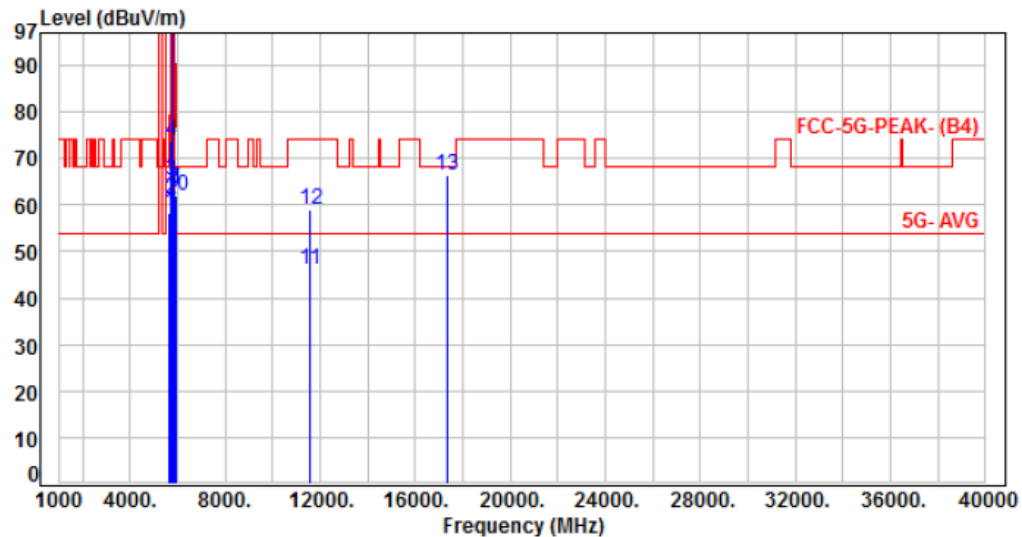


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 50.94          | 58.29          | 68.20          | -9.91       | Peak     | 123         | 29            | P   |
| 2   | 5700.00         | 7.37        | 53.85          | 61.22          | 105.20         | -43.98      | Peak     | 123         | 29            | P   |
| 3   | 5720.00         | 7.34        | 58.11          | 65.45          | 110.80         | -45.35      | Peak     | 123         | 29            | P   |
| 4   | 5725.00         | 7.33        | 66.33          | 73.66          | 122.20         | -48.54      | Peak     | 123         | 29            | P   |
| 5   | 5775.00         | 7.35        | 94.08          | 101.43         | 200.00         | -98.57      | Average  | 123         | 29            | P   |
| 6   | 5775.00         | 7.35        | 103.32         | 110.67         | 200.00         | -89.33      | Peak     | 123         | 29            | P   |
| 7   | 5850.00         | 7.43        | 56.03          | 63.46          | 122.20         | -58.74      | Peak     | 123         | 29            | P   |
| 8   | 5855.00         | 7.45        | 56.05          | 63.50          | 110.80         | -47.30      | Peak     | 123         | 29            | P   |
| 9   | 5875.00         | 7.54        | 55.07          | 62.61          | 105.20         | -42.59      | Peak     | 123         | 29            | P   |
| 10  | 5925.00         | 7.66        | 54.41          | 62.07          | 68.20          | -6.13       | Peak     | 123         | 29            | P   |
| 11  | 11550.00        | 17.88       | 28.14          | 46.02          | 54.00          | -7.98       | Average  | 100         | 138           | P   |
| 12  | 11550.00        | 17.88       | 41.04          | 58.92          | 74.00          | -15.08      | Peak     | 100         | 138           | P   |
| 13  | 17325.00        | 24.29       | 41.93          | 66.22          | 68.20          | -1.98       | Peak     | 100         | 146           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                 |           |   |            |
|-----------|---|---------------------------------|-----------|---|------------|
| Power     | : | AC 120V / 60Hz from PoE         | Pol/Phase | : | HORIZONTAL |
| Test Mode | : | Mode 7, Band 4, 11ax HE80 CH155 |           | : |            |

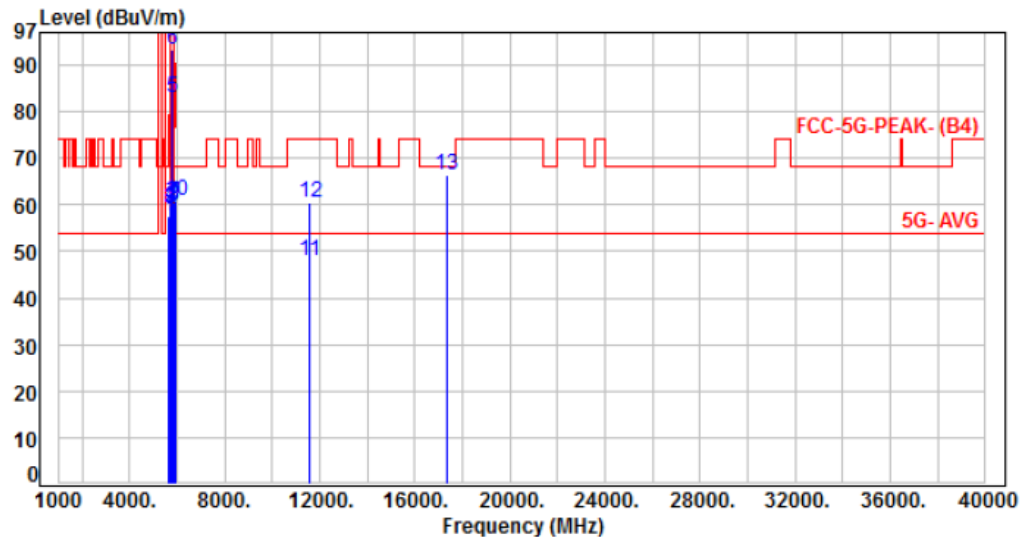

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 50.14          | 57.49          | 68.20          | -10.71      | Peak     | 100         | 331           | P   |
| 2   | 5700.00         | 7.37        | 52.10          | 59.47          | 105.20         | -45.73      | Peak     | 100         | 331           | P   |
| 3   | 5720.00         | 7.34        | 51.84          | 59.18          | 110.80         | -51.62      | Peak     | 100         | 331           | P   |
| 4   | 5725.00         | 7.33        | 52.51          | 59.84          | 122.20         | -62.36      | Peak     | 100         | 331           | P   |
| 5   | 5775.00         | 7.35        | 75.63          | 82.98          | 200.00         | -117.02     | Average  | 100         | 331           | P   |
| 6   | 5775.00         | 7.35        | 85.91          | 93.26          | 200.00         | -106.74     | Peak     | 100         | 331           | P   |
| 7   | 5850.00         | 7.43        | 53.17          | 60.60          | 122.20         | -61.60      | Peak     | 100         | 331           | P   |
| 8   | 5855.00         | 7.45        | 52.17          | 59.62          | 110.80         | -51.18      | Peak     | 100         | 331           | P   |
| 9   | 5875.00         | 7.54        | 52.45          | 59.99          | 105.20         | -45.21      | Peak     | 100         | 331           | P   |
| 10  | 5925.00         | 7.66        | 53.16          | 60.82          | 68.20          | -7.38       | Peak     | 100         | 331           | P   |
| 11  | 11550.00        | 17.88       | 29.98          | 47.86          | 54.00          | -6.14       | Average  | 100         | 315           | P   |
| 12  | 11550.00        | 17.88       | 42.67          | 60.55          | 74.00          | -13.45      | Peak     | 100         | 315           | P   |
| 13  | 17325.00        | 24.29       | 42.08          | 66.37          | 68.20          | -1.83       | Peak     | 100         | 269           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                          |           |   |          |
|-----------|---|--------------------------|-----------|---|----------|
| Power     | : | AC 120V / 60Hz from PoE  | Pol/Phase | : | VERTICAL |
| Test Mode | : | Mode 8, Band 1, 11a CH36 |           | : |          |

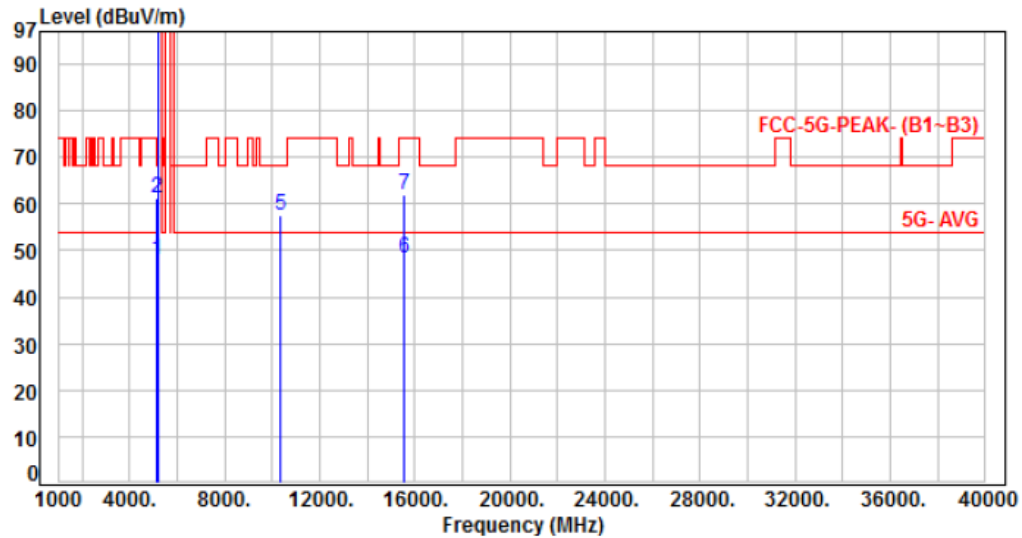

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 41.32          | 48.02          | 54.00          | -5.98       | Average  | 151         | 14            | P   |
| 2   | 5150.00         | 6.70        | 54.67          | 61.37          | 74.00          | -12.63      | Peak     | 151         | 14            | P   |
| 3   | 5180.00         | 6.85        | 98.53          | 105.38         | 200.00         | -94.62      | Average  | 151         | 14            | P   |
| 4   | 5180.00         | 6.85        | 108.27         | 115.12         | 200.00         | -84.88      | Peak     | 151         | 14            | P   |
| 5   | 10360.00        | 15.93       | 41.59          | 57.52          | 68.20          | -10.68      | Peak     | 100         | 166           | P   |
| 6   | 15540.00        | 19.69       | 28.68          | 48.37          | 54.00          | -5.63       | Average  | 100         | 85            | P   |
| 7   | 15540.00        | 19.69       | 42.35          | 62.04          | 74.00          | -11.96      | Peak     | 100         | 85            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                          |           |   |            |
|-----------|---|--------------------------|-----------|---|------------|
| Power     | : | AC 120V / 60Hz from PoE  | Pol/Phase | : | HORIZONTAL |
| Test Mode | : | Mode 8, Band 1, 11a CH36 |           | : |            |

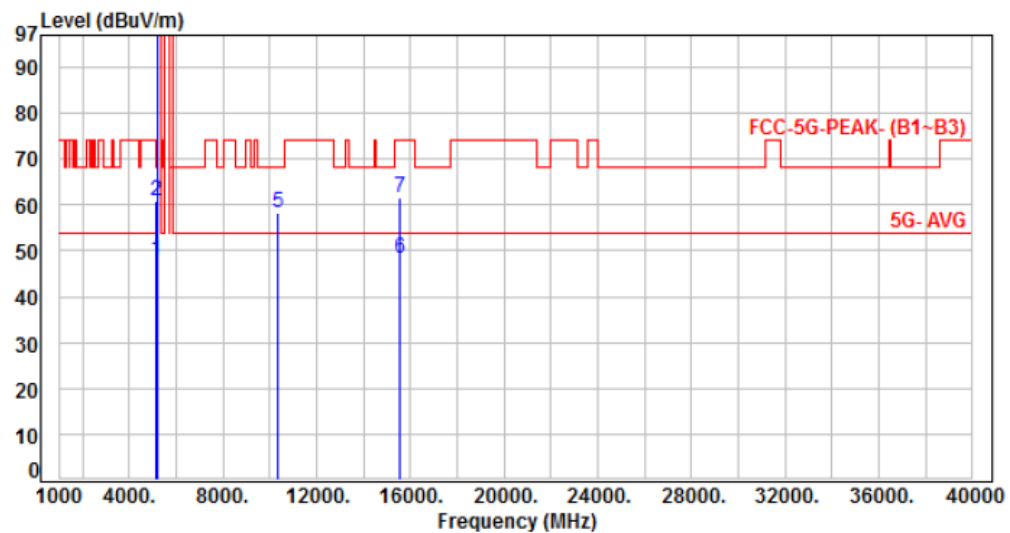

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 41.10          | 47.80          | 54.00          | -6.20       | Average  | 100         | 353           | P   |
| 2   | 5150.00         | 6.70        | 54.26          | 60.96          | 74.00          | -13.04      | Peak     | 100         | 353           | P   |
| 3   | 5180.00         | 6.85        | 96.18          | 103.03         | 200.00         | -96.97      | Average  | 100         | 353           | P   |
| 4   | 5180.00         | 6.85        | 106.39         | 113.24         | 200.00         | -86.76      | Peak     | 100         | 353           | P   |
| 5   | 10360.00        | 15.93       | 42.18          | 58.11          | 68.20          | -10.09      | Peak     | 100         | 46            | P   |
| 6   | 15540.00        | 19.69       | 28.59          | 48.28          | 54.00          | -5.72       | Average  | 100         | 218           | P   |
| 7   | 15540.00        | 19.69       | 41.95          | 61.64          | 74.00          | -12.36      | Peak     | 100         | 218           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                            |           |            |
|-----------|----------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE  | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 8, Band 1, 11a CH40 |           | :          |

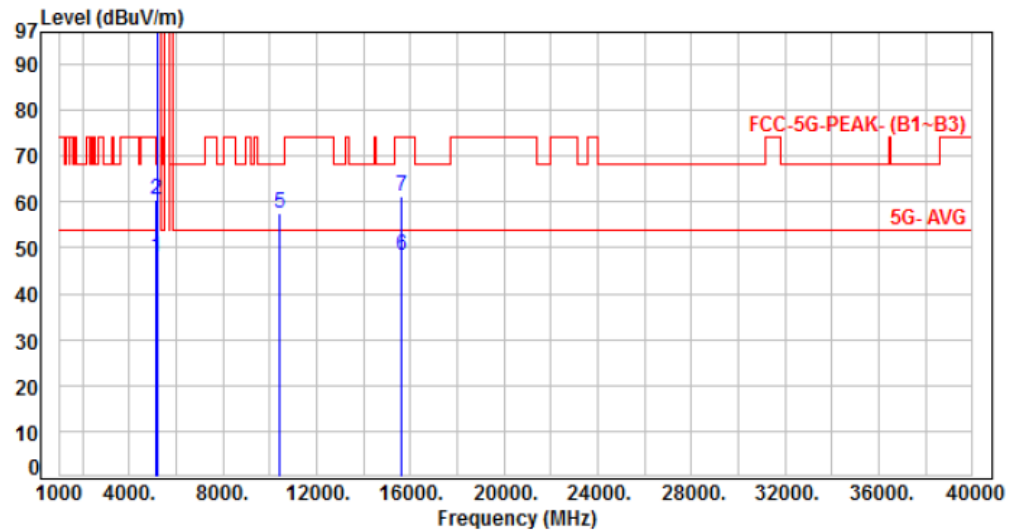

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 41.07          | 47.77          | 54.00          | -6.23       | Average  | 145         | 13            | P   |
| 2   | 5150.00         | 6.70        | 53.93          | 60.63          | 74.00          | -13.37      | Peak     | 145         | 13            | P   |
| 3   | 5200.00         | 6.95        | 98.29          | 105.24         | 200.00         | -94.76      | Average  | 145         | 13            | P   |
| 4   | 5200.00         | 6.95        | 108.83         | 115.78         | 200.00         | -84.22      | Peak     | 145         | 13            | P   |
| 5   | 10400.00        | 15.84       | 41.63          | 57.47          | 68.20          | -10.73      | Peak     | 100         | 166           | P   |
| 6   | 15600.00        | 19.64       | 28.71          | 48.35          | 54.00          | -5.65       | Average  | 100         | 84            | P   |
| 7   | 15600.00        | 19.64       | 41.58          | 61.22          | 74.00          | -12.78      | Peak     | 100         | 84            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                          |           |   |            |
|-----------|---|--------------------------|-----------|---|------------|
| Power     | : | AC 120V / 60Hz from PoE  | Pol/Phase | : | HORIZONTAL |
| Test Mode | : | Mode 8, Band 1, 11a CH40 |           | : |            |

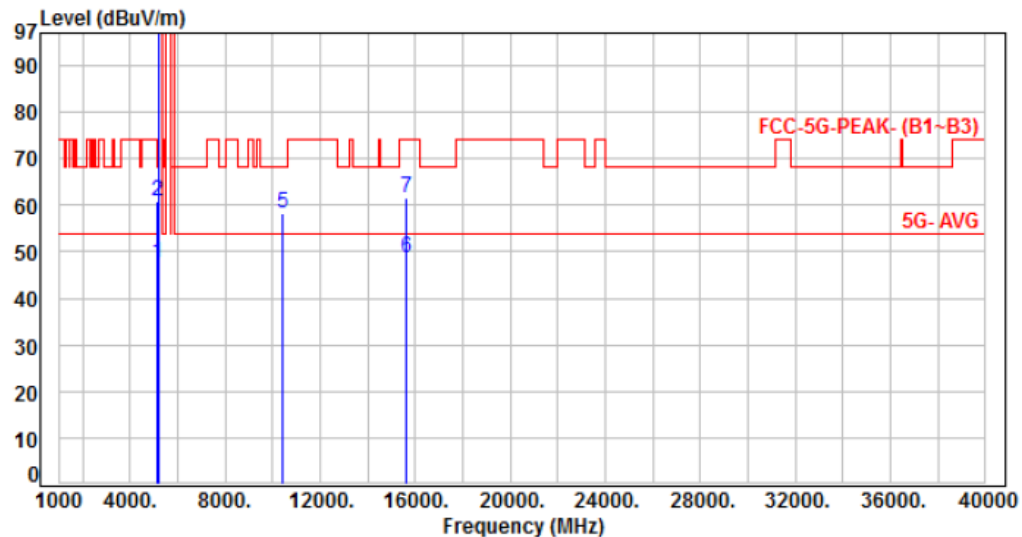

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.98          | 47.68          | 54.00          | -6.32       | Average  | 101         | 355           | P   |
| 2   | 5150.00         | 6.70        | 53.99          | 60.69          | 74.00          | -13.31      | Peak     | 101         | 355           | P   |
| 3   | 5200.00         | 6.95        | 96.80          | 103.75         | 200.00         | -96.25      | Average  | 101         | 355           | P   |
| 4   | 5200.00         | 6.95        | 106.56         | 113.51         | 200.00         | -86.49      | Peak     | 101         | 355           | P   |
| 5   | 10400.00        | 15.84       | 42.38          | 58.22          | 68.20          | -9.98       | Peak     | 100         | 42            | P   |
| 6   | 15600.00        | 19.64       | 28.95          | 48.59          | 54.00          | -5.41       | Average  | 100         | 229           | P   |
| 7   | 15600.00        | 19.64       | 41.87          | 61.51          | 74.00          | -12.49      | Peak     | 100         | 229           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                            |           |            |
|-----------|----------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE  | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 8, Band 1, 11a CH48 |           | :          |

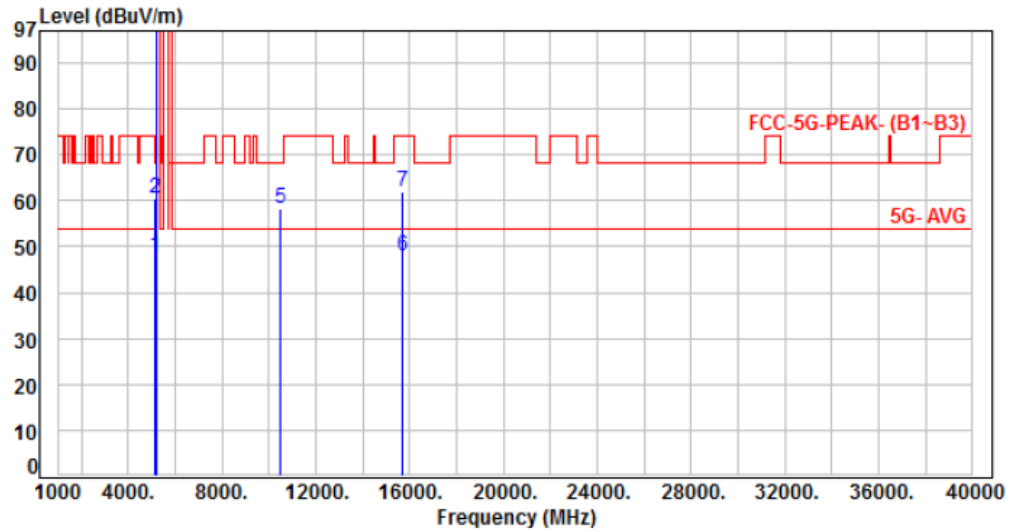

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 41.10          | 47.80          | 54.00          | -6.20       | Average  | 162         | 12            | P   |
| 2   | 5150.00         | 6.70        | 53.84          | 60.54          | 74.00          | -13.46      | Peak     | 162         | 12            | P   |
| 3   | 5240.00         | 7.00        | 97.44          | 104.44         | 200.00         | -95.56      | Average  | 162         | 12            | P   |
| 4   | 5240.00         | 7.00        | 107.94         | 114.94         | 200.00         | -85.06      | Peak     | 162         | 12            | P   |
| 5   | 10480.00        | 15.97       | 42.21          | 58.18          | 68.20          | -10.02      | Peak     | 100         | 163           | P   |
| 6   | 15720.00        | 19.25       | 28.52          | 47.77          | 54.00          | -6.23       | Average  | 100         | 92            | P   |
| 7   | 15720.00        | 19.25       | 42.66          | 61.91          | 74.00          | -12.09      | Peak     | 100         | 92            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                            |           |              |
|-----------|----------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE  | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 8, Band 1, 11a CH48 |           | :            |

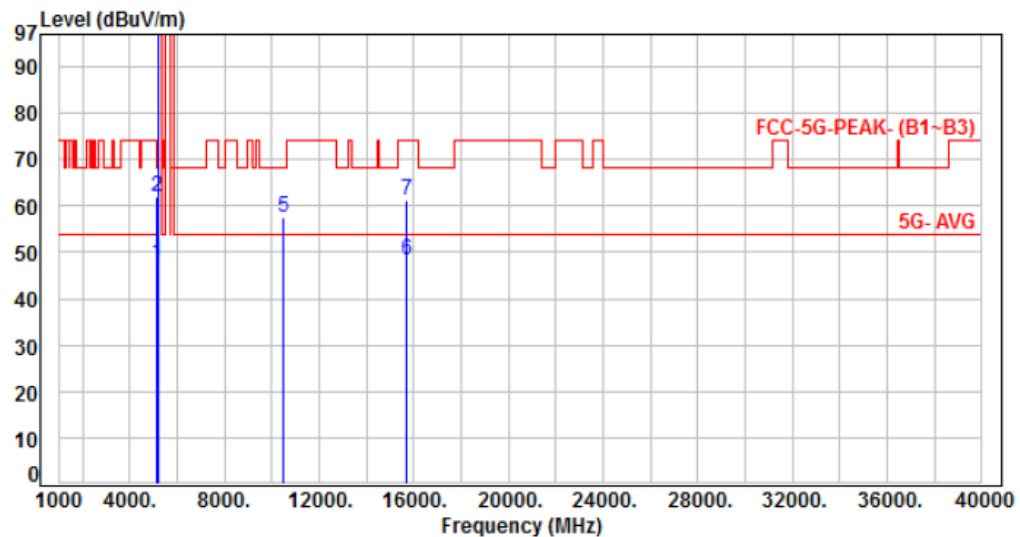

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.83          | 47.53          | 54.00          | -6.47       | Average  | 106         | 354           | P   |
| 2   | 5150.00         | 6.70        | 55.19          | 61.89          | 74.00          | -12.11      | Peak     | 106         | 354           | P   |
| 3   | 5240.00         | 7.00        | 96.09          | 103.09         | 200.00         | -96.91      | Average  | 106         | 354           | P   |
| 4   | 5240.00         | 7.00        | 105.96         | 112.96         | 200.00         | -87.04      | Peak     | 106         | 354           | P   |
| 5   | 10480.00        | 15.97       | 41.60          | 57.57          | 68.20          | -10.63      | Peak     | 100         | 52            | P   |
| 6   | 15720.00        | 19.25       | 29.05          | 48.30          | 54.00          | -5.70       | Average  | 100         | 219           | P   |
| 7   | 15720.00        | 19.25       | 41.93          | 61.18          | 74.00          | -12.82      | Peak     | 100         | 219           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                           |           |   |          |
|-----------|---|---------------------------|-----------|---|----------|
| Power     | : | AC 120V / 60Hz from PoE   | Pol/Phase | : | VERTICAL |
| Test Mode | : | Mode 8, Band 4, 11a CH149 |           | : |          |

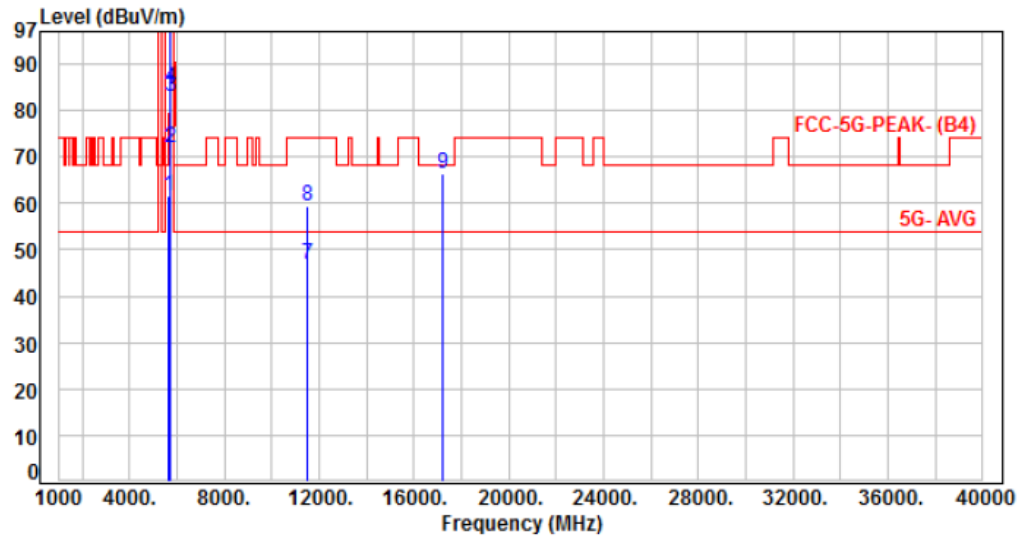

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 54.07          | 61.42          | 68.20          | -6.78       | Peak     | 221         | 19            | P   |
| 2   | 5700.00         | 7.37        | 64.41          | 71.78          | 105.20         | -33.42      | Peak     | 221         | 19            | P   |
| 3   | 5720.00         | 7.34        | 75.69          | 83.03          | 110.80         | -27.77      | Peak     | 221         | 19            | P   |
| 4   | 5725.00         | 7.33        | 77.63          | 84.96          | 122.20         | -37.24      | Peak     | 221         | 19            | P   |
| 5   | 5745.00         | 7.30        | 104.51         | 111.81         | 200.00         | -88.19      | Average  | 221         | 19            | P   |
| 6   | 5745.00         | 7.30        | 114.66         | 121.96         | 200.00         | -78.04      | Peak     | 221         | 19            | P   |
| 7   | 11490.00        | 17.72       | 29.18          | 46.90          | 54.00          | -7.10       | Average  | 100         | 163           | P   |
| 8   | 11490.00        | 17.72       | 41.65          | 59.37          | 74.00          | -14.63      | Peak     | 100         | 163           | P   |
| 9   | 17235.00        | 23.71       | 42.69          | 66.40          | 68.20          | -1.80       | Peak     | 100         | 85            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                             |           |              |
|-----------|-----------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE   | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 8, Band 4, 11a CH149 |           | :            |

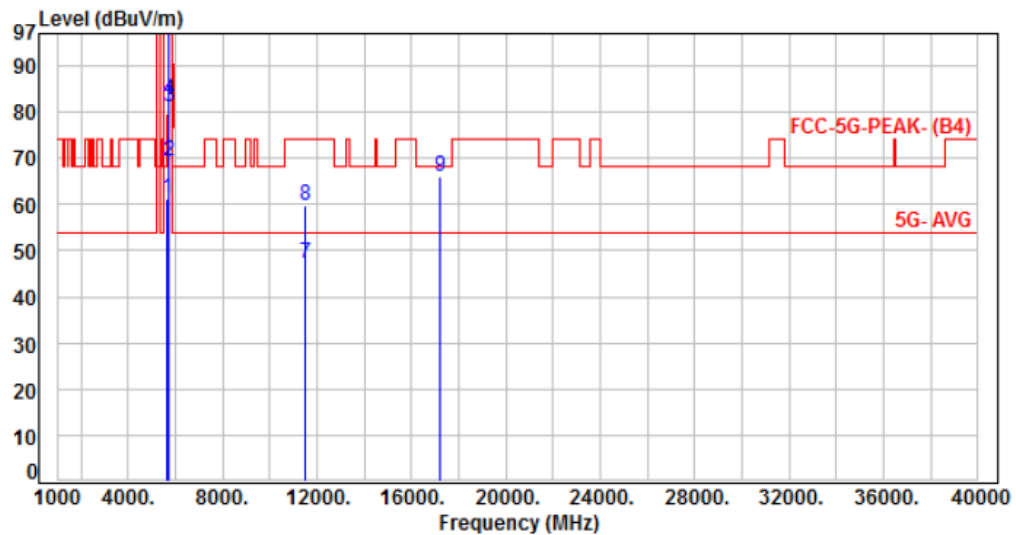


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 54.03          | 61.38          | 68.20          | -6.82       | Peak     | 149         | 351           | P   |
| 2   | 5700.00         | 7.37        | 61.90          | 69.27          | 105.20         | -35.93      | Peak     | 149         | 351           | P   |
| 3   | 5720.00         | 7.34        | 73.65          | 80.99          | 110.80         | -29.81      | Peak     | 149         | 351           | P   |
| 4   | 5725.00         | 7.33        | 75.23          | 82.56          | 122.20         | -39.64      | Peak     | 149         | 351           | P   |
| 5   | 5745.00         | 7.30        | 103.02         | 110.32         | 200.00         | -89.68      | Average  | 149         | 351           | P   |
| 6   | 5745.00         | 7.30        | 113.02         | 120.32         | 200.00         | -79.68      | Peak     | 149         | 351           | P   |
| 7   | 11490.00        | 17.72       | 29.58          | 47.30          | 54.00          | -6.70       | Average  | 100         | 50            | P   |
| 8   | 11490.00        | 17.72       | 41.87          | 59.59          | 74.00          | -14.41      | Peak     | 100         | 50            | P   |
| 9   | 17235.00        | 23.71       | 42.29          | 66.00          | 68.20          | -2.20       | Peak     | 100         | 222           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                             |           |            |
|-----------|-----------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE   | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 8, Band 4, 11a CH157 |           | :          |

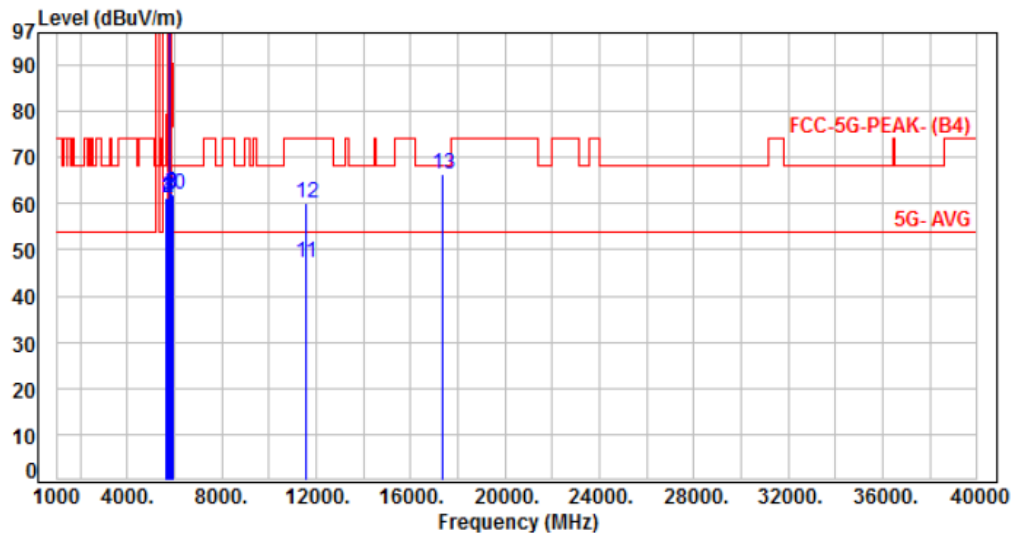

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 53.71          | 61.06          | 68.20          | -7.14       | Peak     | 229         | 21            | P   |
| 2   | 5700.00         | 7.37        | 53.80          | 61.17          | 105.20         | -44.03      | Peak     | 229         | 21            | P   |
| 3   | 5720.00         | 7.34        | 54.01          | 61.35          | 110.80         | -49.45      | Peak     | 229         | 21            | P   |
| 4   | 5725.00         | 7.33        | 53.73          | 61.06          | 122.20         | -61.14      | Peak     | 229         | 21            | P   |
| 5   | 5785.00         | 7.37        | 102.94         | 110.31         | 200.00         | -89.69      | Average  | 229         | 21            | P   |
| 6   | 5785.00         | 7.37        | 113.47         | 120.84         | 200.00         | -79.16      | Peak     | 229         | 21            | P   |
| 7   | 5850.00         | 7.43        | 54.55          | 61.98          | 122.20         | -60.22      | Peak     | 229         | 21            | P   |
| 8   | 5855.00         | 7.45        | 54.40          | 61.85          | 110.80         | -48.95      | Peak     | 229         | 21            | P   |
| 9   | 5875.00         | 7.54        | 54.67          | 62.21          | 105.20         | -42.99      | Peak     | 229         | 21            | P   |
| 10  | 5925.00         | 7.66        | 54.19          | 61.85          | 68.20          | -6.35       | Peak     | 229         | 21            | P   |
| 11  | 11570.00        | 17.92       | 29.34          | 47.26          | 54.00          | -6.74       | Average  | 100         | 162           | P   |
| 12  | 11570.00        | 17.92       | 42.29          | 60.21          | 74.00          | -13.79      | Peak     | 100         | 162           | P   |
| 13  | 17355.00        | 24.51       | 41.69          | 66.20          | 68.20          | -2.00       | Peak     | 100         | 82            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                             |           |              |
|-----------|-----------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE   | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 8, Band 4, 11a CH157 |           |              |

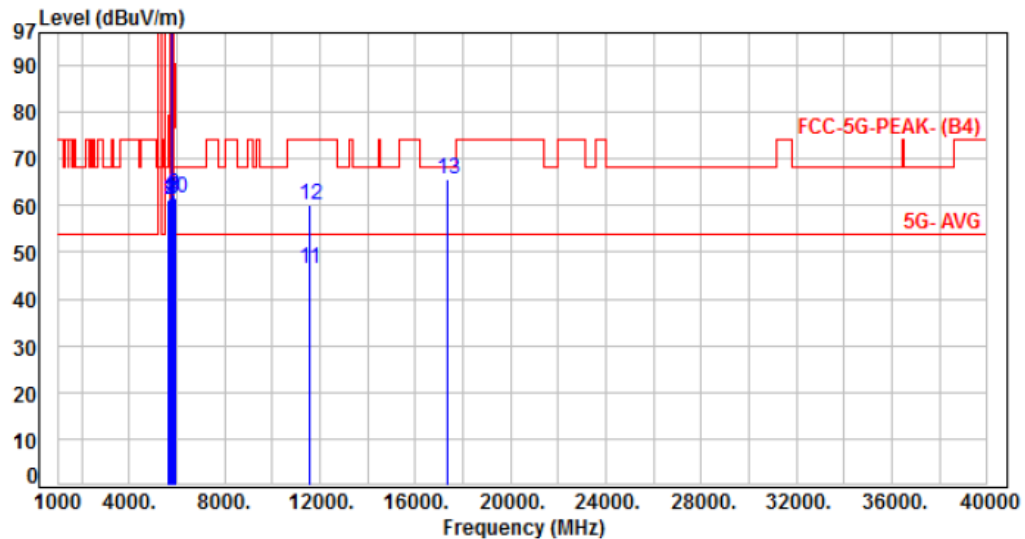

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 53.77          | 61.12          | 68.20          | -7.08       | Peak     | 141         | 356           | P   |
| 2   | 5700.00         | 7.37        | 53.84          | 61.21          | 105.20         | -43.99      | Peak     | 141         | 356           | P   |
| 3   | 5720.00         | 7.34        | 53.92          | 61.26          | 110.80         | -49.54      | Peak     | 141         | 356           | P   |
| 4   | 5725.00         | 7.33        | 54.31          | 61.64          | 122.20         | -60.56      | Peak     | 141         | 356           | P   |
| 5   | 5785.00         | 7.37        | 101.91         | 109.28         | 200.00         | -90.72      | Average  | 141         | 356           | P   |
| 6   | 5785.00         | 7.37        | 111.81         | 119.18         | 200.00         | -80.82      | Peak     | 141         | 356           | P   |
| 7   | 5850.00         | 7.43        | 54.26          | 61.69          | 122.20         | -60.51      | Peak     | 141         | 356           | P   |
| 8   | 5855.00         | 7.45        | 54.25          | 61.70          | 110.80         | -49.10      | Peak     | 141         | 356           | P   |
| 9   | 5875.00         | 7.54        | 54.74          | 62.28          | 105.20         | -42.92      | Peak     | 141         | 356           | P   |
| 10  | 5925.00         | 7.66        | 54.08          | 61.74          | 68.20          | -6.46       | Peak     | 141         | 356           | P   |
| 11  | 11570.00        | 17.92       | 28.58          | 46.50          | 54.00          | -7.50       | Average  | 100         | 46            | P   |
| 12  | 11570.00        | 17.92       | 42.36          | 60.28          | 74.00          | -13.72      | Peak     | 100         | 46            | P   |
| 13  | 17355.00        | 24.51       | 41.28          | 65.79          | 68.20          | -2.41       | Peak     | 100         | 224           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                           |           |   |          |
|-----------|---|---------------------------|-----------|---|----------|
| Power     | : | AC 120V / 60Hz from PoE   | Pol/Phase | : | VERTICAL |
| Test Mode | : | Mode 8, Band 4, 11a CH165 |           | : |          |

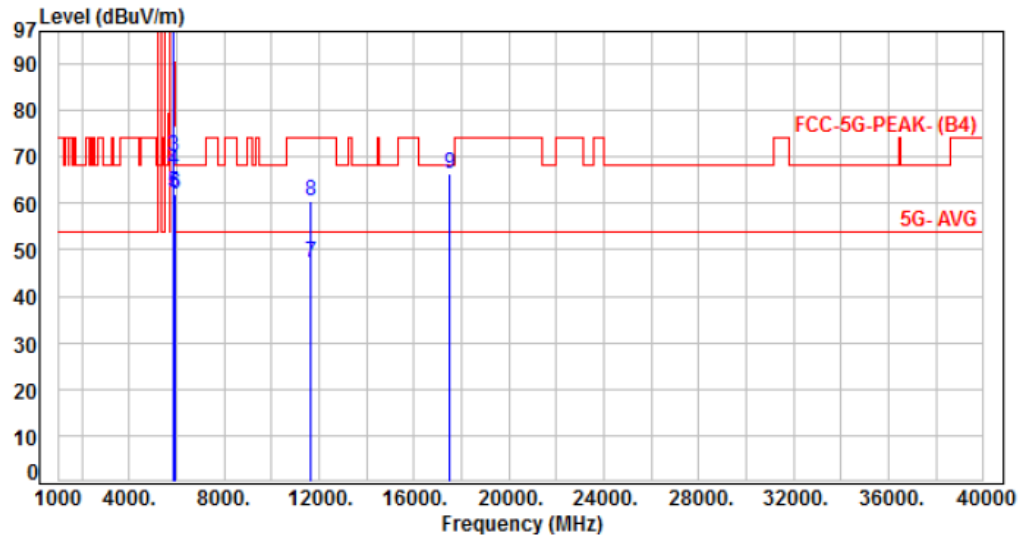

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 7.42        | 102.43         | 109.85         | 200.00         | -90.15      | Average  | 228         | 22            | P   |
| 2   | 5825.00         | 7.42        | 112.20         | 119.62         | 200.00         | -80.38      | Peak     | 228         | 22            | P   |
| 3   | 5850.00         | 7.43        | 62.63          | 70.06          | 122.20         | -52.14      | Peak     | 228         | 22            | P   |
| 4   | 5855.00         | 7.45        | 59.75          | 67.20          | 110.80         | -43.60      | Peak     | 228         | 22            | P   |
| 5   | 5875.00         | 7.54        | 54.71          | 62.25          | 105.20         | -42.95      | Peak     | 228         | 22            | P   |
| 6   | 5925.00         | 7.66        | 54.17          | 61.83          | 68.20          | -6.37       | Peak     | 228         | 22            | P   |
| 7   | 11650.00        | 18.08       | 29.08          | 47.16          | 54.00          | -6.84       | Average  | 100         | 170           | P   |
| 8   | 11650.00        | 18.08       | 42.39          | 60.47          | 74.00          | -13.53      | Peak     | 100         | 170           | P   |
| 9   | 17475.00        | 25.09       | 41.33          | 66.42          | 68.20          | -1.78       | Peak     | 100         | 84            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                             |           |              |
|-----------|-----------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE   | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 8, Band 4, 11a CH165 |           |              |

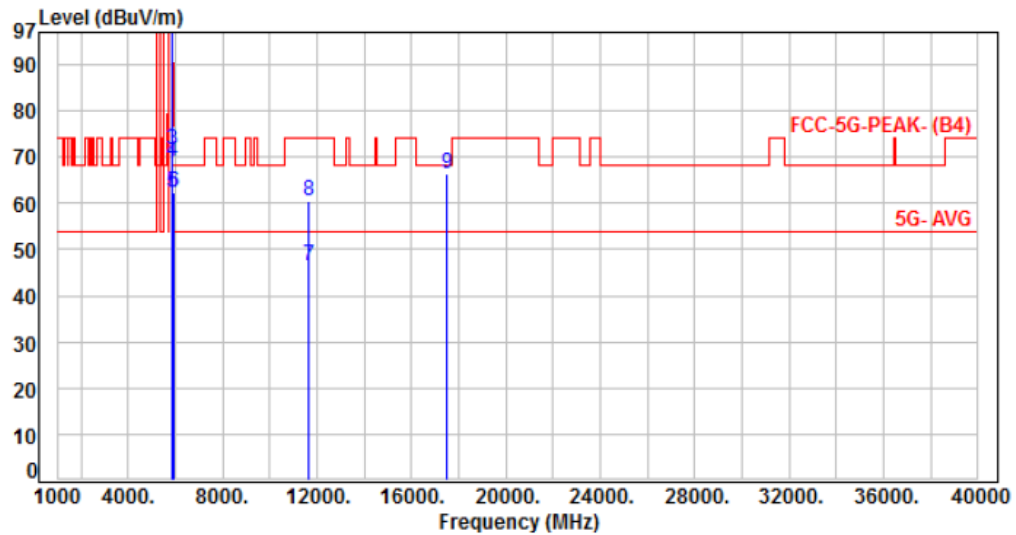


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 7.42        | 101.99         | 109.41         | 200.00         | -90.59      | Average  | 159         | 358           | P   |
| 2   | 5825.00         | 7.42        | 112.24         | 119.66         | 200.00         | -80.34      | Peak     | 159         | 358           | P   |
| 3   | 5850.00         | 7.43        | 64.24          | 71.67          | 122.20         | -50.53      | Peak     | 159         | 358           | P   |
| 4   | 5855.00         | 7.45        | 61.52          | 68.97          | 110.80         | -41.83      | Peak     | 159         | 358           | P   |
| 5   | 5875.00         | 7.54        | 54.96          | 62.50          | 105.20         | -42.70      | Peak     | 159         | 358           | P   |
| 6   | 5925.00         | 7.66        | 54.60          | 62.26          | 68.20          | -5.94       | Peak     | 159         | 358           | P   |
| 7   | 11650.00        | 18.08       | 28.30          | 46.38          | 54.00          | -7.62       | Average  | 100         | 51            | P   |
| 8   | 11650.00        | 18.08       | 42.36          | 60.44          | 74.00          | -13.56      | Peak     | 100         | 51            | P   |
| 9   | 17475.00        | 25.09       | 41.16          | 66.25          | 68.20          | -1.95       | Peak     | 100         | 228           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                |           |   |          |
|-----------|---|--------------------------------|-----------|---|----------|
| Power     | : | AC 120V / 60Hz from PoE        | Pol/Phase | : | VERTICAL |
| Test Mode | : | Mode 9, Band 1, 11ax HE20 CH36 |           | : |          |

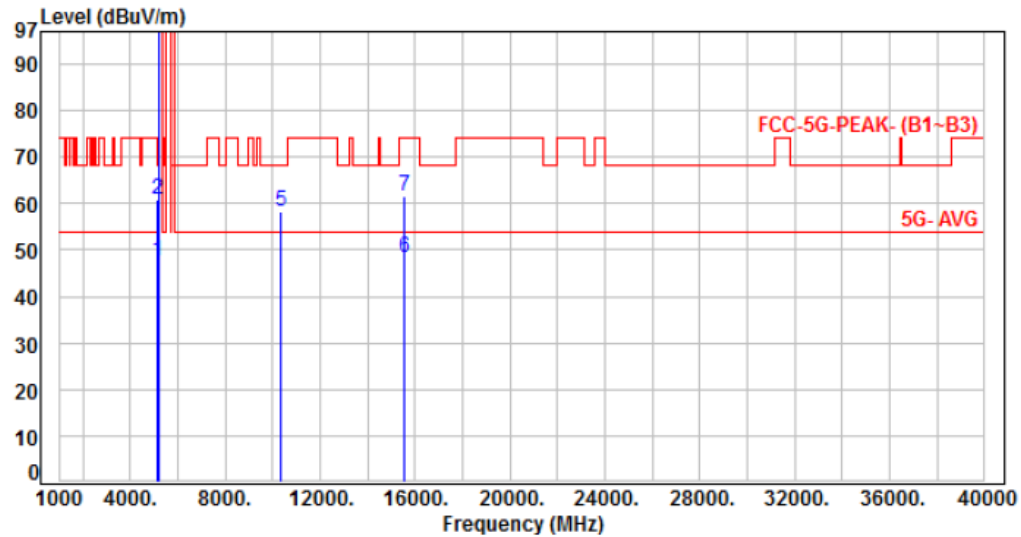

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.87          | 47.57          | 54.00          | -6.43       | Average  | 136         | 16            | P   |
| 2   | 5150.00         | 6.70        | 54.24          | 60.94          | 74.00          | -13.06      | Peak     | 136         | 16            | P   |
| 3   | 5180.00         | 6.85        | 97.39          | 104.24         | 200.00         | -95.76      | Average  | 136         | 16            | P   |
| 4   | 5180.00         | 6.85        | 110.34         | 117.19         | 200.00         | -82.81      | Peak     | 136         | 16            | P   |
| 5   | 10360.00        | 15.93       | 42.49          | 58.42          | 68.20          | -9.78       | Peak     | 100         | 165           | P   |
| 6   | 15540.00        | 19.69       | 28.58          | 48.27          | 54.00          | -5.73       | Average  | 100         | 81            | P   |
| 7   | 15540.00        | 19.69       | 41.75          | 61.44          | 74.00          | -12.56      | Peak     | 100         | 81            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                |           |   |            |
|-----------|---|--------------------------------|-----------|---|------------|
| Power     | : | AC 120V / 60Hz from PoE        | Pol/Phase | : | HORIZONTAL |
| Test Mode | : | Mode 9, Band 1, 11ax HE20 CH36 |           | : |            |

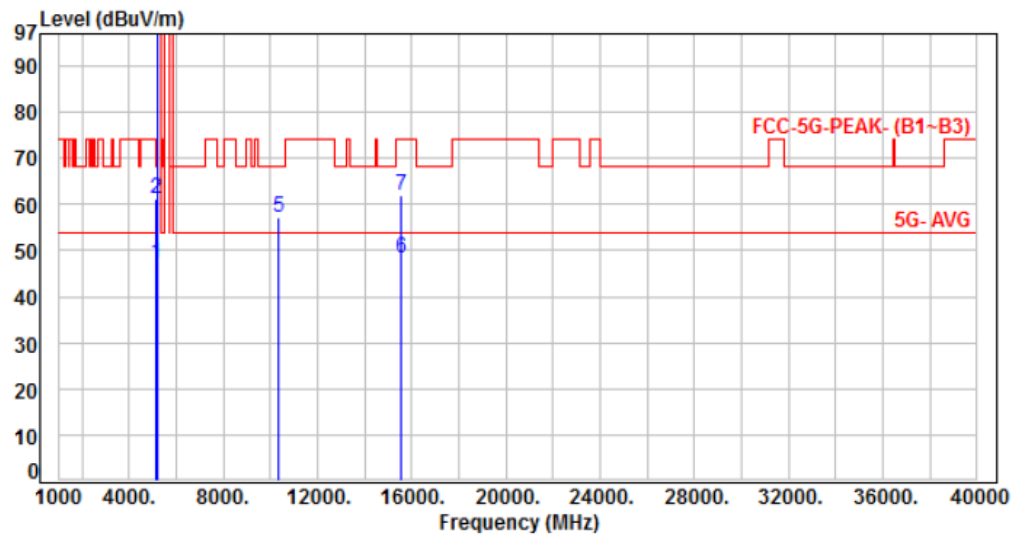

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.49          | 47.19          | 54.00          | -6.81       | Average  | 100         | 350           | P   |
| 2   | 5150.00         | 6.70        | 54.52          | 61.22          | 74.00          | -12.78      | Peak     | 100         | 350           | P   |
| 3   | 5180.00         | 6.85        | 94.99          | 101.84         | 200.00         | -98.16      | Average  | 100         | 350           | P   |
| 4   | 5180.00         | 6.85        | 108.39         | 115.24         | 200.00         | -84.76      | Peak     | 100         | 350           | P   |
| 5   | 10360.00        | 15.93       | 41.26          | 57.19          | 68.20          | -11.01      | Peak     | 100         | 44            | P   |
| 6   | 15540.00        | 19.69       | 28.73          | 48.42          | 54.00          | -5.58       | Average  | 100         | 231           | P   |
| 7   | 15540.00        | 19.69       | 42.17          | 61.86          | 74.00          | -12.14      | Peak     | 100         | 231           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                |           |   |          |
|-----------|---|--------------------------------|-----------|---|----------|
| Power     | : | AC 120V / 60Hz from PoE        | Pol/Phase | : | VERTICAL |
| Test Mode | : | Mode 9, Band 1, 11ax HE20 CH40 |           | : |          |

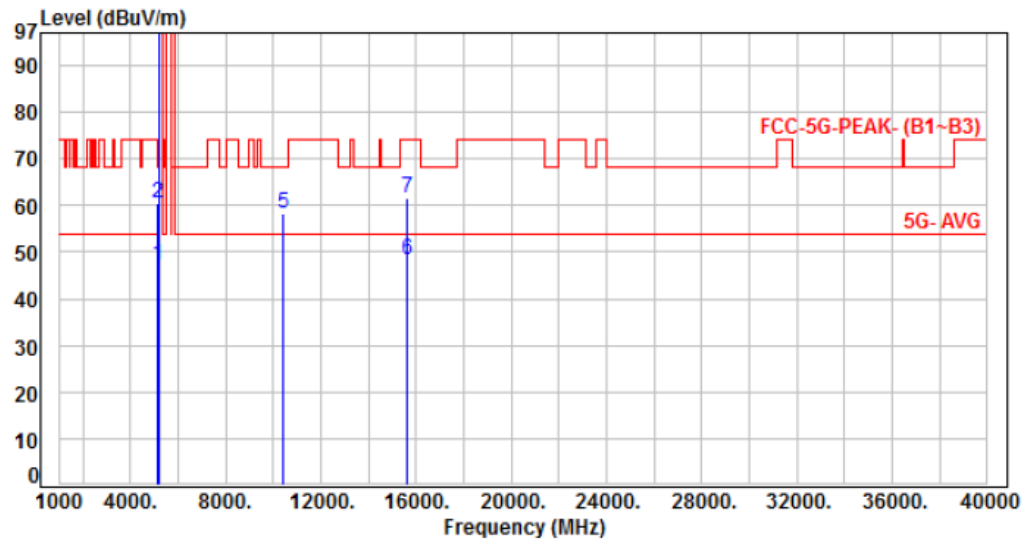

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.48          | 47.18          | 54.00          | -6.82       | Average  | 145         | 14            | P   |
| 2   | 5150.00         | 6.70        | 53.65          | 60.35          | 74.00          | -13.65      | Peak     | 145         | 14            | P   |
| 3   | 5200.00         | 6.95        | 97.09          | 104.04         | 200.00         | -95.96      | Average  | 145         | 14            | P   |
| 4   | 5200.00         | 6.95        | 110.61         | 117.56         | 200.00         | -82.44      | Peak     | 145         | 14            | P   |
| 5   | 10400.00        | 15.84       | 42.49          | 58.33          | 68.20          | -9.87       | Peak     | 100         | 168           | P   |
| 6   | 15600.00        | 19.64       | 28.85          | 48.49          | 54.00          | -5.51       | Average  | 100         | 82            | P   |
| 7   | 15600.00        | 19.64       | 42.07          | 61.71          | 74.00          | -12.29      | Peak     | 100         | 82            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                  |           |              |
|-----------|----------------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE        | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 9, Band 1, 11ax HE20 CH40 |           |              |

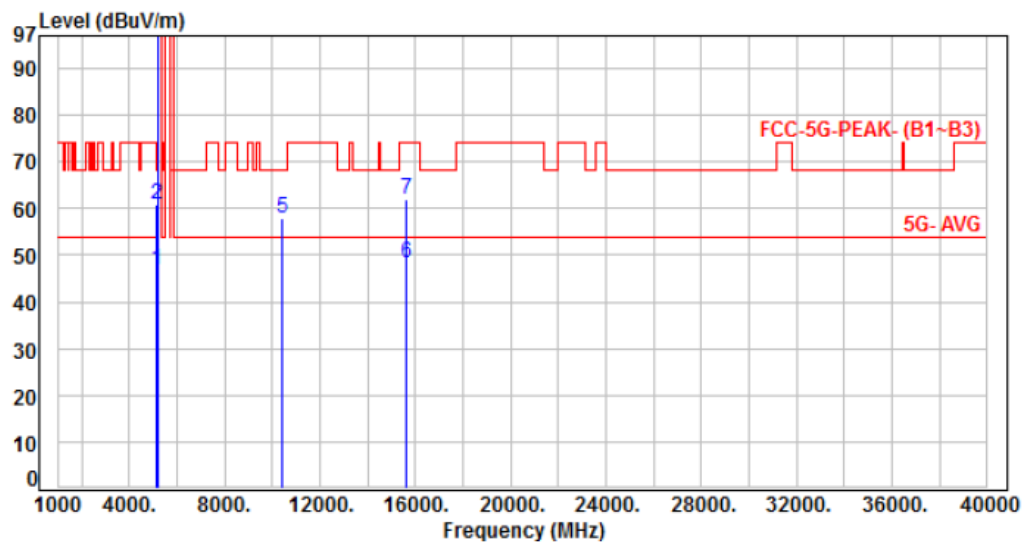

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.24          | 46.94          | 54.00          | -7.06       | Average  | 100         | 354           | P   |
| 2   | 5150.00         | 6.70        | 54.20          | 60.90          | 74.00          | -13.10      | Peak     | 100         | 354           | P   |
| 3   | 5200.00         | 6.95        | 95.54          | 102.49         | 200.00         | -97.51      | Average  | 100         | 354           | P   |
| 4   | 5200.00         | 6.95        | 109.44         | 116.39         | 200.00         | -83.61      | Peak     | 100         | 354           | P   |
| 5   | 10400.00        | 15.84       | 41.93          | 57.77          | 68.20          | -10.43      | Peak     | 100         | 49            | P   |
| 6   | 15600.00        | 19.64       | 28.86          | 48.50          | 54.00          | -5.50       | Average  | 100         | 232           | P   |
| 7   | 15600.00        | 19.64       | 42.38          | 62.02          | 74.00          | -11.98      | Peak     | 100         | 232           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                  |           |            |
|-----------|----------------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE        | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 9, Band 1, 11ax HE20 CH48 |           | :          |

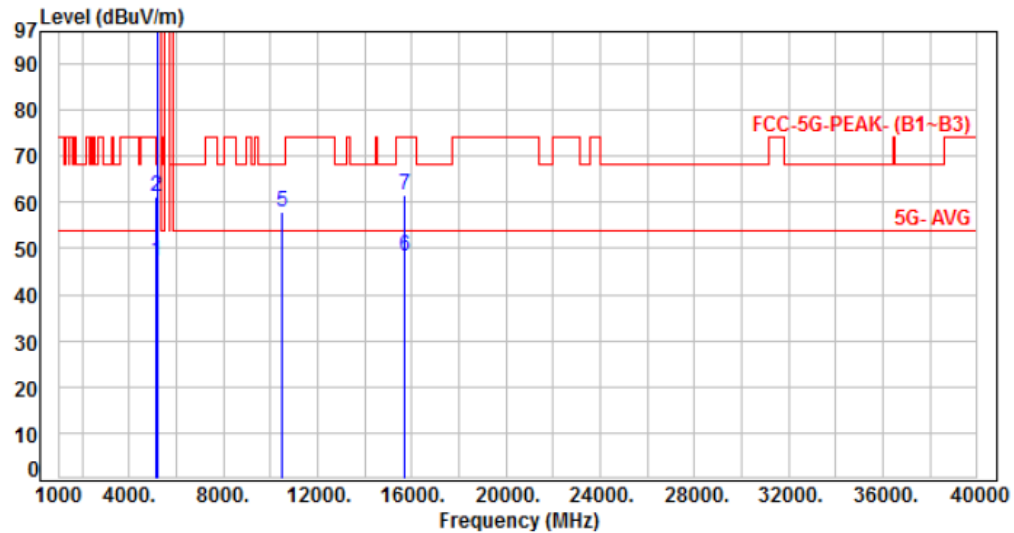


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.33          | 47.03          | 54.00          | -6.97       | Average  | 159         | 15            | P   |
| 2   | 5150.00         | 6.70        | 54.36          | 61.06          | 74.00          | -12.94      | Peak     | 159         | 15            | P   |
| 3   | 5240.00         | 7.00        | 97.01          | 104.01         | 200.00         | -95.99      | Average  | 159         | 15            | P   |
| 4   | 5240.00         | 7.00        | 110.20         | 117.20         | 200.00         | -82.80      | Peak     | 159         | 15            | P   |
| 5   | 10480.00        | 15.97       | 41.89          | 57.86          | 68.20          | -10.34      | Peak     | 100         | 160           | P   |
| 6   | 15720.00        | 19.25       | 29.21          | 48.46          | 54.00          | -5.54       | Average  | 100         | 90            | P   |
| 7   | 15720.00        | 19.25       | 42.33          | 61.58          | 74.00          | -12.42      | Peak     | 100         | 90            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                |           |   |            |
|-----------|---|--------------------------------|-----------|---|------------|
| Power     | : | AC 120V / 60Hz from PoE        | Pol/Phase | : | HORIZONTAL |
| Test Mode | : | Mode 9, Band 1, 11ax HE20 CH48 |           | : |            |

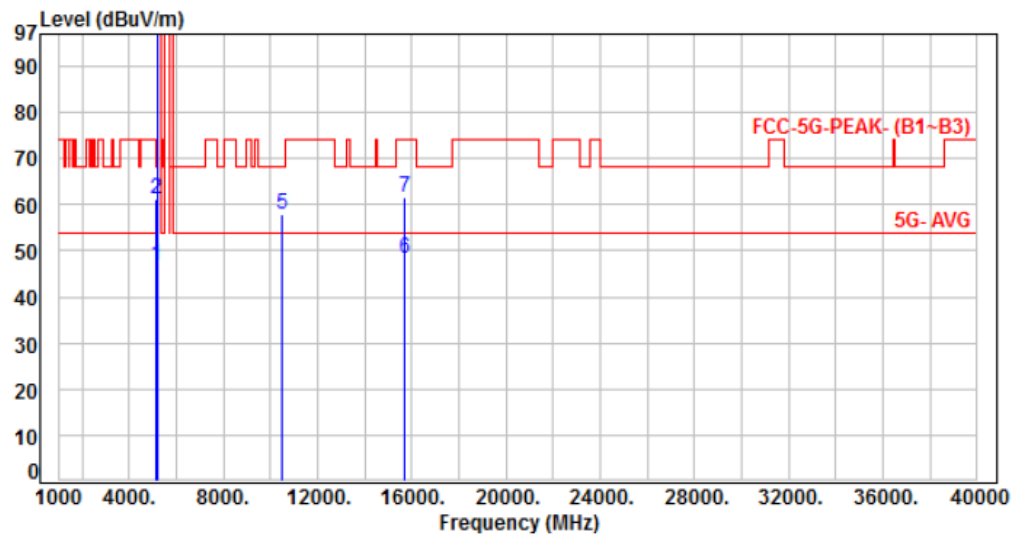


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.21          | 46.91          | 54.00          | -7.09       | Average  | 100         | 353           | P   |
| 2   | 5150.00         | 6.70        | 54.56          | 61.26          | 74.00          | -12.74      | Peak     | 100         | 353           | P   |
| 3   | 5240.00         | 7.00        | 95.74          | 102.74         | 200.00         | -97.26      | Average  | 100         | 353           | P   |
| 4   | 5240.00         | 7.00        | 109.94         | 116.94         | 200.00         | -83.06      | Peak     | 100         | 353           | P   |
| 5   | 10480.00        | 15.97       | 41.86          | 57.83          | 68.20          | -10.37      | Peak     | 100         | 50            | P   |
| 6   | 15720.00        | 19.25       | 29.17          | 48.42          | 54.00          | -5.58       | Average  | 100         | 218           | P   |
| 7   | 15720.00        | 19.25       | 42.42          | 61.67          | 74.00          | -12.33      | Peak     | 100         | 218           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                   |           |            |
|-----------|-----------------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE         | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 9, Band 4, 11ax HE20 CH149 |           | :          |

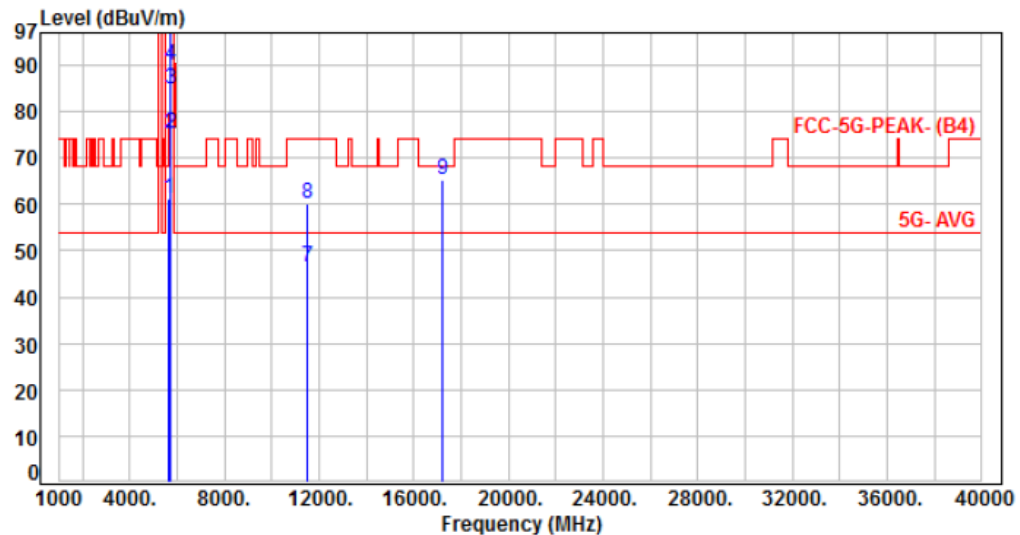

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 53.99          | 61.34          | 68.20          | -6.86       | Peak     | 287         | 21            | P   |
| 2   | 5700.00         | 7.37        | 68.02          | 75.39          | 105.20         | -29.81      | Peak     | 287         | 21            | P   |
| 3   | 5720.00         | 7.34        | 77.59          | 84.93          | 110.80         | -25.87      | Peak     | 287         | 21            | P   |
| 4   | 5725.00         | 7.33        | 82.73          | 90.06          | 122.20         | -32.14      | Peak     | 287         | 21            | P   |
| 5   | 5745.00         | 7.30        | 103.26         | 110.56         | 200.00         | -89.44      | Average  | 287         | 21            | P   |
| 6   | 5745.00         | 7.30        | 116.83         | 124.13         | 200.00         | -75.87      | Peak     | 287         | 21            | P   |
| 7   | 11490.00        | 17.72       | 28.84          | 46.56          | 54.00          | -7.44       | Average  | 100         | 161           | P   |
| 8   | 11490.00        | 17.72       | 42.52          | 60.24          | 74.00          | -13.76      | Peak     | 100         | 161           | P   |
| 9   | 17235.00        | 23.71       | 41.41          | 65.12          | 68.20          | -3.08       | Peak     | 100         | 91            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                   |           |              |
|-----------|-----------------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE         | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 9, Band 4, 11ax HE20 CH149 |           | :            |

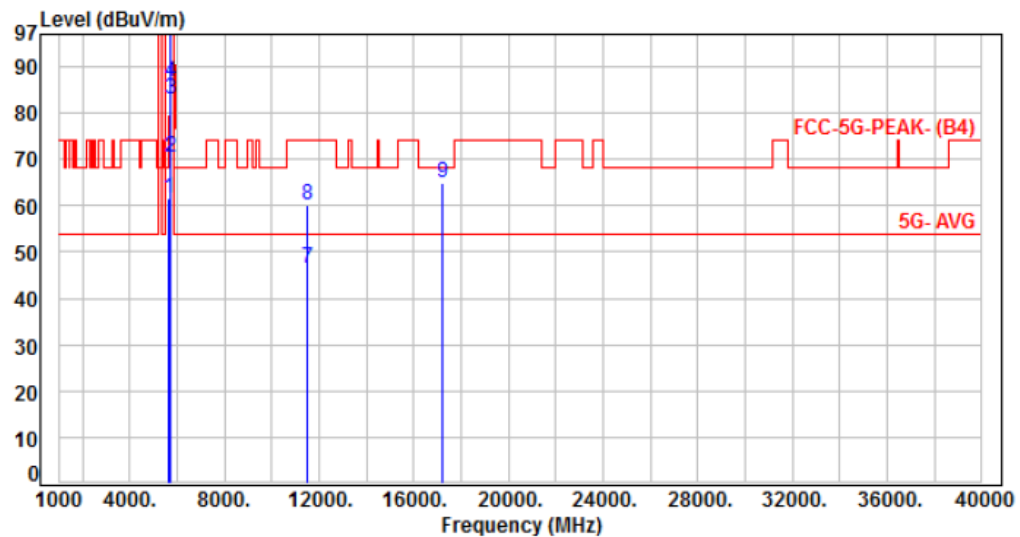

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 54.36          | 61.71          | 68.20          | -6.49       | Peak     | 153         | 355           | P   |
| 2   | 5700.00         | 7.37        | 63.03          | 70.40          | 105.20         | -34.80      | Peak     | 153         | 355           | P   |
| 3   | 5720.00         | 7.34        | 75.69          | 83.03          | 110.80         | -27.77      | Peak     | 153         | 355           | P   |
| 4   | 5725.00         | 7.33        | 79.51          | 86.84          | 122.20         | -35.36      | Peak     | 153         | 355           | P   |
| 5   | 5745.00         | 7.30        | 102.01         | 109.31         | 200.00         | -90.69      | Average  | 153         | 355           | P   |
| 6   | 5745.00         | 7.30        | 115.90         | 123.20         | 200.00         | -76.80      | Peak     | 153         | 355           | P   |
| 7   | 11490.00        | 17.72       | 28.69          | 46.41          | 54.00          | -7.59       | Average  | 100         | 52            | P   |
| 8   | 11490.00        | 17.72       | 42.55          | 60.27          | 74.00          | -13.73      | Peak     | 100         | 52            | P   |
| 9   | 17235.00        | 23.71       | 41.17          | 64.88          | 68.20          | -3.32       | Peak     | 100         | 225           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                   |           |            |
|-----------|-----------------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE         | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 9, Band 4, 11ax HE20 CH157 |           | :          |

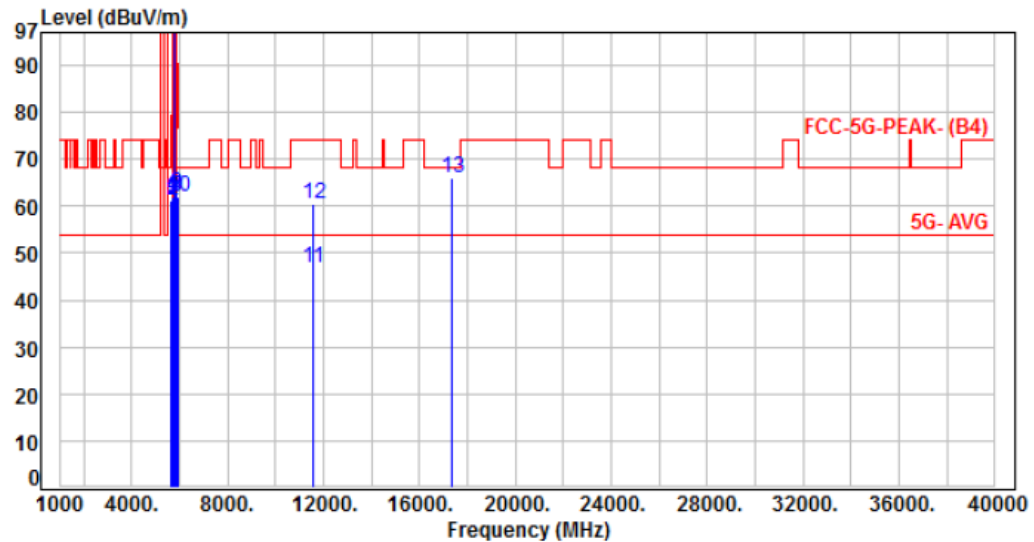

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 53.76          | 61.11          | 68.20          | -7.09       | Peak     | 219         | 20            | P   |
| 2   | 5700.00         | 7.37        | 53.77          | 61.14          | 105.20         | -44.06      | Peak     | 219         | 20            | P   |
| 3   | 5720.00         | 7.34        | 54.37          | 61.71          | 110.80         | -49.09      | Peak     | 219         | 20            | P   |
| 4   | 5725.00         | 7.33        | 54.62          | 61.95          | 122.20         | -60.25      | Peak     | 219         | 20            | P   |
| 5   | 5785.00         | 7.37        | 103.53         | 110.90         | 200.00         | -89.10      | Average  | 219         | 20            | P   |
| 6   | 5785.00         | 7.37        | 116.69         | 124.06         | 200.00         | -75.94      | Peak     | 219         | 20            | P   |
| 7   | 5850.00         | 7.43        | 54.60          | 62.03          | 122.20         | -60.17      | Peak     | 219         | 20            | P   |
| 8   | 5855.00         | 7.45        | 54.64          | 62.09          | 110.80         | -48.71      | Peak     | 219         | 20            | P   |
| 9   | 5875.00         | 7.54        | 55.26          | 62.80          | 105.20         | -42.40      | Peak     | 219         | 20            | P   |
| 10  | 5925.00         | 7.66        | 54.34          | 62.00          | 68.20          | -6.20       | Peak     | 219         | 20            | P   |
| 11  | 11570.00        | 17.92       | 28.84          | 46.76          | 54.00          | -7.24       | Average  | 100         | 162           | P   |
| 12  | 11570.00        | 17.92       | 42.55          | 60.47          | 74.00          | -13.53      | Peak     | 100         | 162           | P   |
| 13  | 17355.00        | 24.51       | 41.65          | 66.16          | 68.20          | -2.04       | Peak     | 100         | 80            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                 |           |   |            |
|-----------|---|---------------------------------|-----------|---|------------|
| Power     | : | AC 120V / 60Hz from PoE         | Pol/Phase | : | HORIZONTAL |
| Test Mode | : | Mode 9, Band 4, 11ax HE20 CH157 |           | : |            |

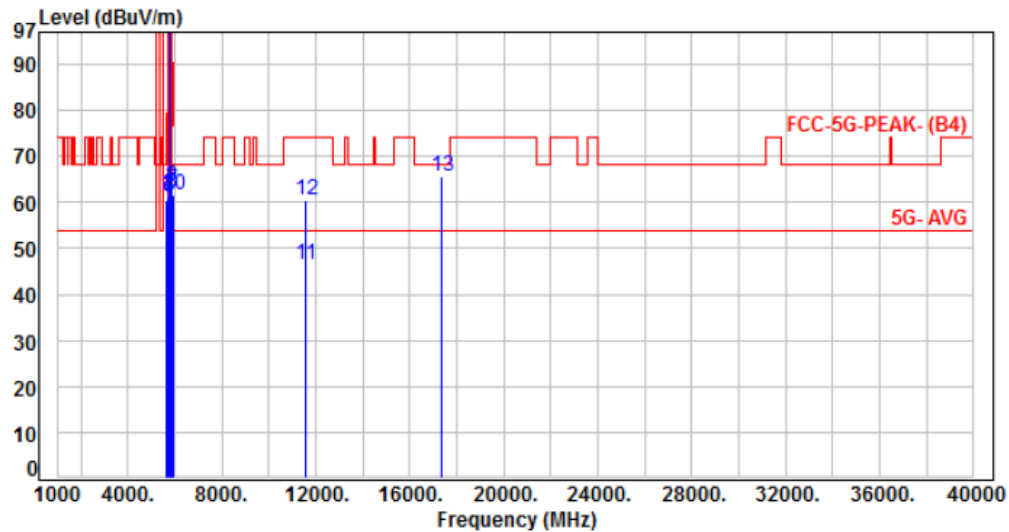

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 53.13          | 60.48          | 68.20          | -7.72       | Peak     | 163         | 357           | P   |
| 2   | 5700.00         | 7.37        | 54.17          | 61.54          | 105.20         | -43.66      | Peak     | 163         | 357           | P   |
| 3   | 5720.00         | 7.34        | 53.96          | 61.30          | 110.80         | -49.50      | Peak     | 163         | 357           | P   |
| 4   | 5725.00         | 7.33        | 54.36          | 61.69          | 122.20         | -60.51      | Peak     | 163         | 357           | P   |
| 5   | 5785.00         | 7.37        | 101.44         | 108.81         | 200.00         | -91.19      | Average  | 163         | 357           | P   |
| 6   | 5785.00         | 7.37        | 115.48         | 122.85         | 200.00         | -77.15      | Peak     | 163         | 357           | P   |
| 7   | 5850.00         | 7.43        | 55.14          | 62.57          | 122.20         | -59.63      | Peak     | 163         | 357           | P   |
| 8   | 5855.00         | 7.45        | 54.52          | 61.97          | 110.80         | -48.83      | Peak     | 163         | 357           | P   |
| 9   | 5875.00         | 7.54        | 55.77          | 63.31          | 105.20         | -41.89      | Peak     | 163         | 357           | P   |
| 10  | 5925.00         | 7.66        | 53.88          | 61.54          | 68.20          | -6.66       | Peak     | 163         | 357           | P   |
| 11  | 11570.00        | 17.92       | 28.72          | 46.64          | 54.00          | -7.36       | Average  | 100         | 55            | P   |
| 12  | 11570.00        | 17.92       | 42.39          | 60.31          | 74.00          | -13.69      | Peak     | 100         | 55            | P   |
| 13  | 17355.00        | 24.51       | 41.20          | 65.71          | 68.20          | -2.49       | Peak     | 100         | 224           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                   |           |            |
|-----------|-----------------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE         | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 9, Band 4, 11ax HE20 CH165 |           | :          |

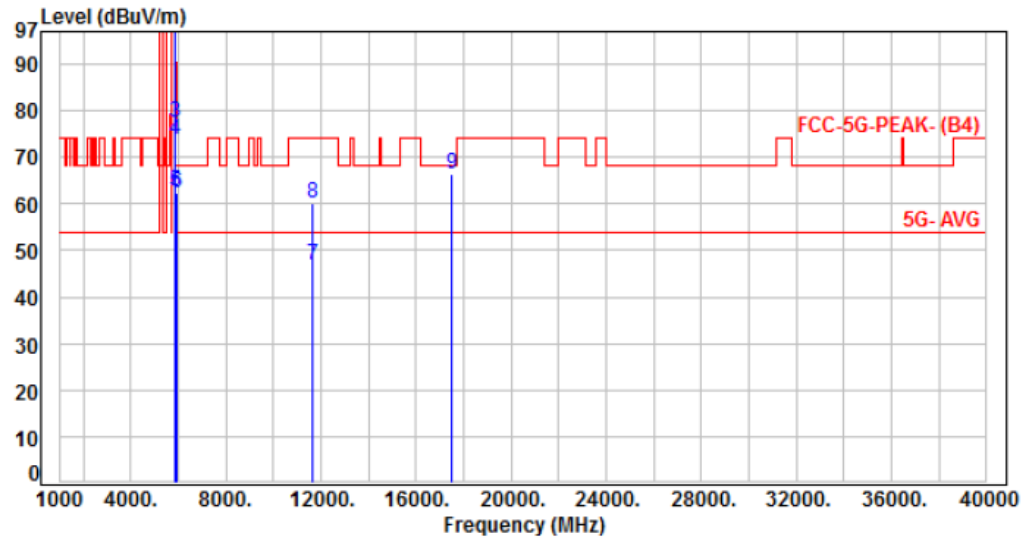

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 7.42        | 102.31         | 109.73         | 200.00         | -90.27      | Average  | 100         | 21            | P   |
| 2   | 5825.00         | 7.42        | 115.68         | 123.10         | 200.00         | -76.90      | Peak     | 100         | 21            | P   |
| 3   | 5850.00         | 7.43        | 69.92          | 77.35          | 122.20         | -44.85      | Peak     | 100         | 21            | P   |
| 4   | 5855.00         | 7.45        | 66.18          | 73.63          | 110.80         | -37.17      | Peak     | 100         | 21            | P   |
| 5   | 5875.00         | 7.54        | 55.31          | 62.85          | 105.20         | -42.35      | Peak     | 100         | 21            | P   |
| 6   | 5925.00         | 7.66        | 54.49          | 62.15          | 68.20          | -6.05       | Peak     | 100         | 21            | P   |
| 7   | 11650.00        | 18.08       | 28.61          | 46.69          | 54.00          | -7.31       | Average  | 100         | 161           | P   |
| 8   | 11650.00        | 18.08       | 42.18          | 60.26          | 74.00          | -13.74      | Peak     | 100         | 161           | P   |
| 9   | 17475.00        | 25.09       | 41.36          | 66.45          | 68.20          | -1.75       | Peak     | 100         | 84            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                   |           |              |
|-----------|-----------------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE         | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 9, Band 4, 11ax HE20 CH165 |           |              |

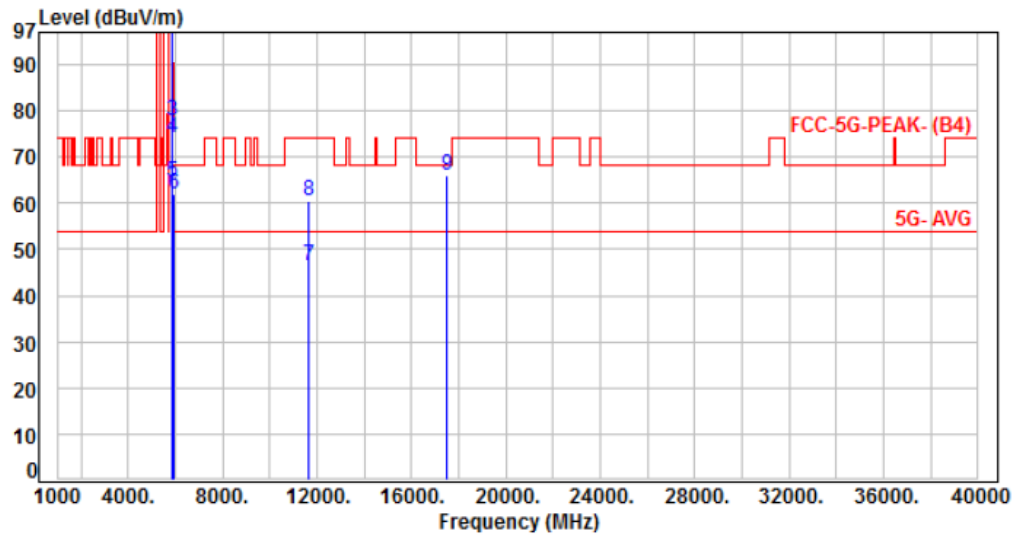


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 7.42        | 101.89         | 109.31         | 200.00         | -90.69      | Average  | 149         | 354           | P   |
| 2   | 5825.00         | 7.42        | 114.98         | 122.40         | 200.00         | -77.60      | Peak     | 149         | 354           | P   |
| 3   | 5850.00         | 7.43        | 70.22          | 77.65          | 122.20         | -44.55      | Peak     | 149         | 354           | P   |
| 4   | 5855.00         | 7.45        | 66.58          | 74.03          | 110.80         | -36.77      | Peak     | 149         | 354           | P   |
| 5   | 5875.00         | 7.54        | 57.06          | 64.60          | 105.20         | -40.60      | Peak     | 149         | 354           | P   |
| 6   | 5925.00         | 7.66        | 54.30          | 61.96          | 68.20          | -6.24       | Peak     | 149         | 354           | P   |
| 7   | 11650.00        | 18.08       | 28.55          | 46.63          | 54.00          | -7.37       | Average  | 100         | 50            | P   |
| 8   | 11650.00        | 18.08       | 42.24          | 60.32          | 74.00          | -13.68      | Peak     | 100         | 50            | P   |
| 9   | 17475.00        | 25.09       | 41.09          | 66.18          | 68.20          | -2.02       | Peak     | 100         | 222           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                   |           |            |
|-----------|-----------------------------------|-----------|------------|
| Power     | : AC 120V / 60Hz from PoE         | Pol/Phase | : VERTICAL |
| Test Mode | : Mode 10, Band 1, 11ax HE40 CH38 |           | :          |

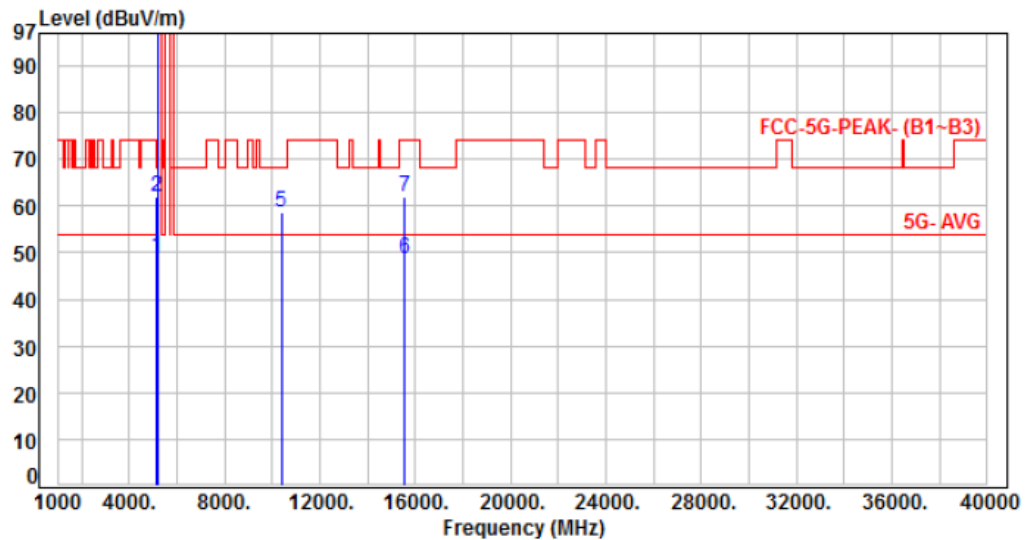

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 42.32          | 49.02          | 54.00          | -4.98       | Average  | 144         | 13            | P   |
| 2   | 5150.00         | 6.70        | 55.38          | 62.08          | 74.00          | -11.92      | Peak     | 144         | 13            | P   |
| 3   | 5190.00         | 6.90        | 94.05          | 100.95         | 200.00         | -99.05      | Average  | 144         | 13            | P   |
| 4   | 5190.00         | 6.90        | 106.61         | 113.51         | 200.00         | -86.49      | Peak     | 144         | 13            | P   |
| 5   | 10380.00        | 15.89       | 42.66          | 58.55          | 68.20          | -9.65       | Peak     | 10          | 155           | P   |
| 6   | 15570.00        | 19.65       | 29.13          | 48.78          | 54.00          | -5.22       | Average  | 10          | 91            | P   |
| 7   | 15570.00        | 19.65       | 42.28          | 61.93          | 74.00          | -12.07      | Peak     | 10          | 91            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                 |           |   |            |
|-----------|---|---------------------------------|-----------|---|------------|
| Power     | : | AC 120V / 60Hz from PoE         | Pol/Phase | : | HORIZONTAL |
| Test Mode | : | Mode 10, Band 1, 11ax HE40 CH38 |           | : |            |

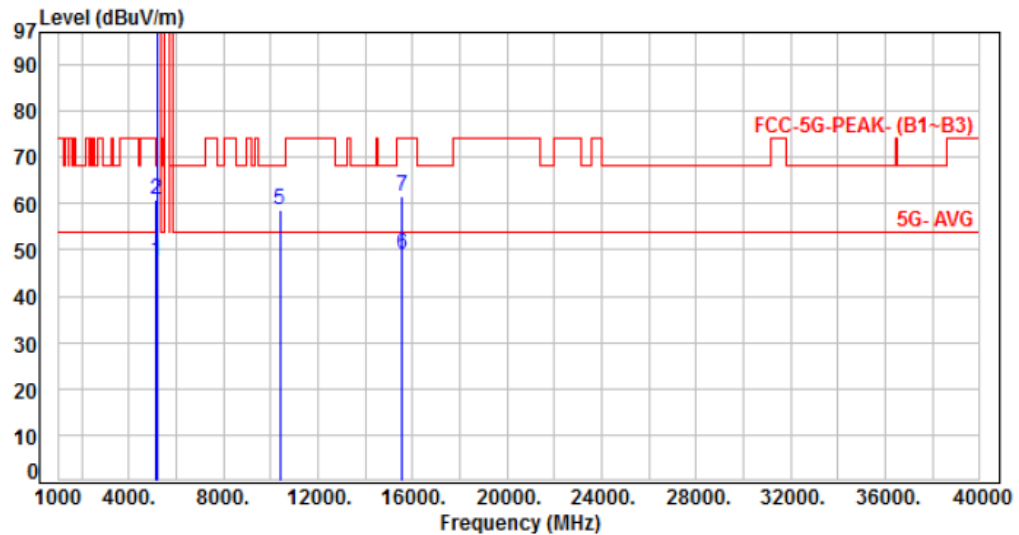

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.98          | 47.68          | 54.00          | -6.32       | Average  | 100         | 355           | P   |
| 2   | 5150.00         | 6.70        | 54.06          | 60.76          | 74.00          | -13.24      | Peak     | 100         | 355           | P   |
| 3   | 5190.00         | 6.90        | 92.32          | 99.22          | 200.00         | -100.78     | Average  | 100         | 355           | P   |
| 4   | 5190.00         | 6.90        | 104.49         | 111.39         | 200.00         | -88.61      | Peak     | 100         | 355           | P   |
| 5   | 10380.00        | 15.89       | 42.74          | 58.63          | 68.20          | -9.57       | Peak     | 100         | 42            | P   |
| 6   | 15570.00        | 19.65       | 29.27          | 48.92          | 54.00          | -5.08       | Average  | 100         | 230           | P   |
| 7   | 15570.00        | 19.65       | 41.81          | 61.46          | 74.00          | -12.54      | Peak     | 100         | 230           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                 |           |   |          |
|-----------|---|---------------------------------|-----------|---|----------|
| Power     | : | AC 120V / 60Hz from PoE         | Pol/Phase | : | VERTICAL |
| Test Mode | : | Mode 10, Band 1, 11ax HE40 CH46 |           | : |          |

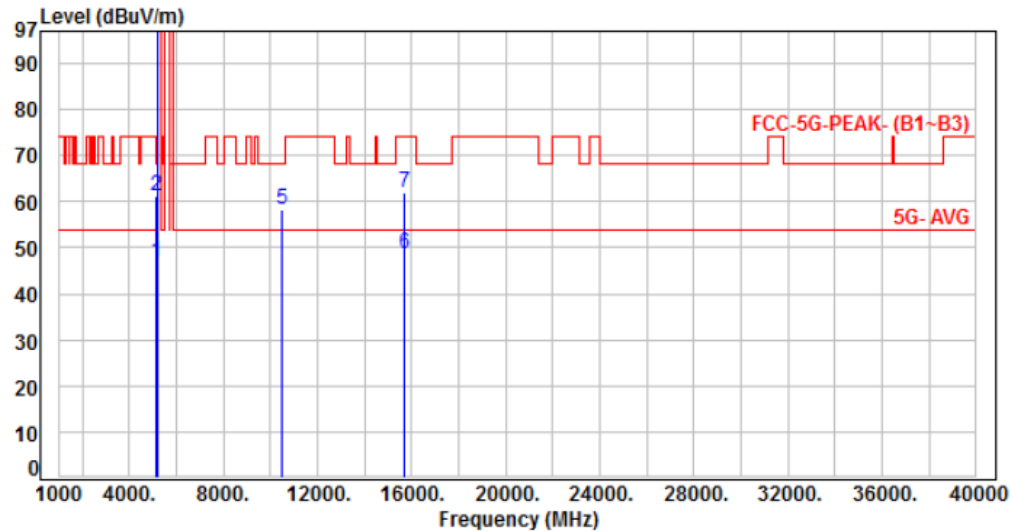

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.31          | 47.01          | 54.00          | -6.99       | Average  | 186         | 320           | P   |
| 2   | 5150.00         | 6.70        | 54.37          | 61.07          | 74.00          | -12.93      | Peak     | 186         | 320           | P   |
| 3   | 5230.00         | 6.99        | 94.86          | 101.85         | 200.00         | -98.15      | Average  | 186         | 320           | P   |
| 4   | 5230.00         | 6.99        | 108.87         | 115.86         | 200.00         | -84.14      | Peak     | 186         | 320           | P   |
| 5   | 10460.00        | 15.86       | 42.39          | 58.25          | 68.20          | -9.95       | Peak     | 100         | 162           | P   |
| 6   | 15690.00        | 19.44       | 29.26          | 48.70          | 54.00          | -5.30       | Average  | 100         | 85            | P   |
| 7   | 15690.00        | 19.44       | 42.57          | 62.01          | 74.00          | -11.99      | Peak     | 100         | 85            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                 |           |   |            |
|-----------|---|---------------------------------|-----------|---|------------|
| Power     | : | AC 120V / 60Hz from PoE         | Pol/Phase | : | HORIZONTAL |
| Test Mode | : | Mode 10, Band 1, 11ax HE40 CH46 |           | : |            |

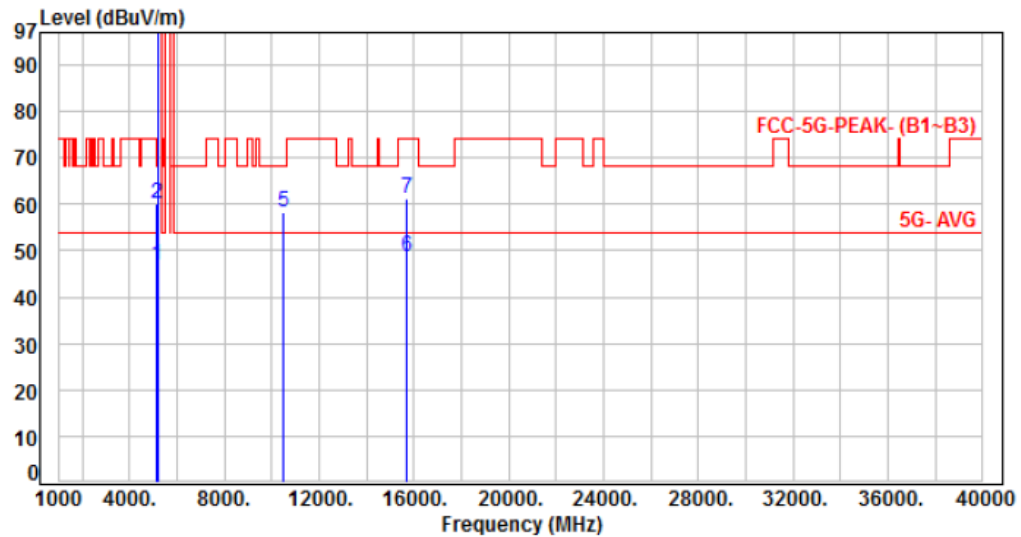

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 6.70        | 40.28          | 46.98          | 54.00          | -7.02       | Average  | 111         | 354           | P   |
| 2   | 5150.00         | 6.70        | 53.39          | 60.09          | 74.00          | -13.91      | Peak     | 111         | 354           | P   |
| 3   | 5230.00         | 6.99        | 92.96          | 99.95          | 200.00         | -100.05     | Average  | 111         | 354           | P   |
| 4   | 5230.00         | 6.99        | 105.67         | 112.66         | 200.00         | -87.34      | Peak     | 111         | 354           | P   |
| 5   | 10460.00        | 15.86       | 42.35          | 58.21          | 68.20          | -9.99       | Peak     | 100         | 47            | P   |
| 6   | 15690.00        | 19.44       | 29.15          | 48.59          | 54.00          | -5.41       | Average  | 100         | 228           | P   |
| 7   | 15690.00        | 19.44       | 41.81          | 61.25          | 74.00          | -12.75      | Peak     | 100         | 228           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |   |                                  |           |   |          |
|-----------|---|----------------------------------|-----------|---|----------|
| Power     | : | AC 120V / 60Hz from PoE          | Pol/Phase | : | VERTICAL |
| Test Mode | : | Mode 10, Band 4, 11ax HE40 CH151 |           | : |          |

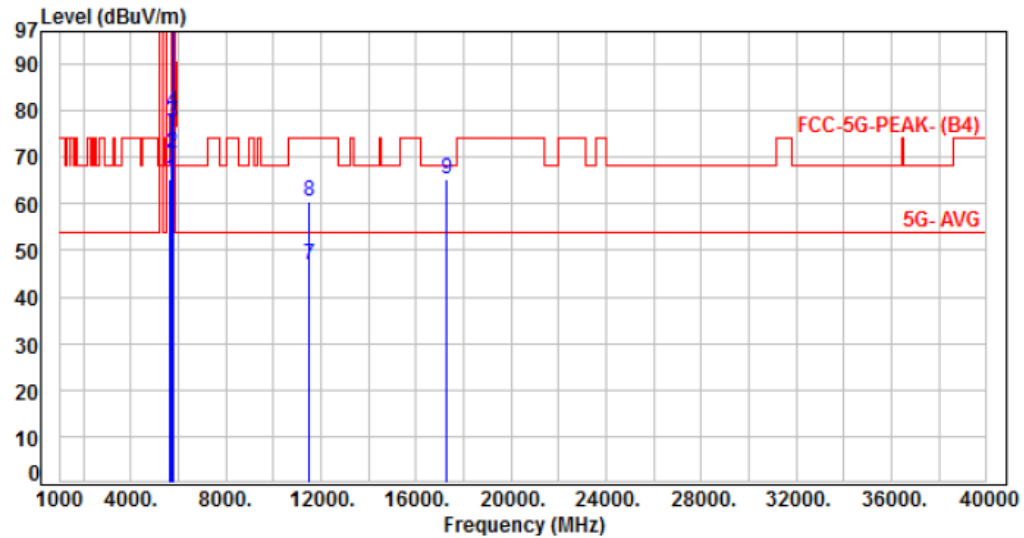

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 58.04          | 65.39          | 68.20          | -2.81       | Peak     | 245         | 19            | P   |
| 2   | 5700.00         | 7.37        | 63.41          | 70.78          | 105.20         | -34.42      | Peak     | 245         | 19            | P   |
| 3   | 5720.00         | 7.34        | 70.05          | 77.39          | 110.80         | -33.41      | Peak     | 245         | 19            | P   |
| 4   | 5725.00         | 7.33        | 72.40          | 79.73          | 122.20         | -42.47      | Peak     | 245         | 19            | P   |
| 5   | 5755.00         | 7.30        | 98.55          | 105.85         | 200.00         | -94.15      | Average  | 245         | 19            | P   |
| 6   | 5755.00         | 7.30        | 111.77         | 119.07         | 200.00         | -80.93      | Peak     | 245         | 19            | P   |
| 7   | 11510.00        | 17.79       | 28.96          | 46.75          | 54.00          | -7.25       | Average  | 100         | 168           | P   |
| 8   | 11510.00        | 17.79       | 42.63          | 60.42          | 74.00          | -13.58      | Peak     | 100         | 168           | P   |
| 9   | 17265.00        | 23.86       | 41.41          | 65.27          | 68.20          | -2.93       | Peak     | 100         | 83            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                                    |           |              |
|-----------|------------------------------------|-----------|--------------|
| Power     | : AC 120V / 60Hz from PoE          | Pol/Phase | : HORIZONTAL |
| Test Mode | : Mode 10, Band 4, 11ax HE40 CH151 |           | :            |

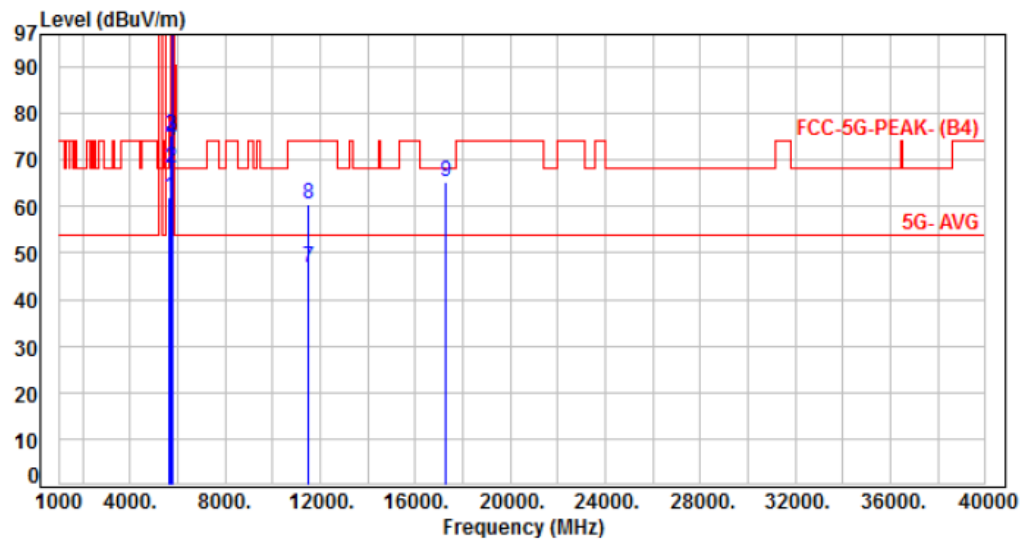

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.35        | 54.54          | 61.89          | 68.20          | -6.31       | Peak     | 129         | 357           | P   |
| 2   | 5700.00         | 7.37        | 60.75          | 68.12          | 105.20         | -37.08      | Peak     | 129         | 357           | P   |
| 3   | 5720.00         | 7.34        | 67.73          | 75.07          | 110.80         | -35.73      | Peak     | 129         | 357           | P   |
| 4   | 5725.00         | 7.33        | 66.88          | 74.21          | 122.20         | -47.99      | Peak     | 129         | 357           | P   |
| 5   | 5755.00         | 7.30        | 97.11          | 104.41         | 200.00         | -95.59      | Average  | 129         | 357           | P   |
| 6   | 5755.00         | 7.30        | 109.86         | 117.16         | 200.00         | -82.84      | Peak     | 129         | 357           | P   |
| 7   | 11510.00        | 17.79       | 28.95          | 46.74          | 54.00          | -7.26       | Average  | 100         | 41            | P   |
| 8   | 11510.00        | 17.79       | 42.57          | 60.36          | 74.00          | -13.64      | Peak     | 100         | 41            | P   |
| 9   | 17265.00        | 23.86       | 41.29          | 65.15          | 68.20          | -3.05       | Peak     | 100         | 218           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor