

Prüfbericht-Nr.: Test report no.:	CN2310OU (P15C-Sigfox) 001	Auftrags-Nr.: Order no.:	238547573	Seite 1 von 20 Page 1 of 20
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2022-09-03	
Auftraggeber: Client:	LITE-ON TECHNOLOGY CORP Bldg. C, 90, Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C			
Prüfgegenstand: Test item:	Sigfox Monarch Module			
Bezeichnung / Typ-Nr.: Identification / Type no.:	WSG309S			
Auftrags-Inhalt: Order content:	FCC Part 15C Test report			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: Date of sample receipt:	2022-09-26			
Prüfmuster-Nr.: Test sample no.:	A003342957-069			
Prüfzeitraum: Testing period:	2023-06-28 - 2023-07-05			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
überprüft von: compiled by:	genehmigt von: authorized by:			
Datum: Date:	2023-07-13	Ausstellungsdatum: Issue date:	2023-07-13	
Stellung / Position:	Senior Project Manager	Stellung / Position:	Senior Project Manager	
Sonstiges / Other:	This is C2PC report. Only output power and radiated spurious emissions are performed in this report. For other test results, refer to report no.: FR930617-02AF for the details.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(2)	Peak Output Power	Pass
-	15.247(a)(1)	20 dB Bandwidth	Note 2
-	2.1049	99% Occupied Bandwidth	Note 2
-	15.247(d)	Conducted Spurious Emission and Band Edges	Note 2
5.1.3	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
-	15.247(a)(1)	Hopping Channel Separation	Note 2
-	15.247(a)(1) (i)	Number of Hopping Frequency Used	Note 2
-	15.247(a)(1)(i)	Dwell Time on Each Channel	Note 2
-	15.207	Mains Conducted Emission	N/A

Note:

1. Refer to report no.: FR930617-02AF.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	4
1. GENERAL REMARKS	5
1.1 COMPLEMENTARY MATERIALS.....	5
1.2 DECISION RULE OF CONFORMITY	5
2. TEST SITES	6
2.1 TEST LABORATORY	6
2.2 TEST FACILITY.....	6
2.3 TRACEABILITY	7
2.4 CALIBRATION	7
2.5 MEASUREMENT UNCERTAINTY	7
3. GENERAL PRODUCT INFORMATION.....	8
3.1 PRODUCT FUNCTION AND INTENDED USE	8
3.2 SYSTEM DETAILS AND RATINGS.....	8
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.4 SUBMITTED DOCUMENTS.....	9
4. TEST SET-UP AND OPERATION MODES.....	10
4.1 PRINCIPLE OF CONFIGURATION SELECTION	10
4.2 TEST OPERATION AND TEST SOFTWARE.....	11
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4 TEST SETUP DIAGRAM	12
5. TEST RESULTS	13
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1 Antenna Requirement.....	13
5.1.2 Peak Output Power	14
5.1.3 Radiated Spurious Emissions and Band Edges	16

APPENDIX A - TEST RESULT OF RADIATED EMISSIONS**APPENDIX SP - PHOTOGRAPHS OF TEST SETUP****APPENDIX EP - PHOTOGRAPHS OF EUT**

Prüfbericht - Nr.: CN2310OU (P15C-Sigfox) 001
Test Report No.

Seite 4 von 20
Page 4 of 20

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN2310OU (P15C-Sigfox) 001	Original Release	2023-07-13

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Radiated Emissions

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Sigfox Monarch Module. It contains Sigfox module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Sigfox Monarch Module
Type Identification	WSG309S
FCC ID	PPQ-WSG309S
Host Information	Product Name: UnaTag Brand: Unabiz Model: SWWBM1

Note: The EUT is installed into the host during the test.

Technical Specification of EUT

Item	EUT information
Operating Frequency	902.1375 – 904.6625 MHz
Channel Number	54
Operation Voltage	3.6 Vdc (from host)
Modulation	GFSK
Maximum Output Power (mW)	232.81
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Mode	Channel Frequency (MHz)	
	902.1375	904.6625
GFSK	Default	Default

4.2 Carrier Frequency and Channel

Micro Channel Groups	Micro ch.1	Micro ch.2	Micro ch.3	Micro ch.4	Micro ch.5	Micro ch.6
1	902.1375	902.1625	902.1875	902.2125	902.2375	902.2625
2	902.4375	902.4625	902.4875	902.5125	902.5375	902.5625
3	902.7375	902.7625	902.7875	902.8125	902.8375	902.8625
4	903.0375	903.0625	903.0875	903.1125	903.1375	903.1625
5	903.3375	903.3625	903.3875	903.4125	903.4375	903.4625
6	903.6375	903.6625	903.6875	903.7125	903.7375	903.7625
7	903.9375	903.9625	903.9875	904.0125	904.0375	904.0625
8	904.2375	904.2625	904.2875	904.3125	904.3375	904.3625
9	904.5375	904.5625	904.5875	904.6125	904.6375	904.6625

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with fixture interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	Tera Term
---------------	-----------

The samples were used as follows:
A003342957-069

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Output Power	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	-	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Z-plane**.
2. "-" means no effect.

Output Power

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type
-	902.1375 to 904.6225	902.1375, 904.6225	GFSK

Radiated Spurious Emissions (Above 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type
-	902.1375 to 904.6225	902.1375, 904.6225	GFSK

Radiated Spurious Emissions (Below 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type
-	902.1375 to 904.6225	902.1375, 904.6225	GFSK

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Output Power	18-23 °C	57-67 %	Nick Hsu
Radiated Spurious Emissions above 1 GHz	22.7-24.6 °C	52-55 %	Roger Liao
Radiated Spurious Emissions below 1 GHz	22.7-24.6 °C	52-55 %	Roger Liao

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None

Support Unit

Support Unit					
No.	Description	Brand	Model	S/N	Remark
A	UnaTag	Unabiz	SWWBM1	N/A	--
-	Notebook	Lenovo	20CLS3P606	PC0DH09R	--

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

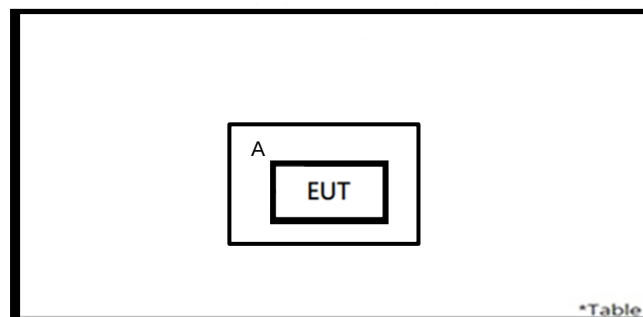

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only.

According to the manufacturer declaration, the EUT has an antenna with a directional gain of -0.47 dBi. The antenna is PIFA antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.
Refer to EUT photo for details.


5.1.2 Peak Output Power

Limit

1 watt for systems employing at least 50 hopping channels; and 0.25 watts for systems employing less than 50 hopping channels.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2023/3/17	2024/3/15	2023/6/28	2023/6/28
Power Sensor	Anritsu	MA2411B	1725269	2023/3/17	2024/3/15	2023/6/28	2023/6/28

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result**Peak Output Power**

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(mW)	(dBm)
Low Channel	902.1375	23.67	232.81	30
High Channel	904.6625	23.66	232.27	30

Average Power (For Reference)

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	902.1375	23.64	231.21
High Channel	904.6625	23.62	230.14

5.1.3 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

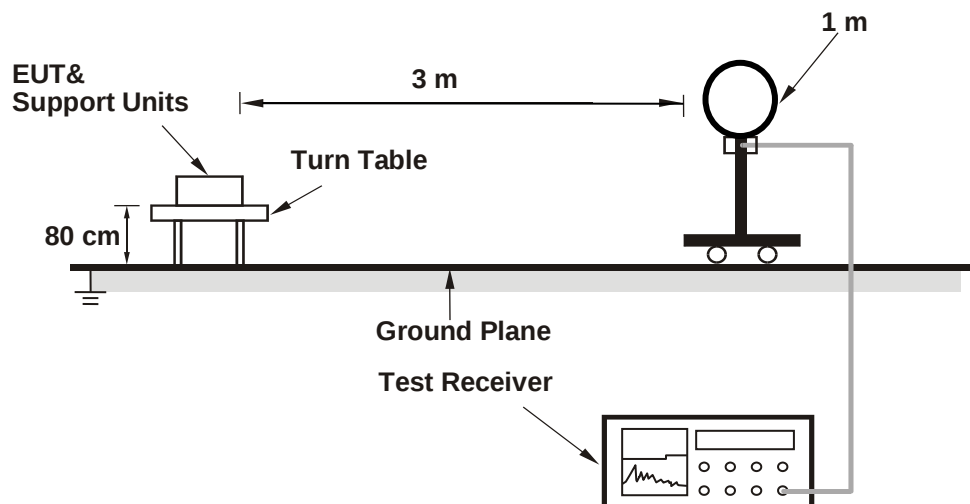

<Radiated Emissions 30 MHz to 1 GHz>

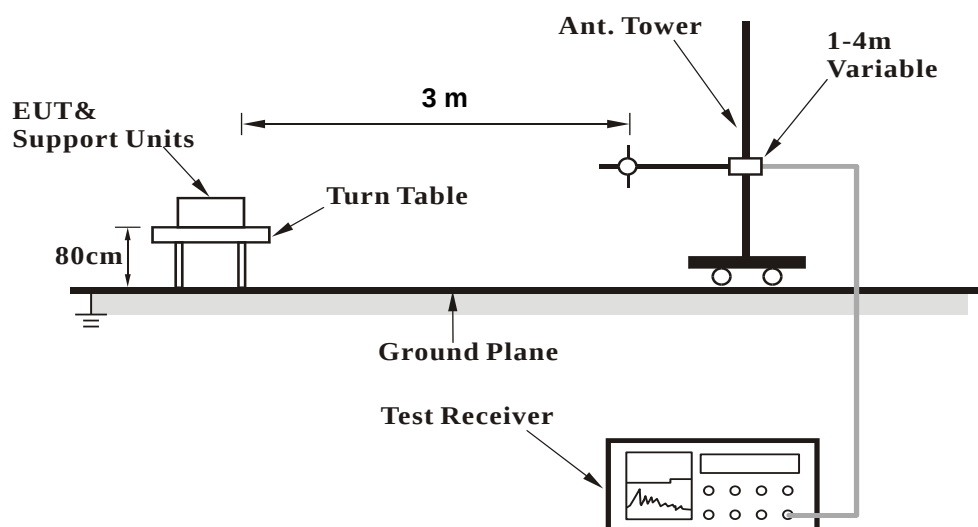

<Radiated Emissions above 1 GHz>

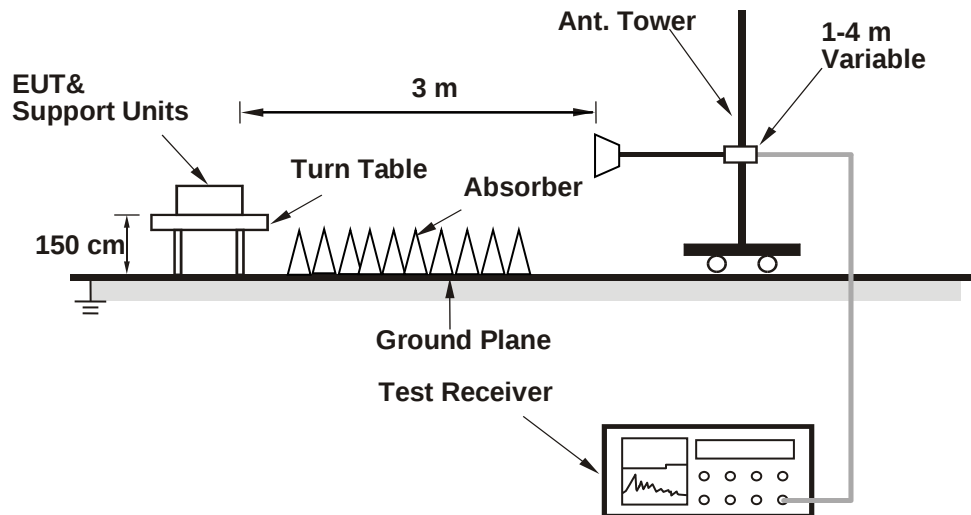

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1 GHz					
Signal Analyzer	R&S	FSV40	101509	2023/4/26	2024/4/24
Horn Antenna	ETS-Lindgren	3117	00218929	2022/11/17	2023/11/16
HF-AMP + AC source	EMCI	EM01G18GA	980635	2023/2/16	2024/2/15
HF-AMP + AC source	EMCI	EMC184045SE	980656	2023/1/6	2024/1/5
Horn Antenna	SCHWARZBECK	BBHA 9170	00890	2023/5/4	2024/5/2
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2023/3/31	2024/3/29
LF-AMP	Agilent	8447D	2727A05146	2023/2/16	2024/2/15
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
Below 30 MHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2023/1/4	2024/1/3
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
6. The emission levels of other frequencies (including the 10th harmonic of the highest fundamental frequency) are very lower than the limit and are not shown in the test report.

Prüfbericht - Nr.: CN2310OU (P15C-Sigfox) 001
Test Report No.

Seite 20 von 20
Page 20 of 20

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)


Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix A.

Appendix A: Test Results of Radiated Spurious Emissions

<902.1375 MHz>

Band Edges

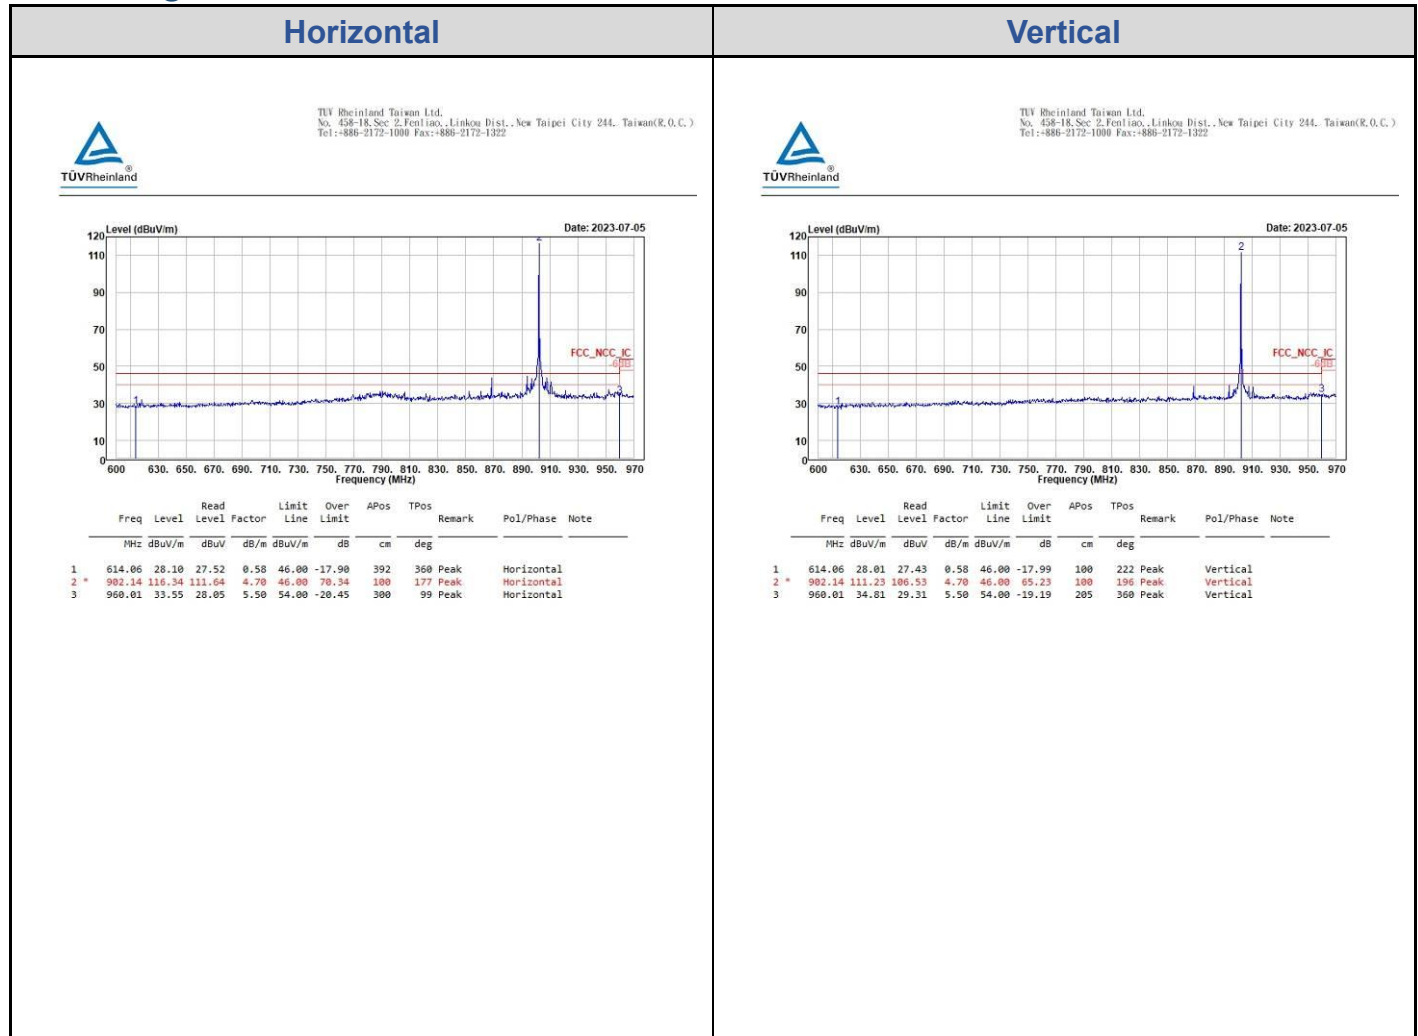


Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

9kHz~150kHz(Open)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

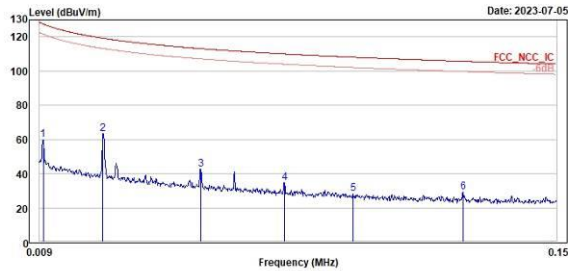


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.01	59.75	42.03	17.72	127.60	-67.85	100	310 Peak	Open
2	0.03	63.08	44.14	18.94	119.18	-56.10	100	43 Peak	Open
3	0.05	42.46	23.41	19.05	113.11	-70.65	100	177 Peak	Open
4	0.08	34.77	16.27	18.50	110.00	-75.23	100	319 Peak	Open
5	0.09	28.07	10.02	18.05	108.09	-88.02	100	18 Peak	Open
6	0.12	29.01	10.99	18.02	105.70	-76.69	100	21 Peak	Open

150kHz~30MHz(Open)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

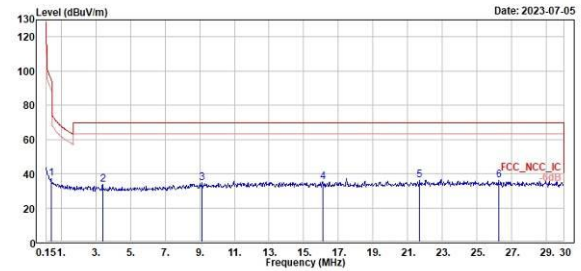


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.42	36.86	18.06	18.80	95.17	-58.31	100	325 Peak	Open
2	3.40	33.38	13.81	19.57	69.50	-36.12	100	57 Peak	Open
3	9.13	34.65	13.52	21.13	69.50	-34.85	100	249 Peak	Open
4	16.09	35.15	13.24	21.91	69.50	-34.35	100	160 Peak	Open
5	21.67	36.05	13.87	22.18	69.50	-33.45	100	314 Peak	Open
6	26.24	36.26	14.05	22.21	69.50	-33.24	100	87 Peak	Open

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz

Horizontal



TÜV Rheinland Taiwan Ltd.
 No. 438-18, Sec. 2, Fenhao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

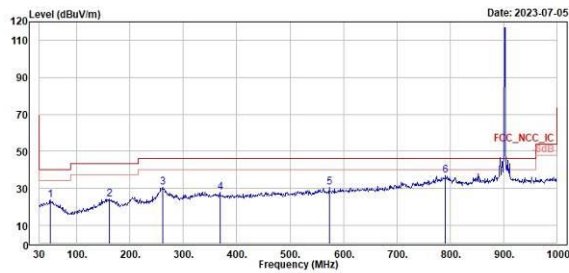


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	58.37	23.57	29.22	-5.65	40.00	-16.43	300	40	Peak	Horizontal		
2	169.95	24.37	30.08	-5.71	43.50	-19.13	200	113	Peak	Horizontal		
3	268.86	30.69	36.82	-6.13	46.00	-15.31	100	128	Peak	Horizontal		
4	368.53	28.01	31.43	-3.42	46.00	-17.99	100	74	Peak	Horizontal		
5	573.20	30.39	30.92	-0.53	46.00	-15.61	200	175	Peak	Horizontal		
6	791.45	36.86	33.30	3.56	46.00	-9.14	100	253	Peak	Horizontal		

Vertical



TÜV Rheinland Taiwan Ltd.
 No. 438-18, Sec. 2, Fenhao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

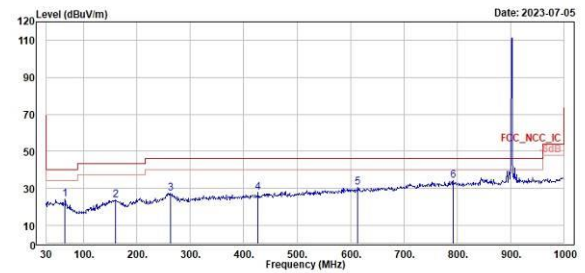


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	64.92	24.04	31.39	-7.35	40.00	-15.96	200	113	Peak	Vertical		
2	159.01	23.56	29.28	-5.72	43.50	-19.94	100	272	Peak	Vertical		
3	262.80	27.48	33.51	-6.03	46.00	-18.52	100	92	Peak	Vertical		
4	426.73	27.62	30.23	-2.61	46.00	-18.38	300	171	Peak	Vertical		
5	612.97	30.72	30.16	0.56	46.00	-15.28	400	305	Peak	Vertical		
6	792.42	34.11	30.55	3.56	46.00	-11.09	200	86	Peak	Vertical		

Spurious Emissions, Tx Mode, 1GHz ~ 10GHz

Horizontal



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

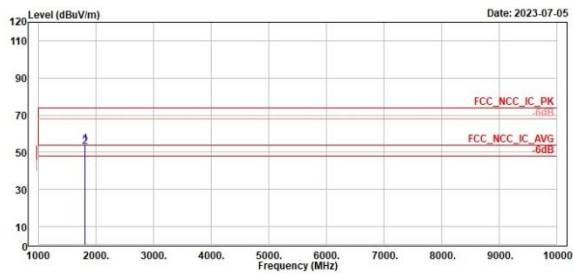


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	1804.00	54.11	69.87	-15.76	74.00	-19.89	300	184	Peak	Horizontal	
2	1804.00	52.95	68.71	-15.76	54.00	-1.05	300	184	Average	Horizontal	

Vertical



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

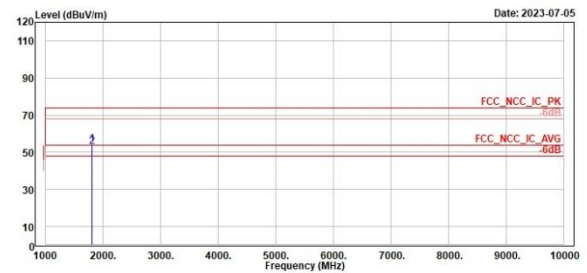


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	1804.00	54.13	69.89	-15.76	74.00	-19.87	300	132	Peak	Vertical	
2	1804.00	52.73	68.49	-15.76	54.00	-1.27	300	132	Average	Vertical	

<904.6625 MHz>
Band Edges

Horizontal



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1090 Fax: +886-2172-1322

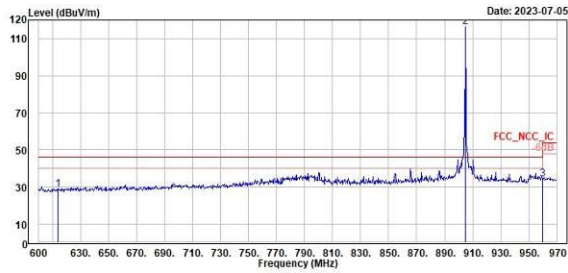


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		cm	deg			
1	614.06	28.62	28.04	0.58	46.00	-17.38	100	28	Peak	Horizontal		
2 *	904.66	116.44	111.72	4.72	46.00	70.44	100	318	Peak	Horizontal		
3	960.01	34.33	28.83	5.50	54.00	-19.67	100	76	Peak	Horizontal		

Vertical



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1090 Fax: +886-2172-1322

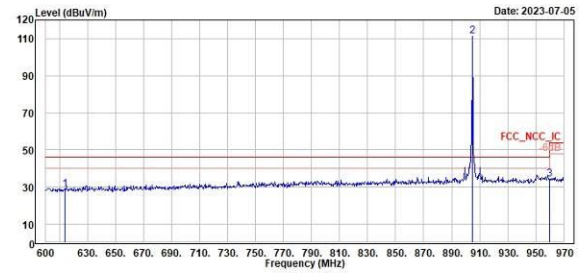


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		cm	deg			
1	614.06	28.90	28.32	0.58	46.00	-17.10	400	104	Peak	Vertical		
2 *	904.66	111.25	106.53	4.72	46.00	65.25	100	195	Peak	Vertical		
3	960.01	34.05	28.55	5.50	54.00	-19.95	400	325	Peak	Vertical		

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

9kHz~150kHz(Open)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

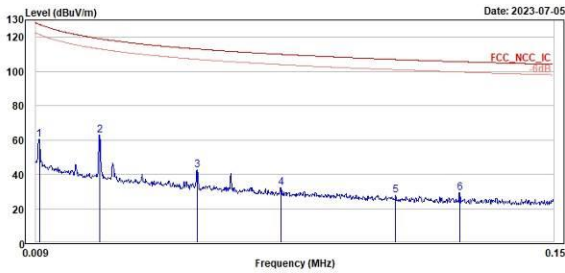


Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	60.33	42.61	17.72	127.60	-67.27	100	334	Peak	Open		
2	0.03	62.95	44.00	18.95	119.13	-56.18	100	97	Peak	Open		
3	0.05	42.50	23.45	19.05	113.11	-70.61	100	97	Peak	Open		
4	0.08	32.18	13.68	18.50	110.00	-77.82	100	197	Peak	Open		
5	0.11	27.69	9.74	17.95	107.01	-79.32	100	145	Peak	Open		
6	0.12	29.20	11.18	18.02	105.70	-76.50	100	5	Peak	Open		

150kHz~30MHz(Open)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

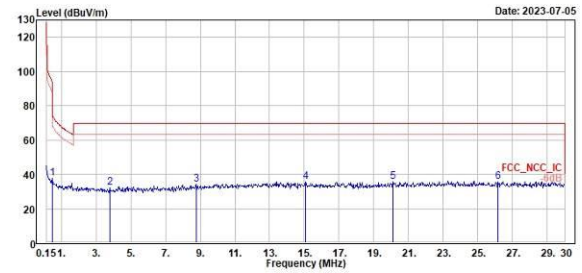


Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.48	37.59	18.76	18.83	94.01	-56.42	100	150	Peak	Open		
2	3.82	32.27	12.73	19.54	69.50	-37.23	100	262	Peak	Open		
3	8.78	33.89	12.90	20.99	69.50	-35.61	100	360	Peak	Open		
4	15.08	35.79	13.96	21.83	69.50	-33.71	100	189	Peak	Open		
5	20.12	35.62	13.45	22.17	69.50	-33.88	100	360	Peak	Open		
6	26.18	35.64	13.43	22.21	69.50	-33.86	100	360	Peak	Open		

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz

Horizontal



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

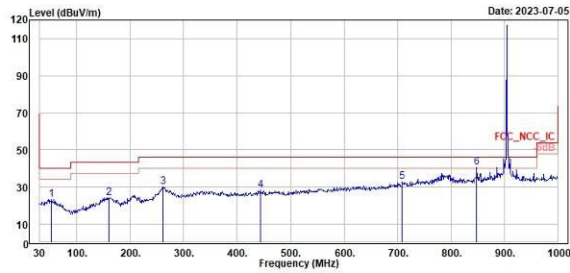


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	52.31	23.43	29.10	-5.67	40.00	-16.57	100	228	Peak	Horizontal		
2	159.01	24.39	30.11	-5.72	43.50	-19.11	200	213	Peak	Horizontal		
3	260.86	30.00	36.13	-6.13	46.00	-16.00	100	98	Peak	Horizontal		
4	443.22	28.22	30.11	-1.89	46.00	-17.78	400	80	Peak	Horizontal		
5	709.00	32.66	30.45	2.21	46.00	-13.34	400	154	Peak	Horizontal		
6	848.68	40.79	36.72	4.07	46.00	-5.21	100	177	Peak	Horizontal		

Vertical



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

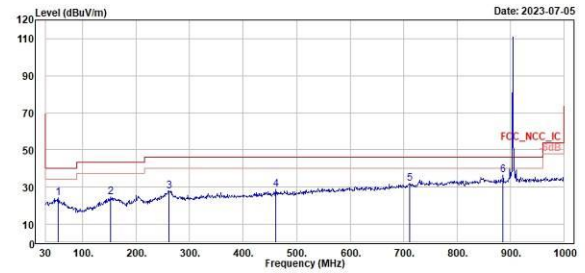


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	53.28	24.19	29.85	-5.66	40.00	-15.81	300	360	Peak	Vertical		
2	152.22	24.68	30.68	-6.00	43.50	-18.82	100	188	Peak	Vertical		
3	260.86	27.88	34.01	-6.13	46.00	-18.12	100	76	Peak	Vertical		
4	461.65	28.77	30.75	-1.98	46.00	-17.23	200	244	Peak	Vertical		
5	711.91	31.80	29.64	2.16	46.00	-14.20	200	349	Peak	Vertical		
6	886.51	36.48	31.86	4.62	46.00	-9.52	100	202	Peak	Vertical		

Spurious Emissions, Tx Mode, 1GHz ~ 10GHz

Horizontal



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

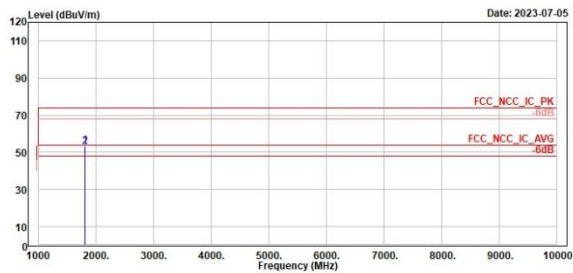


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	1809.00	53.52	69.18	-15.66	74.00	-20.48	400	333	Peak	Horizontal		
2	1809.00	52.75	68.41	-15.66	54.00	-1.25	400	333	Average	Horizontal		

Vertical



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

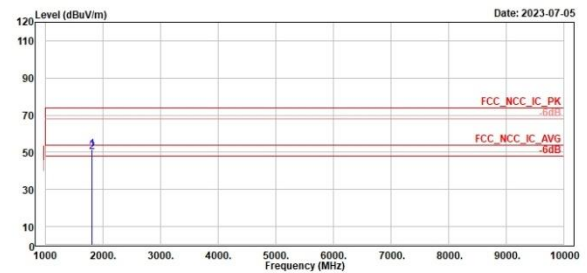

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	1809.00	51.56	67.22	-15.66	74.00	-22.44	100	158	Peak	Vertical		
2	1809.00	50.11	65.77	-15.66	54.00	-3.89	100	158	Average	Vertical		