



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

HONG KONG IPRO TECHNOLOGY CO., LIMITED

FLAT/RM A3, 9/F SILVERCORP INT TOWER, 707-713 NATHAN RD MONGKOK,
HONGKONG, China

FCC ID: PQ4IPROJADE8S

Report Type: Original Report	Product Type: Smart Phone
Report Number: RDG190307004-00D	
Report Date: 2019-04-23	
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	15
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	20
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25
FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §22.917(A) & §24.238(A)- BAND EDGES.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY	43

APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	44
TEST DATA	44

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Smart Phone
EUT Model:		Jade8S
Operation modes:		GSM Voice, GPRS Data, WCDMA(R99 (Voice+Data), HSDPA/HSUPA/HSPA+)
Operation Frequency:		GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX)
Maximum Output Power: (Conducted)		GSM 850 : 31.90 dBm; PCS 1900: 29.81 dBm WCDMA Band 2: 22.86 dBm; WCDMA Band 5: 22.38 dBm
Modulation Type:		GMSK, QPSK, 16QAM
Rated Input Voltage:		DC3.8V from Battery or DC5V from adapter
Adapter Information	Model Name:	NTR-S01
	Input:	AC 100-240V, 50/60Hz, 0.15A
	Output:	DC5V, 1000mA
External Dimension:		145.8 mm(L)* 72.6 mm(W)* 9.4 mm(H)
Serial Number:		190307004
EUT Received Date:		2019.04.08

Objective

This report is prepared on behalf of *HONG KONG IPRO TECHNOLOGY CO.,LIMITED* in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: PQ4IPROJADE8S.
FCC Part 15C DSS submissions with FCC ID: PQ4IPROJADE8S.
FCC Part 15B JBP submissions with FCC ID: PQ4IPROJADE8S.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.

The test items were performed with the EUT operating at testing mode.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	109038
N/A	ANTENNA	N/A	N/A

Configuration of Test Setup

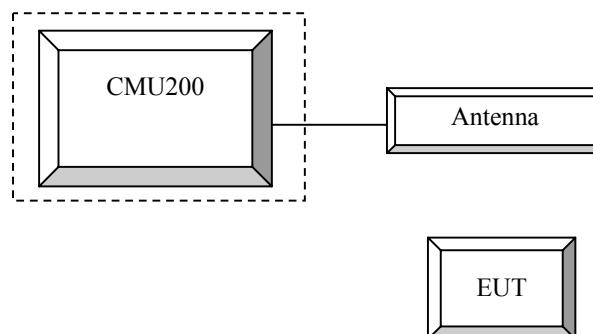

Block Diagram of Test Setup

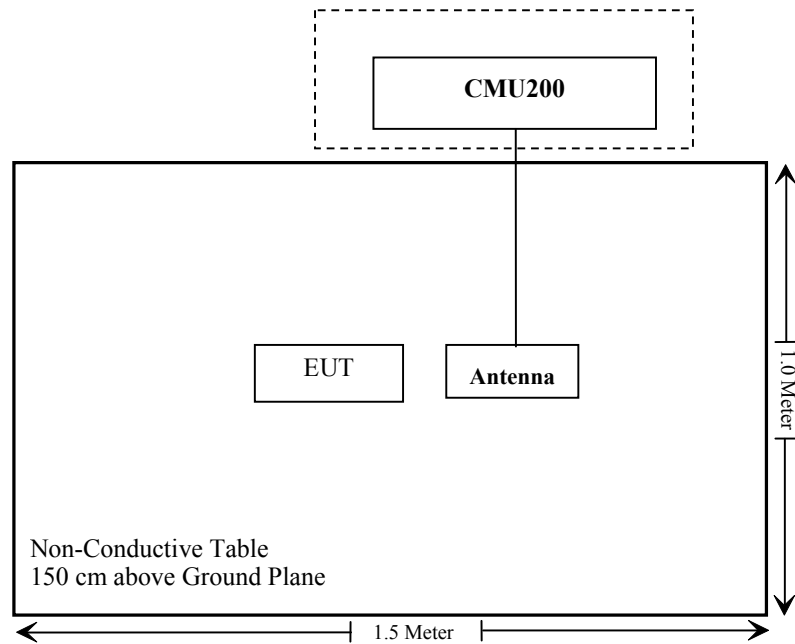

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c);	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Spurious Radiation Emissions	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RDG190307004-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode Subset	HSDPA 1	HSDPA 2	HSDPA 3	HSDPA 4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	Not Required	/
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2018-05-06	2019-05-06
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
R&S	Universal Radio Communication Tester	CMU200	110 822	2018-12-14	2019-12-14
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.5~27.6 °C
Relative Humidity:	42~57 %
ATM Pressure:	101.4~101.5 kPa

* The testing was performed by Tiago Huang from 2019-04-12 to 2019-04-15.

Test Result: Compliance

Conducted Output Power**Cellular Band & PCS Band**

Band	Channel No.	Conducted Peak Output Power (dBm)				
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
Cellular	128	31.60	31.69	30.95	29.13	27.93
	190	31.80	31.82	31.13	29.18	28.00
	251	31.90	31.82	31.20	29.21	28.09
PCS	512	29.80	29.81	29.17	27.17	25.92
	661	29.50	29.53	28.85	26.84	25.74
	810	29.30	29.35	28.65	26.64	25.59

WCDMA Band II

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.75	2.60	22.86	2.72	22.79	2.79
HSDPA	1	21.74	2.56	21.89	3.97	21.71	3.62
	2	21.62	4.27	21.51	3.76	21.80	4.26
	3	21.45	4.63	21.41	4.45	21.60	3.83
	4	21.43	4.54	21.48	4.51	21.58	4.54
HSUPA	1	22.13	3.37	22.00	3.69	21.99	3.24
	2	21.74	4.61	21.74	4.80	21.64	3.69
	3	21.45	4.67	21.51	3.62	21.60	4.24
	4	21.39	3.86	21.41	4.69	21.18	4.48
	5	21.14	4.70	20.91	3.46	21.08	4.13
HSPA+ (16QAM)	1	21.41	3.51	21.42	4.02	21.52	4.04

WCDMA Band V

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.38	3.01	22.23	3.01	22.26	2.79
HSDPA	1	21.38	3.24	21.28	4.10	21.24	3.30
	2	21.12	3.78	21.13	4.40	21.18	4.43
	3	21.03	4.70	21.00	3.87	21.05	4.19
	4	20.97	4.40	21.14	3.95	20.74	3.50
HSUPA	1	21.74	3.21	21.56	4.17	21.79	3.17
	2	21.54	4.19	21.35	4.75	21.68	4.71
	3	21.32	3.99	21.49	4.77	21.26	4.36
	4	21.21	3.65	21.38	4.22	21.04	4.02
	5	20.92	4.24	20.93	4.18	21.08	4.51
HSPA+ (16QAM)	1	21.34	4.06	21.30	3.34	21.18	3.77

ERP & EIRP

Part 22H

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Middle Channel								
836.60	H	93.51	19.28	0.00	0.50	18.78	38.45	19.67
836.60	V	99.87	28.61	0.00	0.50	28.11	38.45	10.34
WCDMA Band V Middle Channel								
836.60	H	89.57	15.34	0.00	0.50	14.84	38.45	23.61
836.60	V	94.36	23.10	0.00	0.50	22.60	38.45	15.85

Part 24E

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
PCS 1900 Middle Channel								
1880.00	H	94.02	19.24	11.14	1.56	28.82	33.00	4.18
1880.00	V	90.23	15.26	11.14	1.56	24.84	33.00	8.16
WCDMA Band II Middle Channel								
1880.00	H	88.44	13.66	11.14	1.56	23.24	33.00	9.76
1880.00	V	81.99	7.02	11.14	1.56	16.60	33.00	16.40

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH


Applicable Standard

FCC §2.1049, §22.917, §22.905, §24.238

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

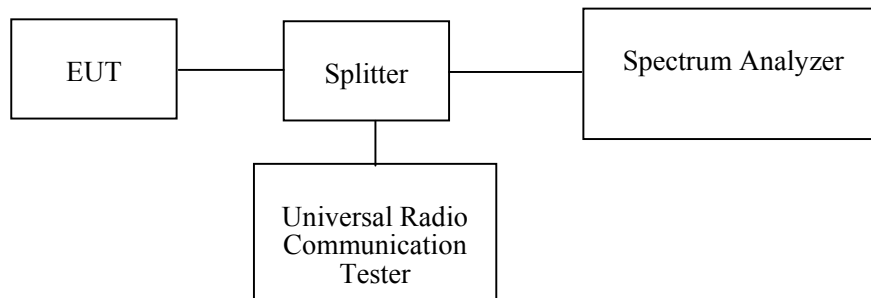

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A
Unknown	Attenuator	UNAT-3+	3dB-1	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.6 °C
Relative Humidity:	57 %
ATM Pressure:	101.5 kPa


* The testing was performed by Tiago Huang on 2019-04-12.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.


Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
Cellular	M	GSM	0.246	0.317
PCS		PCS	0.248	0.321
WCDMA Band II		Rel 99	4.160	4.712
		HSDPA	4.160	4.696
		HSUPA	4.140	4.689
WCDMA Band V		Rel 99	4.140	4.712
		HSDPA	4.180	4.701
		HSUPA	4.180	4.696

GSM 850 Cellular Band

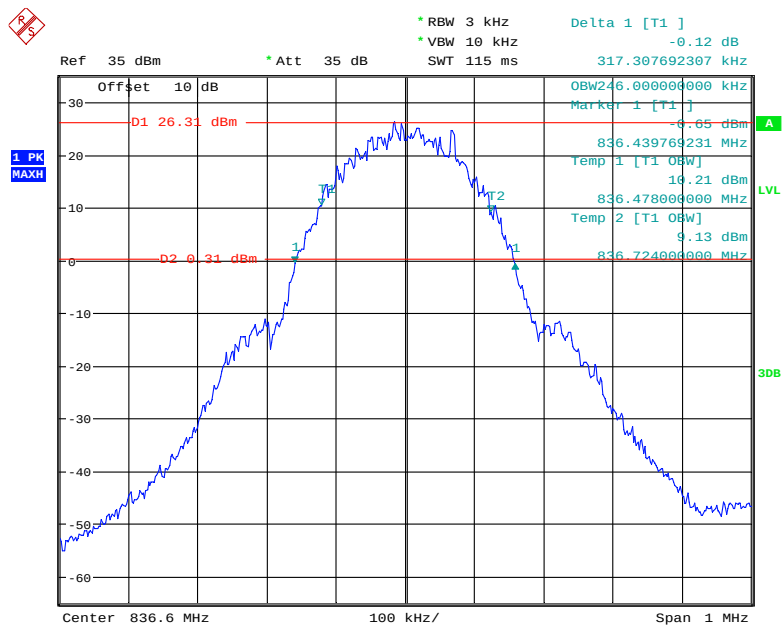


Date: 12.APR.2019 21:22:32

GSM PCS1900 Cellular Band

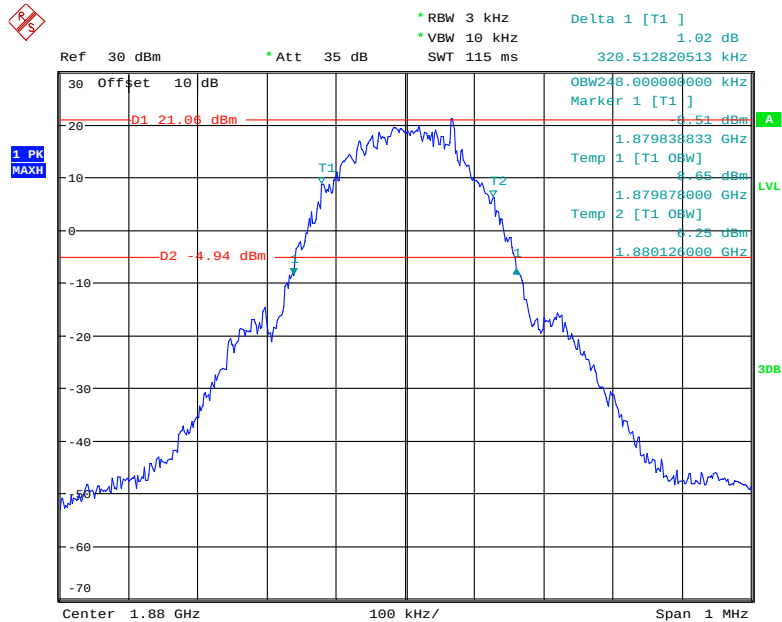


Date: 12.APR.2019 21:31:05

REL99 Band II

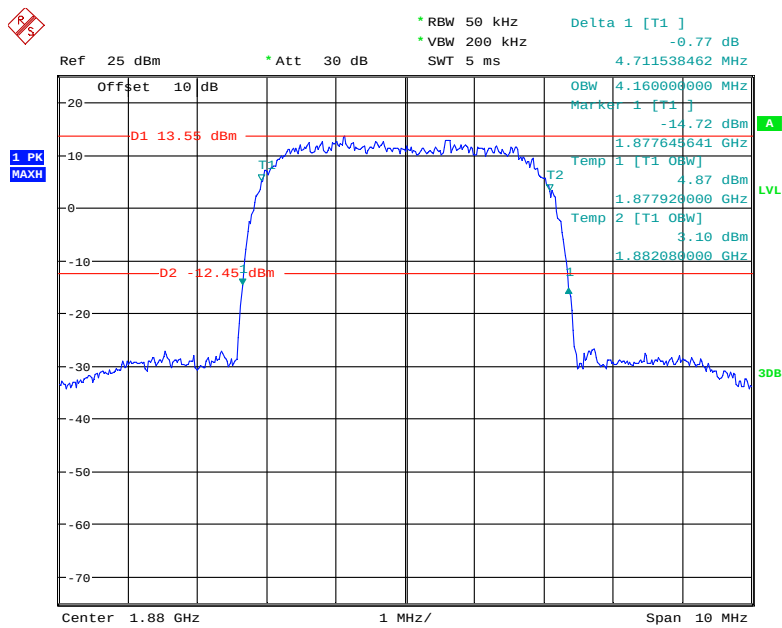


Date: 12.APR.2019 20:43:22

HSDPA Band II

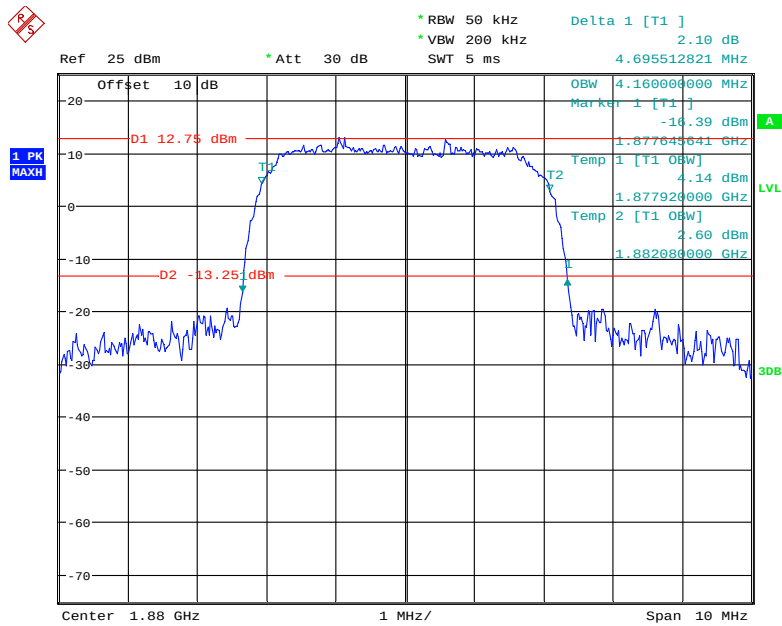


Date: 12.APR.2019 20:49:44

HSUPA Band II

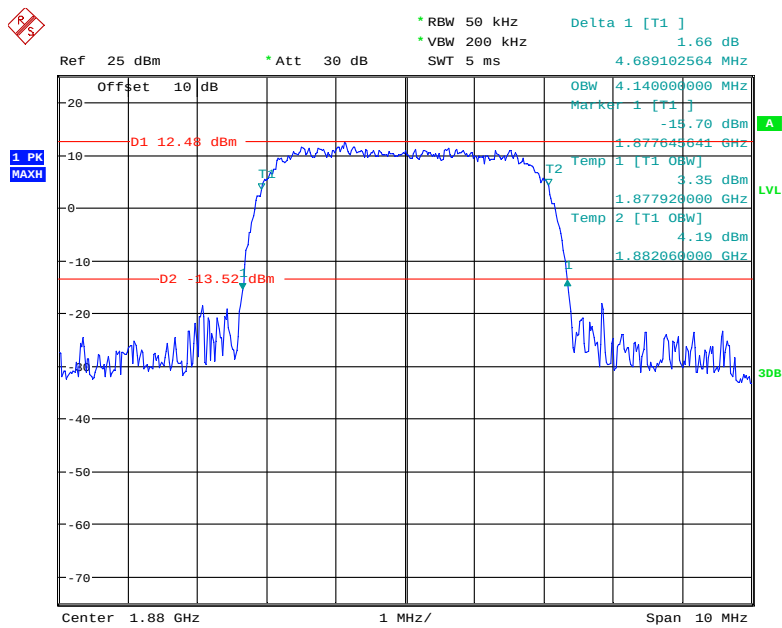


Date: 12.APR.2019 21:01:10

REL99 Band V

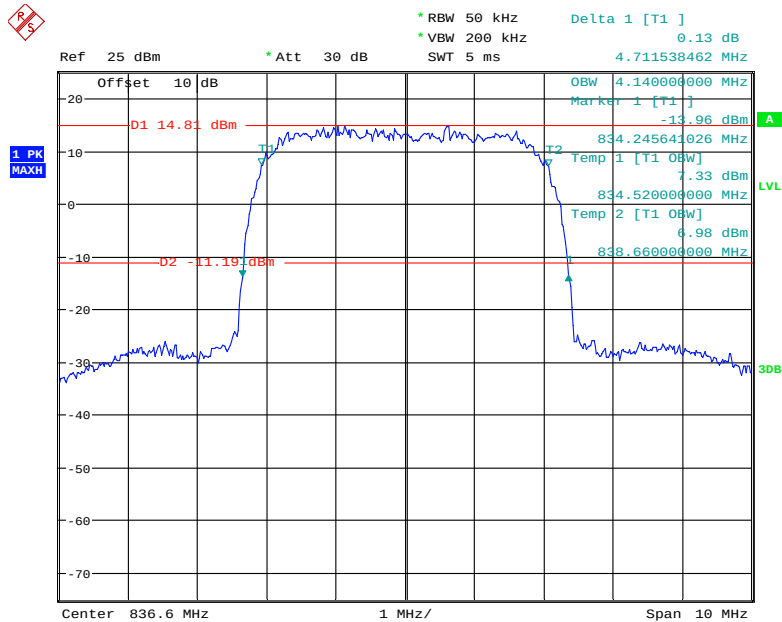


Date: 12.APR.2019 20:35:09

HSDPA Band V

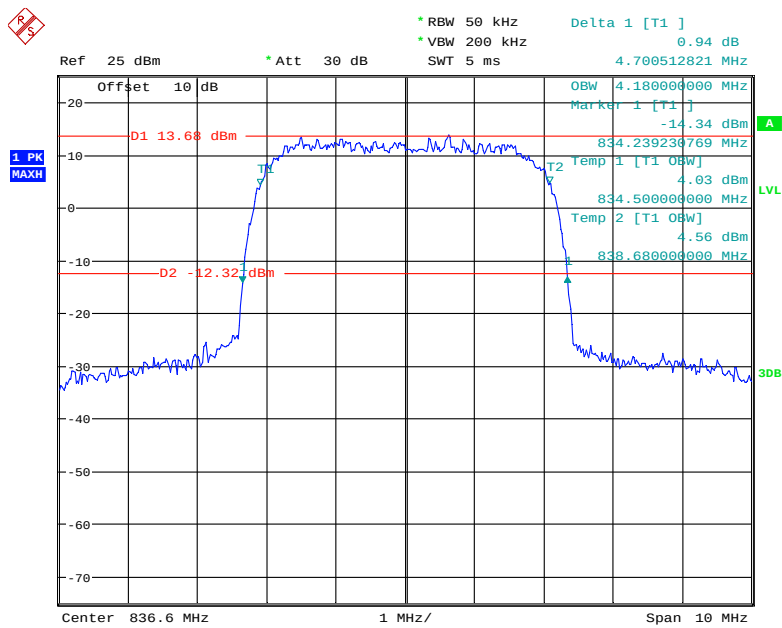

Date: 12.APR.2019 20:53:06

HSUPA Band V

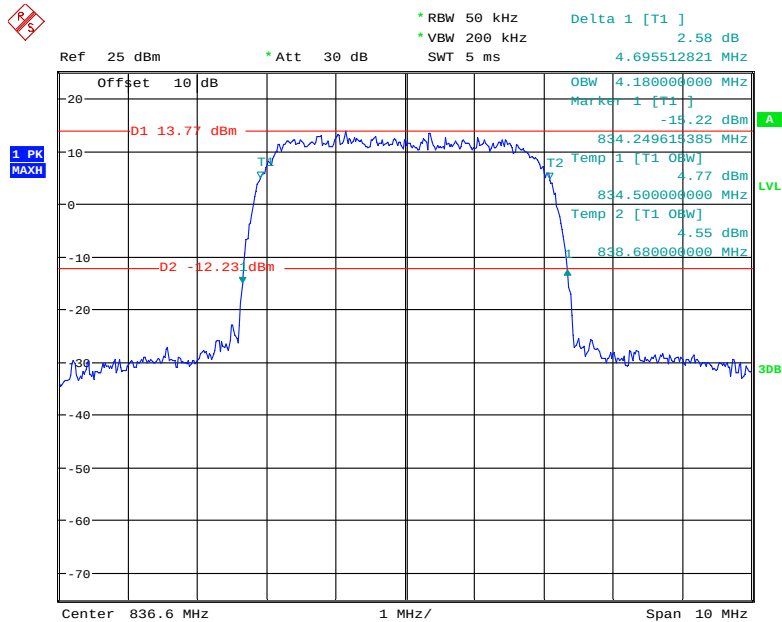

Date: 12.APR.2019 20:58:20

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

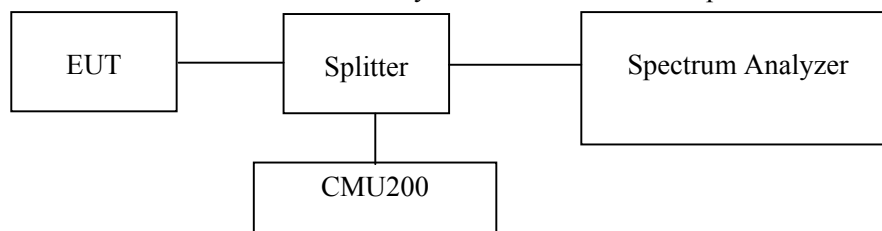

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-1-4	2020-1-4
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A
Unknown	Attenuator	UNAT-3+	3dB-1	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	27.6 °C
Relative Humidity:	57 %
ATM Pressure:	101.5 kPa


* The testing was performed by Tiago Huang on 2019-04-12.

Test Result: Compliance. Please refer to the following plots.

GSM850_Middle Channel

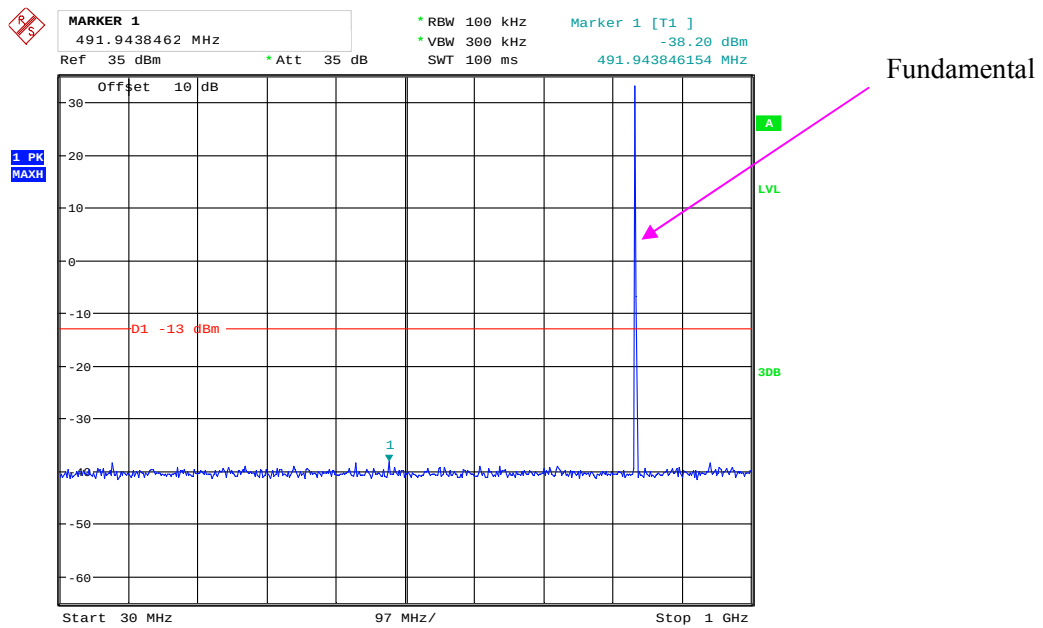


Date: 12.APR.2019 21:26:14

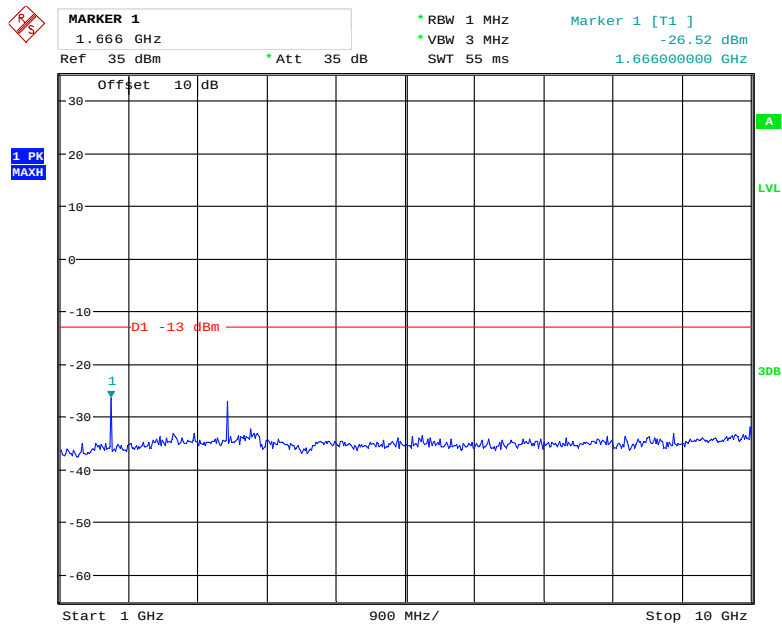


Date: 12.APR.2019 21:26:40

PCS 1900_ Middle Channel

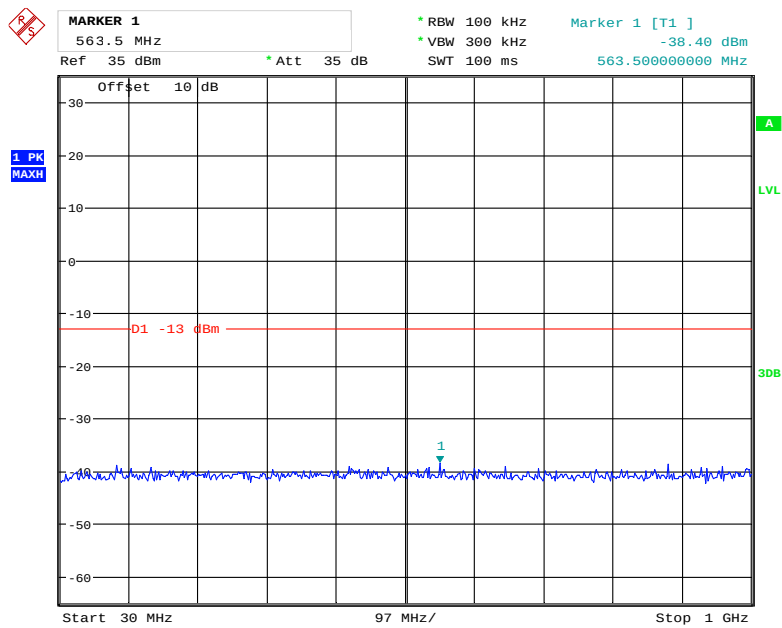


Date: 12.APR.2019 21:29:11

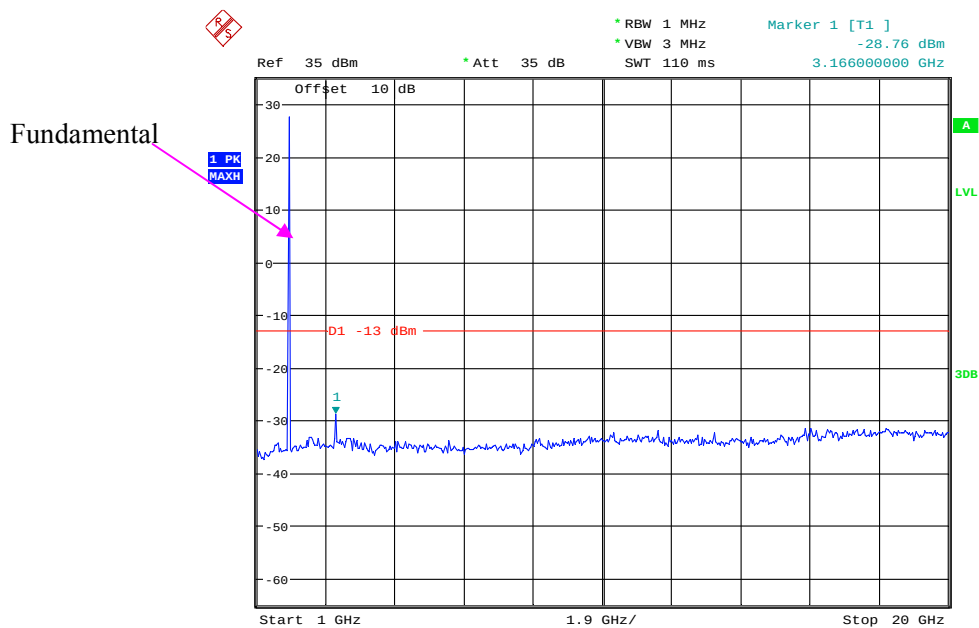


Date: 12.APR.2019 21:28:37

REL99 Band II_ Middle Channel

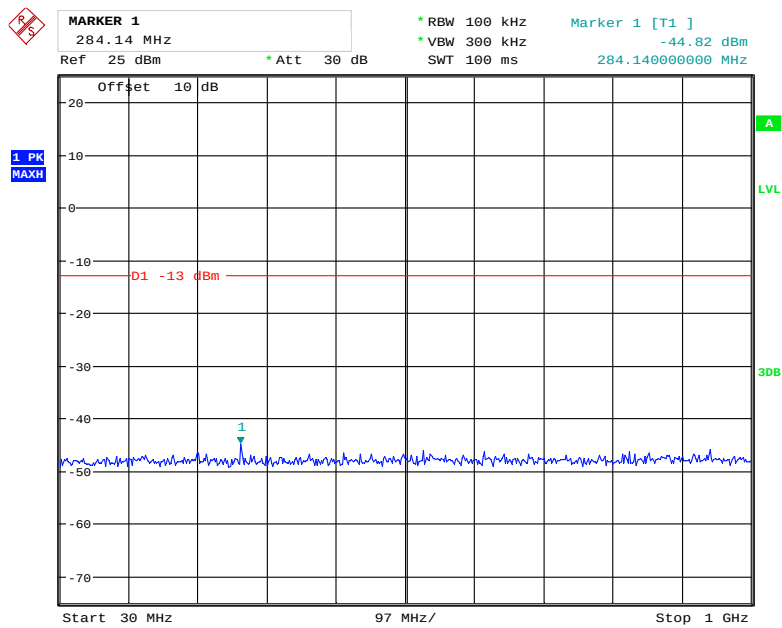


Date: 12.APR.2019 20:45:26

Fundamental

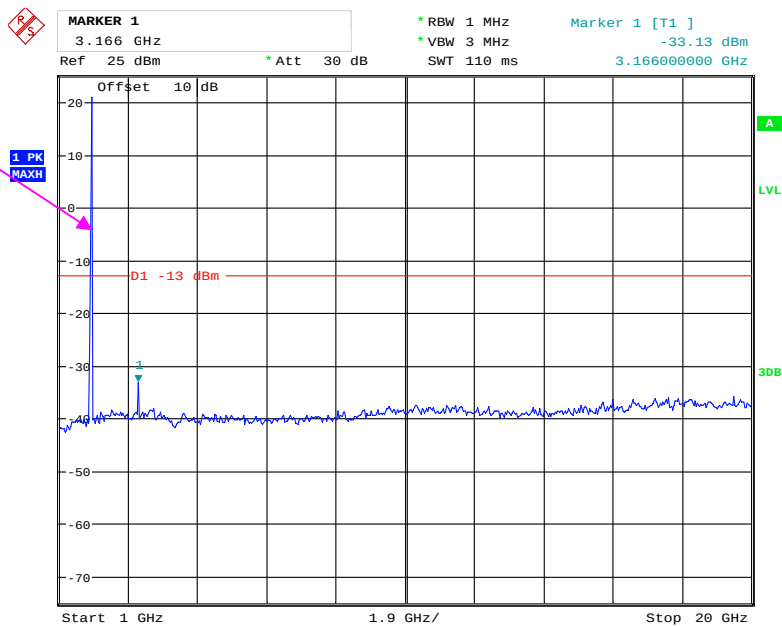


Date: 12.APR.2019 20:46:13

Rel 99 Band V_ Middle Channel

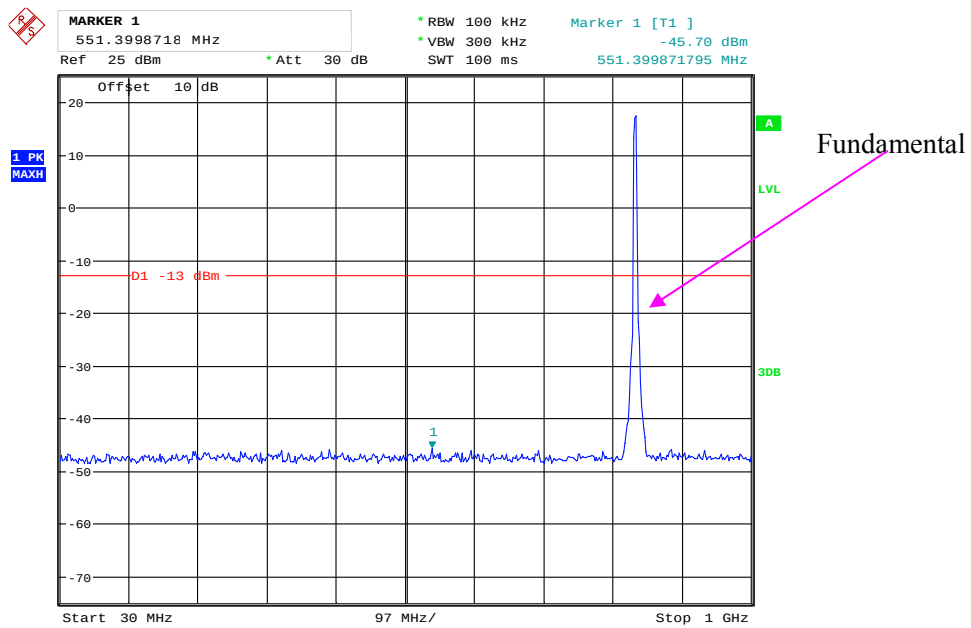

Date: 12.APR.2019 20:40:35

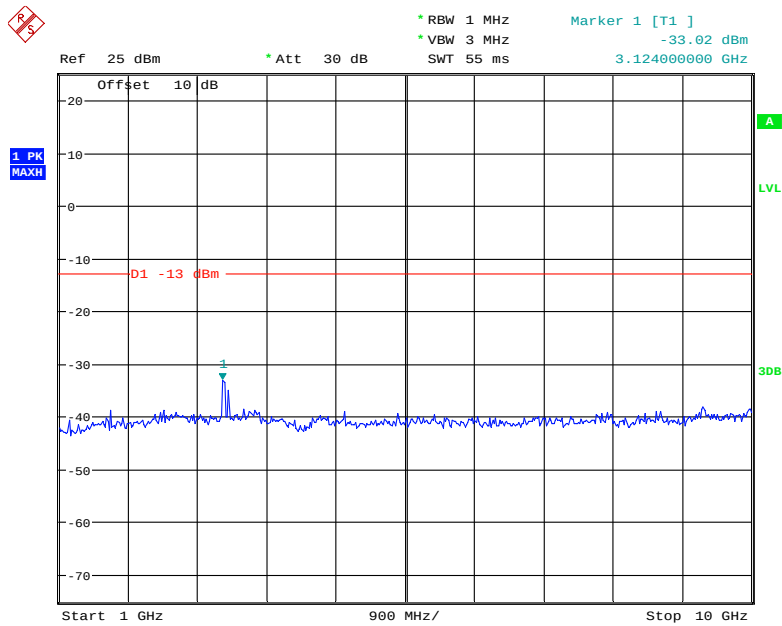

Date: 12.APR.2019 20:41:19

FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2018-05-06	2019-05-06
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2018-09-05	2019-09-05
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2016-11-18	2019-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16
Sinoscite	Band-stop filter	BSF824-862MS-1438-001	1438001	2018-06-16	2019-06-16
Sinoscite	Band-stop filter	BSF1850-1910MS-0935V2	0935V2	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.5 °C
Relative Humidity:	42 %
ATM Pressure:	101.4 kPa

* The testing was performed by Sunny Cen & Neil Liao on 2019-04-11.

Test Result: Compliance.

*EUT Operation Mode: Transmitting***Cellular Band (PART 22H)****30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM850, Frequency:836.600 MHz								
1673.200	H	44.19	-70.02	10.6	0.73	-60.1	-13.0	47.1
1673.200	V	44.62	-70.19	10.6	0.73	-60.3	-13.0	47.3
2509.800	H	48.72	-64.3	13.1	1.25	-52.4	-13.0	39.4
2509.800	V	46.07	-66.98	13.1	1.25	-55.1	-13.0	42.1
3346.400	H	40.20	-70.46	13.8	1.61	-58.2	-13.0	45.2
3346.400	V	39.49	-71.22	13.8	1.61	-59.0	-13.0	46.0
384.000	H	45.68	-59.74	0.0	0.6	-60.3	-13.0	47.3
384.000	V	48.75	-59.71	0.0	0.6	-60.3	-13.0	47.3
WCDMA Band V R99, Frequency:836.600 MHz								
1673.200	H	38.86	-75.35	10.6	0.73	-65.5	-13.0	52.5
1673.200	V	39.96	-74.85	10.6	0.73	-65.0	-13.0	52.0
2509.800	H	45.37	-67.65	13.1	1.25	-55.8	-13.0	42.8
2509.800	V	45.38	-67.67	13.1	1.25	-55.8	-13.0	42.8
3346.400	H	39.23	-71.43	13.8	1.61	-59.2	-13.0	46.2
3346.400	V	39.54	-71.17	13.8	1.61	-59.0	-13.0	46.0
318.000	H	46.36	-61.59	0.0	0.54	-62.1	-13.0	49.1
318.000	V	47.54	-62.11	0.0	0.54	-62.7	-13.0	49.7

PCS Band (PART 24E)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM1900, Frequency:1880.000 MHz								
3760.000	H	41.32	-67.48	13.8	1.63	-55.4	-13.0	42.4
3760.000	V	41.11	-67.56	13.8	1.63	-55.4	-13.0	42.4
5640.000	H	41.84	-64.19	14.0	1.31	-51.5	-13.0	38.5
5640.000	V	40.12	-65.79	14.0	1.31	-53.1	-13.0	40.1
597.000	H	47.58	-54.61	0.0	0.76	-55.4	-13.0	42.4
597.000	V	49.62	-55.83	0.0	0.76	-56.6	-13.0	43.6
WCDMA Band II, R99, Frequency:1880.000 MHz								
3760.000	H	42.29	-66.51	13.8	1.63	-54.4	-13.0	41.4
3760.000	V	41.51	-67.16	13.8	1.63	-55.0	-13.0	42.0
5640.000	H	47.17	-58.86	14.0	1.31	-46.2	-13.0	33.2
5640.000	V	42.60	-63.31	14.0	1.31	-50.6	-13.0	37.6
741.000	H	45.62	-54.67	0.0	0.94	-55.6	-13.0	42.6
741.000	V	48.31	-54.98	0.0	0.94	-55.9	-13.0	42.9

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §22.917(a) & §24.238(a)- BAND EDGES


Applicable Standard

FCC § 2.1053, §22.917, § 24.238.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

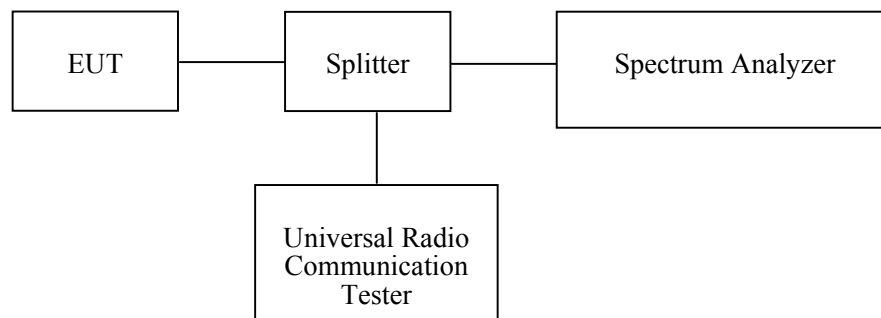

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-1-4	2020-1-4
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A
Unknown	Attenuator	UNAT-3+	3dB-1	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	27.6 °C
Relative Humidity:	57 %
ATM Pressure:	101.5 kPa

* The testing was performed by Tiago Huang on 2019-04-12.

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

GSM 850, Left Band Edge

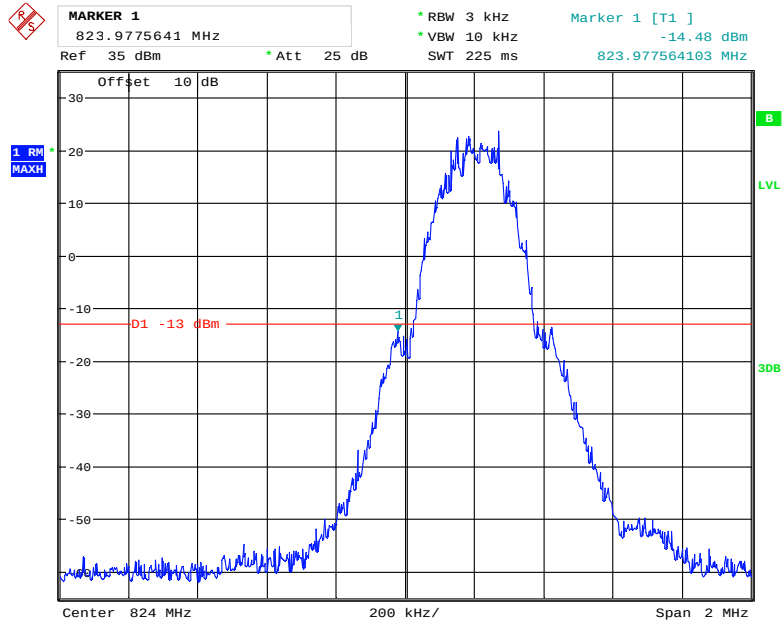


Date: 12.APR.2019 21:24:15

GSM 850, Right Band Edge

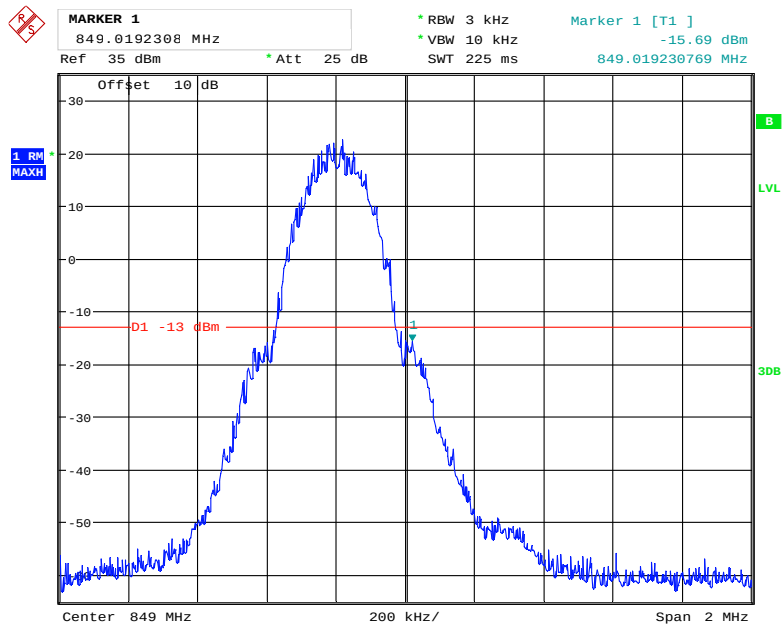


Date: 12.APR.2019 21:24:53

GSM 1900, Left Band Edge

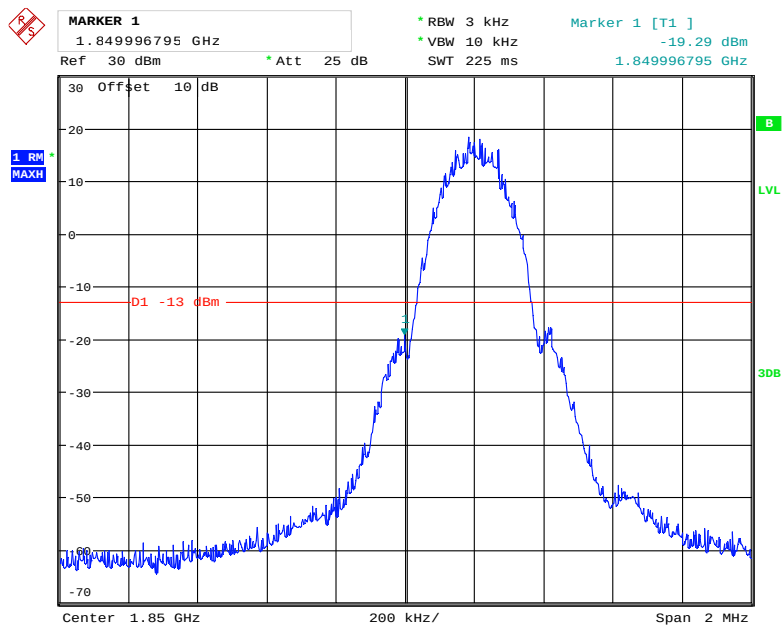

Date: 12.APR.2019 21:32:38


GSM 1900, Right Band Edge

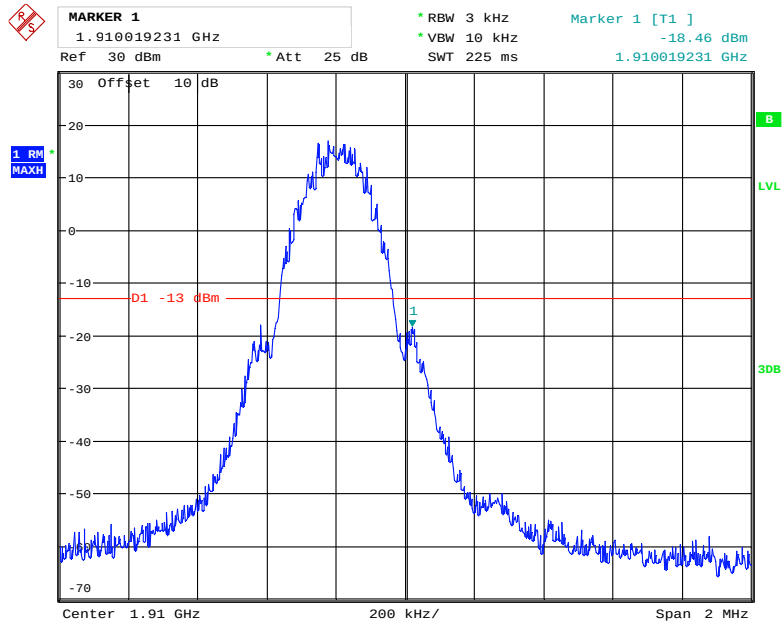

Date: 12.APR.2019 21:33:15


WCDMA Band II:

REL99 Band II, Left Band Edge

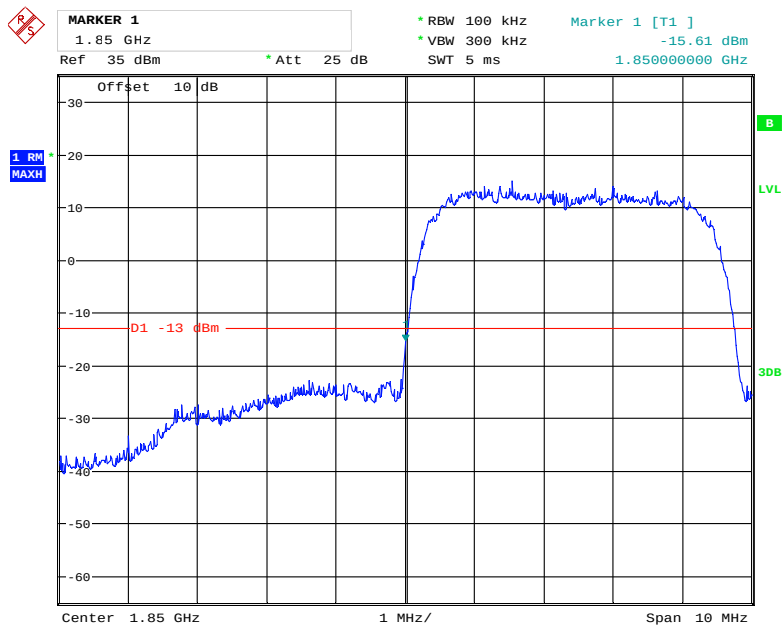


Date: 12.APR.2019 20:43:58

REL99 Band II, Right Band Edge

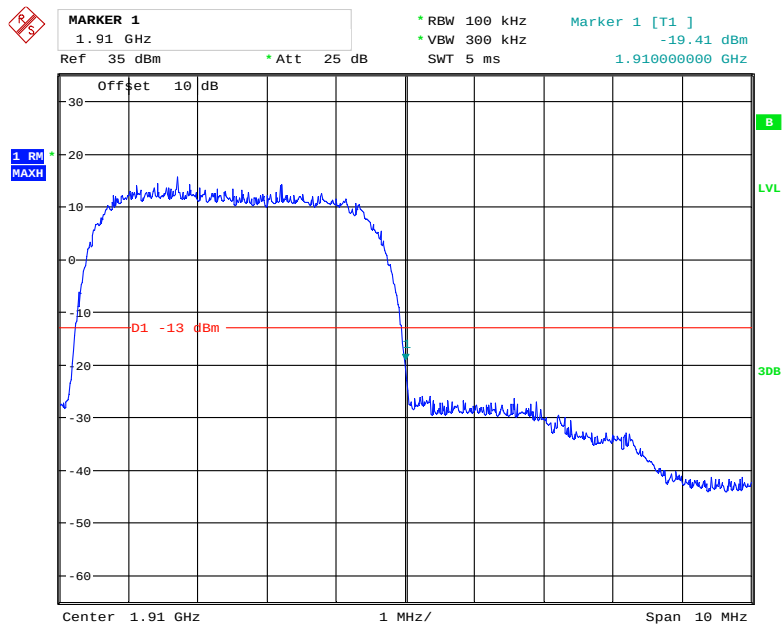


Date: 12.APR.2019 20:44:33

HSDPA Band II, Left Band Edge

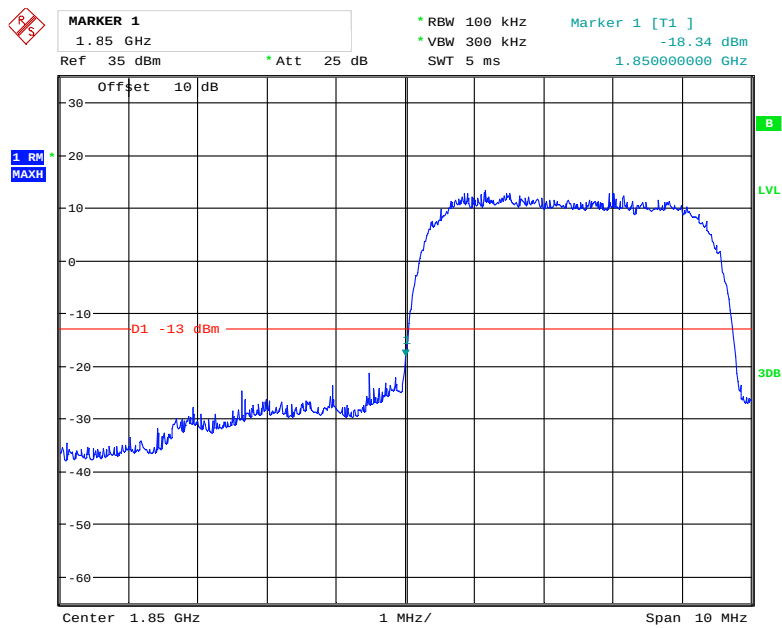


Date: 12.APR.2019 20:50:43

HSDPA Band II, Right Band Edge

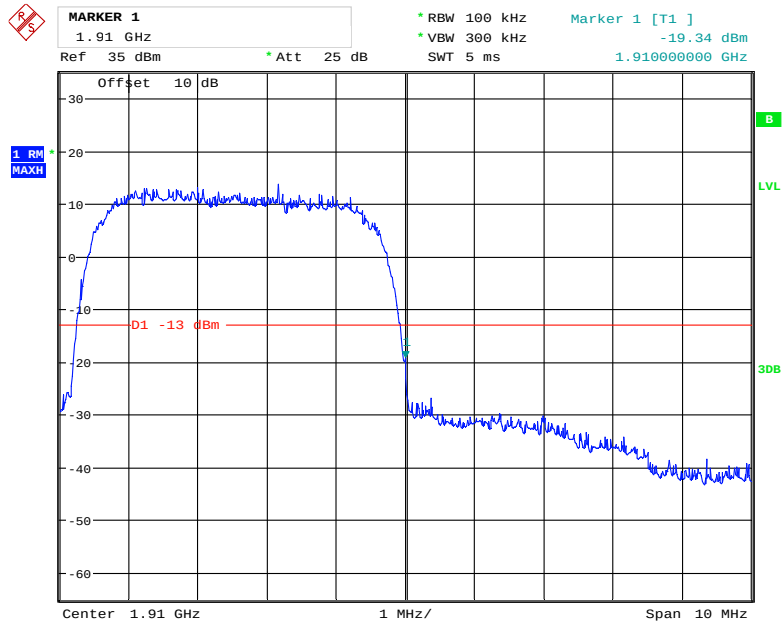


Date: 12.APR.2019 20:51:28

HSUPA Band II, Left Band Edge

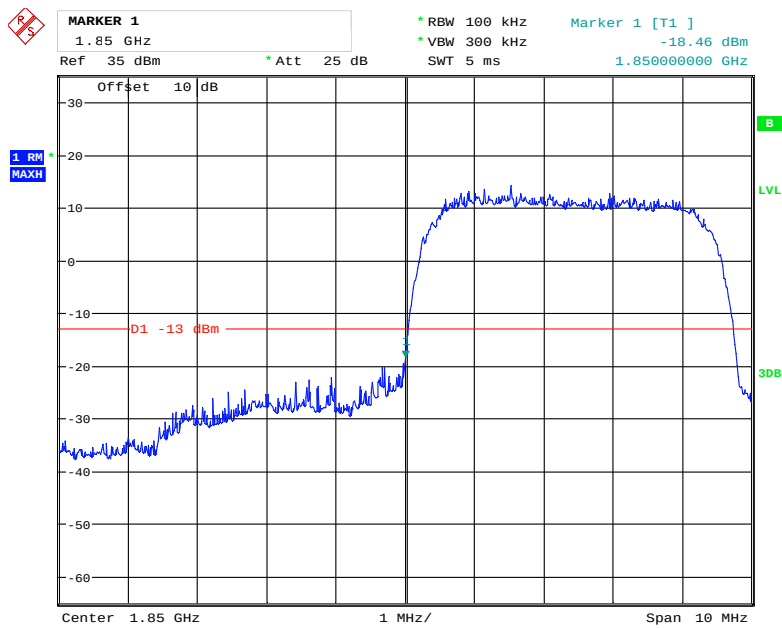

Date: 12.APR.2019 21:02:03


HSUPA Band II, Right Band Edge

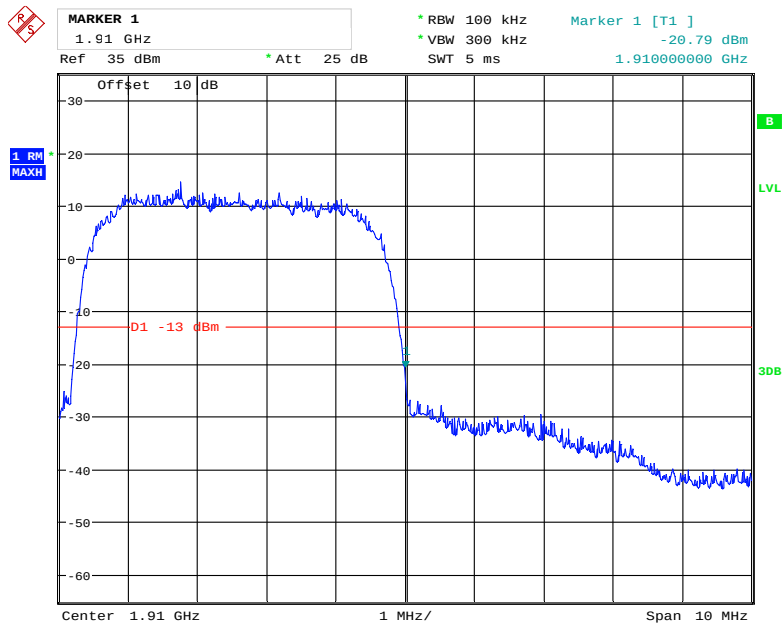

Date: 12.APR.2019 21:02:35


WCDMA Band V

REL99 Band V, Left Band Edge

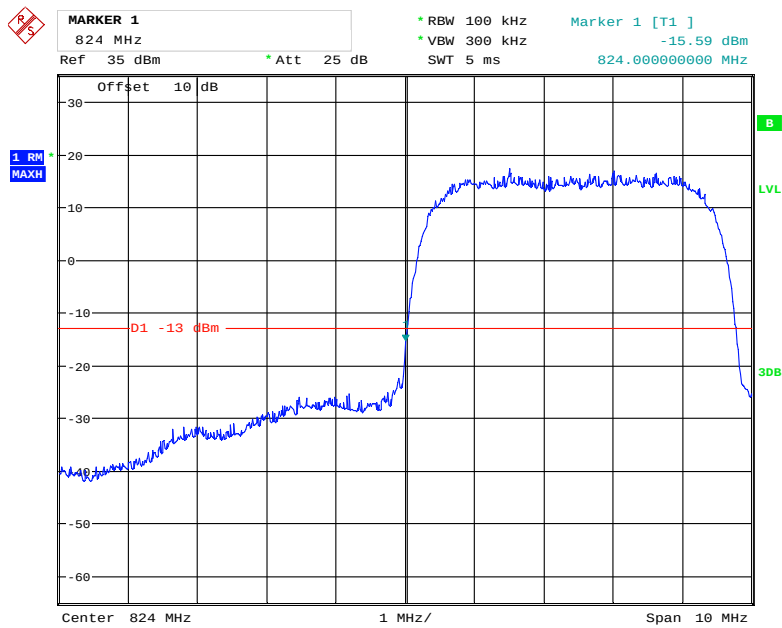

Date: 12.APR.2019 20:38:32

REL99 Band V Right Band Edge

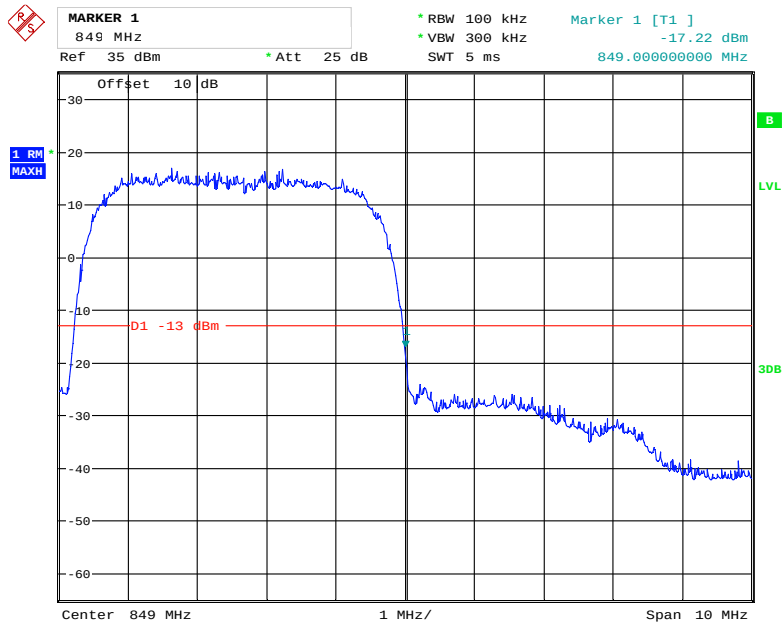

Date: 12.APR.2019 20:39:09

MARKER 1
824 MHz

Ref 35 dBm * Att 25 dB

* RBW 100 kHz
* VBW 300 kHz
SWT 5 ms

Marker 1 [T1]
-17.44 dBm
824.00000000 MHz

Offset 10 dB


30
20
10
0
-10
-20
-30
-40
-50
-60

1 RM
MAXH


D1 -13 dBm

Center 824 MHz 1 MHz/ Span 10 MHz

HSDPA Band V, Right Band Edge




HSUPA Band V, Left Band Edge

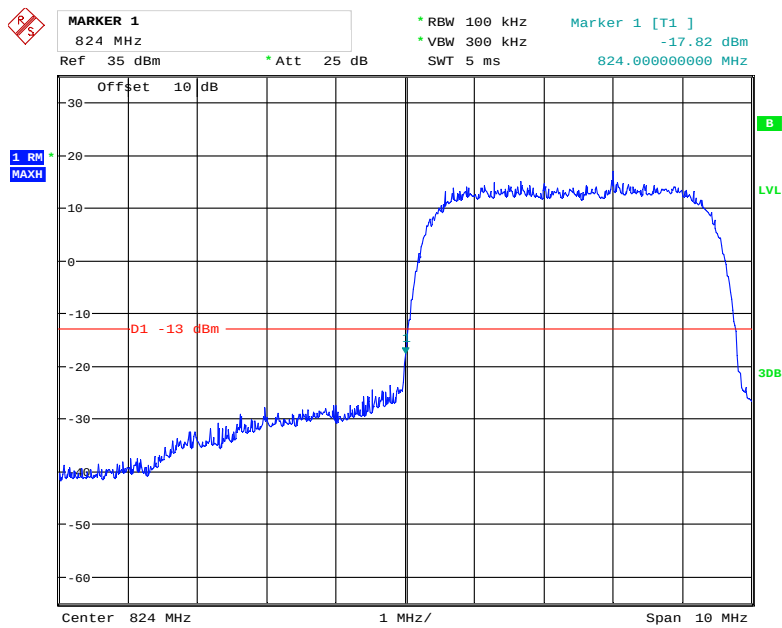

Date: 12.APR.2019 20:58:57

HSUPA Band V, Right Band Edge

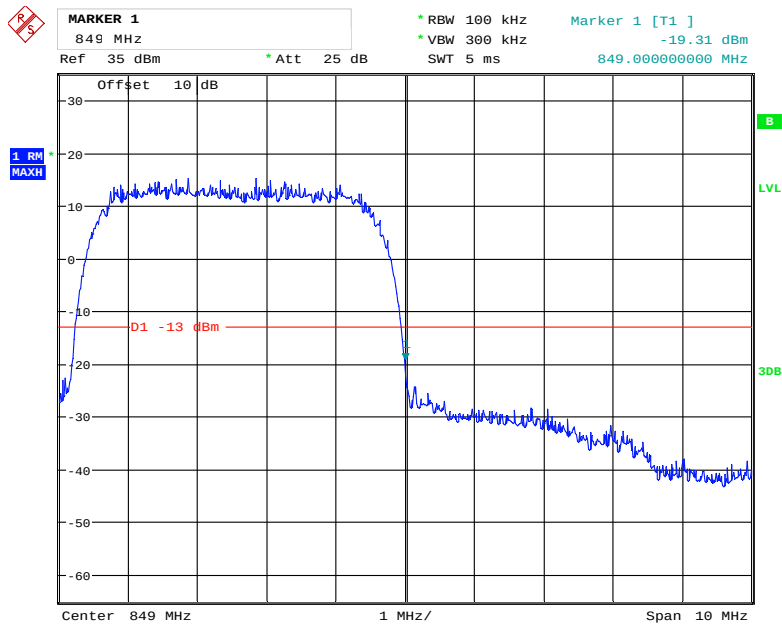

Date: 12.APR.2019 20:59:18

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY**Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

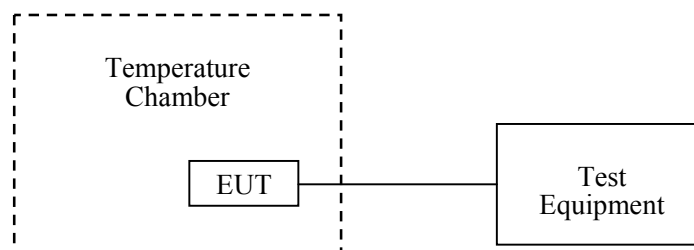

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Universal Radio Communication Tester	CMU200	106 891	2018-12-14	2019-12-14
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2019-03-26	2020-03-26
UNI-T	Multimeter	UT39A	M130199938	2018-07-24	2019-07-24
Pro instrument	DC Power Supply	pps3300	3300012	Not Required	/
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.6 °C
Relative Humidity:	57 %
ATM Pressure:	101.5 kPa

* The testing was performed by Tiago Huang on 2019-04-12.

Test Result: Compliance.

Cellular Band

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	-20	-0.02391	2.5
-20		-17	-0.02032	
-10		13	0.01554	
0		-5	-0.00598	
10		13	0.01554	
20		-3	-0.00359	
30		-19	-0.02271	
40		-3	-0.00359	
50		-9	-0.01076	
25	3.6	9	0.01076	
25	4.35	18	0.02152	

PCS Band

GMSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V _{DC}	Hz	ppm	
-30	3.8	10	0.00532	Pass
-20		5	0.00266	
-10		9	0.00479	
0		11	0.00585	
10		-14	-0.00745	
20		16	0.00851	
30		12	0.00638	
40		11	0.00585	
50		8	0.00426	
25	3.6	17	0.00904	
25	4.35	-2	-0.00106	

WCDMA Band II: R99

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V _{DC}	Hz	ppm	
-30	3.8	-18	-0.00957	Pass
-20		-17	-0.00904	
-10		-21	-0.01117	
0		8	0.00426	
10		16	0.00851	
20		7	0.00372	
30		13	0.00691	
40		-1	-0.00053	
50		-2	-0.00106	
25	3.6	-4	-0.00213	
25	4.35	-15	-0.00798	

WCDMA Band V: R99

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	-20	-0.02391	2.5
-20		-20	-0.02391	
-10		-12	-0.01434	
0		2	0.00239	
10		13	0.01554	
20		-3	-0.00359	
30		9	0.01076	
40		8	0.00956	
50		-13	-0.01554	
25	3.6	-12	-0.01434	
25	4.35	-1	-0.00120	

***** END OF REPORT *****