



TESTING LABORATORY  
CERTIFICATE #4820.01



## FCC PART 15B

### TEST REPORT

For

**HONG KONG IPRO TECHNOLOGY CO.,LIMITED**

12/F 3 LOCKHART ROAD WANCHAI HK

**FCC ID: PQ4IPROWE PAD**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Tablet
<b>Report Number:</b> RDG190903002-00D	
<b>Report Date:</b> 2019-10-30	
<b>Reviewed By:</b> Jerry Zhang EMC Manager	<i>Jerry Zhang</i>
Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China <b>Test Laboratory:</b> Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

## **TABLE OF CONTENTS**

<b>General Information .....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S) .....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	4
TEST FACILITY .....	4
DECLARATIONS .....	4
<b>System Test Configuration .....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION.....	5
EQUIPMENT MODIFICATIONS.....	5
EUT EXERCISE SOFTWARE .....	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	5
SUPPORT CABLE LIST AND DETAILS.....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
TEST EQUIPMENT LIST .....	7
ENVIRONMENTAL CONDITIONS .....	7
<b>Summary of Test Results.....</b>	<b>8</b>
<b>Conducted emissions.....</b>	<b>9</b>
EUT SETUP .....	9
EMI TEST RECEIVER SETUP .....	9
TEST PROCEDURE.....	9
TEST DATA.....	11
<b>Radiated emissions.....</b>	<b>13</b>
EUT SETUP .....	13
EMI TEST RECEIVER SETUP .....	14
TEST PROCEDURE.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
TEST DATA.....	15

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Tablet
<b>EUT Model:</b>	Wepad
<b>Highest Operation Frequency:</b>	2480 MHz
<b>Adapter Information</b>	<b>Rated Input Voltage:</b> 3.8VDC from battery and 5VDC from adapter
	<b>Model:</b> WePad
	<b>Input:</b> AC 100-240V 50/60Hz 0.2A MAX
	<b>Output:</b> DC 5.0V 1.0A
<b>External Dimension:</b>	190mm(L) * 100mm(W) * 10mm(H)
<b>Serial Number:</b>	RDG1910093002-RF-S1
<b>EUT Received Date:</b>	2019.9.3
<b>EUT Status:</b>	Good

### Objective

This report is prepared on behalf of HONG KONG IPRO TECHNOLOGY CO.,LIMITED in accordance with FCC Part 15B Part 2, subpart J, and Part 15, Subpart A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 B Class B.

### Related Submittal(s)/Grant(s)

FCC Part 22H, 24E PCE submissions with FCC ID: PQ4IPROWE PAD  
FCC Part 15C DSS submissions with FCC ID: PQ4IPROWE PAD  
FCC Part 15C DTS submissions with FCC ID: PQ4IPROWE PAD

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

## Measurement Uncertainty

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	±1°C
Humidity	±5%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in downloading mode.

### Equipment Modifications

No modification was made to the EUT.

### EUT Exercise Software


The software "Winthrax.exe" was used during test.

### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	293

### Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	yes	No	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	yes	No	1.8	USB Port of Laptop	Keyboard
USB Cable	No	No	0.8	Adapter	EUT
Earphone	No	No	1.2	EUT	Earphone

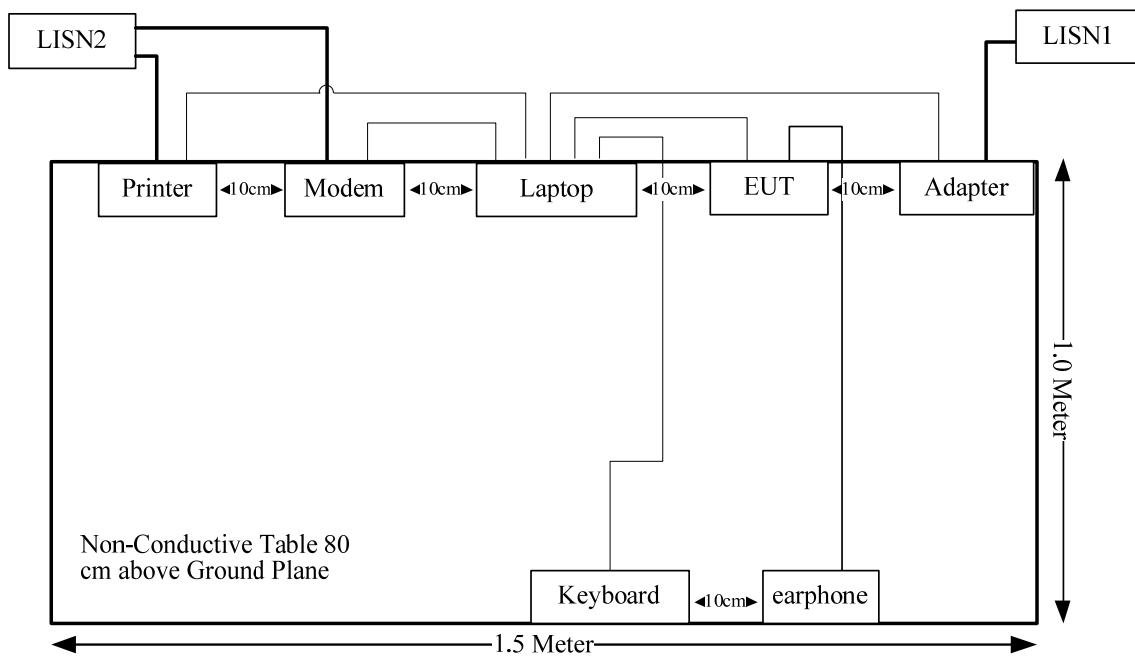**Block Diagram of Test Setup**

## Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted emissions</b>					
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESCI	101121	2019-05-09	2020-05-09
R&S	L.I.S.N	ESH2-Z5	892107/021	2018-09-19	2019-09-19
<b>Radiated emissions Below 1GHz</b>					
R&S	EMI Test Receiver	ESCI	100035	2019-08-03	2020-08-03
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-2	2017-08-25	2020-08-25
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2018-10-24	2019-10-24
Sonoma	Amplifier	310N	185914	2018-11-13	2019-11-13
<b>Radiated emissions Above 1GHz</b>					
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2019-08-03	2020-08-03
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2019-02-24	2020-02-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2019-09-05	2020-09-05

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Environmental Conditions


Test Item:	Conducted emissions	Radiated emissions Below 1GHz	Radiated emissions Above 1GHz
Test Date:	2019-09-18	2019-10-22	2019-09-18
Tester:	Sem Xing	Ade Xiao	Neil Liao
Temperature:	27.7°C	26.1°C	26.8°C
Relative Humidity:	65%	50%	49%
ATM Pressure:	100.1kPa	100.7kPa	100.6kPa

**SUMMARY OF TEST RESULTS**

Rule and Clause	Description of Test	Test Result
FCC §15.107	Conducted emissions	Compliance
FCC §15.109	Radiated emissions	Compliance

## CONDUCTED EMISSIONS

### EUT Setup

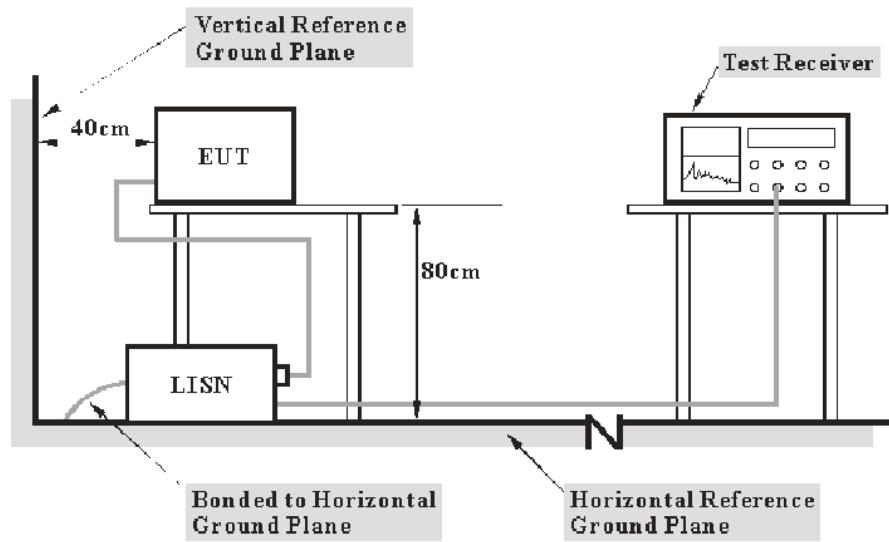

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the Main LISN with 120V/60Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the Adapter of Laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_c + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_c$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN


The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data

Please refer to following table and plots:

Port: L  
 Test Mode: Downloading  
 Power Source: AC120V/60Hz

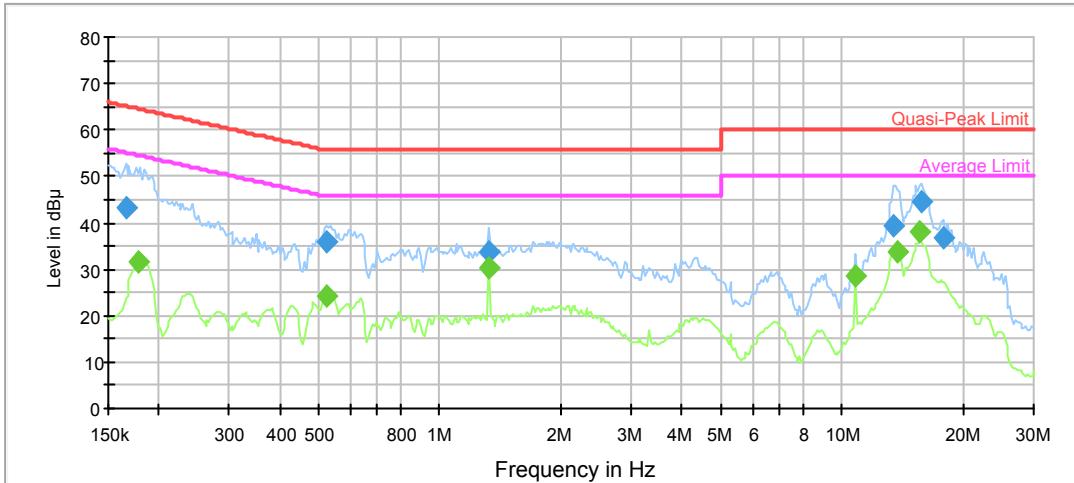


## Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.165693	43.0	9.000	L1	11.0	22.2	65.2
0.525514	35.9	9.000	L1	9.9	20.1	56.0
1.325783	33.7	9.000	L1	9.8	22.3	56.0
13.469532	39.4	9.000	L1	9.9	20.6	60.0
15.794085	44.5	9.000	L1	9.9	15.5	60.0
17.975142	36.6	9.000	L1	10.0	23.4	60.0

## Final Result 2

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.177646	31.6	9.000	L1	10.8	23.0	54.6
0.525514	24.2	9.000	L1	9.9	21.8	46.0
1.325783	30.5	9.000	L1	9.8	15.5	46.0
10.821371	28.4	9.000	L1	9.8	21.6	50.0
13.740269	33.7	9.000	L1	9.9	16.3	50.0
15.637708	37.9	9.000	L1	9.9	12.1	50.0

Port: N  
 Test Mode: Downloading  
 Power Source: AC120V/60Hz

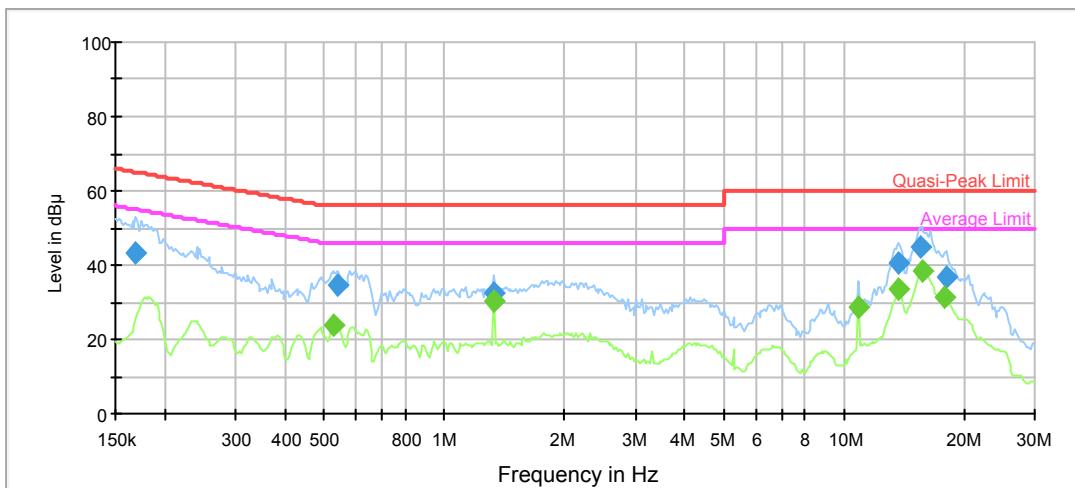

## Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.169024	43.1	9.000	N	10.9	21.9	65.0
0.541438	34.4	9.000	N	9.8	21.6	56.0
1.325783	32.5	9.000	N	9.8	23.5	56.0
13.740269	40.6	9.000	N	9.9	19.4	60.0
15.482879	44.9	9.000	N	9.9	15.1	60.0
18.154894	36.9	9.000	N	10.0	23.1	60.0


## Final Result 2

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.525514	24.0	9.000	N	9.9	22.0	46.0
1.325783	30.4	9.000	N	9.8	15.6	46.0
10.821371	28.9	9.000	N	9.8	21.1	50.0
13.740269	33.4	9.000	N	9.9	16.6	50.0
15.637708	38.2	9.000	N	9.9	11.8	50.0
17.797171	31.6	9.000	N	10.0	18.4	50.0


## RADIATED EMISSIONS

### EUT Setup

Below 1GHz:

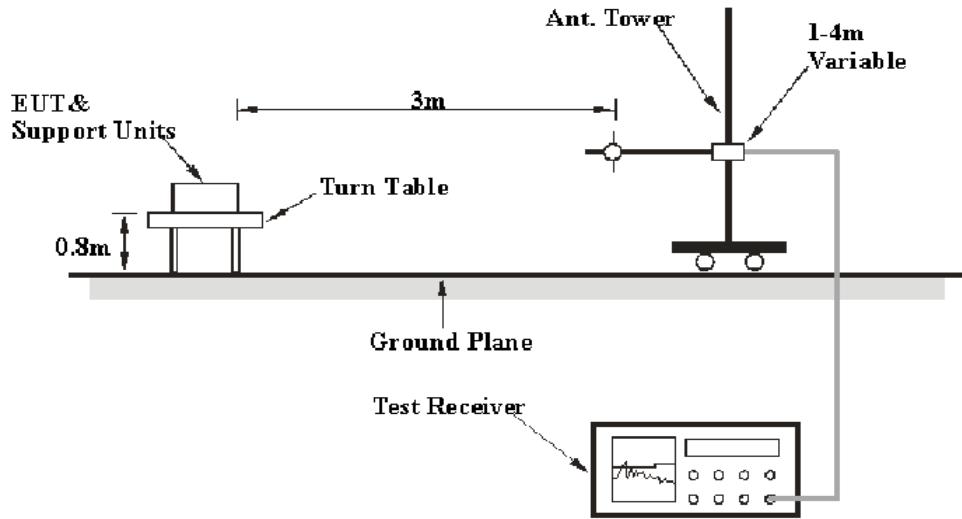

Above 1GHz:

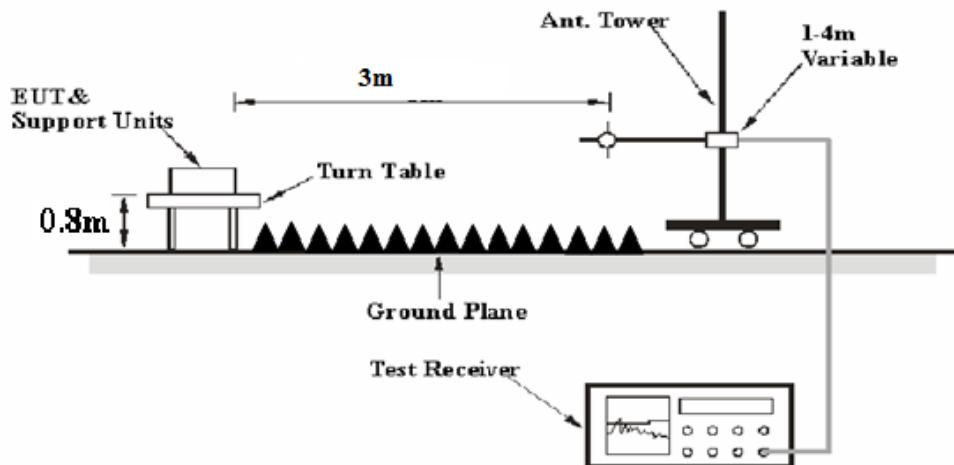

The radiated emission below 1GHz tests were performed in the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site A, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

During the radiated emissions, the adapter of laptop was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Meter Reading + Corrected

Note:

Corrected = Antenna Factor + Cable Loss - Amplifier Gain

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Limit} - \text{Result}$$

## Test Data

Please refer to following table and plots:

**Condition:** FCC Part 15B Class B  
**EUT:** Tablet  
**Test Mode:** Downloading

**Polarization:** Horizontal  
**Power:** AC 120V/60Hz  
**Distance:** 3m

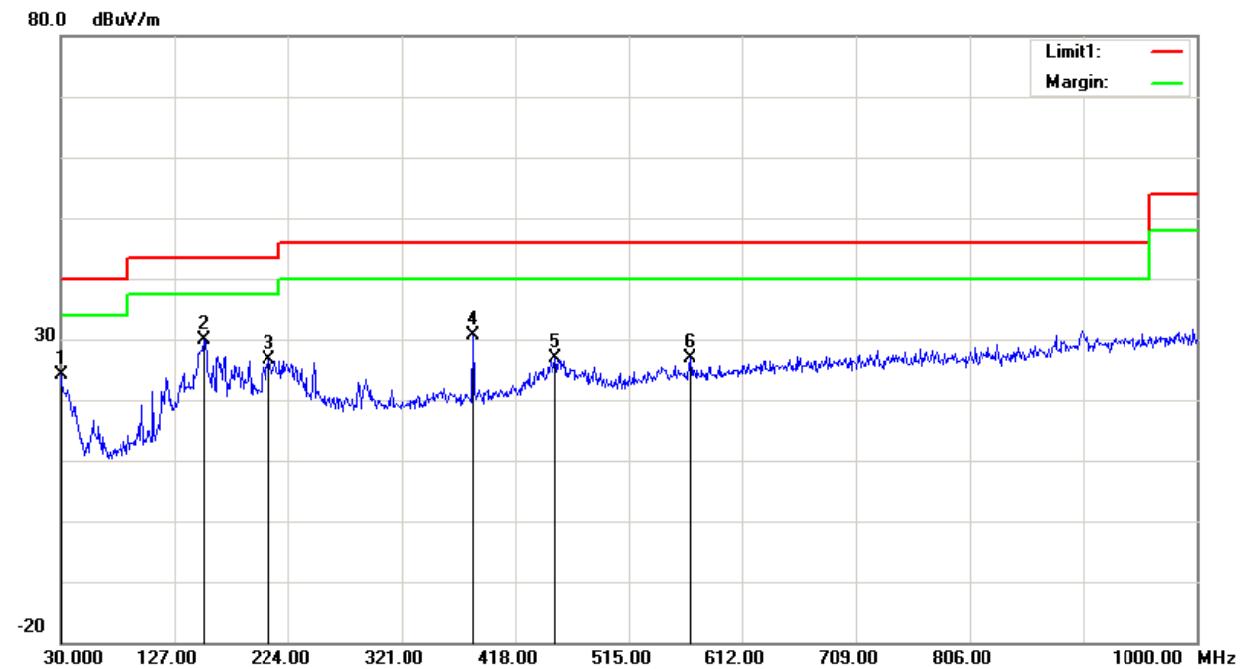

Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.000	28.38	peak	-4.33	24.05	40.00	15.95
152.2200	39.17	peak	-9.41	29.76	43.50	13.74
207.5100	37.51	peak	-10.95	26.56	43.50	16.94
382.1100	36.45	peak	-5.81	30.64	46.00	15.36
451.9500	31.14	peak	-4.27	26.87	46.00	19.13
567.3800	28.27	peak	-1.51	26.76	46.00	19.24

**Condition:** FCC Part 15B Class B  
**EUT:** Tablet  
**Test Mode:** Downloading


**Polarization:** Vertical  
**Power:** AC 120V/60Hz  
**Distance:** 3m



Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
42.6100	41.13	peak	-11.26	29.87	40.00	10.13
181.3200	48.60	QP	-9.98	38.62	43.50	4.88
272.5000	40.36	peak	-8.61	31.75	46.00	14.25
382.1100	35.84	peak	-5.81	30.03	46.00	15.97
454.8600	38.91	peak	-4.15	34.76	46.00	11.24
902.0300	30.37	peak	3.60	33.97	46.00	12.03

**Condition:** FCC Part 15B Class B  
**EUT:** Tablet  
**Test Mode:** Downloading


**Polarization:** Horizontal  
**Power:** AC 120V/60Hz  
**Distance:** 3m

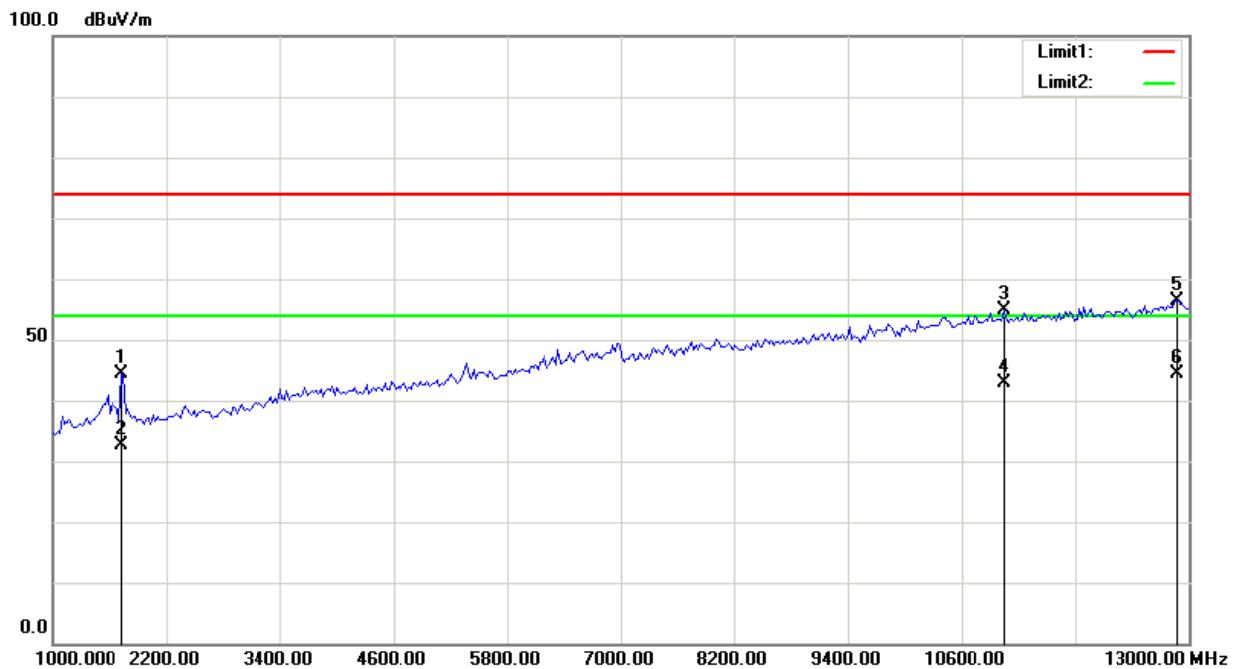

Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1721.443	45.26	peak	-0.97	44.29	74.00	29.71
1721.443	33.54	AVG	-0.97	32.57	54.00	21.43
11052.104	36.61	peak	18.21	54.82	74.00	19.18
11052.104	24.65	AVG	18.21	42.86	54.00	11.14
12879.760	35.68	peak	20.63	56.31	74.00	17.69
12879.760	23.64	AVG	20.63	44.27	54.00	9.73

**Condition:** FCC Part 15B Class B  
**EUT:** Tablet  
**Test Mode:** Downloading

**Polarization:** Vertical  
**Power:** AC 120V/60Hz  
**Distance:** 3m

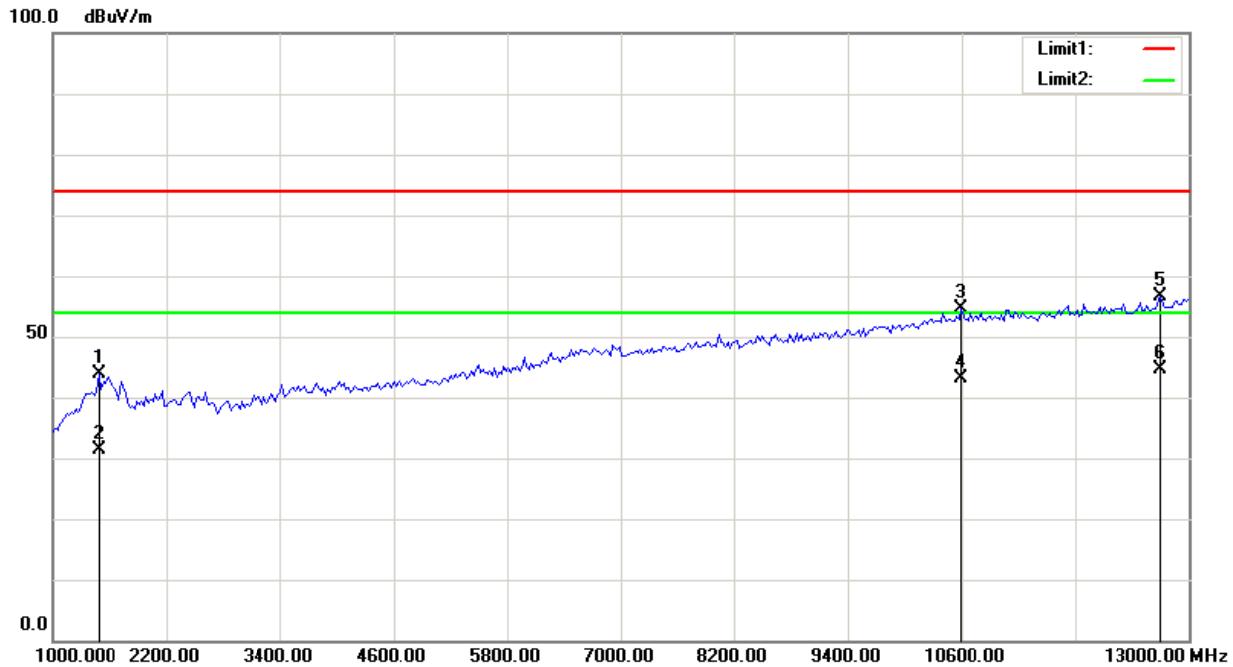

Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1480.962	45.10	peak	-1.33	43.77	74.00	30.23
1480.962	32.64	AVG	-1.33	31.31	54.00	22.69
10595.190	37.18	peak	17.43	54.61	74.00	19.39
10595.190	25.74	AVG	17.43	43.17	54.00	10.83
12711.423	36.27	peak	20.26	56.53	74.00	17.47
12711.423	24.36	AVG	20.26	44.62	54.00	9.38

\*\*\*\*\*END OF REPORT\*\*\*\*\*