



EMC TEST REPORT



Report No.: 17071351-FCC-E

Supersede Report No: N/A

Applicant	HONG KONG IPRO TECHNOLOGY CO.,LIMITED	
Product Name	Mobile Phone	
Model No.	Xplay	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B:2016, ANSI C63.4: 2014	
Test Date	December 06 to December 24, 2017	
Issue Date	December 25, 2017	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
		
Evans He Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	9
6.2 RADIATED EMISSIONS	15
ANNEX A. TEST INSTRUMENT	20
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	21
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	33
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	36
ANNEX E. DECLARATION OF SIMILARITY.....	37

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17071351-FCC-E	NONE	Original	December 25, 2017

2. Customer information

Applicant Name	HONG KONG IPRO TECHNOLOGY CO.,LIMITED
Applicant Add	FLAT/RM A3, 9/F SILVERCORP INT TOWER 707-713 NATHAN RD MONGKOK, HONGKONG
Manufacturer	HONG KONG IPRO TECHNOLOGY CO.,LIMITED
Manufacturer Add	FLAT/RM A3, 9/F SILVERCORP INT TOWER 707-713 NATHAN RD MONGKOK, HONGKONG

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software of Radiated Emission	Radiated Emission Program-To Shenzhen v2.0
Test Software of Conducted Emission	EZ-EMC(ver.lcp-03A1)

Test Report	17071351-FCC-E
Page	6 of 37

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
---------------------	--------------

Main Model: Xplay

Serial Model: N/A

Antenna Gain:	GSM850: 0.5dBi
	PCS1900: 1.0dBi
	UMTS-FDD Band V: 0.5dBi
	UMTS-FDD Band II: 1.0dBi
	Bluetooth/BLE/WIFI: 1.5dBi
	GPS: 1.2dBi

Antenna Type: PIFA antenna

Input Power:	Adapter:
	Model: NTR-XPLAY
	Input: AC100-240V~50/60Hz, 0.2A
	Output: DC 5.0V,1000mA
	Battery:
	Spec: 3.8V, 8.99Wh

Equipment Category : JBP

Type of Modulation:	GSM / GPRS: GMSK
	EGPRS: GMSK
	UMTS-FDD: QPSK
	802.11b/g/n: DSSS, OFDM
	Bluetooth: GFSK, $\pi/4$ QPSK, 8DPSK
	BLE: GFSK
	GPS: BPSK

RF Operating Frequency (ies):

- GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
- PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
- UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
- UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz
- WIFI: 802.11b/g/n(20M): 2412-2462 MHz

WIFI: 802.11n(40M): 2422-2452 MHz

Bluetooth& BLE: 2402-2480 MHz

GPS: 1575.42 MHz

GSM 850: 124CH

PCS1900: 299CH

UMTS-FDD Band V: 102CH

UMTS-FDD Band II: 277CH

Number of Channels:

WIFI :802.11b/g/n(20M): 11CH

WIFI :802.11n(40M): 7CH

Bluetooth: 79CH

BLE: 40CH

GPS:1CH

Port:

USB Port, Earphone Port

Trade Name :

IPRO

FCC ID:

PQ4XPLAY

GPRS/ EGPRS Multi-slot class

8/10/11/12

Date EUT received:

December 05, 2017

Test Date(s):

December 06 to December 24, 2017

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty

Parameter	Uncertainty
AC Power Line Conducted Emissions (150kHz~30MHz)	±3.11dB
Radiated Emission(30MHz~1GHz)	±5.12dB
Radiated Emission(1GHz~6GHz)	±5.34dB


6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	25 °C
Relative Humidity	58%
Atmospheric Pressure	1016mbar
Test date :	December 16, 2017
Tested By :	Evans He

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.															
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
		0.15 ~ 0.5		66 – 56	56 – 46												
		0.5 ~ 5		56	46												
5 ~ 30	60	50															

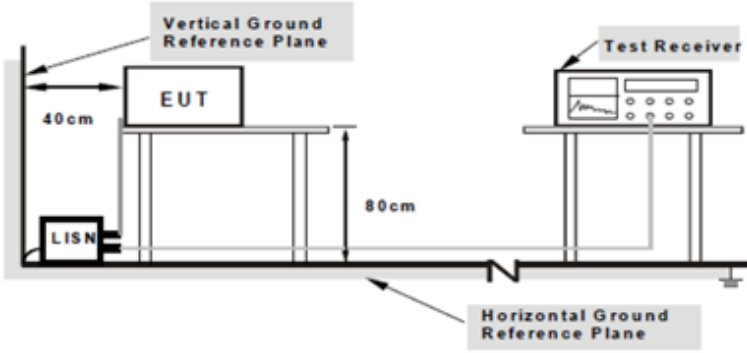Test Setup	 Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.
------------	---

Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. - The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains.
-----------	--

	3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode 1 :	USB Mode
---------------	----------


Test Mode 2 :	MP4 Mode
---------------	----------

Test Mode 3 :	Camera Mode
---------------	-------------

Test Mode 4 :	FM Mode
---------------	---------

All modes were investigated. The results below show only the worst case

Test Mode : USB Mode

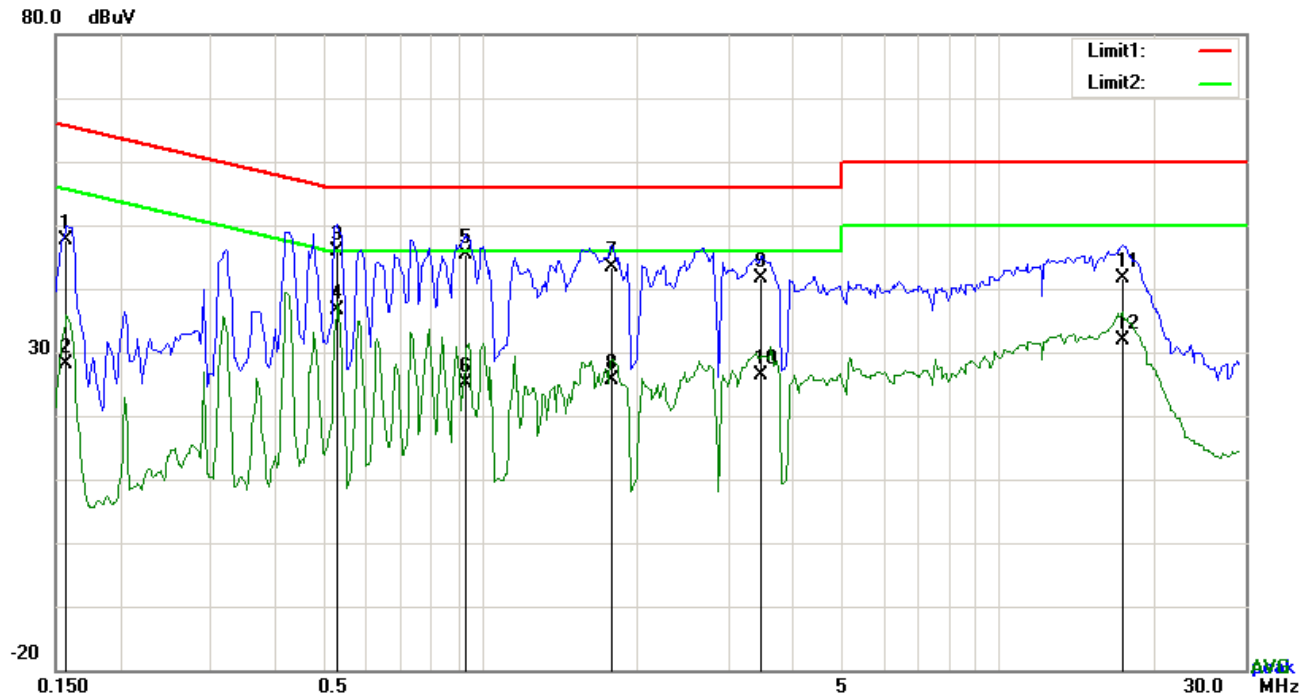


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1578	37.66	QP	10.03	47.69	65.58	-17.89
2	L1	0.1578	18.21	AVG	10.03	28.24	55.58	-27.34
3	L1	0.5244	35.85	QP	10.03	45.88	56.00	-10.12
4	L1	0.5244	26.72	AVG	10.03	36.75	46.00	-9.25
5	L1	0.9300	35.37	QP	10.03	45.40	56.00	-10.60
6	L1	0.9300	15.22	AVG	10.03	25.25	46.00	-20.75
7	L1	1.7880	33.45	QP	10.04	43.49	56.00	-12.51
8	L1	1.7880	15.53	AVG	10.04	25.57	46.00	-20.43
9	L1	3.4875	31.59	QP	10.06	41.65	56.00	-14.35
10	L1	3.4875	16.30	AVG	10.06	26.36	46.00	-19.64
11	L1	17.3013	31.42	QP	10.26	41.68	60.00	-18.32
12	L1	17.3013	21.50	AVG	10.26	31.76	50.00	-18.24

Test Mode : USB Mode

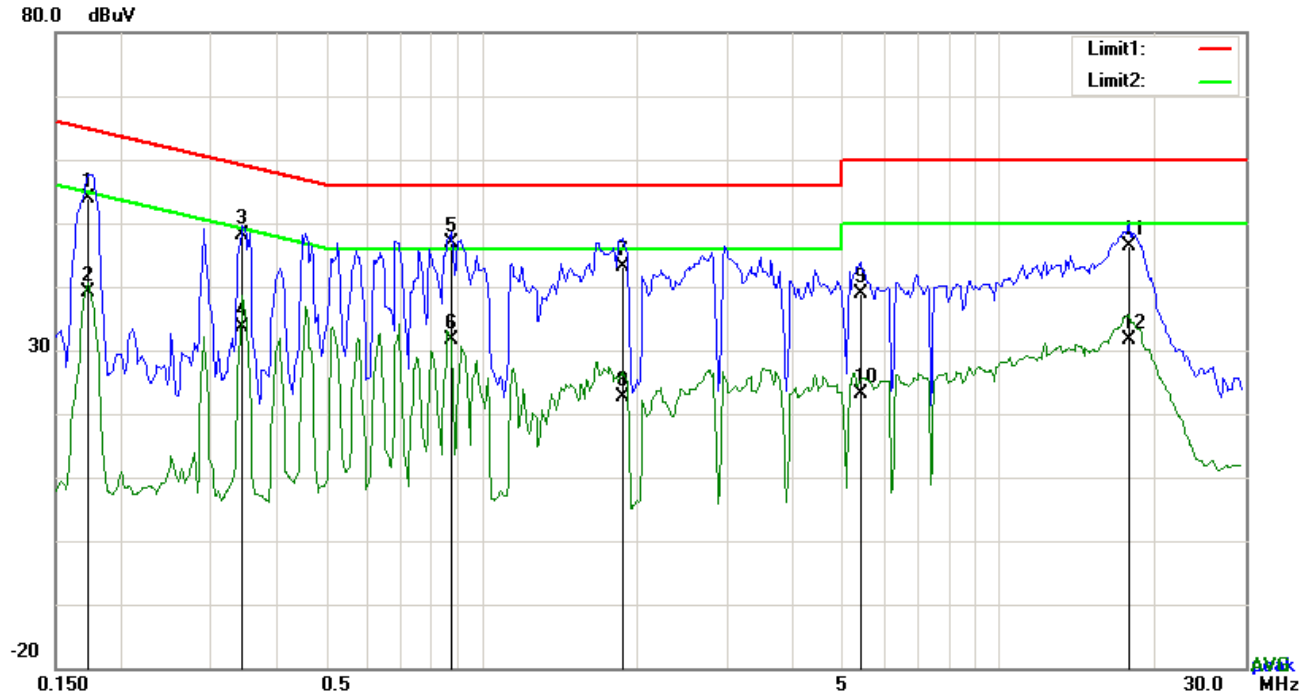


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1734	43.87	QP	10.02	53.89	64.80	-10.91
2	N	0.1734	29.16	AVG	10.02	39.18	54.80	-15.62
3	N	0.3450	38.09	QP	10.02	48.11	59.08	-10.97
4	N	0.3450	23.67	AVG	10.02	33.69	49.08	-15.39
5	N	0.8754	36.86	QP	10.03	46.89	56.00	-9.11
6	N	0.8754	21.52	AVG	10.03	31.55	46.00	-14.45
7	N	1.8699	33.20	QP	10.04	43.24	56.00	-12.76
8	N	1.8699	12.58	AVG	10.04	22.62	46.00	-23.38
9	N	5.4063	28.70	QP	10.08	38.78	60.00	-21.22
10	N	5.4063	12.98	AVG	10.08	23.06	50.00	-26.94
11	N	17.8512	36.15	QP	10.23	46.38	60.00	-13.62
12	N	17.8512	21.41	AVG	10.23	31.64	50.00	-18.36

Test Mode : USB Mode

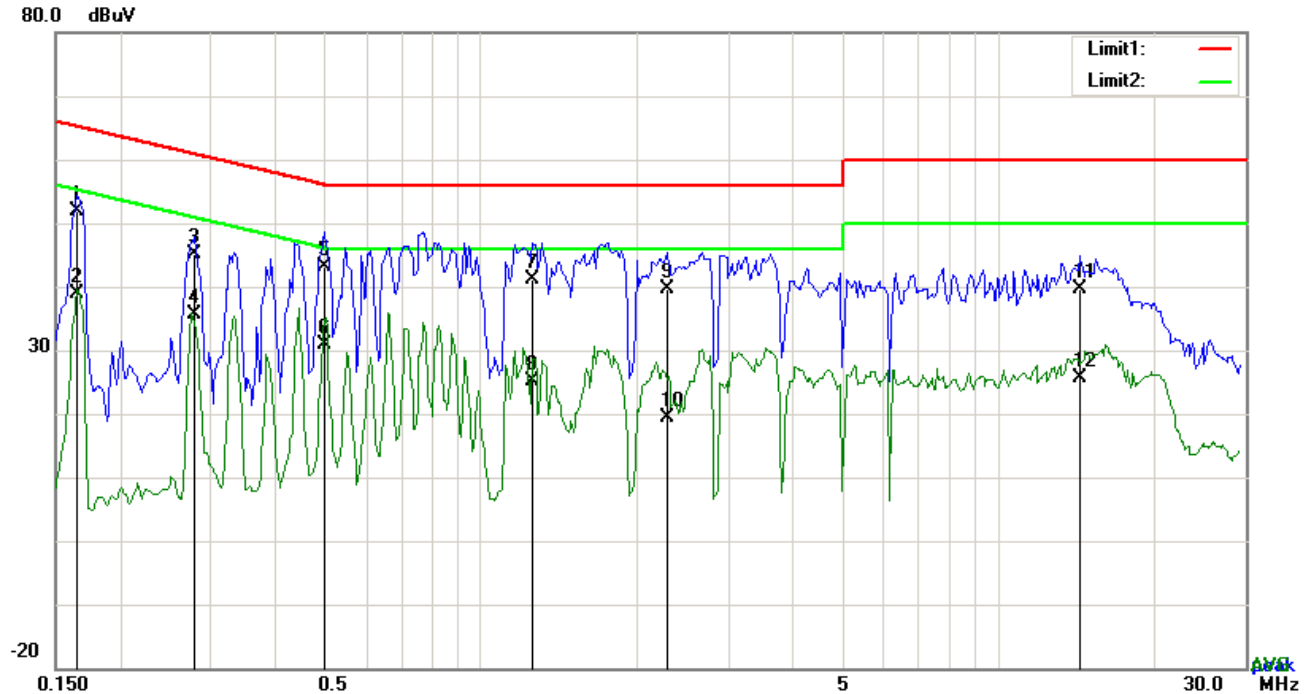


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.1656	41.73	QP	10.03	51.76	65.18	-13.42
2	L1	0.1656	28.77	AVG	10.03	38.80	55.18	-16.38
3	L1	0.2787	35.13	QP	10.03	45.16	60.85	-15.69
4	L1	0.2787	25.62	AVG	10.03	35.65	50.85	-15.20
5	L1	0.4971	33.20	QP	10.03	43.23	56.05	-12.82
6	L1	0.4971	20.81	AVG	10.03	30.84	46.05	-15.21
7	L1	1.2498	31.10	QP	10.03	41.13	56.00	-14.87
8	L1	1.2498	15.15	AVG	10.03	25.18	46.00	-20.82
9	L1	2.2950	29.50	QP	10.05	39.55	56.00	-16.45
10	L1	2.2950	9.25	AVG	10.05	19.30	46.00	-26.70
11	L1	14.3373	29.35	QP	10.22	39.57	60.00	-20.43
12	L1	14.3373	15.42	AVG	10.22	25.64	50.00	-24.36

Test Mode : USB Mode

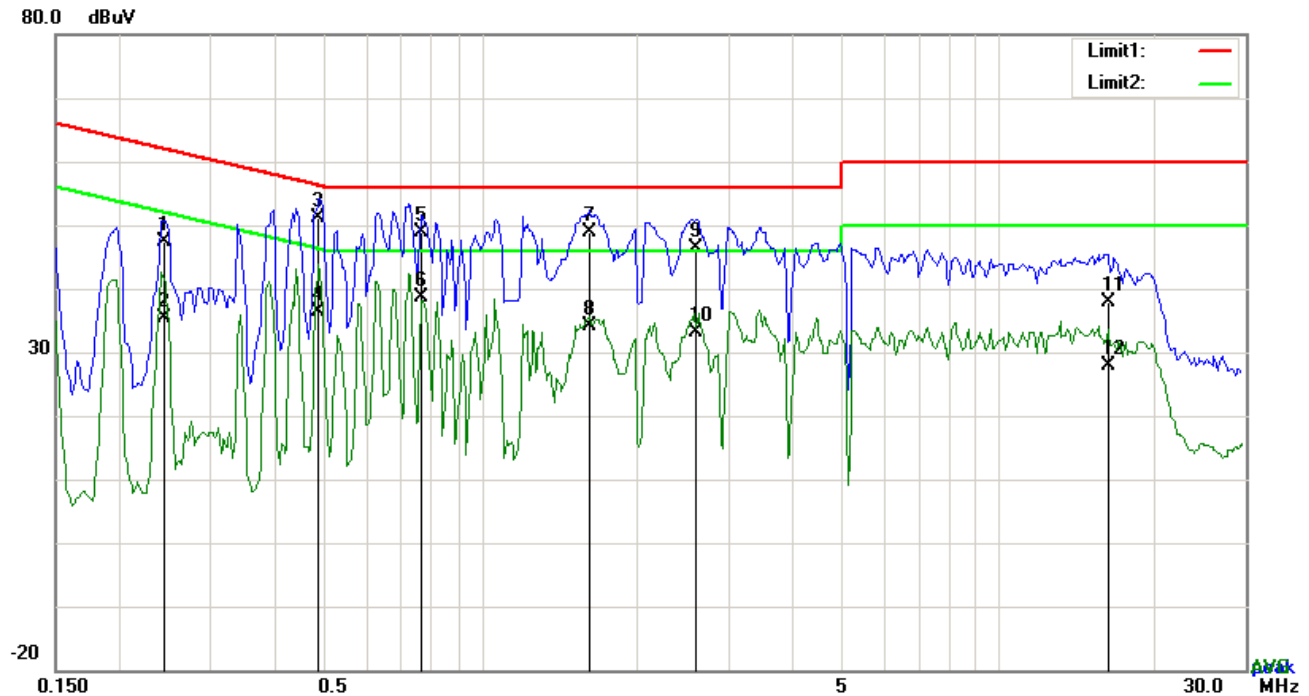

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.2436	37.31	QP	10.03	47.34	61.97	-14.63
2	N	0.2436	25.29	AVG	10.03	35.32	51.97	-16.65
3	N	0.4854	41.09	QP	10.03	51.12	56.25	-5.13
4	N	0.4854	26.31	AVG	10.03	36.34	46.25	-9.91
5	N	0.7662	38.83	QP	10.03	48.86	56.00	-7.14
6	N	0.7662	28.49	AVG	10.03	38.52	46.00	-7.48
7	N	1.6242	38.75	QP	10.04	48.79	56.00	-7.21
8	N	1.6242	24.01	AVG	10.04	34.05	46.00	-11.95
9	N	2.5953	36.25	QP	10.05	46.30	56.00	-9.70
10	N	2.5953	23.09	AVG	10.05	33.14	46.00	-12.86
11	N	16.2756	27.75	QP	10.24	37.99	60.00	-22.01
12	N	16.2756	17.66	AVG	10.24	27.90	50.00	-22.10

6.2 Radiated Emissions

Temperature	25 °C
Relative Humidity	58%
Atmospheric Pressure	1016mbar
Test date :	December 16, 2017
Tested By :	Evans He

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.109(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	☒	
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 - 960		200
		Above 960		500

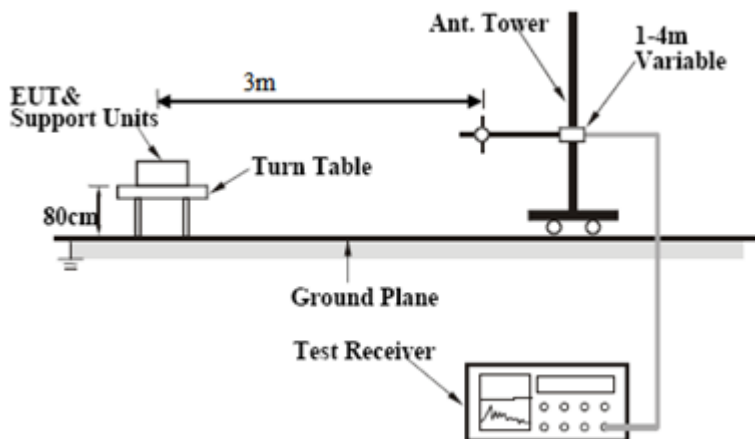Test Setup	
------------	--

Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarization (whichever gave the higher emission level
-----------	--

	over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz. ■ 1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%) 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode 1 :	USB Mode
---------------	----------

Test Mode 2 :	MP4 Mode
---------------	----------

Test Mode 3 :	Camera Mode
---------------	-------------


Test Mode 4 :	FM Mode
---------------	---------

All modes were investigated. The results below show only the worst case

Test Mode : USB Mode

Below 1GHz

80.0 dBuV/m

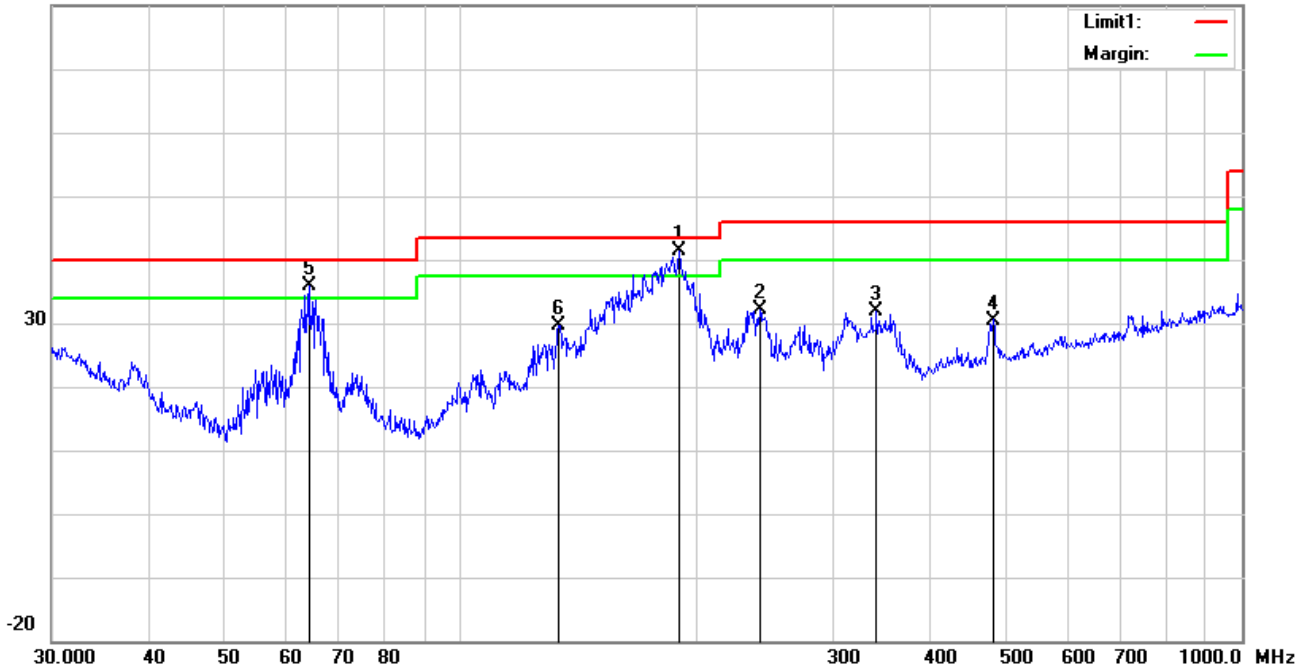


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	190.4050	50.56	QP	11.57	22.32	1.54	41.35	43.50	-2.15	100	326
2	H	241.6763	41.13	peak	11.52	22.30	1.67	32.02	46.00	-13.98	200	40
3	H	340.7817	37.55	peak	14.46	22.18	1.99	31.82	46.00	-14.18	100	165
4	H	480.5276	32.73	peak	17.31	21.85	2.31	30.50	46.00	-15.50	100	183
5	H	63.9828	49.81	QP	7.50	22.40	0.85	35.76	40.00	-4.24	100	309
6	H	133.6188	37.69	peak	13.01	22.39	1.23	29.54	43.50	-13.96	100	257

Below 1GHz

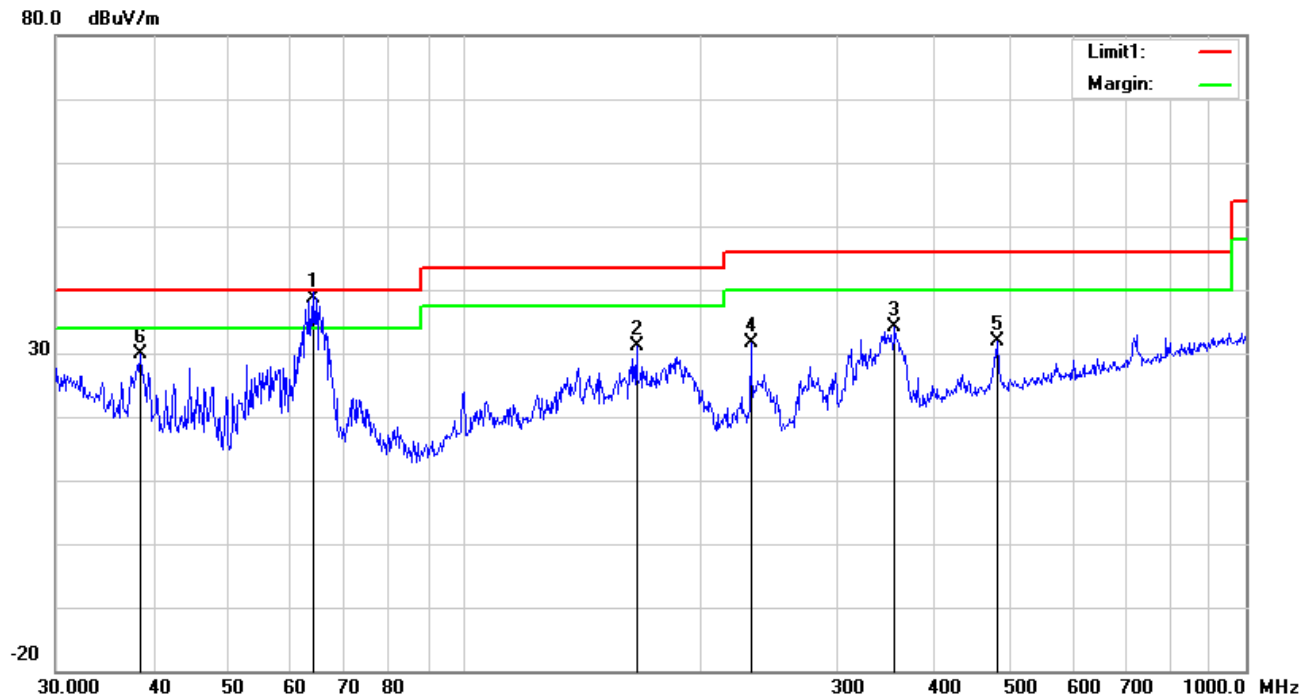

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	V	63.9828	52.67	QP	7.50	22.40	0.85	38.62	40.00	-1.38	100	307
2	V	166.0680	39.85	peak	12.11	22.26	1.37	31.07	43.50	-12.43	100	239
3	V	355.4273	39.57	peak	14.76	22.13	2.04	34.24	46.00	-11.76	100	181
4	V	232.5318	40.65	peak	11.64	22.32	1.64	31.61	46.00	-14.39	200	29
5	V	480.5276	34.01	peak	17.31	21.85	2.31	31.78	46.00	-14.22	100	291
6	V	38.4809	36.37	peak	15.01	22.27	0.78	29.89	40.00	-10.11	100	29

Above 1GHz

Frequency (MHz)	Read_level (dBμV/m)	Azimuth	Height (cm)	Polarity (H/V)	Level (dBμV/m)	Factors (dB)	Limit (dBμV/m)	Margin (dB)	Detector (PK/AV)
1095.17	68.85	222	100	V	-20.16	48.69	74	-25.31	PK
1870.72	62.66	164	100	V	-15.84	46.82	74	-27.18	PK
5574.04	49.93	292	100	V	-1.97	47.96	74	-26.04	PK
1815.81	28.88	43	100	H	16.4	45.28	74	-28.72	PK
2223.68	63.16	83	100	H	-14.2	48.96	74	-25.04	PK
4694.33	52.02	314	100	H	-5.15	46.87	74	-27.13	PK

Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to $5 \times 2480 \text{ MHz} = 12,400 \text{ MHz}$.

Note2: The frequency that above 3GHz is mainly from the environment noise.

Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
EMI test receiver	ESCS30	8471241027	09/15/2017	09/14/2018	☒
Line Impedance Stabilization Network	LI-125A	191106	09/23/2017	09/22/2018	☒
Line Impedance Stabilization Network	LI-125A	191107	09/23/2017	09/22/2018	☒
ISN	ISN T800	34373	09/23/2017	09/22/2018	☐
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	☒
Double Ridge Horn Antenna	AH-118	71259	09/22/2017	09/21/2018	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Label View




EUT - Front View



EUT - Rear View



EUT - Top View

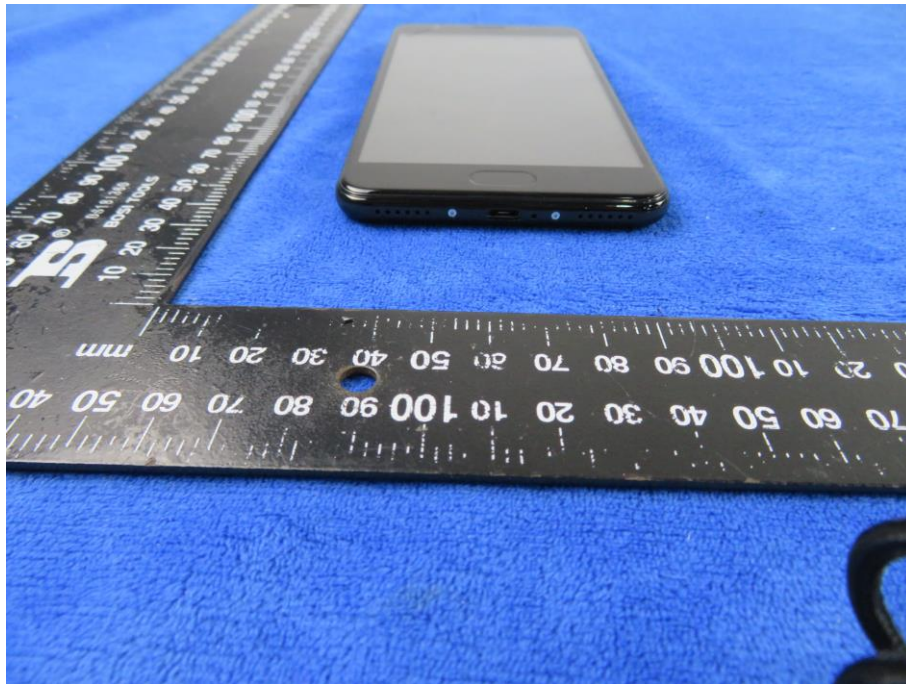


EUT - Bottom View



EUT - Left View



EUT - Right View

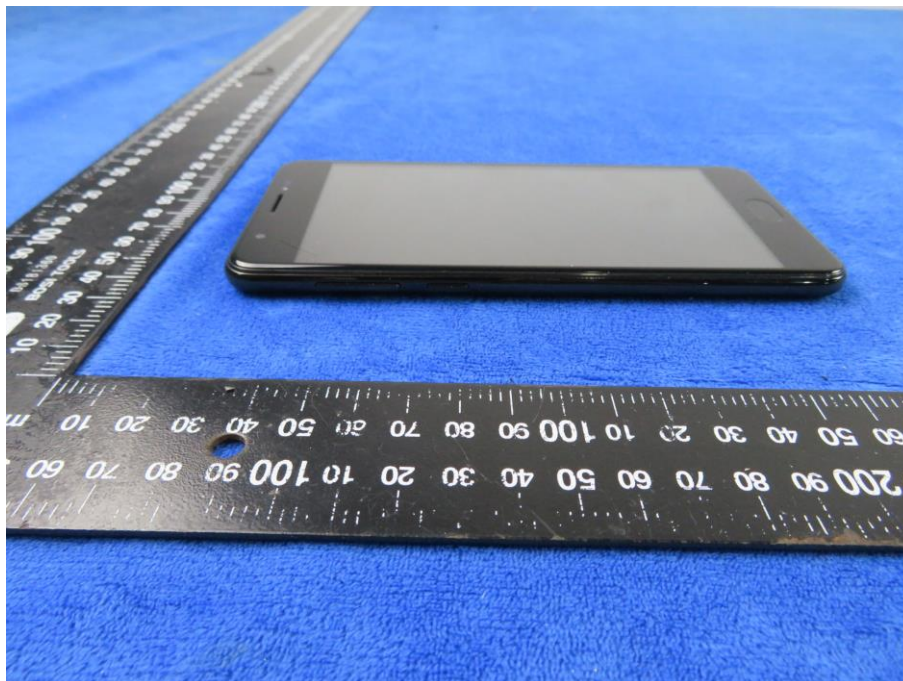

Annex B.ii. Photograph: EUT Internal Photo


Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View

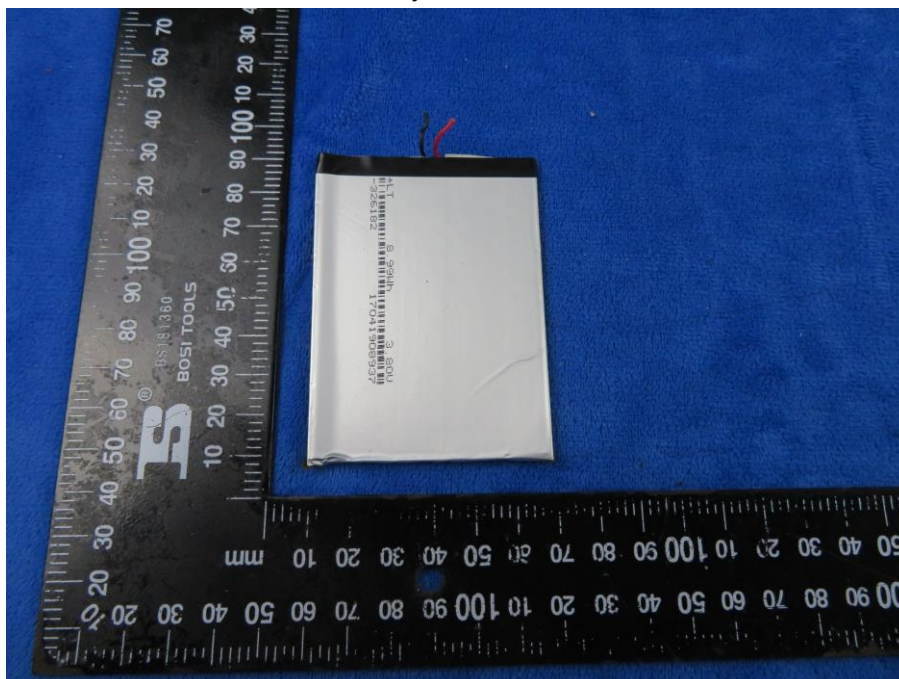


Battery - Rear View

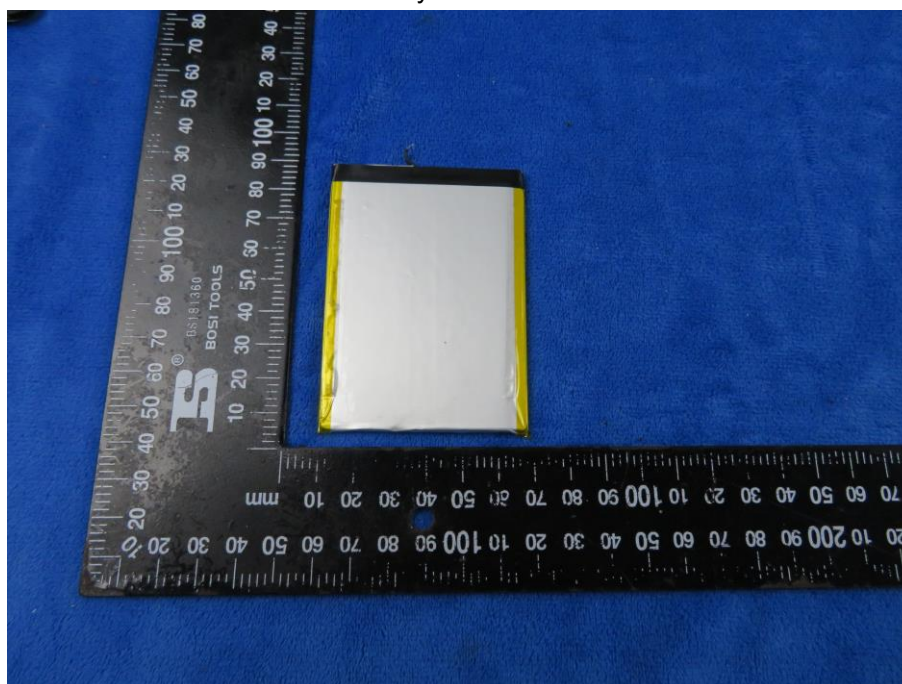


Mainboard with Shielding – Front View

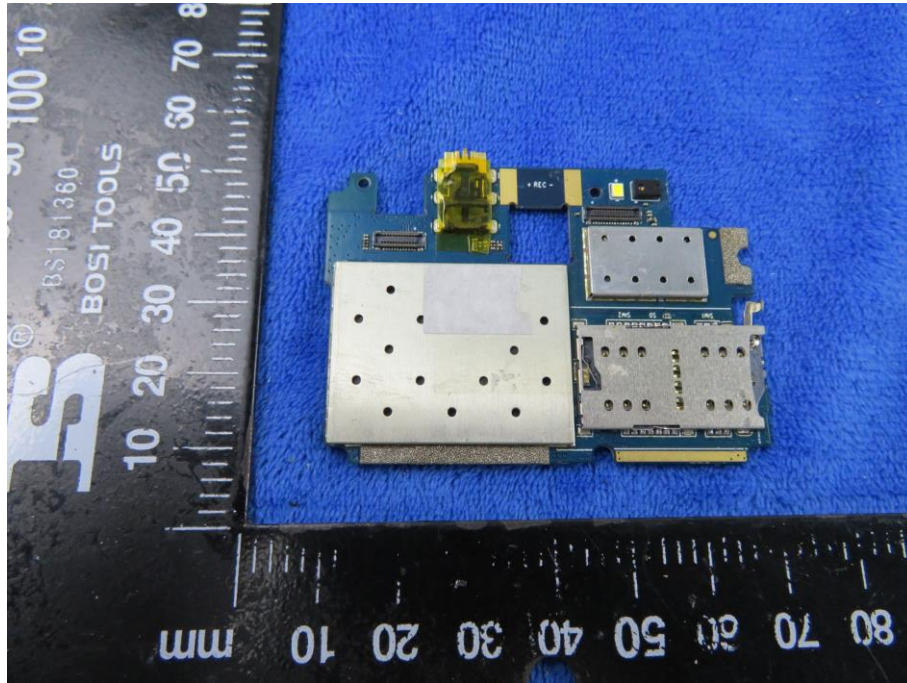


Mainboard with Shielding – Rear View

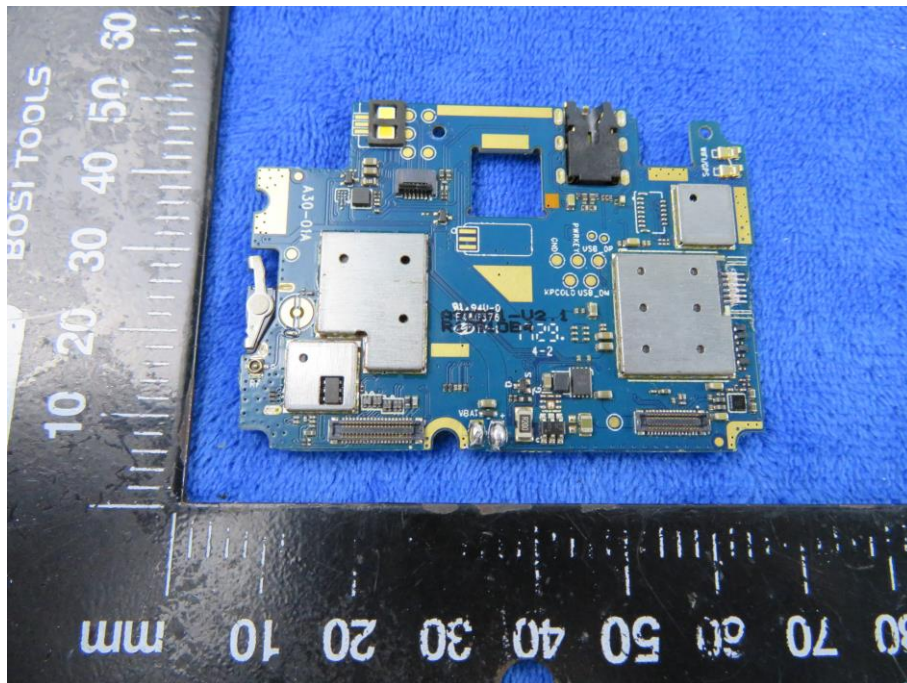


Mainboard without Shielding – Front View

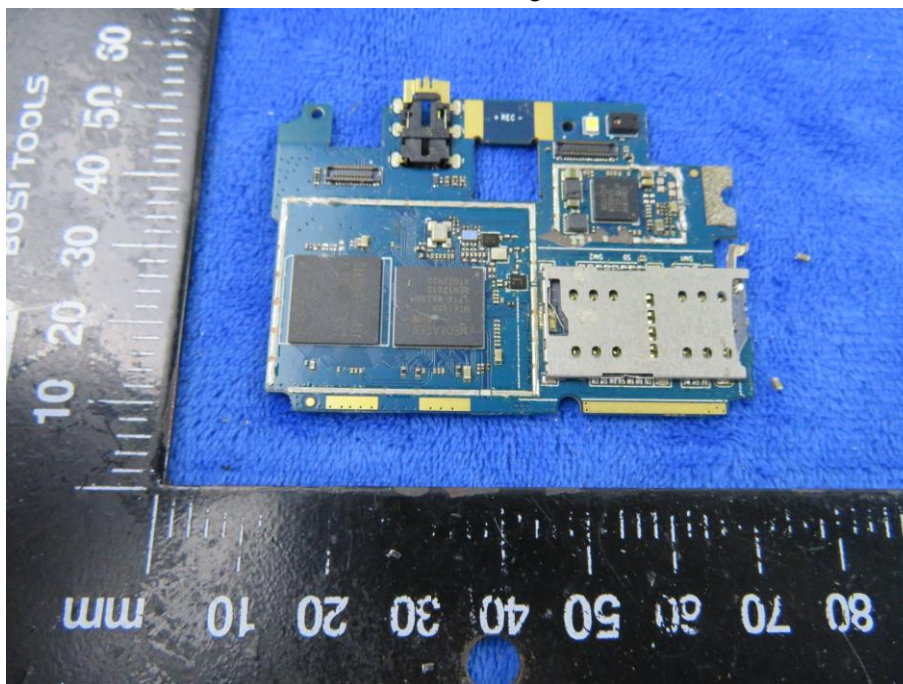


Mainboard without Shielding – Rear View

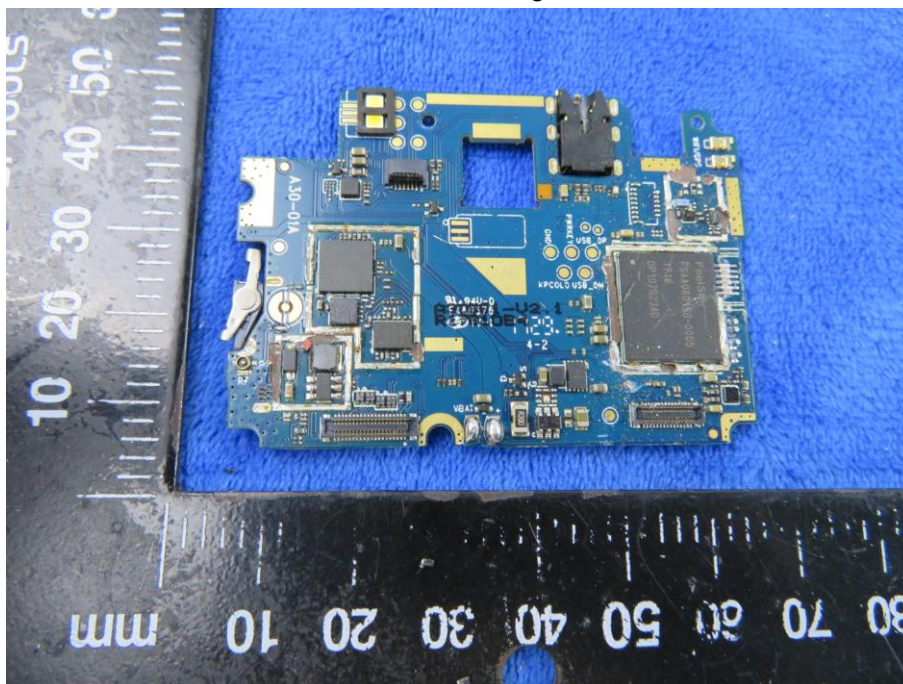

Small Mainboard – Front View

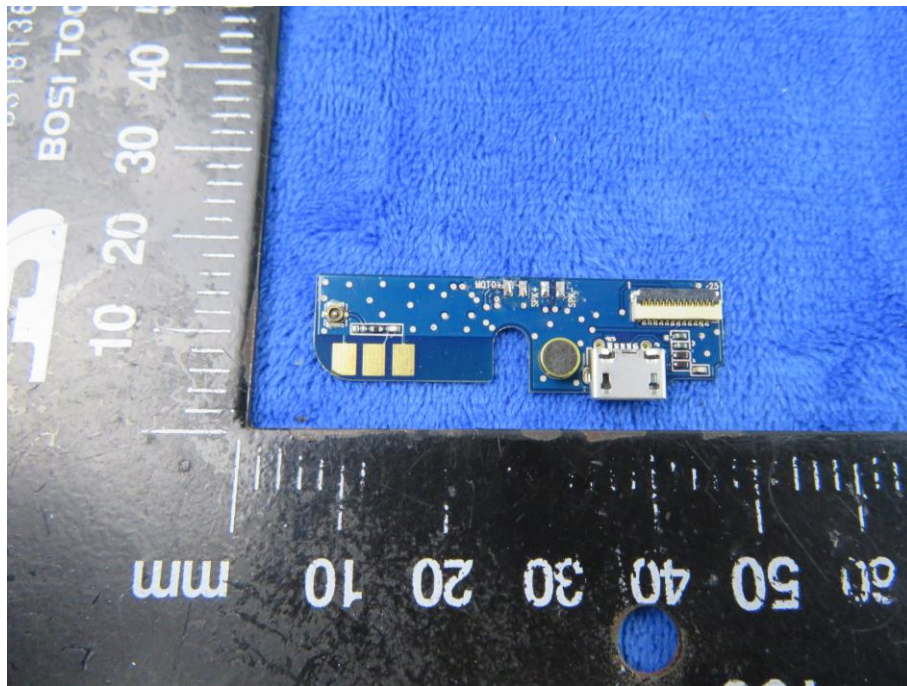

Small Mainboard – Rear View

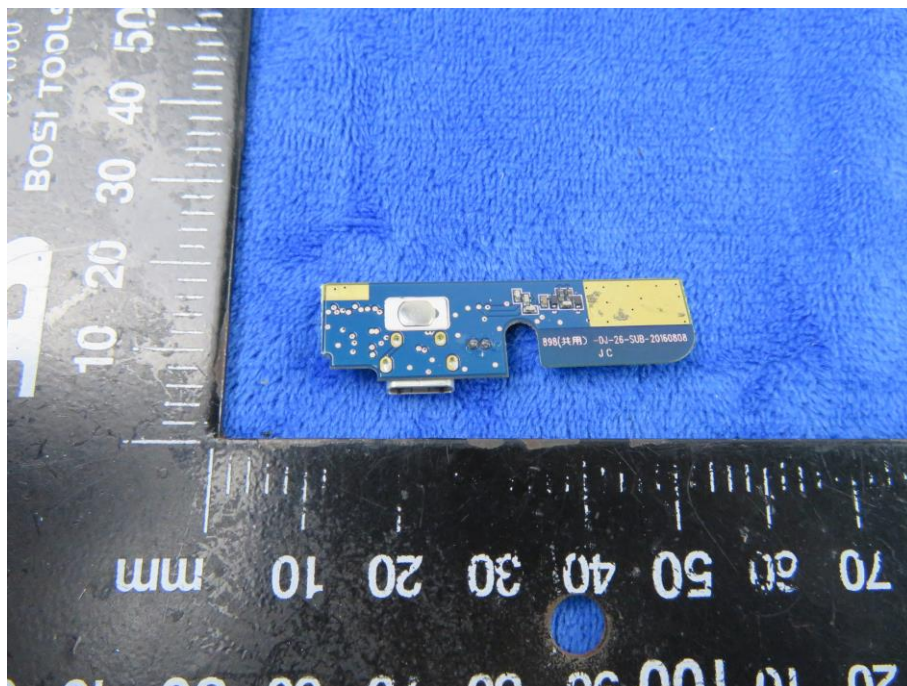

LCD – Front View



LCD – Rear View




GSM/PCS/UMTS-FDD - Antenna View




WIFI/BT/BLE/GPS - Antenna View




Annex B.iii. Photograph: Test Setup Photo

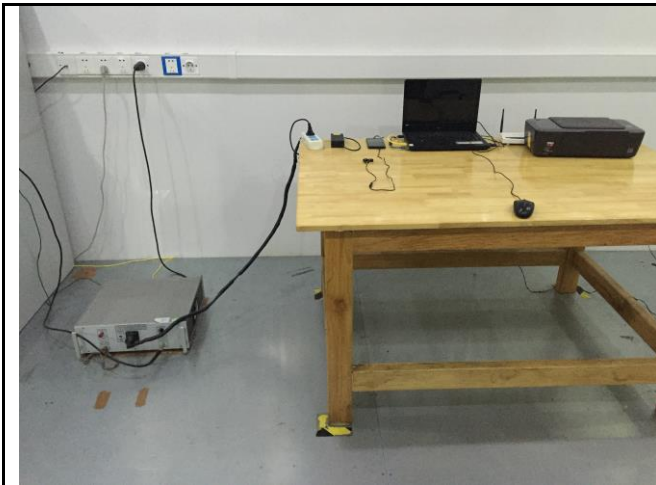


Conducted Emissions Test Setup – Front View

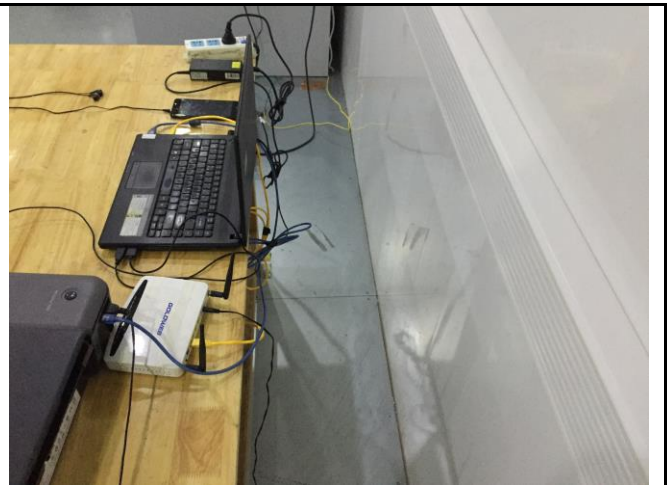

Conducted Emissions Test Setup – Side View

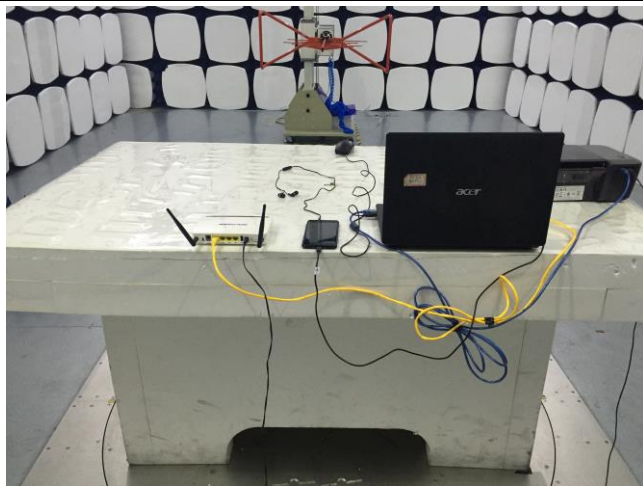

Radiated Emissions Test Setup Below 1GHz

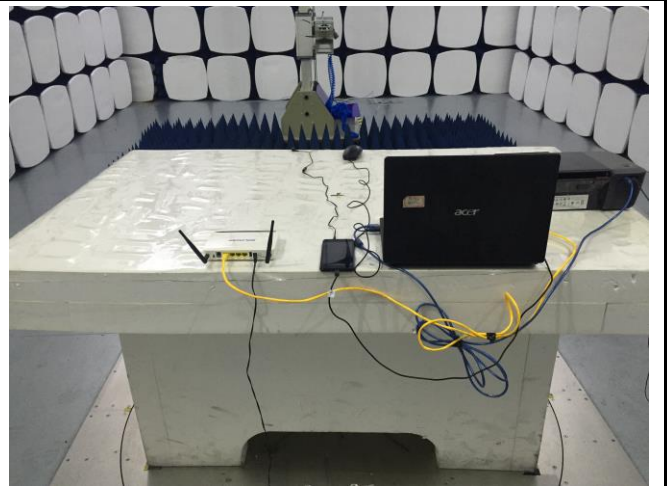


Radiated Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

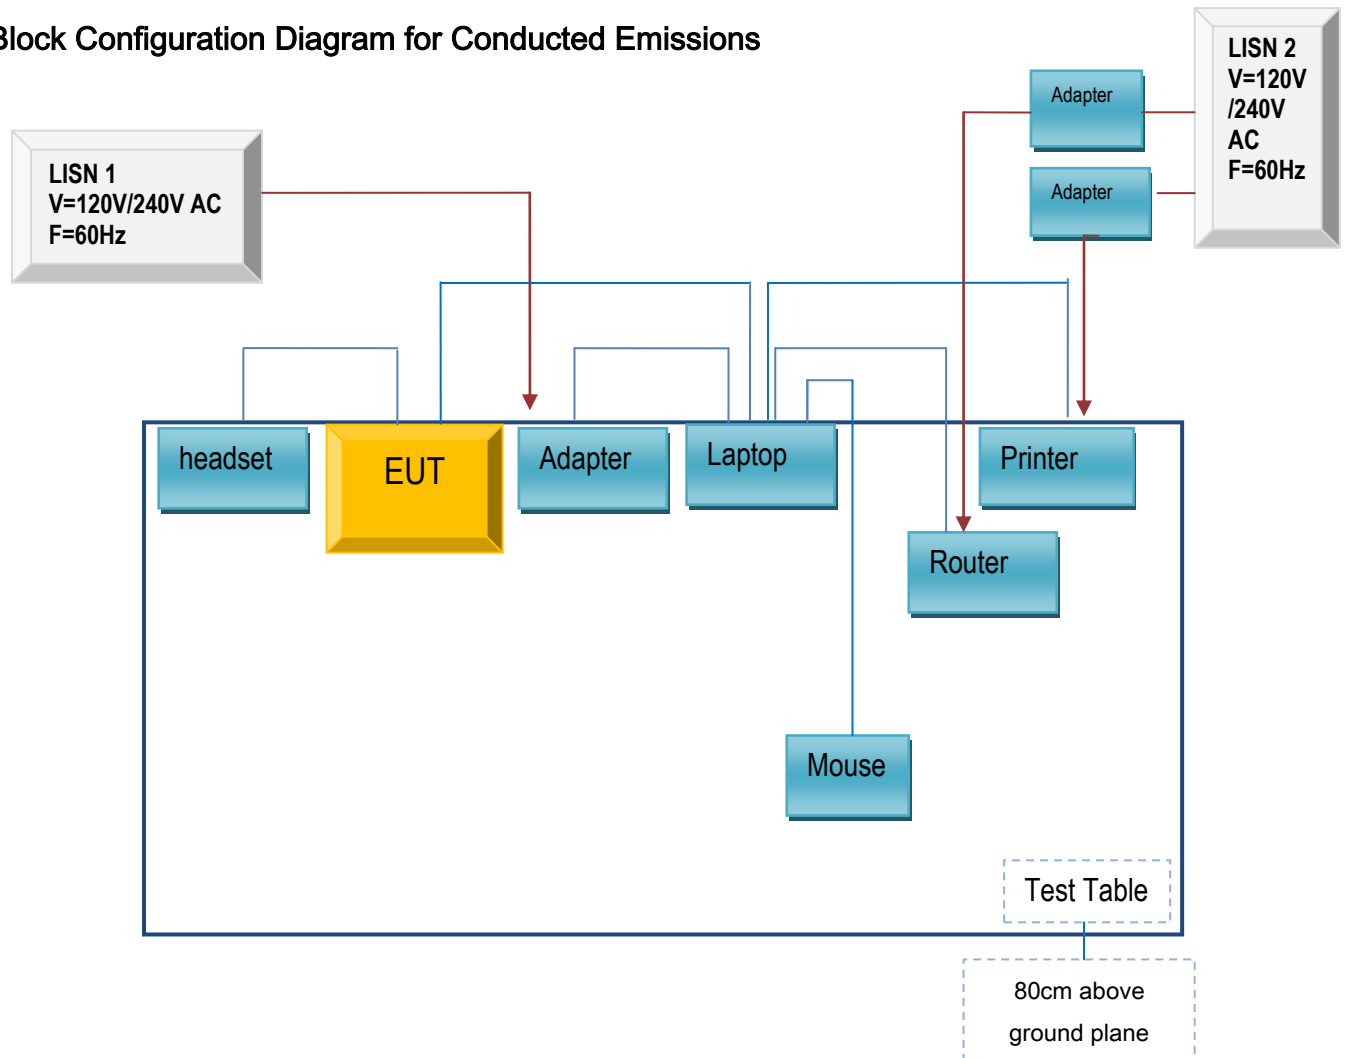

Block Configuration Diagram for Radiated Emissions

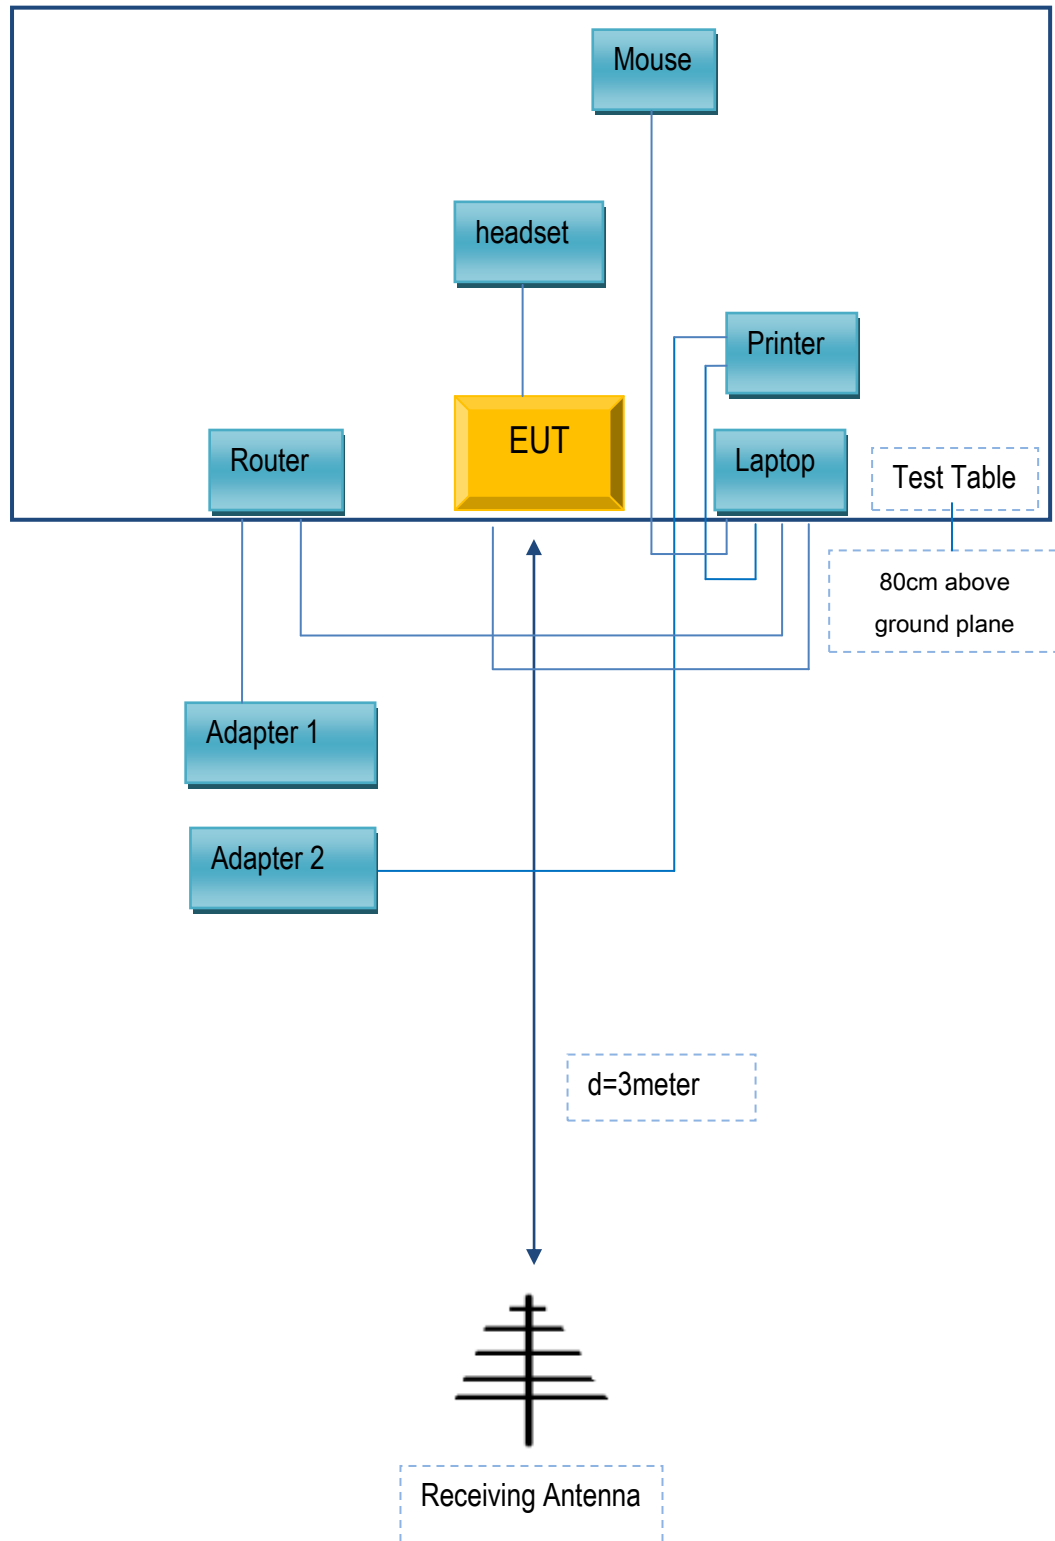

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
Lenovo	AC Adapter	42T4416	21D9JU
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
BULL	Socket	GN-403	GN201203
HONG KONG IPRO TECHNOLOGY CO.,LIMITED	headset	XPLAY	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	JX120051274
USB Cable	Un-shielding	No	2m	CBA3000AH0C1
RJ45 Cable	Un-shielding	No	2m	KX156327541
Router Power cable	Un-shielding	No	2m	13274630Z
Printer Power cable	Un-shielding	No	2m	127581031
Power Cable	Un-shielding	No	0.8m	GT211032

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A