



## Test Report

Product Name : USB Wireless LAN Card

Model No. : WU221P-X

FCC ID.: PQP-WU221P-X

Applicant : PRIME ELECTRONICS & SATELLITICS INC.

Address : 69, Tung-Yuan Rd., Chung-Li Industrial Park,  
Chung-Li City, Taoyuan, Taiwan.

Date of Receipt : Mar. 05, 2002

Date of Test : Apr. 10, 2002

Report No. : 023H013FI

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.  
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

## Test Report Certification

Test Date : Apr. 10, 2002  
Report No. : 023H013FIAccredited by NIST (NVLAP)  
NVLAP Lab Code: 200347-0

Product Name : USB Wireless LAN Card  
Applicant : PRIME ELECTRONICS & SATELLITICS INC.  
Address : 69, Tung-Yuan Rd., Chung-Li Industrial Park,  
Manufacturer : PRIME ELECTRONICS & SATELLITICS INC.  
Model No. : WU221P-X  
FCC ID. : PQP-WU221P-X  
Rated Voltage : DC 5V (Power by PC)  
Trade Name : PESI  
Measurement Standard : FCC Part 15 Subpart C Paragraph 15.247  
Measurement Procedure : ANSI C63.4:1992  
Test Result : Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuiTek Corporation.  
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. GovernmentDocumented By : Ellie  
(Ellie Cheng)Tested By : Sean Chang  
(Sean Chang)Approved By : Kevin Wang  
(Kevin Wang)

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. EUT Description.....	5
1.2. Operational Description.....	5
1.3. Tested System Details .....	6
1.4. Configuration of tested System.....	7
1.5. EUT Exercise Software .....	7
1.6. Test Facility .....	8
<b>2. Conducted Emission .....</b>	<b>9</b>
2.1. Test Equipment List .....	9
2.2. Test Setup.....	9
2.3. Limits.....	9
2.4. Test Procedure.....	10
2.5. Test Result of Conducted Emission .....	11
<b>3. Peak Power Output.....</b>	<b>12</b>
3.1. Test Equipment .....	12
3.2. Test Setup.....	12
3.3. Test Condition.....	12
3.4. Limit .....	12
3.5. Test Result of Peak Power Output .....	13
<b>4. RF Exposure Evaluation .....</b>	<b>14</b>
4.1. Friis Formula .....	14
4.2. EUT Operation condition .....	14
4.3. Test Result of RF Exposure Evaluation .....	15
<b>5. Radiated Emission .....</b>	<b>16</b>
5.1. Test Equipment .....	16
5.2. Test Setup.....	16
5.3. Limits.....	17
5.4. Test Procedure.....	17
5.5. Test Result of Radiated Emission .....	18
<b>6. Band Edge.....</b>	<b>36</b>
6.1. Test Equipment .....	36
6.2. Test Setup.....	36
6.3. Test Condition.....	37
6.4. Limit .....	37
6.5. Test Procedure.....	37
6.6. Test Result of Band Edge.....	38
<b>7. Occupied Bandwidth .....</b>	<b>42</b>
7.1. Test Equipment .....	42
7.2. Test Setup.....	42
7.3. Test Condition.....	42
7.4. Limit .....	42
7.5. Test Result of Occupied Bandwidth .....	43

---

<b>8.</b>	<b>Transmitter Power Density .....</b>	<b>46</b>
8.1.	Test Equipment .....	46
8.2.	Test Setup.....	46
8.3.	Test Condition.....	46
8.4.	Limit .....	46
8.5.	Test Result of Transmitter Power Density .....	47
<b>9.</b>	<b>Processing Gain.....</b>	<b>50</b>
9.1.	Test Condition.....	50
9.2.	Limit .....	50
9.3.	Test Result of Processing Gain .....	51
<b>10.</b>	<b>EMI Reduction Method During Compliance Testing.....</b>	<b>52</b>

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name : USB Wireless LAN Card  
Trade Name : PESI  
FCC ID. : PQP-WU221P-X  
Model No. : WU221P-X  
Frequency Range : 2412MHz to 2462MHz  
Channel Number : 11  
Chip Rate : 1Mbps, 2Mbps, 5.5Mbps, 11Mbps  
Type of Modulation : Direct Sequence Spread Spectrum  
Antenna type : Soldered on PCB  
Operator Selection of Operating Frequency : By software  
USB Cable : Shielded, 1.0m, a ferrite core bonded

Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2412 MHz	Channel 2:	2417 MHz	Channel 3:	2422 MHz
Channel 4:	2427 MHz	Channel 5:	2432 MHz	Channel 6:	2437 MHz
Channel 7:	2442 MHz	Channel 8:	2447 MHz	Channel 9:	2452 MHz
Channel 10:	2457 MHz	Channel 11:	2462 MHz		

Note:

1. This device is a 2.4GHz USB Wireless LAN Card with USB interface included a 2.4GHz receiving function, a 2.4GHz transmitting function for the desktop/ laptop computers. Direct Sequence device with 11 channels..
3. Regards to the frequency band operation; two rate that were included the lowest、middle and highest frequency of channel were selected to perform the test, then shown on this report.
4. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
5. This device is a composite device in accordance with Part 15 regulations. The function receiving was measured and made a test report that the report number is 019H011F under Declaration of Conformity.

### 1.2. Operational Description

EUT is an USB interface 2.4GHz wireless LAN with 11 channels. This device provided four kind of transmitting speed 1,2,5.5 and 11Mbps. The device of RF carrier is DQPSK, DB PSK and CCK.

The device adapts direct sequence spread spectrum modulation. The dual monopole antenna printed on PCB provides diversity function to improve the receiving function. Data can be transmitted by the radio signal connect to the Internet or Local network.


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards ) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
(1)	Notebook	DELL	PP01L	2724903568	Non-shielded,1.8m
(2)	Monitor	SYNCO	15CTO	1910882	Shielded,1.8m
(3)	Printer	HP	P1371A	CN02600150	Shielded,1.8m
(4)	Modem	ACEEX	2814	960018054	N/A
(5)	Mouse	Logitech	M-M35	LZA74956375	N/A
(6)	Microphone	AIWA	CD-8000	N/A	N/A
(7)	Earphone	SONY	MDR-354	MY75N1D2Y1	Non-shielded,0.7m

Signal Cable Type		Signal cable Description
A.	Printer Cable	Shielded, 1.5m, two ferrite cores bonded.
B.	RS232 Cable	Shielded, 1.5m
C.	USB Cable	Shielded, 1.0m, a ferrite core bonded.
D.	Mouse Cable	Shielded, 1.0m
E.	Microphone Cable	Non-shielded, 1.5m
F.	Earphone Cable	Non-shielded, 1.8m

## 1.4. Configuration of tested System

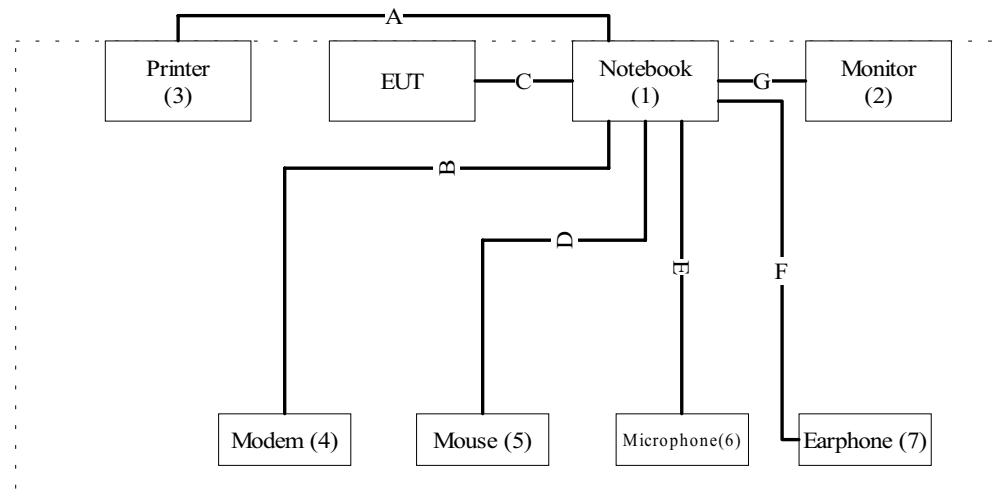

## 1.5. EUT Exercise Software

- 1.5.1 Setup the EUT and simulators as shown on 1.4.
- 1.5.2 Turn on the power of all equipment.
- 1.5.3 Notebook PC reads data from disk.
- 1.5.4 Data will be transmitting through EUT.
- 1.5.5 The transmitted status will be shown on the monitor.
- 1.5.6 Repeat the above procedure 1.5.4 to 1.5.5

## 1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046  
Reference 31040/SIT1300F2  
August 30, 2001 Accreditation on NVLAP  
NVLAP Lab Code: 200347-0



Site Name: Quietek Corporation

Site Address: No.75-1, Wang-Yeh Valley, Yung-Hsing,  
Chiung-Lin, Hsin-Chu County,  
Taiwan, R.O.C.  
TEL : 886-3-592-8858 / FAX : 886-3-592-8859  
E-Mail: [service@quietek.com](mailto:service@quietek.com)

## 2. Conducted Emission


### 2.1. Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2001	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2001	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2001	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	No.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

### 2.2. Test Setup

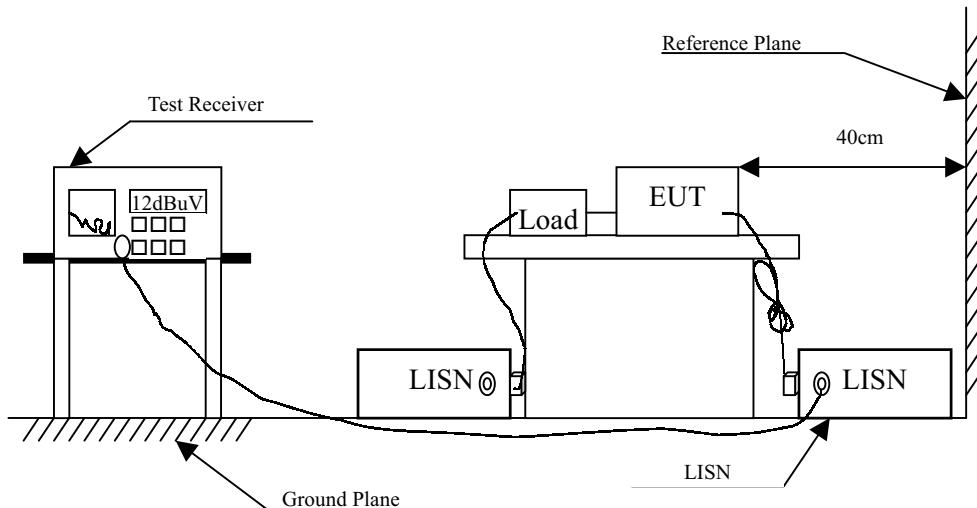

### 2.3. Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency MHz	Limits	
	uV	dBuV
0.45 - 30	250	48.0

## 2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:1992 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.45MHz to 30MHz using a receiver bandwidth of 9kHz.

## 2.5. Test Result of Conducted Emission

Product : USB Wireless LAN Card  
 Test Item : Conducted Emission Test  
 Test Site : No2. Shielded Room  
 Test Mode : Normal Operation

Frequency	Cable Loss	LISN Factor	Reading Level	Emission Level	Limits
MHz	dB	dB	dBuV	dBuV	dBuV

### Line 1

#### Quasi-Peak:

*0.475	0.21	0.10	31.45	31.76	48.00
1.840	0.09	0.13	20.91	21.12	48.00
3.680	0.17	0.16	23.83	24.16	48.00
5.339	0.29	0.17	18.01	18.47	48.00
17.419	0.41	0.40	27.26	28.08	48.00
27.045	0.30	0.56	21.09	21.95	48.00

### Line 2

#### Quasi-Peak:

*0.473	0.21	0.10	27.58	27.89	48.00
1.481	0.16	0.12	21.75	22.03	48.00
2.844	0.23	0.15	22.81	23.18	48.00
3.848	0.17	0.16	24.36	24.69	48.00
17.583	0.41	0.40	26.68	27.50	48.00
23.688	0.28	0.51	24.69	25.49	48.00

#### Remarks :

1. All Readings below 1GHz are Quasi-Peak value.
2. “\*” means that this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable loss

### 3. Peak Power Output

#### 3.1. Test Equipment


The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.  
2. Mark "X" test instruments are used to measure the final test results.

#### 3.2. Test Setup

##### Conduction Power Measurement

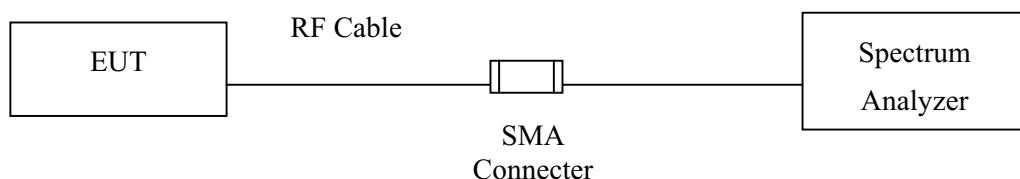

#### 3.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

#### 3.4. Limit

The maximum peak power shall be less 1 Watt.

### 3.5. Test Result of Peak Power Output

Product : USB Wireless LAN Card  
Test Item : Peak Power Output Data  
Test Site : No.1 OATS  
Test Mode : Normal Operation

#### Data Speed: 1Mbps

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
1	2412	2.81	1Watt= 30 dBm	Pass
6	2437	0.64	1Watt= 30 dBm	Pass
11	2462	-2.08	1Watt= 30 dBm	Pass

#### Data Speed: 11Mbps

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
1	2412	2.87	1Watt= 30 dBm	Pass
6	2437	0.66	1Watt= 30 dBm	Pass
11	2462	-2.05	1Watt= 30 dBm	Pass

#### 4. RF Exposure Evaluation

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (Minutes)
(A) Limits for Occupational/ Control Exposures				
300-1500	--	--	F/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/ Uncontrolled Exposures				
300-1500	--	--	F/1500	6
1500-100,000	--	--	1	30

F= Frequency in MHz

##### 4.1. Friis Formula

Friis transmission formula:  $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

$P_d$  = power density in  $\text{mW/cm}^2$

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi$  = 3.1416

$R$  = distance between observation point and center of the radiator in cm

$P_d$  is the limit of MPE, 1  $\text{mW/cm}^2$ . If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance  $r$  where the MPE limit is reached.

##### 4.2. EUT Operation condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

### 4.3. Test Result of RF Exposure Evaluation

Product : USB Wireless LAN Card  
Test Item : RF Exposure Evaluation Data  
Test Site : No.1 OATS  
Test Mode : Normal Operation

#### 4.3.1 Antenna Gain

Antenna Gain: The maximum Gain measured in fully anechoic chamber is 2dBi .

#### 4.3.2 Output Power Into Antenna & RF Exposure Evaluation Distance

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Minimum Allowable Distance ® From Skin(cm)
1 (1Mbps)	2412	2.81	0.490789
1 (11Mbps)	2412	2.87	0.494191
6 (1Mbps)	2437	0.64	0.382292
6 (11Mbps)	2437	0.66	0.383173
11 (1Mbps)	2462	-2.08	0.279509
11 (11Mbps)	2462	-2.05	0.280476

The distance r (4<sup>th</sup> column) calculated from the Friis transmission formula is far shorter than 20 cm separation requirement. So, RF exposure limit warning or SAR test are not required.

## 5. Radiated Emission


### 5.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 2001
	X	Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2001
	X	Pre-Amplifier	HP	8447D/3307A01812	May, 2001
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2001
	X	Horn Antenna	EM	EM6917 / 103325	May, 2001
Site # 2		Test Receiver	R & S	ESCS 30 / 825442/17	May, 2001
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 2001
		Pre-Amplifier	HP	8447D/3307A01814	May, 2001
		Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2001
		Horn Antenna	EM	EM6917 / 103325	May, 2001

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.  
2. Mark "X" test instruments are used to measure the final test results.

### 5.2. Test Setup

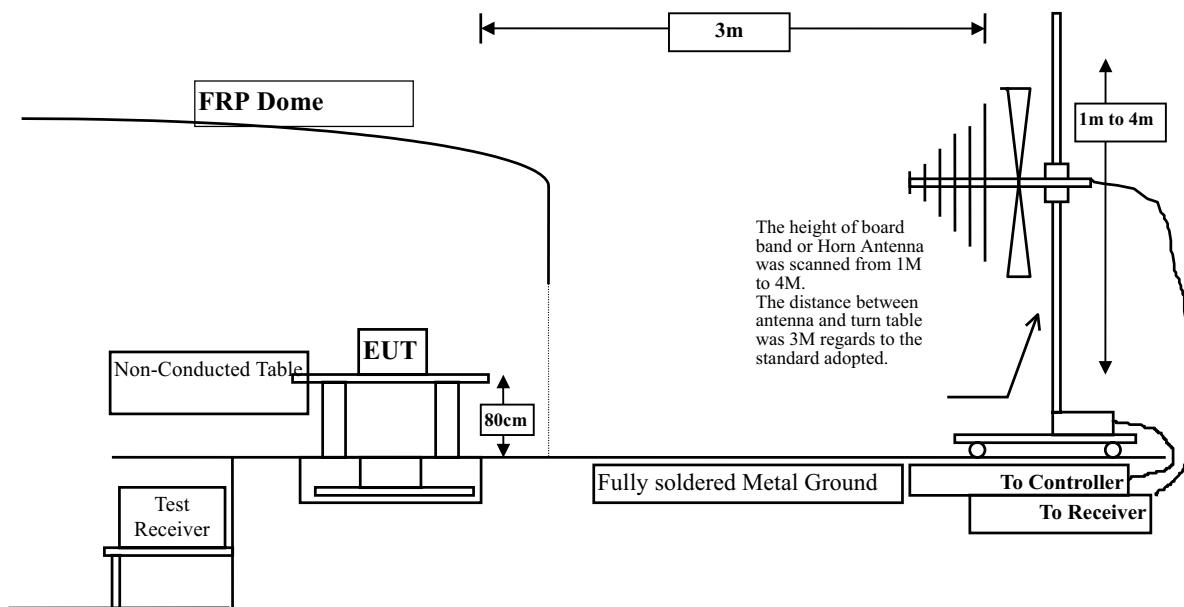

### 5.3. Limits

#### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks : 1. RF Voltage (dBuV) =  $20 \log \text{RF Voltage (uV)}$

2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30 )is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

## 5.5. Test Result of Radiated Emission

Product : USB Wireless LAN Card  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 1(1Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

#### Peak Detector

4824.000	6.19	33.70	19.50	30.63	51.03	22.97	74.00
7236.000	7.35	36.72	18.32	34.10	59.85	14.15	74.00
9648.000	8.76	38.25	15.87	26.73	< 57.87	16.13	74.00
12060.00	9.94	39.03	15.97	26.70	< 59.70	14.30	74.00

#### Average Detector

4824.000	6.19	33.70	19.50	20.91	41.30	12.70	54.00
7236.000	7.35	36.72	18.32	23.24	48.99	5.01	54.00
9648.000	8.76	38.25	15.87	17.54	< 48.68	5.32	54.00
12060.00	9.94	39.03	15.97	17.14	< 50.14	3.86	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss -PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 1(1Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

---

### Vertical

#### Peak Detector

4824.000	6.19	33.70	19.50	32.57	52.96	21.04	74.00
7236.000	7.35	36.72	18.32	34.98	60.73	13.27	74.00
9648.000	8.76	38.25	15.87	26.73	< 57.87	16.13	74.00
12060.00	9.94	39.03	15.97	26.70	< 59.70	14.30	74.00

#### Average Detector

4824.000	6.19	33.70	19.50	21.23	41.62	12.38	54.00
7236.000	7.35	36.72	18.32	23.38	49.13	4.87	54.00
9648.000	8.76	38.25	15.87	17.54	< 48.68	5.32	54.00
12060.00	9.94	39.03	15.97	17.14	< 50.14	3.86	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.1 OATS  
Test Mode : Channel 6(1Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
4874.000	6.21	33.85	19.49	30.79	51.36	22.64	74.00
7311.000	7.38	36.87	18.27	33.93	59.91	14.09	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12185.00	10.13	39.07	16.31	26.70	< 59.59	14.41	74.00

**Horizontal****Peak Detector**

4874.000	6.21	33.85	19.49	30.79	51.36	22.64	74.00
7311.000	7.38	36.87	18.27	33.93	59.91	14.09	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12185.00	10.13	39.07	16.31	26.70	< 59.59	14.41	74.00

**Average Detector**

4874.000	6.21	33.85	19.49	21.16	41.73	12.27	54.00
7311.000	7.38	36.87	18.27	22.41	48.39	5.61	54.00
9748.000	8.96	38.44	15.79	17.54	< 49.15	4.85	54.00
12185.00	10.13	39.07	16.31	14.14	< 50.03	3.97	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.1 OATS  
Test Mode : Channel 6(1Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
4874.000	6.21	33.85	19.49	30.71	51.28	22.72	74.00
7311.000	7.38	36.87	18.27	32.56	58.54	15.46	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12185.00	10.13	39.07	16.31	26.70	< 59.59	14.41	74.00

**Vertical****Peak Detector**

4874.000	6.21	33.85	19.49	30.71	51.28	22.72	74.00
7311.000	7.38	36.87	18.27	32.56	58.54	15.46	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12185.00	10.13	39.07	16.31	26.70	< 59.59	14.41	74.00

**Average Detector**

4874.000	6.21	33.85	19.49	21.13	41.70	12.30	54.00
7311.000	7.38	36.87	18.27	21.42	47.40	6.60	54.00
9748.000	8.96	38.44	15.79	17.54	< 49.15	4.85	54.00
12185.00	10.13	39.07	16.31	14.14	< 50.03	3.97	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.1 OATS  
Test Mode : Channel 11(1Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
4924.000	6.24	33.99	19.49	31.73	52.47	21.53	74.00
7386.000	7.42	37.02	18.22	33.62	59.85	14.15	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12310.00	9.45	38.54	16.31	26.70	< 58.38	15.62	74.00

**Horizontal****Peak Detector**

4924.000	6.24	33.99	19.49	31.73	52.47	21.53	74.00
7386.000	7.42	37.02	18.22	33.62	59.85	14.15	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12310.00	9.45	38.54	16.31	26.70	< 58.38	15.62	74.00

**Average Detector**

4924.000	6.24	33.99	19.49	21.37	42.11	11.89	54.00
7386.000	7.42	37.02	18.22	23.04	49.27	4.73	54.00
9848.000	8.96	38.44	15.79	17.54	< 49.15	4.85	54.00
12310.00	9.45	38.54	16.31	17.14	< 48.82	5.18	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 11(1Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

### Vertical

#### Peak Detector

4924.000	6.24	33.99	19.49	31.43	52.17	21.83	74.00
7386.000	7.42	37.02	18.22	33.08	59.31	14.69	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12310.00	9.45	38.54	16.31	26.70	< 58.38	15.62	74.00

#### Average Detector

4924.000	6.24	33.99	19.49	21.45	42.19	11.81	54.00
7386.000	7.42	37.02	18.22	23.01	49.24	4.76	54.00
9848.000	8.96	38.44	15.79	17.54	< 49.15	4.85	54.00
12310.00	9.45	38.54	16.31	17.14	< 48.82	5.18	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.1 OATS  
Test Mode : Channel 1(11Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
4824.000	6.19	33.70	19.50	31.79	52.18	21.82	74.00
7236.000	7.35	36.72	18.32	34.95	60.71	13.29	74.00
9648.000	8.76	38.25	15.87	26.73	< 57.87	16.13	74.00
12060.00	9.94	39.03	15.97	26.70	< 59.70	14.30	74.00

---

**Horizontal****Peak Detector**

4824.000	6.19	33.70	19.50	31.79	52.18	21.82	74.00
7236.000	7.35	36.72	18.32	34.95	60.71	13.29	74.00
9648.000	8.76	38.25	15.87	26.73	< 57.87	16.13	74.00
12060.00	9.94	39.03	15.97	26.70	< 59.70	14.30	74.00

**Average Detector**

4824.000	6.19	33.70	19.50	21.18	41.57	12.43	54.00
7236.000	7.35	36.72	18.32	23.32	49.07	4.93	54.00
9648.000	8.76	38.25	15.87	17.54	< 48.68	5.32	54.00
12060.00	9.94	39.03	15.97	17.14	< 50.14	3.86	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 1(11Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

### Vertical

#### Peak Detector

4824.000	6.19	33.70	19.50	31.42	51.82	22.18	74.00
7236.000	7.35	36.72	18.32	33.77	59.53	14.47	74.00
9648.000	8.76	38.25	15.87	26.73	< 57.87	16.13	74.00
12060.00	9.94	39.03	15.97	26.70	< 59.70	14.30	74.00

#### Average Detector

4824.000	6.19	33.70	19.50	20.90	41.29	12.71	54.00
7236.000	7.35	36.72	18.32	23.34	49.09	4.91	54.00
9648.000	8.76	38.25	15.87	17.54	< 48.68	5.32	54.00
12060.00	9.94	39.03	15.97	17.14	< 50.14	3.86	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.1 OATS  
Test Mode : Channel 6(11Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
4874.000	6.21	33.85	19.49	31.58	52.15	21.85	74.00
7311.000	7.38	36.87	18.27	33.86	59.84	14.16	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12185.00	10.13	39.07	16.31	26.70	< 59.59	14.41	74.00

---

**Horizontal****Peak Detector**

4874.000	6.21	33.85	19.49	31.58	52.15	21.85	74.00
7311.000	7.38	36.87	18.27	33.86	59.84	14.16	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12185.00	10.13	39.07	16.31	26.70	< 59.59	14.41	74.00

**Average Detector**

4874.000	6.21	33.85	19.49	21.26	41.83	12.17	54.00
7311.000	7.38	36.87	18.27	22.44	48.42	5.58	54.00
9748.000	8.96	38.44	15.79	17.54	< 49.15	4.85	54.00
12185.00	10.13	39.07	16.31	14.14	< 50.03	3.97	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 6(11Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

---

### Vertical

#### Peak Detector

4874.000	6.21	33.85	19.49	31.43	52.00	22.00	74.00
7311.000	7.38	36.87	18.27	33.08	59.06	14.94	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12185.00	10.13	39.07	16.31	26.70	< 59.59	14.41	74.00

#### Average Detector

4874.000	6.21	33.85	19.49	21.19	41.76	12.24	54.00
7311.000	7.38	36.87	18.27	22.34	48.32	5.68	54.00
9748.000	8.96	38.44	15.79	17.54	< 49.15	4.85	54.00
12185.00	10.13	39.07	16.31	14.14	< 50.03	3.97	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.1 OATS  
Test Mode : Channel 11(11Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
4924.000	6.24	33.99	19.49	34.02	54.76	19.24	74.00
7386.000	7.42	37.02	18.22	33.59	59.82	14.18	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12310.00	9.45	38.54	16.31	26.70	< 58.38	15.62	74.00

**Horizontal****Peak Detector**

4924.000	6.24	33.99	19.49	34.02	54.76	19.24	74.00
7386.000	7.42	37.02	18.22	33.59	59.82	14.18	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12310.00	9.45	38.54	16.31	26.70	< 58.38	15.62	74.00

**Average Detector**

4924.000	6.24	33.99	19.49	21.45	42.19	11.81	54.00
7386.000	7.42	37.02	18.22	23.02	49.25	4.75	54.00
9848.000	8.96	38.44	15.79	17.54	< 49.15	4.85	54.00
12310.00	9.45	38.54	16.31	17.14	< 48.82	5.18	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 11(11Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

---

### Vertical

#### Peak Detector

4924.000	6.24	33.99	19.49	32.00	52.74	21.26	74.00
7386.000	7.42	37.02	18.22	33.91	60.14	13.86	74.00
9848.000	8.96	38.44	15.79	26.73	< 58.34	15.66	74.00
12310.00	9.45	38.54	16.31	26.70	< 58.38	15.62	74.00

#### Average Detector

4924.000	6.24	33.99	19.49	21.43	42.17	11.83	54.00
7386.000	7.42	37.02	18.22	22.96	49.19	4.81	54.00
9848.000	8.96	38.44	15.79	17.54	< 49.15	4.85	54.00
12310.00	9.45	38.54	16.31	17.14	< 48.82	5.18	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Probe Factor + Cable loss - PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Wireless LAN Card  
 Test Item : General Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 1(1Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level		Level	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal:**

44.000	0.94	11.19	0.00	10.60	22.73	17.27	40.00
131.997	1.39	11.69	0.00	18.60	31.69	11.81	43.50
219.998	1.85	8.48	0.00	23.20	33.53	12.47	46.00
*264.000	2.07	12.88	0.00	26.30	41.26	4.74	46.00
287.999	2.20	11.91	0.00	15.90	30.01	15.99	46.00
630.000	3.96	18.63	0.00	9.60	32.18	13.82	46.00
747.990	4.57	18.49	0.00	13.60	36.65	9.35	46.00

**Vertical:**

44.000	0.94	9.57	0.00	18.00	28.51	11.49	40.00
*131.999	1.39	10.59	0.00	24.34	36.33	7.17	43.50
152.000	1.50	9.18	0.00	15.60	26.28	17.22	43.50
175.995	1.62	8.35	0.00	22.68	32.65	10.85	43.50
219.995	1.85	8.99	0.00	23.60	34.44	11.56	46.00
263.994	2.07	13.04	0.00	17.60	32.71	13.29	46.00
475.676	3.16	16.56	0.00	8.50	28.22	17.78	46.00
543.626	3.51	18.49	0.00	7.90	29.90	16.10	46.00
630.000	3.96	18.53	0.00	9.80	32.29	13.71	46.00
747.990	4.57	20.73	0.00	9.30	34.60	11.40	46.00

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ \* ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable loss.

Product : USB Wireless LAN Card  
 Test Item : General Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 6(1Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal:</b>							
44.000	0.94	11.19	0.00	9.20	21.33	18.67	40.00
131.990	1.39	11.69	0.00	17.20	30.29	13.21	43.50
175.997	1.62	8.43	0.00	18.20	28.25	15.25	43.50
219.996	1.85	8.48	0.00	23.50	33.83	12.17	46.00
*263.998	2.07	12.88	0.00	26.40	41.36	4.64	46.00
441.700	2.99	15.71	0.00	14.50	33.20	12.80	46.00
630.002	3.96	18.63	0.00	10.10	32.68	13.32	46.00
747.995	4.57	18.49	0.00	14.20	37.25	8.75	46.00

**Vertical:**

44.000	0.94	9.57	0.00	18.50	29.01	10.99	40.00
131.998	1.39	10.59	0.00	25.20	37.19	6.31	43.50
175.995	1.62	8.35	0.00	24.60	34.57	8.93	43.50
219.998	1.85	8.99	0.00	22.10	32.94	13.06	46.00
263.997	2.07	13.04	0.00	19.20	34.31	11.69	46.00
630.000	3.96	18.53	0.00	9.20	31.69	14.31	46.00
*747.998	4.57	20.73	0.00	16.20	41.50	4.50	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ \* ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable loss.

Product : USB Wireless LAN Card  
 Test Item : General Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 11(1Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal:**

44.000	0.94	11.19	0.00	9.60	21.73	18.27	40.00
131.990	1.39	11.69	0.00	18.60	31.69	11.81	43.50
175.997	1.62	8.43	0.00	18.50	28.55	14.95	43.50
219.996	1.85	8.48	0.00	25.20	35.53	10.47	46.00
*263.997	2.07	12.88	0.00	25.90	40.86	5.14	46.00
630.000	3.96	18.63	0.00	10.60	33.18	12.82	46.00
747.996	4.57	18.49	0.00	14.60	37.65	8.35	46.00

**Vertical:**

44.000	0.94	9.57	0.00	19.50	30.01	9.99	40.00
131.998	1.39	10.59	0.00	25.60	37.59	5.91	43.50
175.998	1.62	8.35	0.00	25.60	35.57	7.93	43.50
219.997	1.85	8.99	0.00	19.60	30.44	15.56	46.00
263.997	2.07	13.04	0.00	19.50	34.61	11.39	46.00
630.002	3.96	18.53	0.00	10.60	33.09	12.91	46.00
*747.999	4.57	20.73	0.00	16.20	41.50	4.50	46.00

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ \* ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable loss.

Product : USB Wireless LAN Card  
 Test Item : General Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 1(11Mbps)

Freq. MHz	Cable Loss dB	Probe Factor dB/m	PreAMP Reading dB	Emission Level dBuV	Margin Level dBuV/m	Limit	
						dB	dBuV/m
44.000	0.94	11.19	0.00	11.20	23.33	16.67	40.00
131.998	1.39	11.69	0.00	17.50	30.59	12.91	43.50
175.997	1.62	8.43	0.00	17.20	27.25	16.25	43.50
219.997	1.85	8.48	0.00	22.96	33.29	12.71	46.00
*263.994	2.07	12.88	0.00	26.80	41.76	4.24	46.00
629.998	3.96	18.63	0.00	10.20	32.78	13.22	46.00
747.991	4.57	18.49	0.00	12.90	35.95	10.05	46.00

**Horizontal:**

44.000	0.94	11.19	0.00	11.20	23.33	16.67	40.00
131.998	1.39	11.69	0.00	17.50	30.59	12.91	43.50
175.997	1.62	8.43	0.00	17.20	27.25	16.25	43.50
219.997	1.85	8.48	0.00	22.96	33.29	12.71	46.00
*263.994	2.07	12.88	0.00	26.80	41.76	4.24	46.00
629.998	3.96	18.63	0.00	10.20	32.78	13.22	46.00
747.991	4.57	18.49	0.00	12.90	35.95	10.05	46.00

**Vertical:**

44.000	0.94	9.57	0.00	18.20	28.71	11.29	40.00
*131.999	1.39	10.59	0.00	25.20	37.19	6.31	43.50
175.996	1.62	8.35	0.00	24.10	34.07	9.43	43.50
219.997	1.85	8.99	0.00	24.20	35.04	10.96	46.00
630.000	3.96	18.53	0.00	10.10	32.59	13.41	46.00
747.998	4.57	20.73	0.00	10.65	35.95	10.05	46.00

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ \* ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable loss.

Product : USB Wireless LAN Card  
 Test Item : General Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 6(11Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal:**

44.000	0.94	11.19	0.00	8.90	21.03	18.97	40.00
131.990	1.39	11.69	0.00	17.60	30.69	12.81	43.50
175.998	1.62	8.43	0.00	17.20	27.25	16.25	43.50
219.996	1.85	8.48	0.00	23.30	33.63	12.37	46.00
*263.998	2.07	12.88	0.00	26.50	41.46	4.54	46.00
441.700	2.99	15.71	0.00	13.60	32.30	13.70	46.00
630.000	3.96	18.63	0.00	9.60	32.18	13.82	46.00
747.992	4.57	18.49	0.00	13.80	36.85	9.15	46.00

**Vertical:**

44.000	0.94	9.57	0.00	18.60	29.11	10.89	40.00
82.010	1.14	7.53	0.00	22.60	31.27	8.73	40.00
125.000	1.36	10.19	0.00	20.80	32.35	11.15	43.50
131.997	1.39	10.59	0.00	24.60	36.59	6.91	43.50
175.996	1.62	8.35	0.00	24.20	34.17	9.33	43.50
219.998	1.85	8.99	0.00	21.60	32.44	13.56	46.00
263.998	2.07	13.04	0.00	18.20	33.31	12.69	46.00
630.000	3.96	18.53	0.00	8.60	31.09	14.91	46.00
*747.990	4.57	20.73	0.00	15.20	40.50	5.50	46.00

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ \* ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable loss.

Product : USB Wireless LAN Card  
 Test Item : General Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 11(11Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level		Level	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal:**

44.000	0.94	11.19	0.00	10.10	22.23	17.77	40.00
131.990	1.39	11.69	0.00	20.10	33.19	10.31	43.50
175.997	1.62	8.43	0.00	18.10	28.15	15.35	43.50
219.996	1.85	8.48	0.00	24.80	35.13	10.87	46.00
*263.998	2.07	12.88	0.00	26.90	41.86	4.14	46.00
441.700	2.99	15.71	0.00	14.60	33.30	12.70	46.00
630.002	3.96	18.63	0.00	10.60	33.18	12.82	46.00
747.993	4.57	18.49	0.00	14.60	37.65	8.35	46.00

**Vertical:**

44.000	0.94	9.57	0.00	19.60	30.11	9.89	40.00
63.000	1.04	5.78	0.00	10.40	17.22	22.78	40.00
*131.998	1.39	10.59	0.00	25.60	37.59	5.91	43.50
175.996	1.62	8.35	0.00	25.20	35.17	8.33	43.50
219.999	1.85	8.99	0.00	19.20	30.04	15.96	46.00
263.997	2.07	13.04	0.00	19.60	34.71	11.29	46.00
630.001	3.96	18.53	0.00	10.40	32.89	13.11	46.00
747.992	4.57	20.73	0.00	13.60	38.90	7.10	46.00

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ \* ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable loss.

## 6. Band Edge

### 6.1. Test Equipment


The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001
X Test Receiver	R & S	ESCS 30 / 825442/14	May, 2001
X Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2001
X Pre-Amplifier	HP	8447D/3307A01812	May, 2001
X Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2001
X Horn Antenna	EM	EM6917 / 103325	May, 2001


Note: 1. All equipments that need to calibrate are with calibration period of 1 year.  
2. Mark "X" test instruments are used to measure the final test results.

### 6.2. Test Setup

#### RF Conducted Measurement:

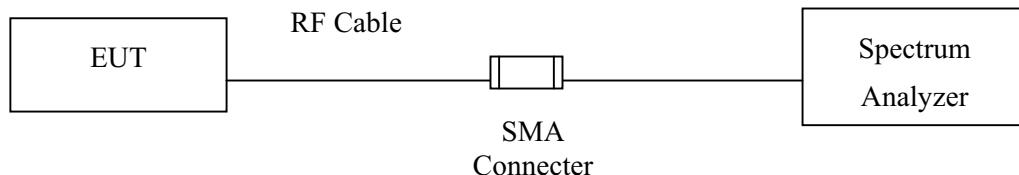

#### RF Radiated Measurement:

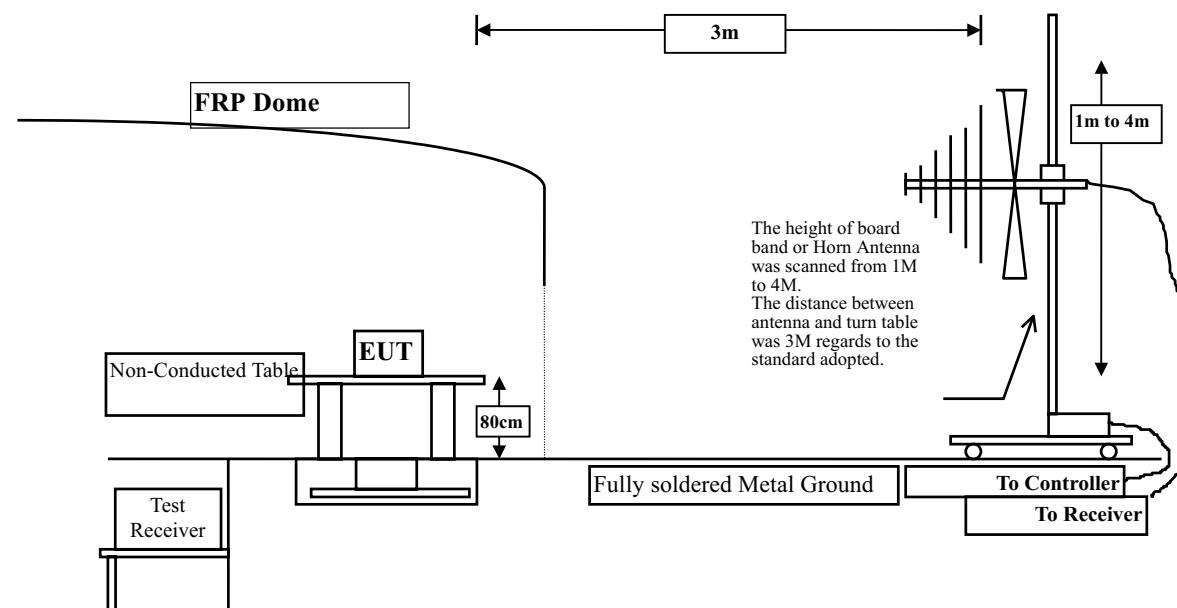

### **6.3. Test Condition**

Standard Temperature and Humidity, Standard Test Voltage

### **6.4. Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### **6.5. Test Procedure**

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz.

## 6.6. Test Result of Band Edge

Product : USB Wireless LAN Card  
 Test Item : Band Edge Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 1 (1Mbps)

### RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (Horizontal)	<2400	>20	Pass
1 (Vertical)	<2400	>20	Pass

Figure Channel 1: (Horizontal)


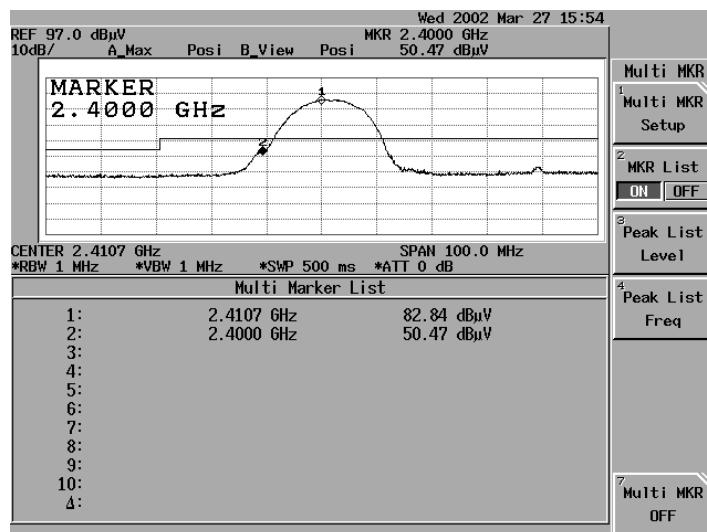




Figure Channel 1: (Vertical)

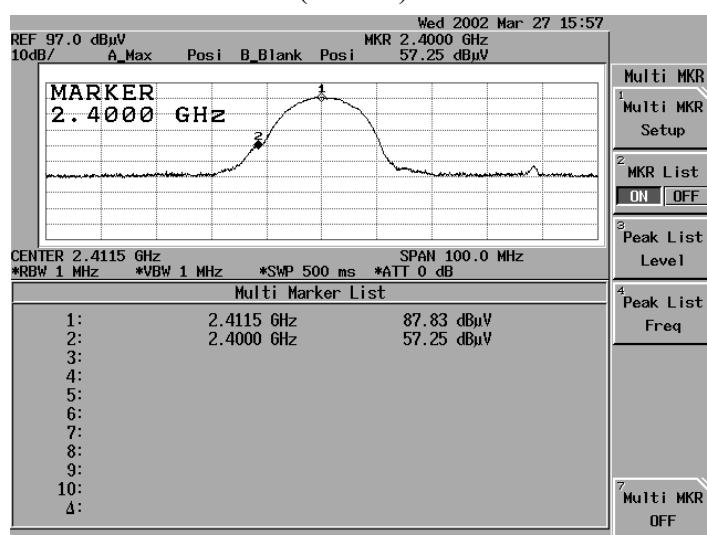

Product : USB Wireless LAN Card  
 Test Item : Band Edge Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 1 (11Mbps)

**RF Radiated Measurement:**



Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (Horizontal)	<2400	>20	Pass
1 (Vertical)	<2400	>20	Pass

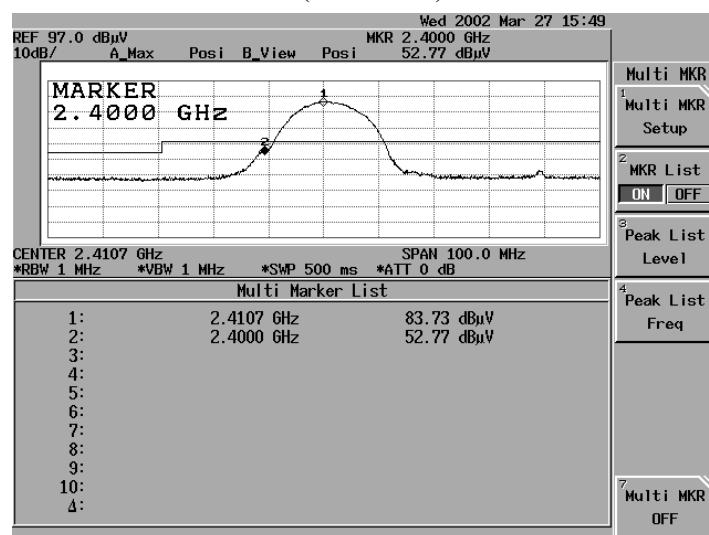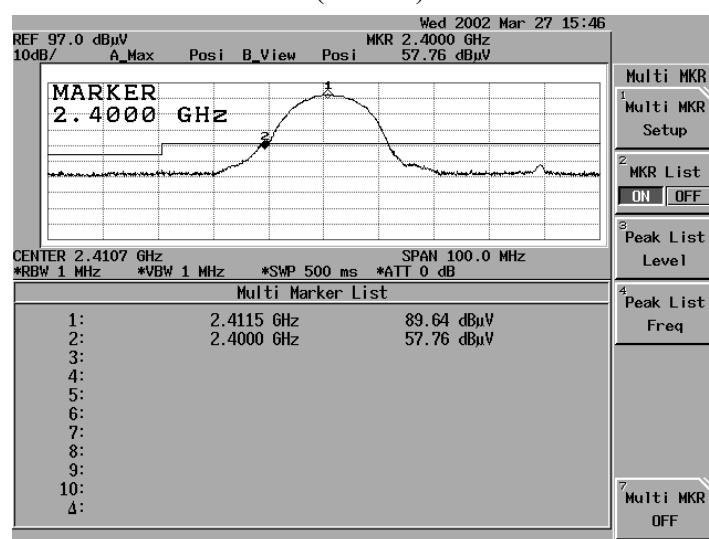**Figure Channel 1:**
**(Horizontal)**

**Figure Channel 1:**
**(Vertical)**


Product : USB Wireless LAN Card  
 Test Item : Band Edge Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 11 (1Mbps)

**RF Radiated Measurement: (Peak)**

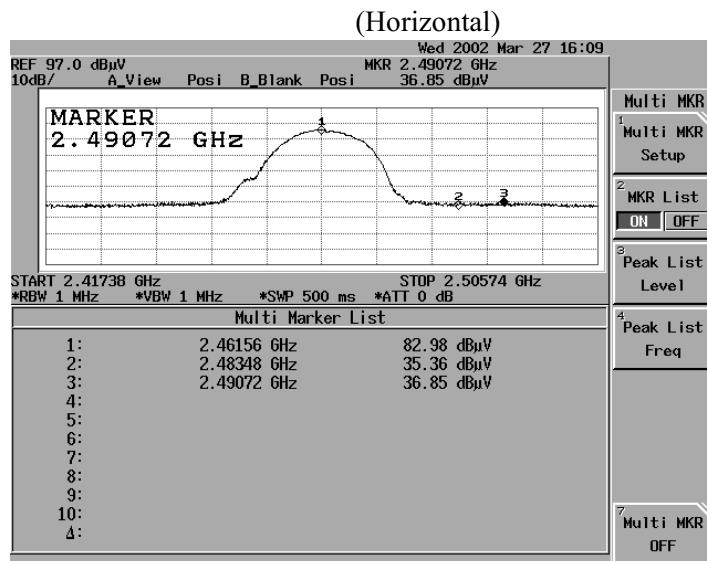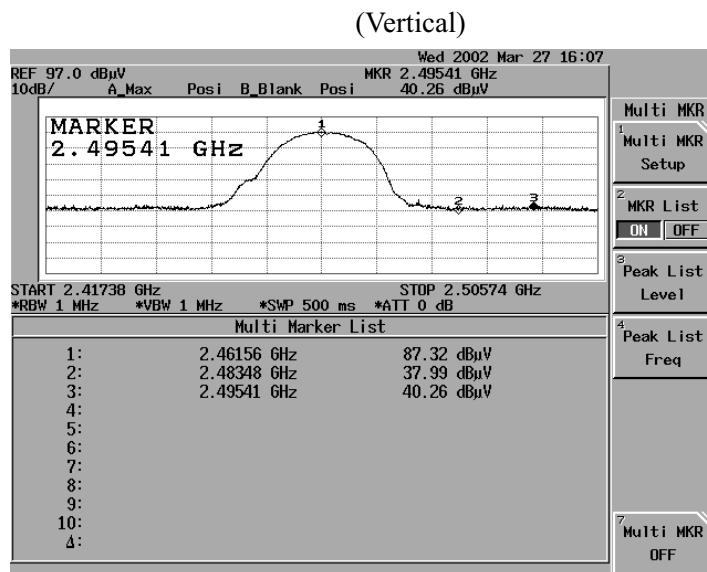Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Result
11(Horizontal)	2490.72	36.85	49.65	74	Pass
11 (Vertical)	2495.41	40.26	53.06	74	Pass

**Figure Channel 11:**

**Figure Channel 11:**


Note:


- 1) The average measurement was not performed when the peak measured data under the limit of average detector.

Product : USB Wireless LAN Card  
 Test Item : Band Edge Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 11 (11Mbps)


**RF Radiated Measurement: (Peak)**

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Result
11(Horizontal)	2488.51	36.57	49.37	74	Pass
11(Vertical)	2493.46	40.27	53.07	74	Pass

**Figure Channel 11:**

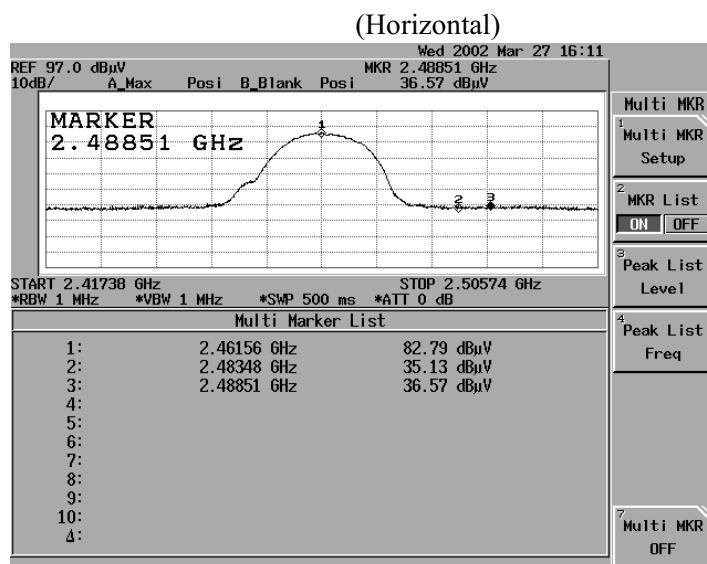

**Figure Channel 11:**

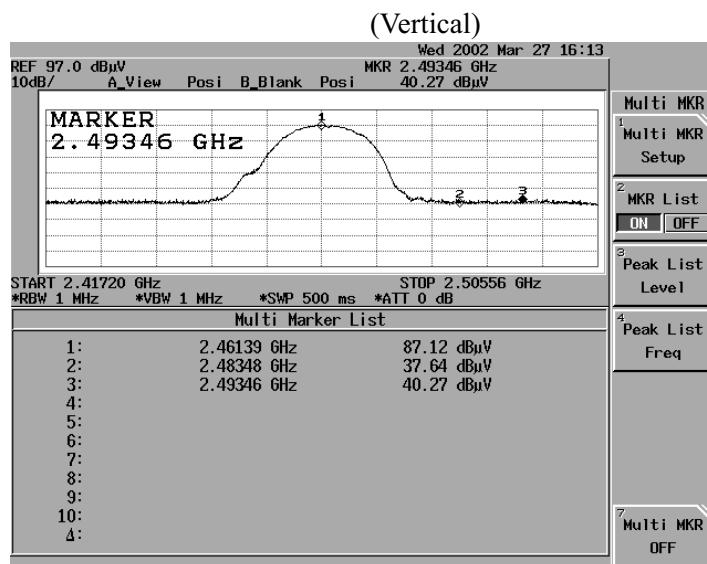

Note:

- 1) The average measurement was not performed when the peak measured data under the limit of average detector.

## 7. Occupied Bandwidth


### 7.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.  
2. Mark "X" test instruments are used to measure the final test results.

### 7.2. Test Setup

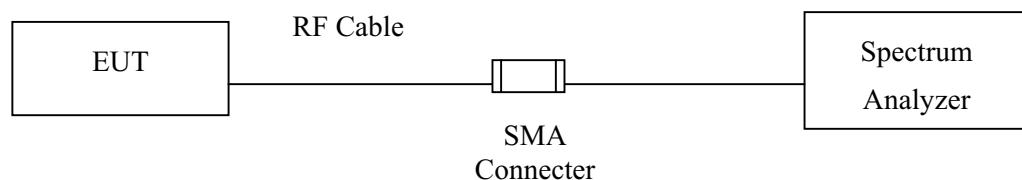

### 7.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

### 7.4. Limit


The minimum bandwidth shall be at least 500kHz.

## 7.5. Test Result of Occupied Bandwidth


Product : USB Wireless LAN Card  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 1

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1 (1Mbps)	2412	10200	>500	Pass
1 (11Mbps)	2412	10300	>500	Pass

**Figure Channel 1: 1Mbps**

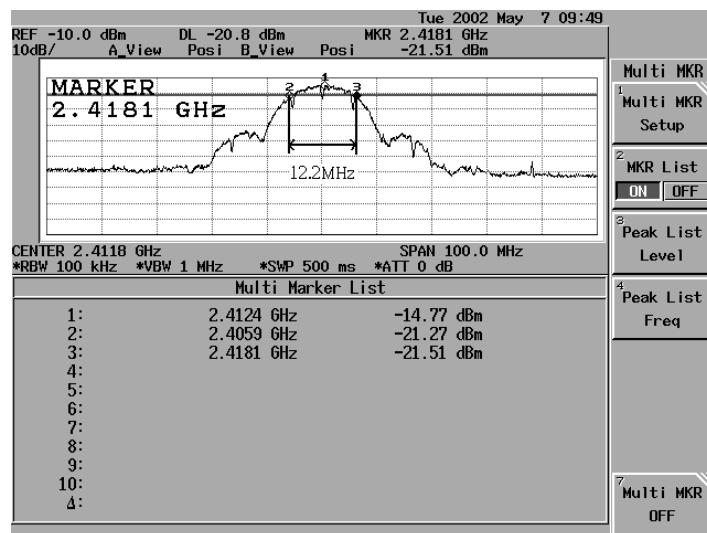


**Figure Channel 1: 11Mbps**

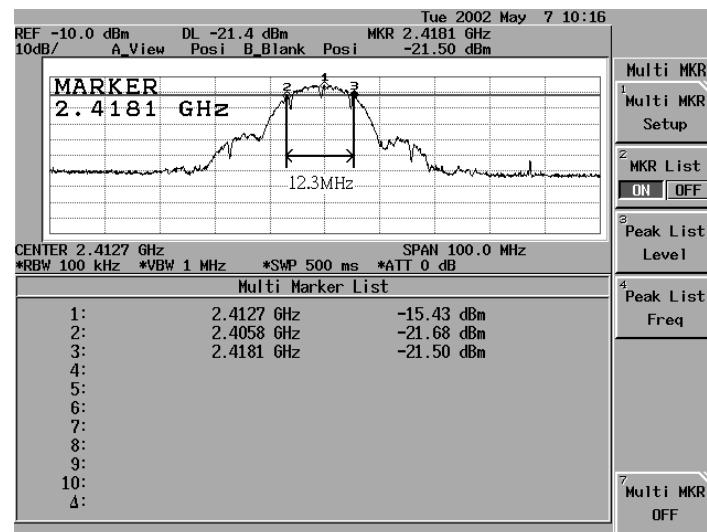


Product : USB Wireless LAN Card  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 6

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6 (1Mbps)	2437	11100	>500	Pass
6 (11Mbps)	2437	10200	>500	Pass

**Figure Channel 6: 1Mbps**

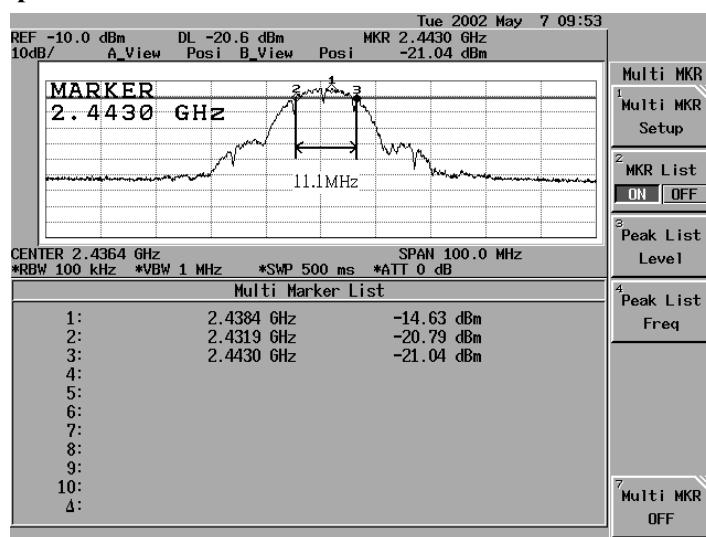


**Figure Channel 6: 11Mbps**

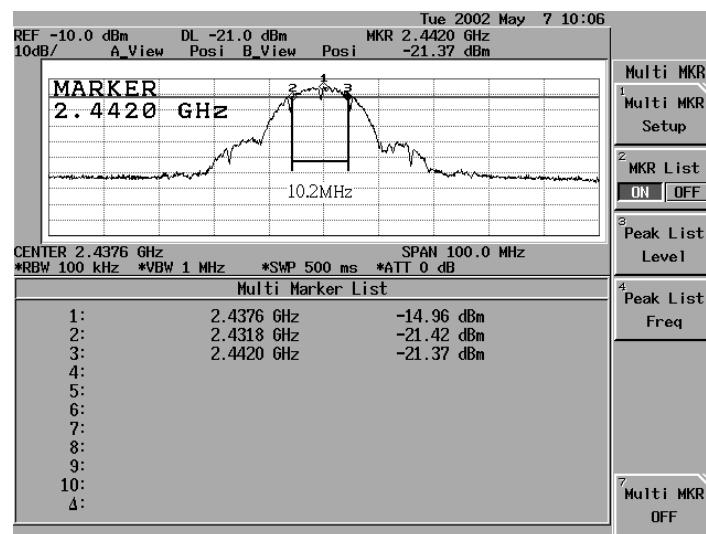


Product : USB Wireless LAN Card  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 11

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11 (1Mbps)	2462	11200	>500	Pass
11 (11Mbps)	2462	12200	>500	Pass

**Figure Channel 11: 1Mbps**

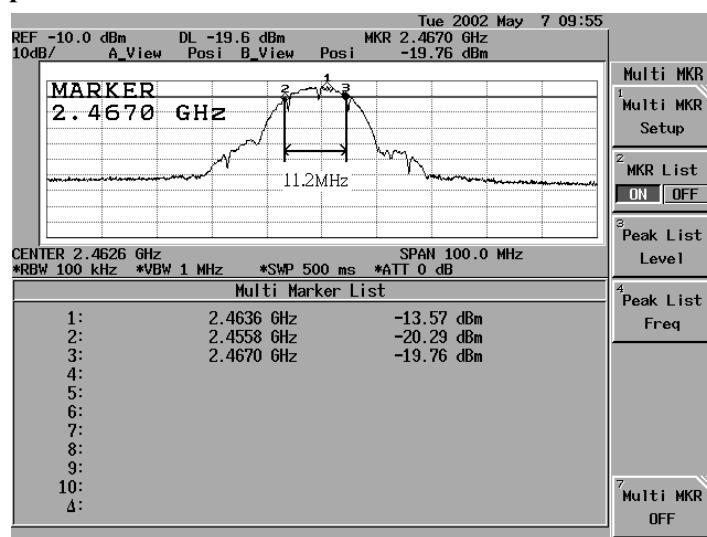

**Figure Channel 11: 11Mbps**

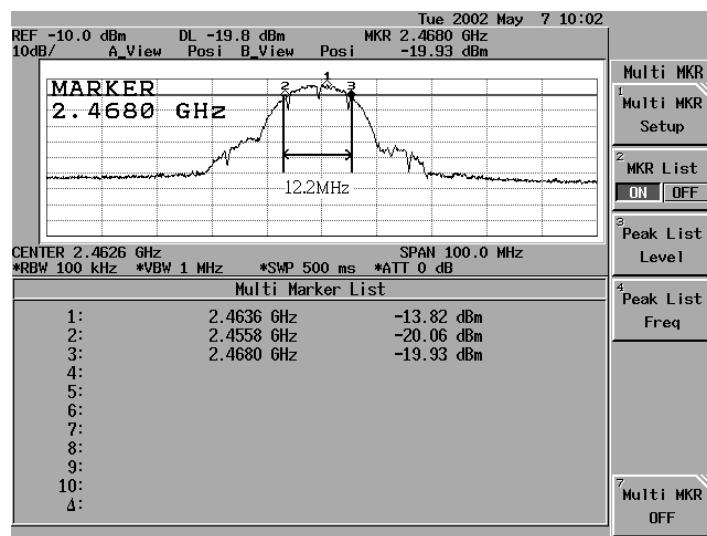

## 8. Transmitter Power Density


### 8.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.  
2. Mark "X" test instruments are used to measure the final test results.

### 8.2. Test Setup

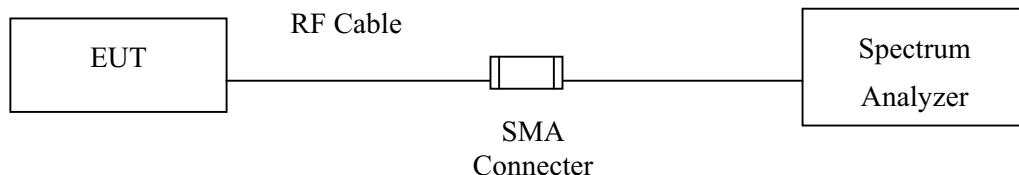

### 8.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

### 8.4. Limit


The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

## 8.5. Test Result of Transmitter Power Density


Product : USB Wireless LAN Card  
 Test Item : Transmitter Power Density Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 1

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
1 (1Mbps)	2412.00	-38.21	< 8dBm	Pass
1 (11Mbps)	2412.00	-38.24	< 8dBm	Pass

1Mbps

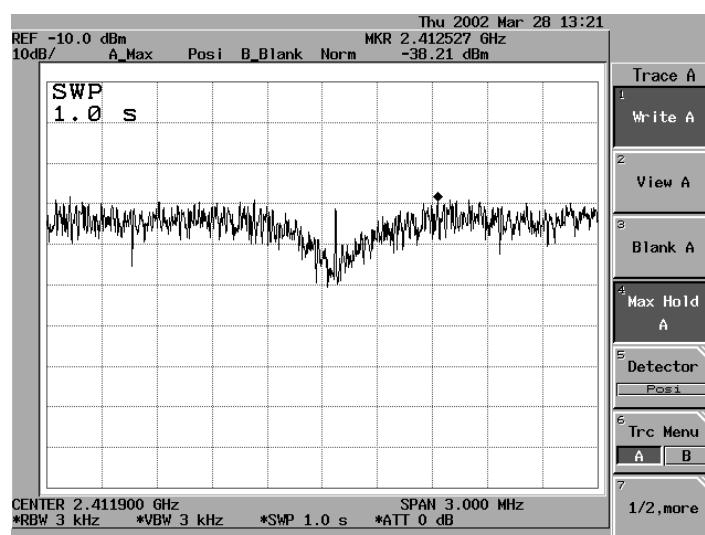


11Mbps

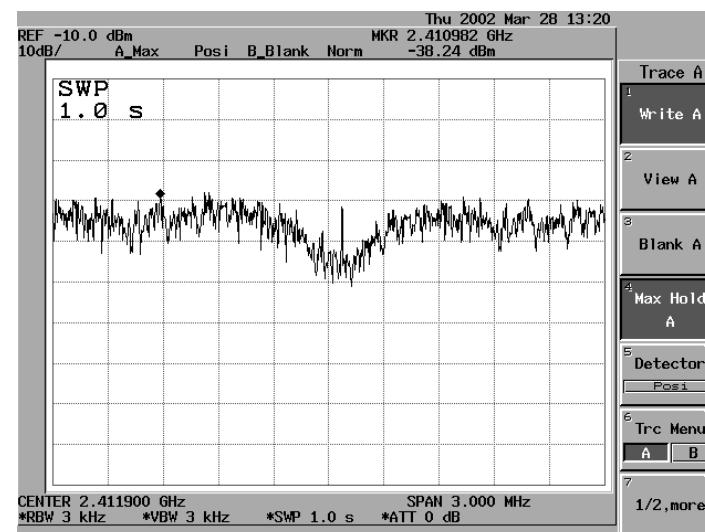


Product : USB Wireless LAN Card  
 Test Item : Transmitter Power Density Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 6

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6 (2Mbps)	2437.00	-36.13	< 8dBm	Pass
6 (11Mbps)	2437.00	-39.14	< 8dBm	Pass

1Mbps

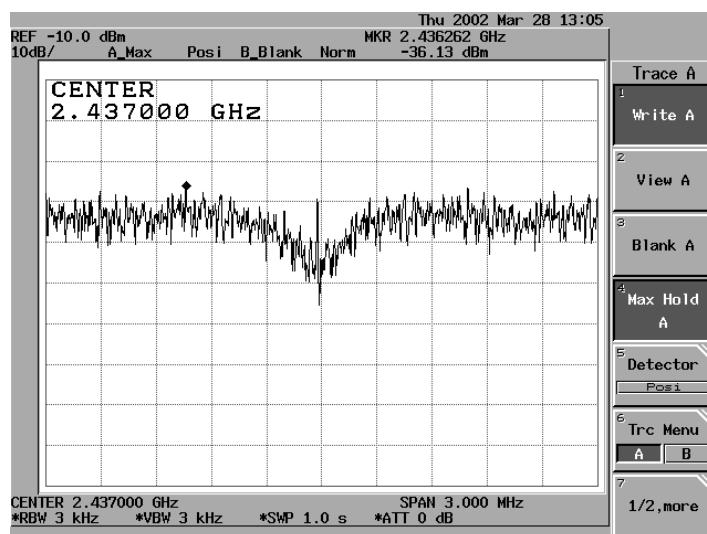


11Mbps

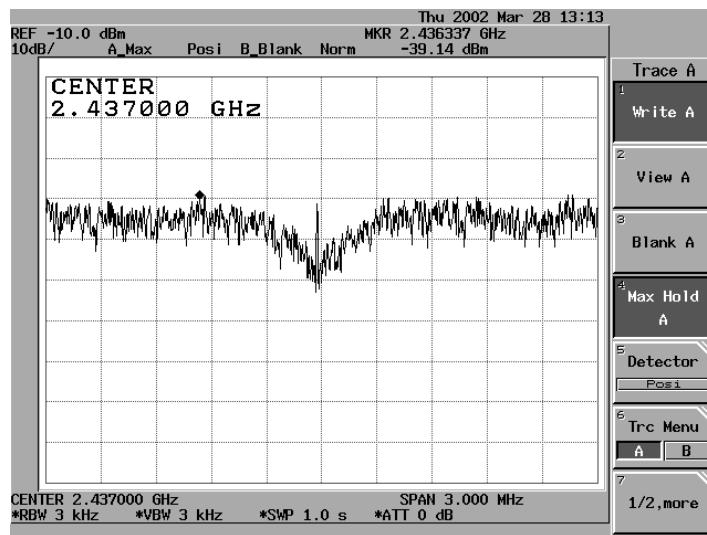


Product : USB Wireless LAN Card  
 Test Item : Transmitter Power Density Data  
 Test Site : No.1 OATS  
 Test Mode : Channel 11

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11 (2Mbps)	2462.00	-39.02	< 8dBm	Pass
11 (11Mbps)	2462.00	-38.54	< 8dBm	Pass

1Mbps

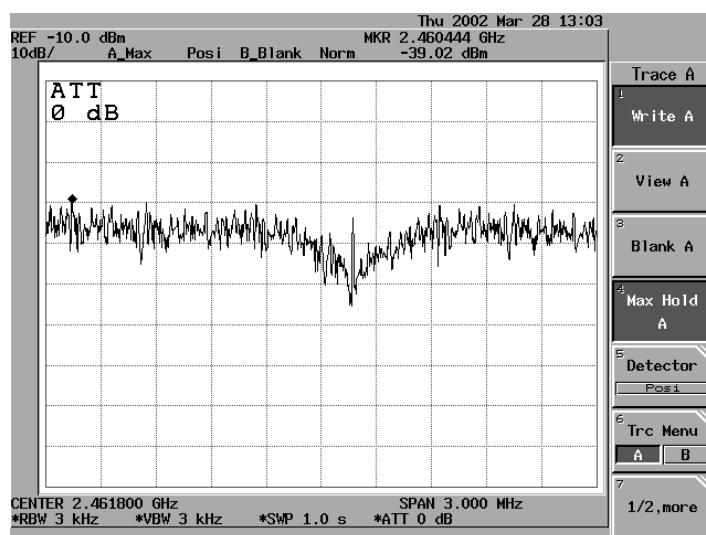

11Mbps

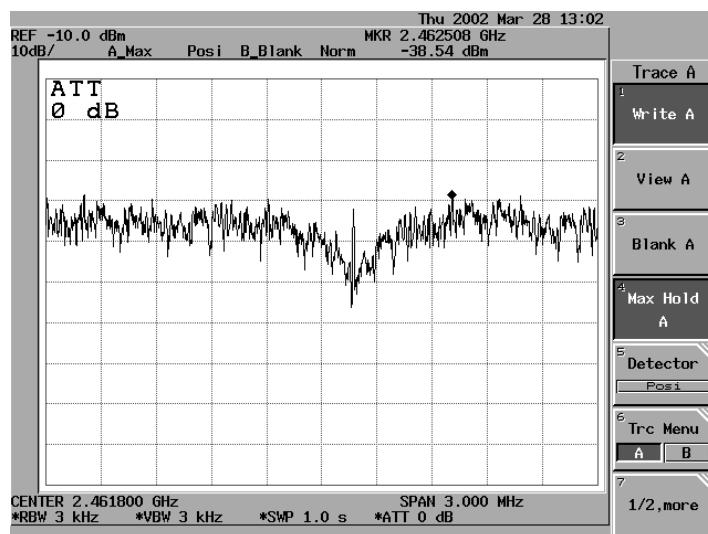

**9. Processing Gain****9.1. Test Condition**

Standard Temperature and Humidity, Standard Test Voltage

**9.2. Limit**

According to FCC Part 15 Subpart C Paragraph 15.247(e), The processing gain shall be at least 10 dB.

---

### 9.3. Test Result of Processing Gain

As EUT power is less than 20dBm, processing gain is omitted.

---

**10. EMI Reduction Method During Compliance Testing**

No modification was made during testing.

## Attachment 1 : EUT Test Photographs

Attachment 2 : EUT Detailed Photographs