



## FCC 47 CFR PART 15 SUBPART C

for

**TSmouse**

**Model: AM618-S-TX, AM618-M-TX**

**Brand: TSmouse**

**Test Report Number:**

**C120829Z01-RP1**

Issued for:

**Touchsens Corp.**

**2F-2, No. 14, Lane 609, Sec.5, Chung Hsin Road, San Chung Dist, New Taipei City, Taiwan 241**

Issued by:

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.**

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

**TEL: 86-755-28055000**

**FAX: 86-755-28055221**

**Issued Date: August 31,2012**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



## Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C120829Z01-RP1	Initial Issue	ALL	Anna Liu



## TABLE OF CONTENTS

<b>1</b>	<b>TEST CERTIFICATION .....</b>	<b>4</b>
<b>2</b>	<b>EUT DESCRIPTION.....</b>	<b>5</b>
<b>3</b>	<b>TEST METHODOLOGY.....</b>	<b>6</b>
3.1.	DESCRIPTION OF TEST MODES.....	6
<b>4</b>	<b>TEST METHODOLOGY.....</b>	<b>7</b>
4.1.	EUT EXERCISE .....	7
4.2.	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
<b>5</b>	<b>INSTRUMENT CALIBRATION .....</b>	<b>8</b>
<b>6</b>	<b>SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
6.1.	DESCRIPTION OF SUPPORT UNITS .....	8
6.2.	CONFIGURATION OF SYSTEM UNDER TEST.....	8
<b>7</b>	<b>FACILITIES AND ACCREDITATIONS .....</b>	<b>9</b>
7.1.	FACILITIES .....	9
7.2.	ACCREDITATIONS.....	9
7.3.	MEASUREMENT UNCERTAINTY .....	9
<b>8</b>	<b>FCC PART 15.249 REQUIREMENTS .....</b>	<b>10</b>
8.1.	BAND EDGES MEASUREMENT .....	10
8.2.	POWER LINE CONDUCTED EMISSIONS MEASUREMENT .....	12
8.3.	SPURIOUS EMISSIONS MEASUREMENT .....	19



## 1 TEST CERTIFICATION

<b>Product</b>	TSmouse
<b>Model</b>	AM618-S-TX, AM618-M-TX
<b>Brand</b>	TSmouse
<b>Tested</b>	August 08~30, 2012
<b>Applicant</b>	<b>Touchsens Corp.</b> 2F-2, No. 14, Lane 609, Sec.5, Chung Hsin Road, San Chung Dist, New Taipei City, Taiwan 241
<b>Manufacturer</b>	<b>Touchsens Corp.</b> 2F-2, No. 14, Lane 609, Sec.5, Chung Hsin Road, San Chung Dist, New Taipei City, Taiwan 241

<b>APPLICABLE STANDARDS</b>	
<b>STANDARD</b>	<b>TEST RESULT</b>
FCC 47 CFR Part 15 Subpart C	No non-compliance noted
<b>DEVIATION FROM APPLICABLE STANDARD</b>	
None	

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.249.

The test results of this report relate only to the tested sample EUT identified in this report.

*Approved by:*

Tom Gan  
Supervisor of EMC Dept.  
Compliance Certification Service Inc.

*Reviewed by:*

Aven Zhou  
Supervisor of Report Dept.  
Compliance Certification Service Inc.



## 2 EUT DESCRIPTION

<b>Product</b>	TSmouse
<b>Model Number</b>	AM618-S-TX, AM618-M-TX
<b>Brand</b>	TSmouse
<b>Model Discrepancy</b>	Both circuit of AM618-S and AM618-M are same, However, AM618-S equipped a independent laser module would be the main difference, furthermore, Key Top material for Air mouse is also little different that AM618-S using a Flat plastic round plate, AM618-M using a Rubber material plate that looks like a mushroom hat.
<b>Serial Number</b>	C120829Z01-RP1
<b>Power Supply</b>	DC3V supplied by the battery
<b>Frequency Range</b>	2405-2475 MHz
<b>Transmit Power</b>	Peak: 89.45 dBuV/m (Max.) Average: 87.51 dBuV/m (Max.)
<b>Modulation Technique</b>	GFSK
<b>Number of Channels</b>	71 Channels
<b>Antenna Specification</b>	PCB Antenna with 1.5 dBi gain(MAX)
<b>Temperature Range</b>	0°C ~ +40°C

**Note:** 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: PR3-TSMOUSE filing to comply with Section 15.207, 15.209 and 15.249 of the FCC Part 15, Subpart C Rules.



### 3 TEST METHODOLOGY

#### 3.1. DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Not applicable since the EUT supplied by the battery.	<input type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in TX mode only.

Channel Low (2405MHz), Channel Mid (2440MHz) and Channel High (2475MHz) were chosen for the final testing.

The field strength of spurious radiation emission was measured in the following position: EUT stand-up position (Y mode) and lie-down position (X, Z mode) The following data show only the worst case setup.

The worst case (X axis) was reported.



## 4 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4:2009 and FCC CFR 15.209 and 15.249.

### 4.1. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

### 4.2. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	<sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



## **5 INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

## **6 SETUP OF EQUIPMENT UNDER TEST**

### **6.1. DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	N/A						

**Note:** Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### **6.2. CONFIGURATION OF SYSTEM UNDER TEST**

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



## 7 FACILITIES AND ACCREDITATIONS

### 7.1. FACILITIES

All measurement facilities used to collect the measurement data are located at  
**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town,  
Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4:2009,  
ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR  
Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 7.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body  
according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following  
approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web  
site, <http://www.ccsrf.com>

### 7.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for  
tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	+/- 3.18dB
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB
	200MHz ~1000MHz	+/- 3.62dB
	Above 1000MHz	+/- 5.04dB
	Band Edges	+/-0.182 dB

This uncertainty represents an expanded uncertainty expressed at approximately  
the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the  
measurement uncertainty; it is therefore not possible to state compliance based on the  
95% level of confidence. However, the result indicates that compliance (non-compliance)  
is more probable than non-compliance) with the specification limit.



## 8 FCC PART 15.249 REQUIREMENTS

### 8.1. BAND EDGES MEASUREMENT

#### LIMIT

1. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.
3. As shown in Section 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

### MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/17/2012	03/17/2013
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2012	03/18/2013
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2012	03/18/2013
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/17/2012	03/17/2013
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/17/2012	03/17/2013
Loop Antenna	A. R. A	PLA-1030/B	1029	03/23/2012	03/23/2013
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/19/2012	03/19/2013
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD		LZ-RF / CCS-SZ-3A2		

*Remark: Each piece of equipment is scheduled for calibration once a year.*

## Test Configuration


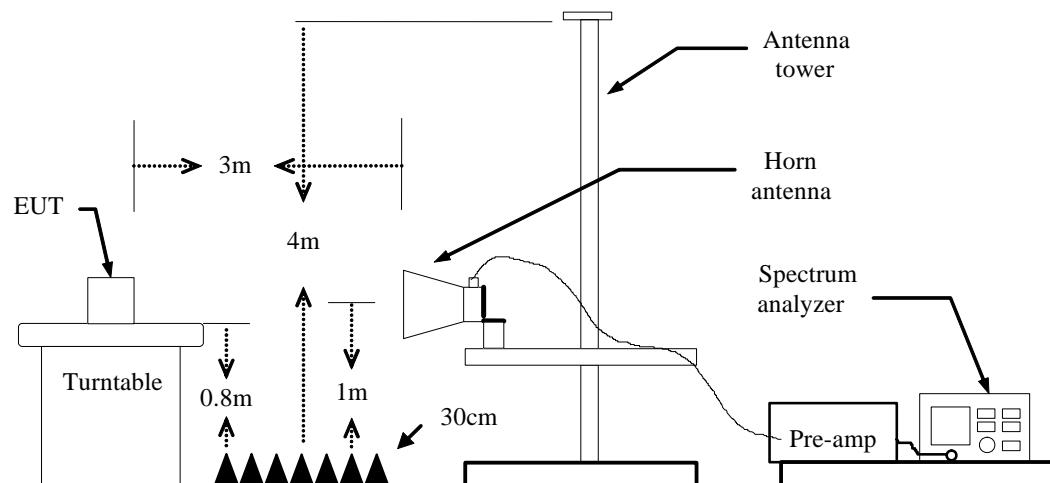


## TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

## TEST RESULTS


Refer to attach spectrum analyzer data chart.

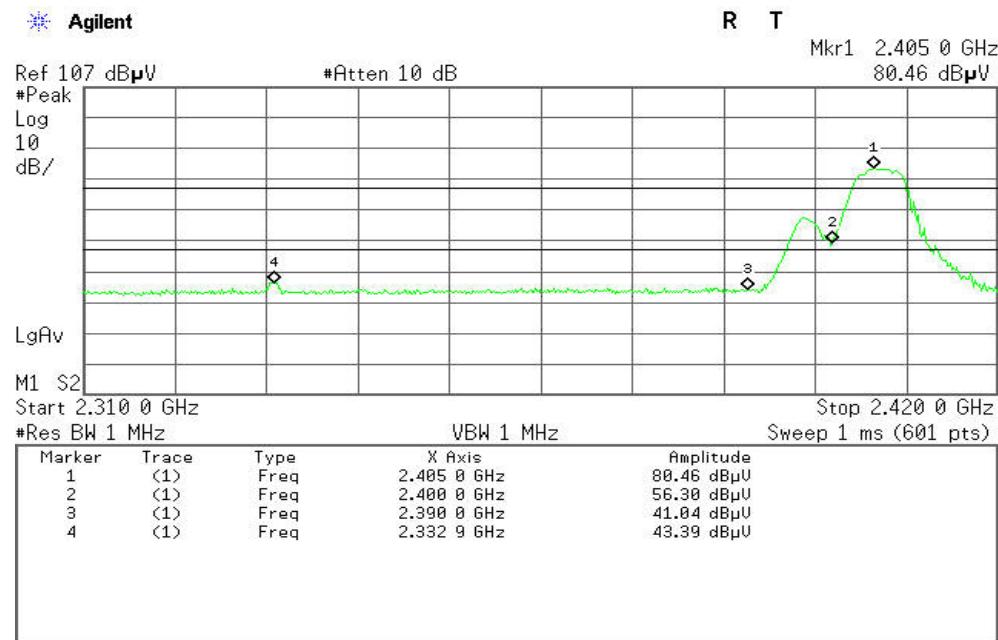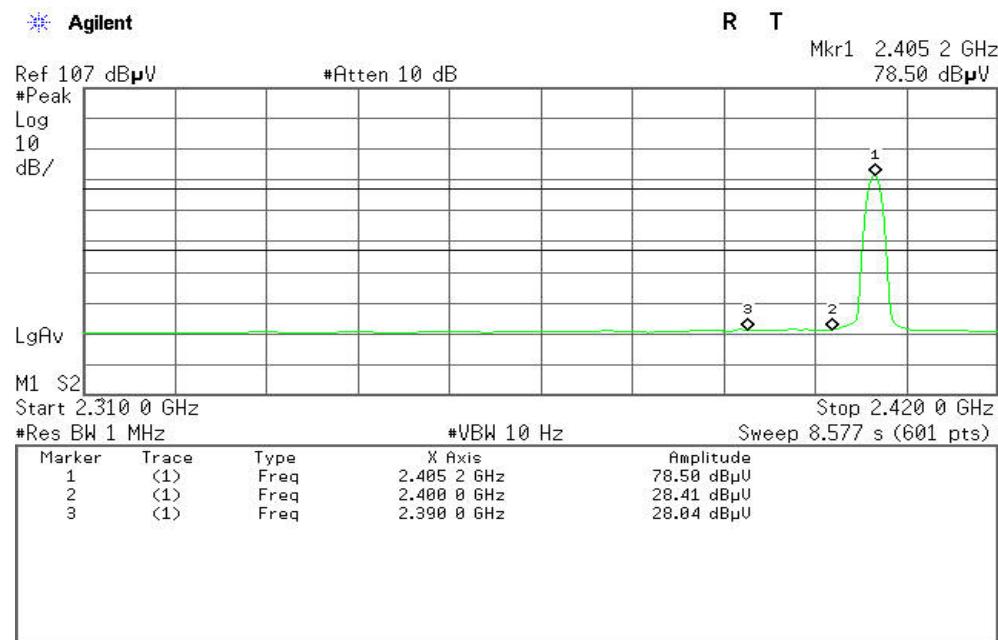**Test Data****Band Edges (CH-Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**




## Detector mode: Peak

## Polarity: Horizontal

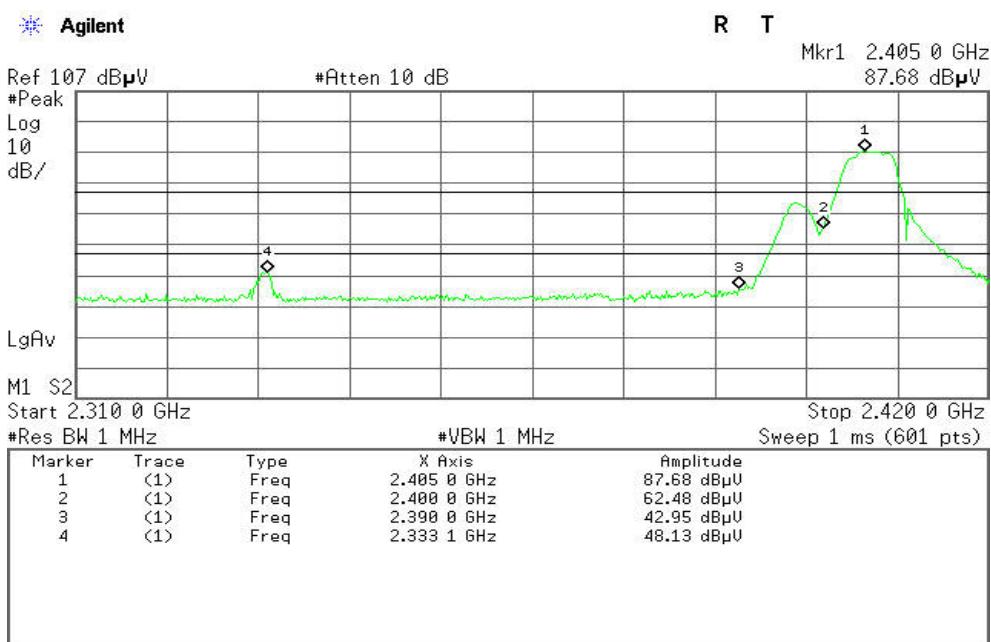

## Detector mode: Average

## Polarity: Horizontal

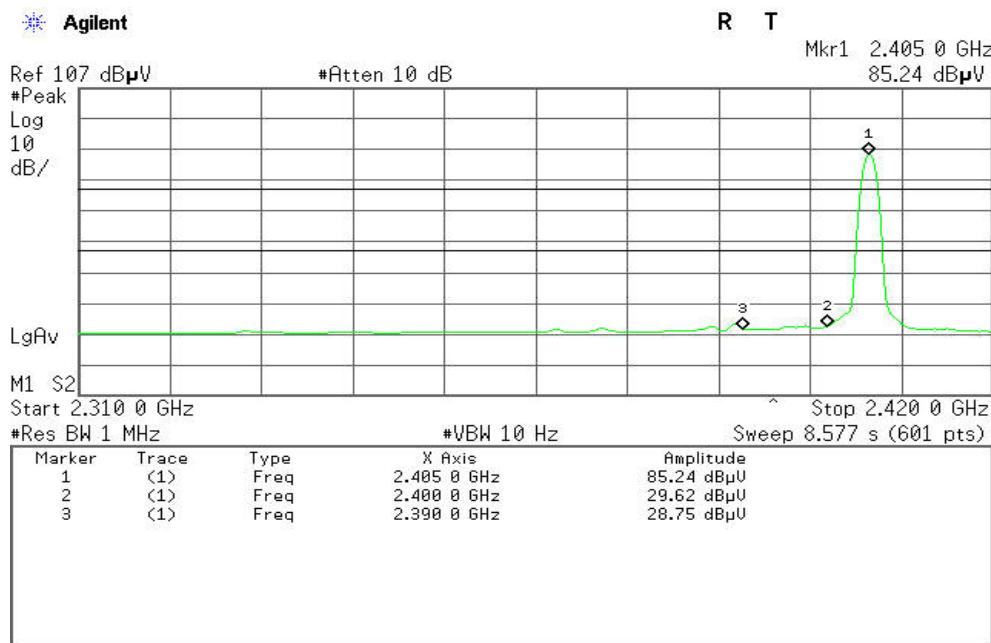




## Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

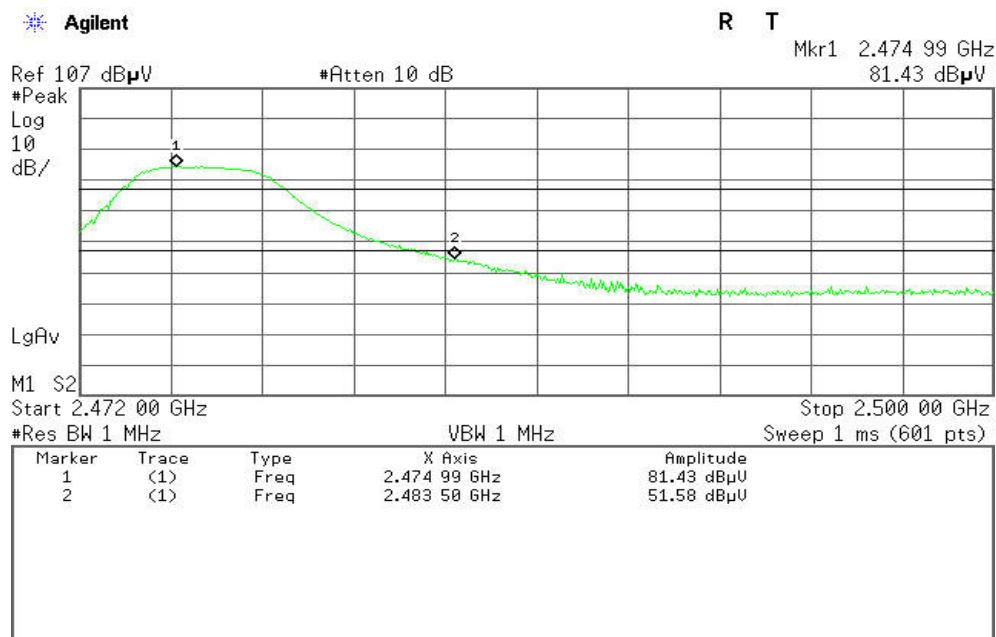

Detector mode: Average

Polarity: Vertical

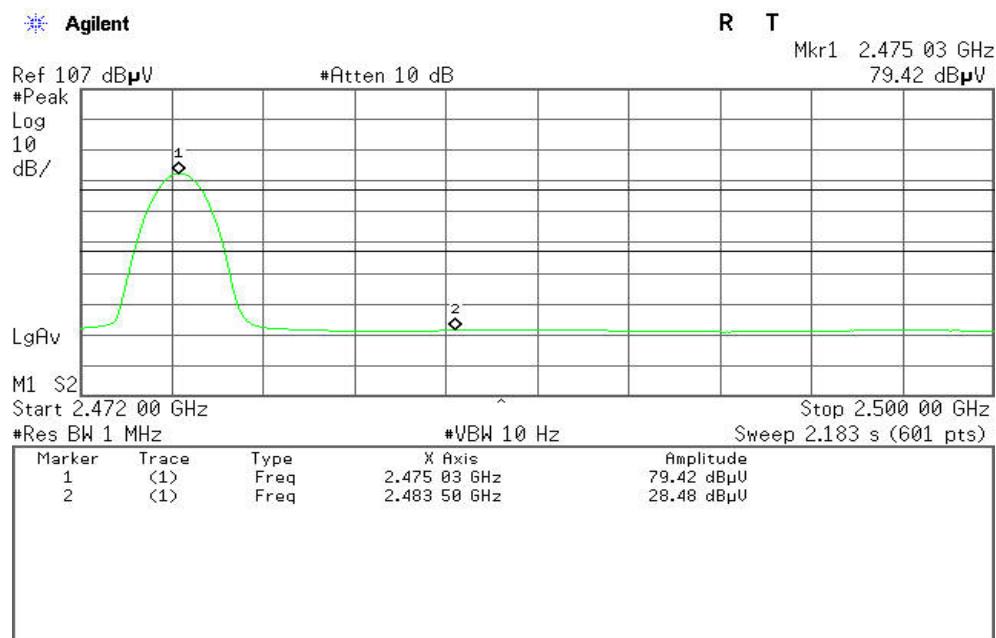



Detector mode: Peak

Polarity: Horizontal

Agilent

Ref 107 dB $\mu$ V

#Atten 10 dB

R T

Mkr1 2.475 03 GHz  
89.45 dB $\mu$ V

#Peak

Log  
10  
dB/



LgAv

M1 S2

Start 2.472 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

VBW 1 MHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.475 03 GHz	89.45 dB $\mu$ V
2	(1)	Freq	2.483 50 GHz	58.71 dB $\mu$ V

Detector mode: Average

Polarity: Horizontal

Agilent

Ref 107 dB $\mu$ V


#Atten 10 dB

R T

Mkr1 2.475 03 GHz  
87.51 dB $\mu$ V

#Peak

Log  
10  
dB/

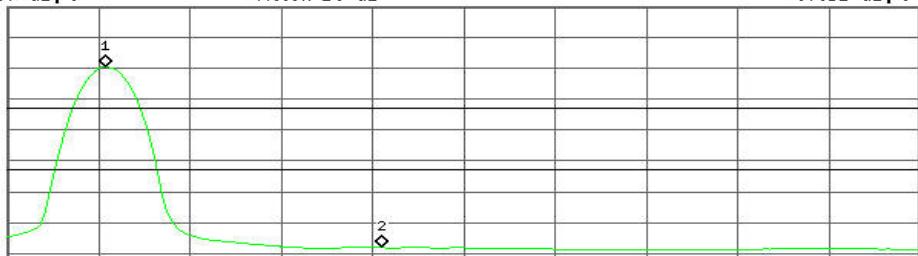

LgAv

M1 S2

Start 2.472 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

VBW 10 Hz

Sweep 2.183 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.475 03 GHz	87.51 dB $\mu$ V
2	(1)	Freq	2.483 50 GHz	28.86 dB $\mu$ V



## 8.2. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

### 8.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

**NOTE:**

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 8.2.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/17/2012	03/17/2013
LISN(EUT)	SCHAFFNER	NNB42	2001/001	03/19/2012	03/19/2013
LISN	EMCO	3825/2	8901-1459	03/19/2012	03/19/2013
Temp. / Humidity Meter	VICTOR	HTC-1	2	03/20/2012	03/20/2013
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			


**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R = No Calibration Request.



## 8.2.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

#### 8.2.4. TEST SETUP

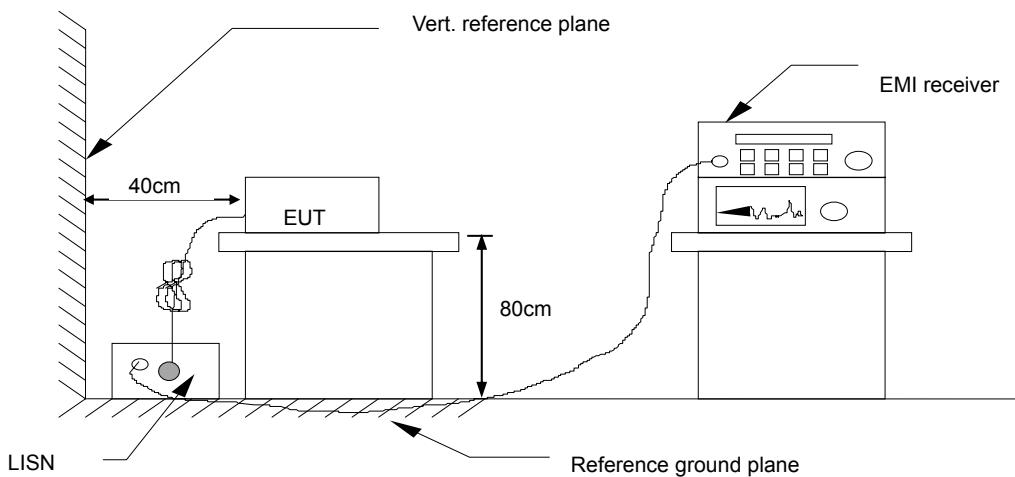

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 8.2.5. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss  
Result = Quasi-peak Reading/ Average Reading + Factor  
Limit = Limit stated in standard  
Margin = Result (dBuV) – Limit (dBuV)

#### 8.2.6. TEST RESULTS

Not applicable, since the EUT supplied by the battery.



## 8.3. SPURIOUS EMISSIONS MEASUREMENT

### 8.3.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (μV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54



### 8.3.2. TEST INSTRUMENTS

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/17/2012	03/17/2013
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2012	03/18/2013
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2012	03/18/2013
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/17/2012	03/17/2013
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/17/2012	03/17/2013
Loop Antenna	A, R, A	PLA-1030/B	1029	03/23/2012	03/23/2013
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/19/2012	03/19/2013
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The FCC Site Registration number is 101879.  
3. N.C.R = No Calibration Required.

### 8.3.3 TEST PROCEDURE (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


7. Repeat above procedures until the measurements for all frequencies are complete.


### 8.3.2.1. TEST SETUP

#### Below 30MHz

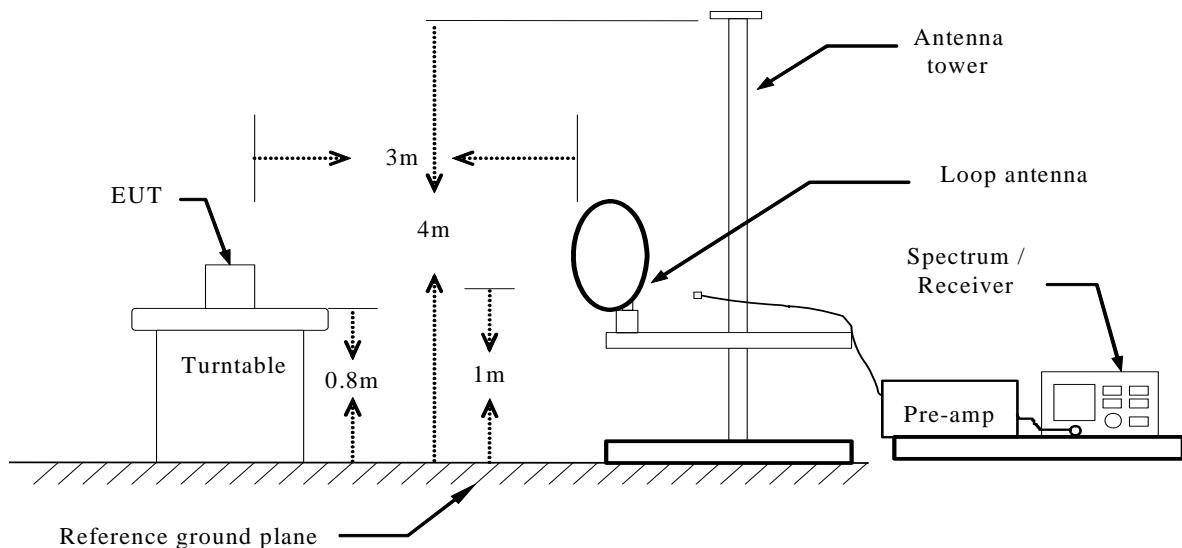

#### **Below 1 GHz**

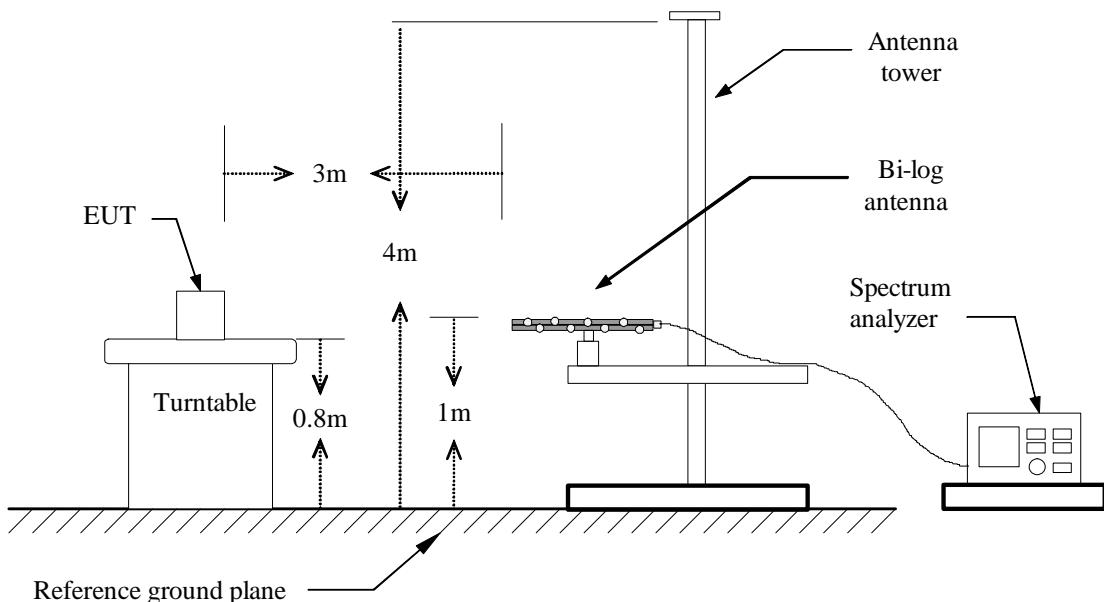

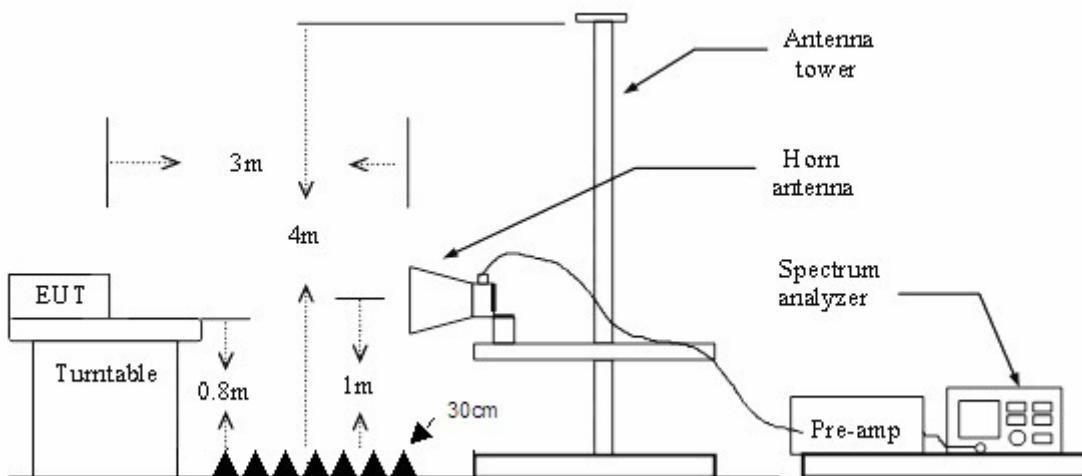**Above 1 GHz**


For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 8.3.2.2. DATA SAMPLE

**Below 1GHz**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	37.47	-16.41	21.06	40.00	-18.94	V	QP

**Above 1GHz**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	55.54	4.56	60.10	74.00	-13.90	V	Peak
XXXX.XXXX	29.66	4.56	34.22	54.00	-19.78	V	AVG

Frequency (MHz)

= Emission frequency in MHz

Reading (dBuV)

= Uncorrected Analyzer / Receiver reading

Correction Factor (dB/m)

= Antenna factor + Cable loss – Amplifier gain

Result (dBuV/m)

= Reading (dBuV) + Corr. Factor (dB/m)

Limit (dBuV/m)

= Limit stated in standard

Margin (dB)

= Result (dBuV/m) – Limit (dBuV/m)

Q.P.

= Quasi-peak Reading

Peak

= Peak Reading

AVG

= Average Reading



### 8.3.2.3. TEST RESULTS

#### Below 1 GHz

**Operation Mode:** TX      **Test Date:** August 13, 2012  
**Temperature:** 24°C      **Tested by:** Leevin Li  
**Humidity:** 52% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
246.6333	35.96	-17.43	18.53	46.00	-27.47	V	QP
424.4667	32.10	-15.00	17.10	46.00	-28.90	V	QP
474.5833	33.53	-14.59	18.94	46.00	-27.06	V	QP
639.4833	32.44	-12.81	19.63	46.00	-26.37	V	QP
746.1833	33.34	-11.16	22.18	46.00	-23.82	V	QP
933.7167	32.05	-8.47	23.58	46.00	-22.42	V	QP
<hr/>							
256.3333	32.89	-17.84	15.05	46.00	-30.95	H	QP
392.1333	33.08	-16.36	16.72	46.00	-29.28	H	QP
450.3333	32.42	-15.35	17.07	46.00	-28.93	H	QP
639.4832	32.69	-12.81	19.88	46.00	-26.12	H	QP
728.4000	32.32	-10.69	21.63	46.00	-24.37	H	QP
856.1167	33.00	-9.46	23.54	46.00	-22.46	H	QP

**Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

#### Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Quasi-peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Above 1 GHz****Operation Mode:** TX / CH Low**Test Date:** August 22, 2012**Temperature:** 24°C**Tested by:** Leevin Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.**Fundamental**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2405.0000	90.18	-9.72	80.46	114.00	-33.54	V	Peak
2405.0000	88.22	-9.72	78.50	94.00	-15.50	V	AVG
2405.0000	97.40	-9.72	87.68	114.00	-26.32	H	Peak
2405.0000	94.96	-9.72	85.24	94.00	-8.76	H	AVG

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3040.0000	47.47	-4.21	43.26	74.00	-30.74	V	Peak
3610.0000	45.94	-2.98	42.96	74.00	-31.04	V	Peak
4810.0000	49.36	0.46	49.82	74.00	-24.18	V	Peak
5620.0000	45.83	2.02	47.85	74.00	-26.15	V	Peak
6655.0000	45.90	5.01	50.91	74.00	-23.09	V	Peak
7210.0000	50.41	7.38	57.79	74.00	-16.21	V	Peak
7210.0000	44.04	7.38	51.42	54.00	-2.58	V	AVG
3460.0000	45.75	-3.70	42.05	74.00	-31.95	H	Peak
3835.0000	45.67	-2.50	43.17	74.00	-30.83	H	Peak
4810.0000	47.26	0.46	47.72	74.00	-26.28	H	Peak
5200.0000	44.90	1.55	46.45	74.00	-27.55	H	Peak
6220.0000	43.97	3.74	47.71	74.00	-26.29	H	Peak
7210.0000	50.10	7.38	57.48	74.00	-16.52	H	Peak
7210.0000	43.08	7.38	50.46	54.00	-3.54	H	AVG

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / CH Mid**Test Date:** August 22, 2012**Temperature:** 24°C**Tested by:** Leevin Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.**Fundamental**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2440.0000	90.88	-9.77	81.11	114.00	-32.89	V	Peak
2440.0000	88.73	-9.77	78.96	94.00	-15.04	V	AVG
2440.0000	98.34	-9.77	88.57	114.00	-25.43	H	Peak
2440.0000	96.15	-9.77	86.38	94.00	-7.62	H	AVG

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3220.0000	46.46	-4.08	42.38	74.00	-31.62	V	Peak
4225.0000	45.35	-1.48	43.87	74.00	-30.13	V	Peak
4885.0000	49.18	0.80	49.98	74.00	-24.02	V	Peak
5545.0000	44.95	1.82	46.77	74.00	-27.23	V	Peak
6265.0000	44.22	3.88	48.10	74.00	-25.90	V	Peak
7315.0000	49.64	7.49	57.13	74.00	-16.87	V	Peak
7315.0000	44.09	7.49	51.58	54.00	-2.42	V	AVG
2965.0000	46.98	-4.38	42.60	74.00	-31.40	H	Peak
3865.0000	45.68	-2.50	43.18	74.00	-30.82	H	Peak
4885.0000	47.49	0.80	48.29	74.00	-25.71	H	Peak
5590.0000	45.08	1.91	46.99	74.00	-27.01	H	Peak
6220.0000	45.31	3.74	49.05	74.00	-24.95	H	Peak
7315.0000	44.08	7.49	51.57	74.00	-22.43	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / CH High**Test Date:** August 22, 2012**Temperature:** 24°C**Tested by:** Leevin Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.**Fundamental**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2475.0000	91.21	-9.78	81.43	114.00	-32.57	V	Peak
2475.0000	89.20	-9.78	79.42	94.00	-14.58	V	AVG
2475.0000	99.23	-9.78	89.45	114.00	-24.55	H	Peak
2475.0000	97.29	-9.78	87.51	94.00	-6.49	H	AVG

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3340.0000	46.64	-4.03	42.61	74.00	-31.39	V	Peak
4285.0000	46.13	-1.26	44.87	74.00	-29.13	V	Peak
4945.0000	46.95	1.07	48.02	74.00	-25.98	V	Peak
5635.0000	44.63	2.08	46.71	74.00	-27.29	V	Peak
6265.0000	44.62	3.88	48.50	74.00	-25.50	V	Peak
7420.0000	50.02	7.60	57.62	74.00	-16.38	V	Peak
7420.0000	43.71	7.60	51.31	54.00	-2.69	V	AVG
3160.0000	46.88	-4.12	42.76	74.00	-31.24	H	Peak
3460.0000	46.69	-3.70	42.99	74.00	-31.01	H	Peak
4255.0000	45.47	-1.37	44.10	74.00	-29.90	H	Peak
4945.0000	46.03	1.07	47.10	74.00	-26.90	H	Peak
5845.0000	44.74	2.85	47.59	74.00	-26.41	H	Peak
7420.0000	47.66	7.60	55.26	74.00	-18.74	H	Peak
7420.0000	41.16	7.60	48.76	54.00	-5.24	H	AVG

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).