

**FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10:2013**  
**TEST REPORT****For****Bluetooth Amplifier****Model: BSS-005****Data Applies To: SO-7500; SO-7500XXXXXXX (X=0~9, a~z, A~Z)****Trade Name: SOLIS****Issued for****Acrox Technologies Co., Ltd.****4F., No.89, Minshan St., Neihu Dist., Taipei City 114, Taiwan, R.O.C.****Issued by****Compliance Certification Services Inc.****Hsinchu Lab.****NO. 989-1 Wen Shan Rd., Shang Shan Village,  
Qionglin Township, Hsinchu County 30741, Taiwan (R.O.C.)****TEL: +886-3-5921698****FAX: +886-3-5921108****<http://www.ccsrf.com>****E-Mail: [service@ccsrf.com](mailto:service@ccsrf.com)****Issued Date: June 14, 2017**

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.

## Revision History

<b>Rev.</b>	<b>Issue Date</b>	<b>Revisions</b>	<b>Effect Page</b>	<b>Revised By</b>
00	06/12/2017	Initial Issue	All Page 83	Gloria Chang
01	06/14/2017	Revised FCC ID	All Page 83	Gloria Chang

## TABLE OF CONTENTS

TITLE	PAGE NO.
<b>1. TEST REPORT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION.....</b>	<b>5</b>
<b>3. DESCRIPTION OF TEST MODES.....</b>	<b>6</b>
<b>4. TEST METHODOLOGY.....</b>	<b>8</b>
<b>5. FACILITIES AND ACCREDITATION.....</b>	<b>8</b>
5.1 FACILITIES.....	8
5.2 ACCREDITATIONS .....	8
5.3 MEASUREMENT UNCERTAINTY.....	9
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>10</b>
<b>7. FCC PART 15.247 REQUIREMENTS.....</b>	<b>12</b>
7.1 DUTY CYCLE CORRECTION FACTOR.....	12
7.2 20dB BANDWIDTH FOR HOPPING.....	15
7.3 MAXIMUM PEAK OUTPUT POWER.....	21
7.4 AVERAGE POWER .....	23
7.5 HOPPING CHANNEL SEPARATION .....	25
7.6 NUMBER OF HOPPING FREQUENCY USED.....	32
7.7 DWELL TIME ON EACH CHANNEL.....	36
7.8 CONDUCTED SPURIOUS EMISSION .....	51
7.9 RADIATED EMISSION .....	59
7.10 CONDUCTED EMISSION.....	75
<b>8. APPENDIX SETUP PHOTOS .....</b>	<b>80</b>

## 1. TEST REPORT CERTIFICATION

**Applicant** : Acrox Technologies Co., Ltd.  
**Address** : 4F., No.89, Minshan St., Neihu Dist., Taipei City 114, Taiwan, R.O.C.  
**Equipment Under Test** : Bluetooth Amplifier  
**Model** : BSS-005  
**Data Applies To** : SO-7500; SO-7500XXXXXXXX (X=0~9, a~z, A~Z)  
**Trade Name** : SOLIS  
**Tested Date** : March 13 ~ April 14, 2017

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.10:2013	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

*Approved by:*



Sb. Lu  
Sr. Engineer

*Reviewed by:*



Gundam Lin  
Sr. Engineer

## 2. EUT DESCRIPTION

<b>Product Name</b>	Bluetooth Amplifier
<b>Model Number</b>	BSS-005
<b>Data Applies To</b>	SO-7500; SO-7500XXXXXXXX (x=0~9, a~z, A~Z)
<b>Identify Number</b>	T170313D09
<b>Received Date</b>	March 13, 2017
<b>Frequency Range</b>	2402MHz to 2480MHz $f = 2402 + n\text{MHz}$ , $n = 0, \dots, 78$
<b>Transmit Power</b>	7.06 dBm (0.0051W)
<b>Channel Spacing</b>	1MHz
<b>Channel Number</b>	79 Channels
<b>Transmit Data Rate</b>	GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps), 8-DPSK (3Mbps)
<b>Type of Modulation</b>	Frequency Hopping Spread Spectrum
<b>Antenna Type</b>	PCB Antenna $\times 1$ , Antenna Gain: -5.69 dBi
<b>Power Rating</b>	110Vac, 50/60Hz, 1.6A 230Vac, 50/60Hz, 1.6A
<b>Test Voltage</b>	120Vac, 60Hz
<b>AC Power Cord Type</b>	Non-shielded cable, 1.7 m $\times 1$ (Detachable)
<b>I/O Port</b>	LINE 1(L/R) Port $\times 2$ , LINE 2(L/R) Port $\times 2$ , Speaker(R) Output Port $\times 2$ , Speaker(L) Output Port $\times 2$ , Power Port $\times 1$
<b>Signal Cable</b>	Shielded AV cable, 1.7m $\times 2$ (Detachable) Non-shielded audio cable, 1.75m $\times 2$ (Detachable)
<b>Support Equipment</b>	Speaker $\times 2$

### The difference of the series model

Model Number	Difference
BSS-005	
SO-7500	1. X=0~9, a~z, A~Z
SO-7500XXXXXXXX	2. The different models as for the marketing purpose.

### Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. This submittal(s) (test report) is intended for FCC ID: PRDBSS05 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
4. The model BSS-005 was considered the main model for testing.

### 3. DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2402
Middle	2441
High	2480

#### Conducted Emission / Radiated Emission Test (Below 1 GHz)

1. The following test modes were scanned during the preliminary test:

No.	Pre-Test Mode
1	TX Mode
2	Normal Mode

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode		
Emission	Radiated Emission	Mode 1
	Conducted Emission	Mode 2

*Remark:* Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

#### Radiated Emission Test (Above 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH5
Low, Mid, High	FHSS	8-DPSK	3-DH5

**Bandedge Measurement:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, High	FHSS	GFSK	DH5
Low, High	FHSS	8-DPSK	3-DH5

**Antenna Port Conducted Measurement:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH5
Low, Mid, High	FHSS	8-DPSK	3-DH5

## 4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10:2013 and FCC CFR 47, 15.207, 15.209 and 15.247.

## 5. FACILITIES AND ACCREDITATION

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at NO. 989-1 Wen Shan Rd., Shang Shan Village, Qionglin Township, Hsinchu County 30741, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.10:2013 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4 and CISPR 16-1-5.

### 5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

**Taiwan**      TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>Canada</b>	INDUSTRY CANADA
<b>Japan</b>	VCCI
<b>Taiwan</b>	BSMI
<b>USA</b>	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

*Remark:* FCC Designation Number TW1027.

### 5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 30 to 1000 MHz	+/- 3.97
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 1 to 18GHz	+/- 3.58
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 26 to 40 GHz	+/- 3.81
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 2.48

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than  $U_{CISPR}$  which is 3.6dB and 5.2dB respectively. CCS values (called  $U_{Lab}$  in CISPR 16-4-2) is less than  $U_{CISPR}$  as shown in the table above. Therefore, MU need not be considered for compliance.

## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.
1	Notebook PC	TOSHIBA	PORTEGE R30-A	7F097011H
2	DC Power Supply	Agilent	E3631A	MY40007576
3	DVD Player	BLUESKY	DVD-929U	0729U01365
4	DVD Player	BLUESKY	DVD-929U	0729U00362
5	Galaxy S5	Samsung	SM-G900I	R58F818DMSB

No.	Signal Cable Description
1	Non-shielded DC cable, 1m x 1
2	Shielded USB cable, 2m x 1, with two ferrite core
3	Shielded print cable, 2m x 1, with two ferrite core

### SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

### EUT OPERATING CONDITION

#### **RF Mode:**

1. EUT & peripherals setup diagram is shown in appendix setup photos.

2. TX Mode:

⇒ **Power control:** TX mode (GFSK)

Frequency: 2402, 2441, 2480

Power set: 63, 63, 63

Data Rate: 15/339 (DH5)

TX mode (8-DPSK)

Frequency: 2402, 2441, 2480

Power set: 105, 105, 105

Data Rate: 31/1021 (3-DH5)

3. All of the functions are under run.

4. Start test.

**Normal Mode:**

1. EUT & peripherals setup diagram is shown in appendix setup photos.
2. Power of all equipment.
3. Connect the speaker.
4. AV terminal link DVD player.
5. Bluetooth link to mobile phone.
6. Play music.
7. All of the functions are under run.
8. Start test.

## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 DUTY CYCLE CORRECTION FACTOR

#### LIMITS


Limit: N/A

#### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY52220817	03/07/2018
Test S/W	N/A			

*Remark:* Each piece of equipment is scheduled for calibration once a year.

#### TEST SETUP

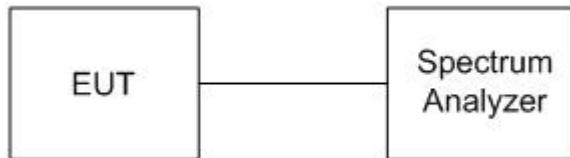

#### TEST PROCEDURE

1. Set center frequency of spectrum analyzer = operating frequency.
2. Set the spectrum analyzer as RBW, VBW=100kHz & 1MHz, Span = 0Hz.
3. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Waternal Guan
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/10
<b>Test Mode</b>	TX Mode	<b>Temp. &amp; Humidity</b>	25°C, 50%


Tp = 100 (ms)

Ton = 2.89 (ms)

Duty Cycle Correction Factor =  $20 \times \log (Ton / Tp)$

$$= 20 \times \log (2.89 / 100) = -30.78$$

Because -30.78 less than -20, so the Duty Cycle Correction Factor = -20

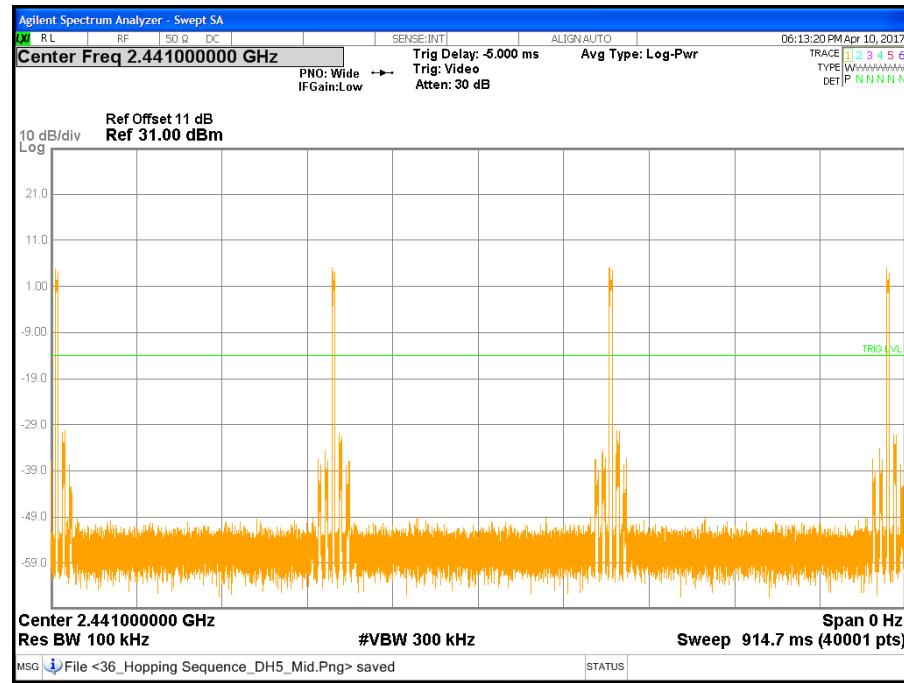

## 7.2 20dB BANDWIDTH FOR HOPPING

### LIMITS

Limit: N/A

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY52220817	03/07/2018
Test S/W	N/A			

*Remark:* Each piece of equipment is scheduled for calibration once a year.

### TEST SETUP



### TEST PROCEDURE

1. The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.
2. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.
3. RBW  $\geq$  1% of the 20 dB bandwidth.
4. VBW  $\geq$  RBW.
5. Sweep = auto.

**TEST RESULTS**

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Waternal Guan
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/10
<b>Test Mode</b>	TX Mode	<b>Temp. &amp; Humidity</b>	25°C, 53%

Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)

<b>Channel</b>	<b>Channel Frequency (MHz)</b>	<b>20dB Bandwidth (MHz)</b>	<b>Result</b>
Low	2402	0.9404	N/A
Middle	2441	0.9387	N/A
High	2480	0.9383	N/A

Modulation Type: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

<b>Channel</b>	<b>Channel Frequency (MHz)</b>	<b>20dB Bandwidth (MHz)</b>	<b>Result</b>
Low	2402	1.2727	N/A
Middle	2441	1.2645	N/A
High	2480	1.2642	N/A

**20dB BANDWIDTH****CH Low / GFSK****CH Middle / GFSK**

## CH High / GFSK



## CH Low / 8-DPSK



## CH Middle / 8-DPSK





## 7.3 MAXIMUM PEAK OUTPUT POWER

### LIMITS


§15.247(b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2495A	1149001	12/05/2017
Power Sensor	Anritsu	MA2411B	1126148	12/05/2017
Test S/W	N/A			

*Remark:* Each piece of equipment is scheduled for calibration once a year.

### TEST SETUP

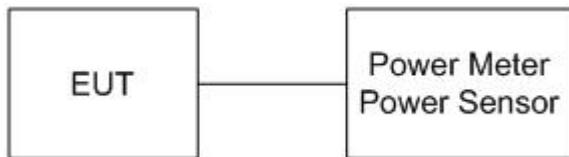

### TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to the peak power detection.

**TEST RESULTS**

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Waternal Guan
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/10
<b>Test Mode</b>	TX Mode	<b>Temp. &amp; Humidity</b>	25°C, 53%

Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)

Channel	Channel Frequency (MHz)	Maximum Peak Output Power				Result	
		Measured Value		Limit			
		(dBm)	(W)	(dBm)	(W)		
Low	2402	6.96	0.0050	20.97	0.1250	PASS	
Middle	2441	7.06	0.0051	20.97	0.1250	PASS	
High	2480	6.69	0.0047	20.97	0.1250	PASS	

**Remark:** The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Modulation Type: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

Channel	Channel Frequency (MHz)	Maximum Peak Output Power				Result	
		Measured Value		Limit			
		(dBm)	(W)	(dBm)	(W)		
Low	2402	5.05	0.0032	20.97	0.1250	PASS	
Middle	2441	5.71	0.0037	20.97	0.1250	PASS	
High	2480	5.45	0.0035	20.97	0.1250	PASS	

**Remark:** The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

## 7.4 AVERAGE POWER

### LIMITS


None: For reporting purposes only.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2495A	1149001	12/05/2017
Power Sensor	Anritsu	MA2411B	1126148	12/05/2017
Test S/W	N/A			

*Remark:* Each piece of equipment is scheduled for calibration once a year.

### TEST SETUP

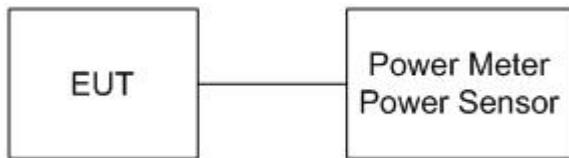

### TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to the average power detection.

**TEST RESULTS**

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Waternal Guan
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/10
<b>Test Mode</b>	TX Mode	<b>Temp. &amp; Humidity</b>	25°C, 53%

Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)

<b>Channel</b>	<b>Channel Frequency (MHz)</b>	<b>Average Power (dBm)</b>
Low	2402	6.76
Middle	2441	6.87
High	2480	6.53

**Remark:** The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Modulation Type: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

<b>Channel</b>	<b>Channel Frequency (MHz)</b>	<b>Average Power (dBm)</b>
Low	2402	4.75
Middle	2441	5.44
High	2480	5.21

**Remark:** The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

## 7.5 HOPPING CHANNEL SEPARATION

### LIMITS


§15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY52220817	03/07/2018
Test S/W		N/A		

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### TEST SETUP

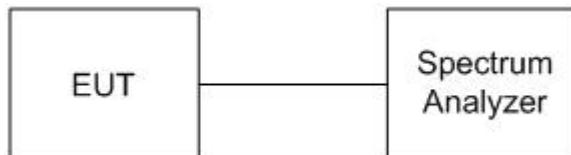

**TEST PROCEDURE**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.
5. Span = wide enough to capture the peaks of two adjacent channels.
6. Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span.
7. Video (or Average) Bandwidth (VBW)  $\geq$  RBW.
8. Sweep = auto.
9. Repeat above procedures until all frequencies measured were complete.

## TEST RESULTS

Refer to section 7.2, 20dB bandwidth measurement, the measured channel separation should be greater than two-third of 20dB bandwidth or Minimum bandwidth.



<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Waternal Guan
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/10
<b>Test Mode</b>	TX Mode	<b>Temp. &amp; Humidity</b>	25°C, 53%

Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)


Channel	Channel Frequency (MHz)	Adjacent Hopping Channel Separation (kHz)	Two –third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
Low	2402	1000	626.95	25	PASS
Middle	2441	1000	625.80	25	PASS
High	2480	1000	625.55	25	PASS

Modulation Type: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)


Channel	Channel Frequency (MHz)	Adjacent Hopping Channel Separation (kHz)	Two –third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
Low	2402	1000	848.45	25	PASS
Middle	2441	1000	843.00	25	PASS
High	2480	1000	842.80	25	PASS

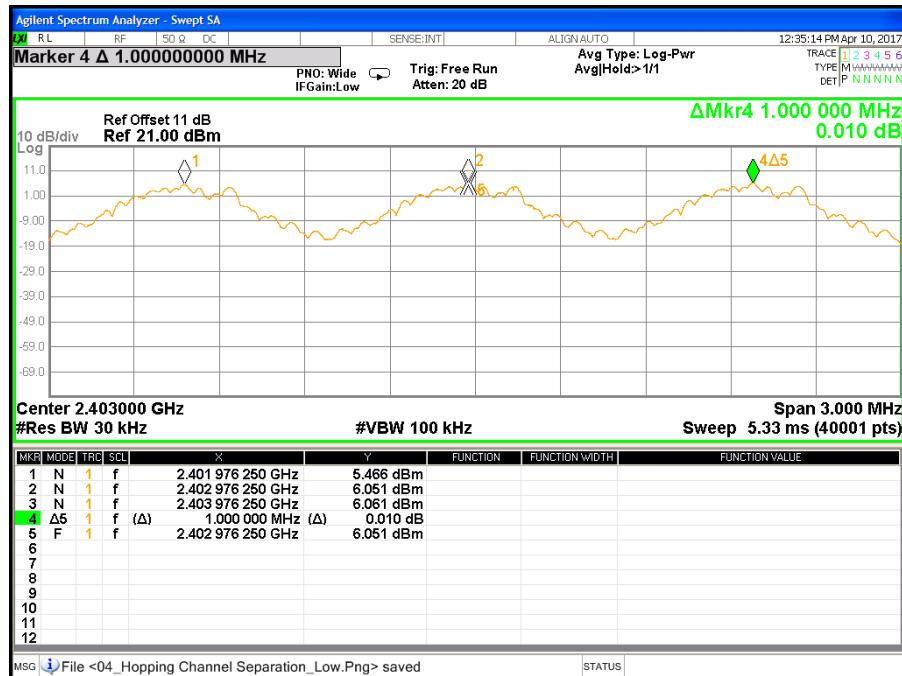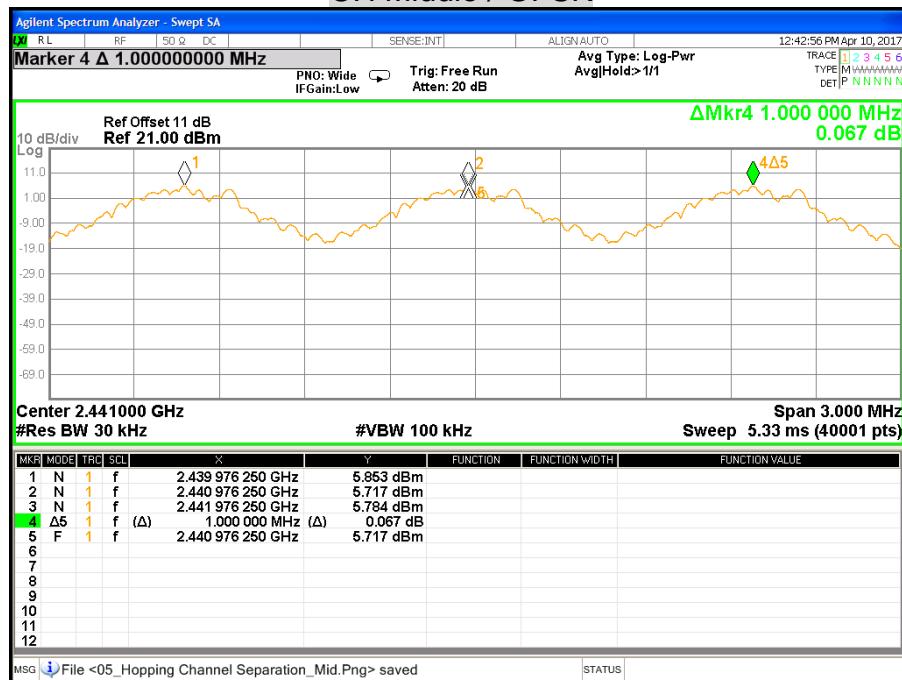**HOPPING CHANNEL SEPARATION****CH Low / GFSK****CH Middle / GFSK**


## CH High / GFSK

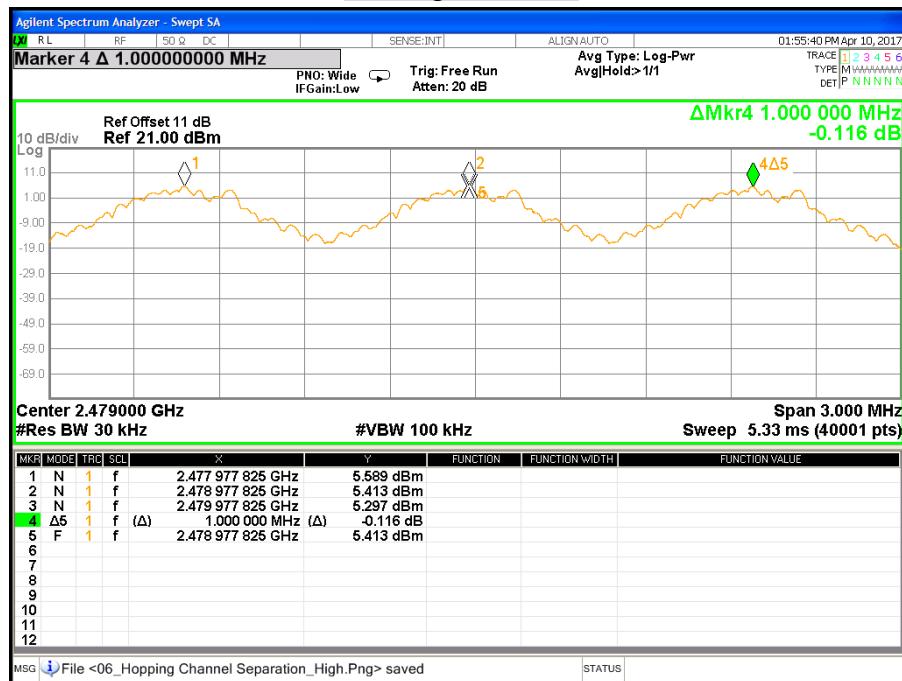


## CH Low / 8-DPSK

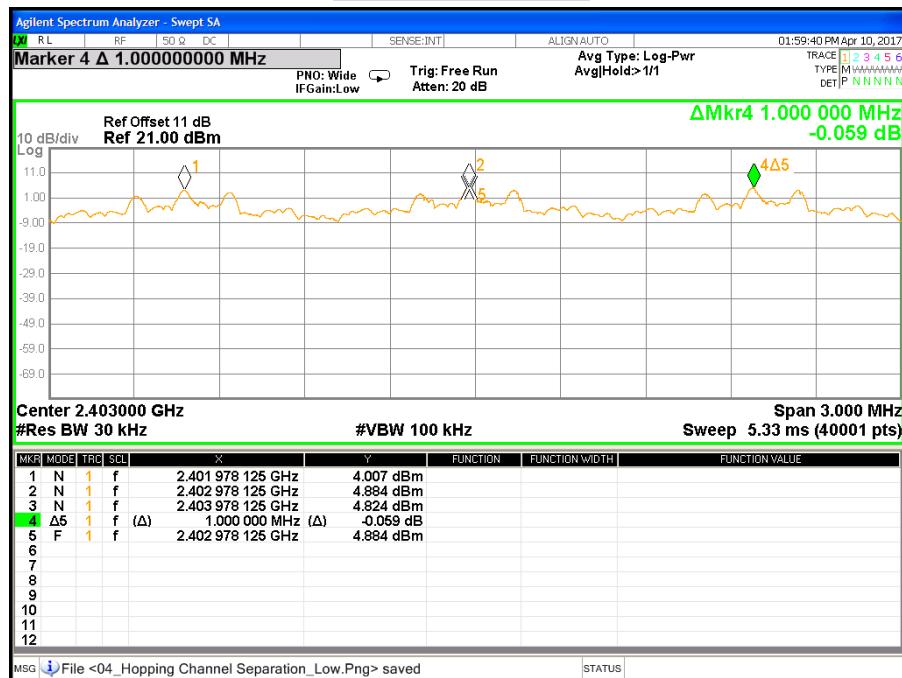

## CH Middle / 8-DPSK

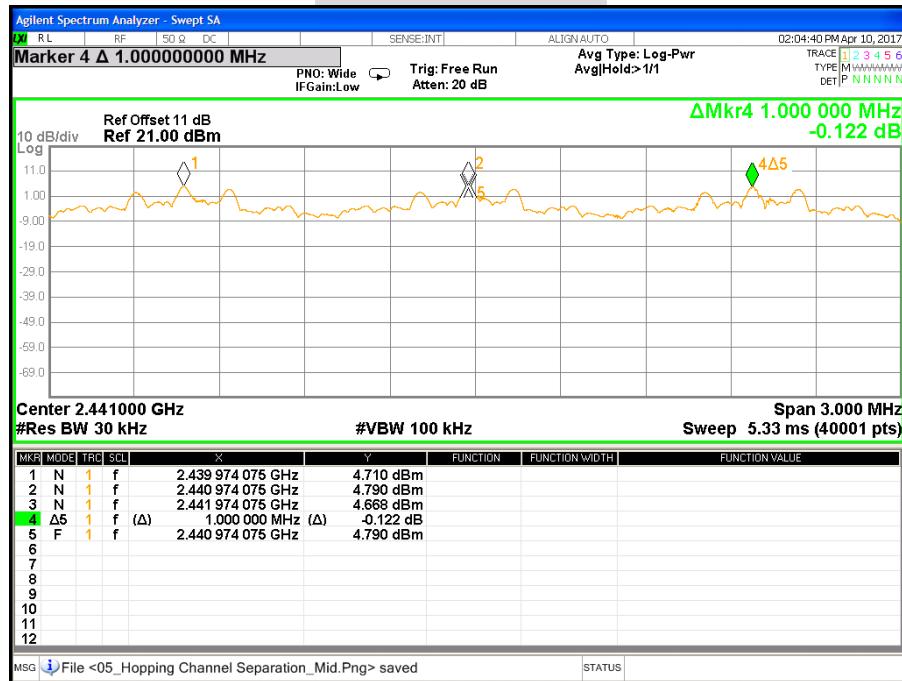

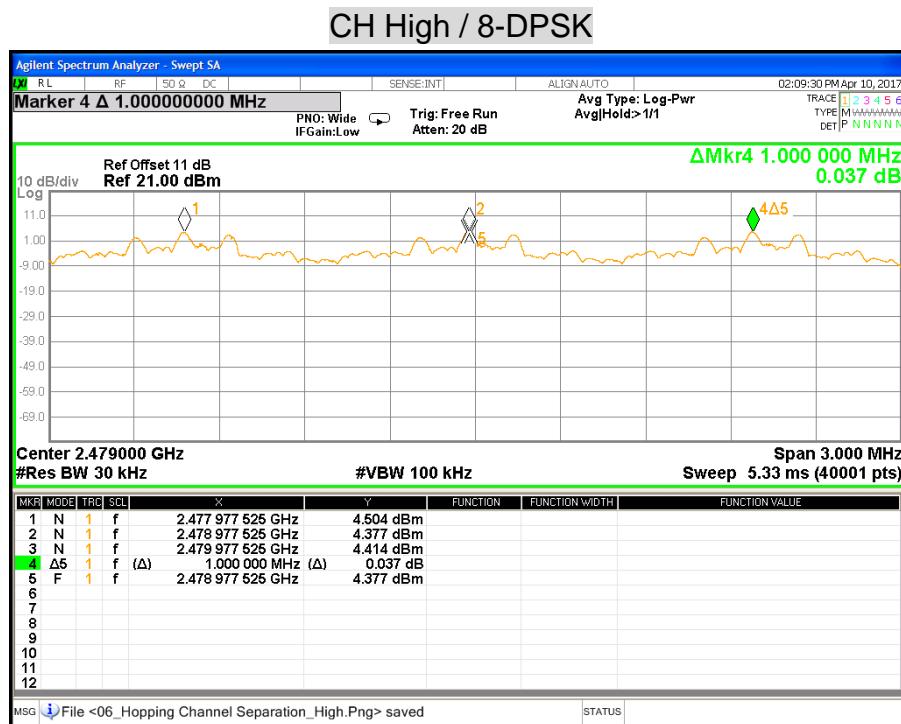

## 7.6 NUMBER OF HOPPING FREQUENCY USED

### LIMITS

§15.247(a)(1)(iii) For frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY52220817	03/07/2018
Test S/W		N/A		

*Remark:* Each piece of equipment is scheduled for calibration once a year.

### TEST SETUP



### TEST PROCEDURE



1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the spectrum analyzer on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the spectrum analyzer on View mode and then plot the result on spectrum analyzer screen.
5. Span = the frequency band of operation.
6. RBW  $\geq$  1% of the span.
7. VBW  $\geq$  RBW.
8. Sweep = auto.
9. Repeat above procedures until all frequencies measured were complete.

**TEST RESULTS**

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Waternal Guan
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/10
<b>Test Mode</b>	TX Mode	<b>Temp. &amp; Humidity</b>	25°C, 53%

Refer to the attached plot.

There are 79 hopping frequencies in a hopping sequence.

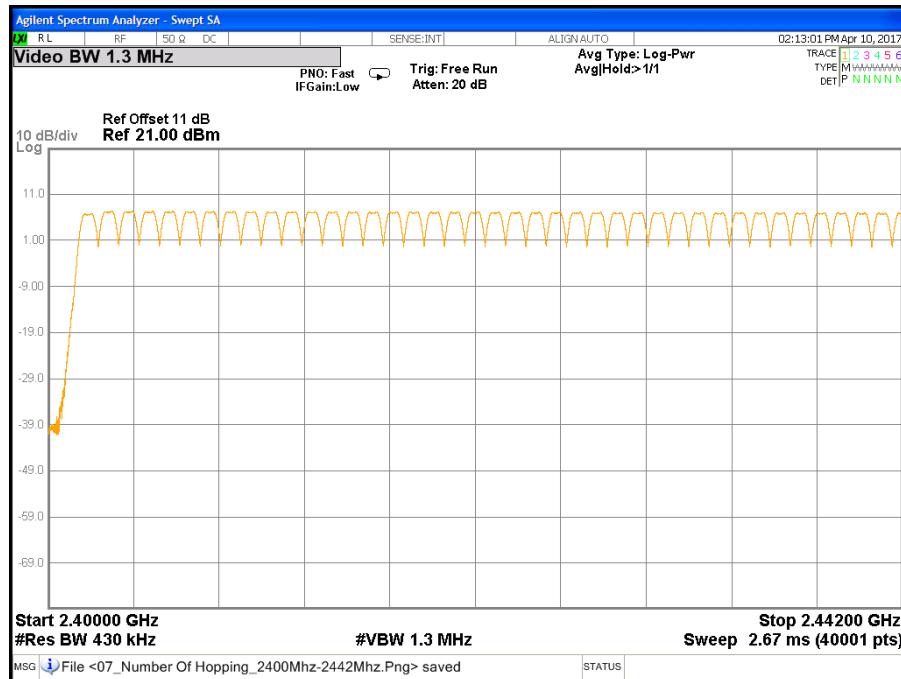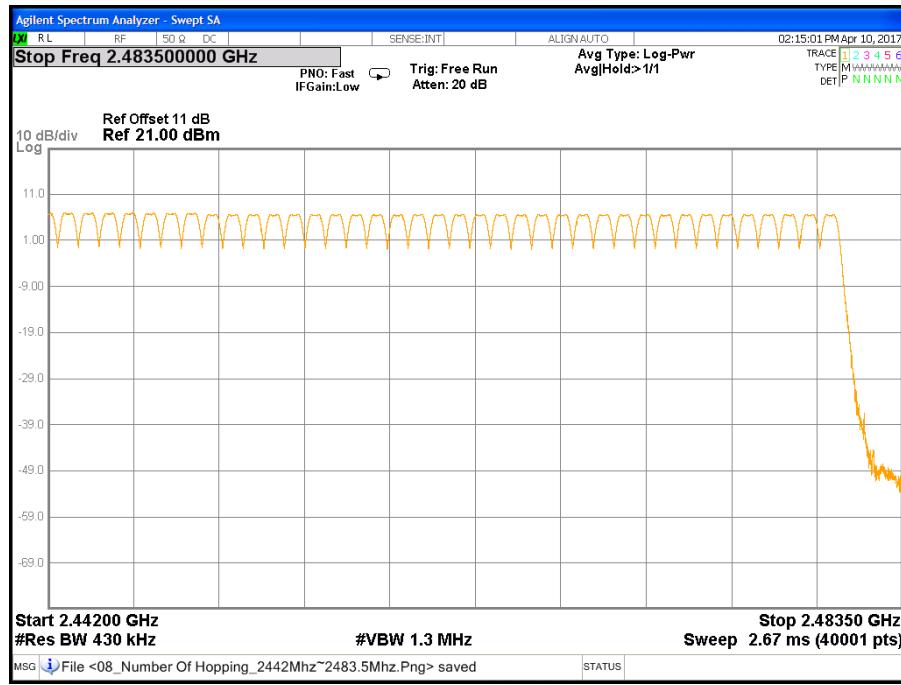**NUMBER OF HOPPING FREQUENCY USED****GFSK****GFSK**

## 8-DPSK



## 8-DPSK



## 7.7 DWELL TIME ON EACH CHANNEL

### LIMITS

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY52220817	03/07/2018
Test S/W	N/A			

*Remark:* Each piece of equipment is scheduled for calibration once a year.

### TEST SETUP



### TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency to be measured and set spectrum analyzer to zero span mode.
4. RBW = 1 MHz.
5. VBW  $\geq$  RBW.
6. Sweep = as necessary to capture the entire dwell time per hopping channel.
7. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
8. Repeat above procedures until all frequencies measured were complete.
9. The EUT has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.
10. The longer the payload is, the slower the hopping rate is.

## **TEST RESULTS**

Time of occupancy on the TX channel in 31.6sec = time domain slot length × hop rate ÷ number of hop per channel × 31.6

Refer to the attached graph.

The hopping rates of Bluetooth devices change with different types of payload. The longer the payload is, the slower the hopping rate. The hopping rate scenario is defined in Bluetooth core specification.

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Waternal Guan
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/10
<b>Test Mode</b>	TX Mode	<b>Temp. &amp; Humidity</b>	25°C, 53%

Modulation Type: GFSK

Channel	Channel Frequency (MHz)	Packet type	Dwell time (ms)	Time of occupancy on the TX channel in 31.6sec (ms)	Limit for Time of occupancy on the TX channel in 31.6sec (ms)	Results
Low	2402	DH1	0.384	122.88	400	PASS
	2402	DH3	1.640	262.40	400	PASS
	2402	DH5	2.890	308.27	400	PASS
Middle	2441	DH1	0.384	122.88	400	PASS
	2441	DH3	1.640	262.40	400	PASS
	2441	DH5	2.890	308.27	400	PASS
High	2480	DH1	0.384	122.88	400	PASS
	2480	DH3	1.640	262.40	400	PASS
	2480	DH5	2.890	308.27	400	PASS

**Remark:**

Ch Low

DH1:  $0.384 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.88 \text{ ms}$

DH3:  $1.640 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 262.40 \text{ ms}$

DH5:  $2.890 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.27 \text{ ms}$

Ch Middle

DH1:  $0.384 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.88 \text{ ms}$

DH3:  $1.640 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 262.40 \text{ ms}$

DH5:  $2.890 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.27 \text{ ms}$

Ch High

DH1:  $0.384 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.88 \text{ ms}$

DH3:  $1.640 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 262.40 \text{ ms}$

DH5:  $2.890 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.27 \text{ ms}$

Modulation Type: 8-DPSK

Channel	Channel Frequency (MHz)	Packet type	Dwell time (ms)	Time of occupancy on the TX channel in 31.6sec (ms)	Limit for Time of occupancy on the TX channel in 31.6sec (ms)	Results
Low	2402	DH1	0.384	122.88	400	PASS
	2402	DH3	1.640	262.40	400	PASS
	2402	DH5	2.890	308.27	400	PASS
Middle	2441	DH1	0.384	122.88	400	PASS
	2441	DH3	1.640	262.40	400	PASS
	2441	DH5	2.890	308.27	400	PASS
High	2480	DH1	0.384	122.88	400	PASS
	2480	DH3	1.640	262.40	400	PASS
	2480	DH5	2.890	308.27	400	PASS

**Remark:**

Ch Low

$$DH1: 0.384 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.88 \text{ ms}$$

$$DH3: 1.640 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 262.40 \text{ ms}$$

$$DH5: 2.890 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.27 \text{ ms}$$

Ch Middle

$$DH1: 0.384 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.88 \text{ ms}$$

$$DH3: 1.640 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 262.40 \text{ ms}$$

$$DH5: 2.890 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.27 \text{ ms}$$


Ch High

$$DH1: 0.384 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.88 \text{ ms}$$

$$DH3: 1.640 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 262.40 \text{ ms}$$

$$DH5: 2.890 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.27 \text{ ms}$$


**DWELL TIME ON EACH PAYLOAD****DH1 CH Low / GFSK****DH3 CH Low / GFSK**

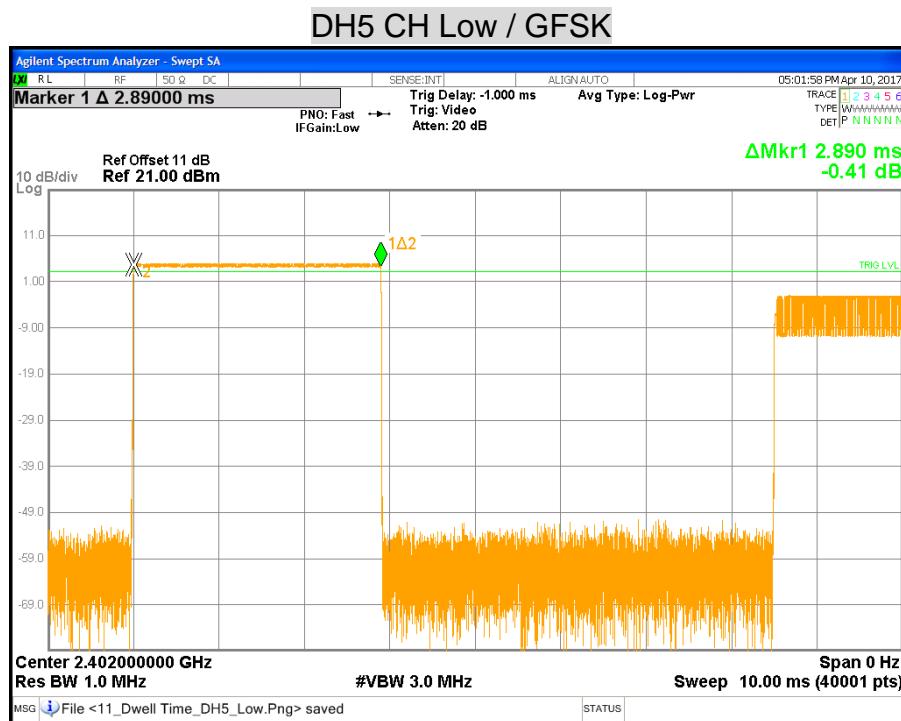

## DH1 CH Middle / GFSK




## DH3 CH Middle / GFSK

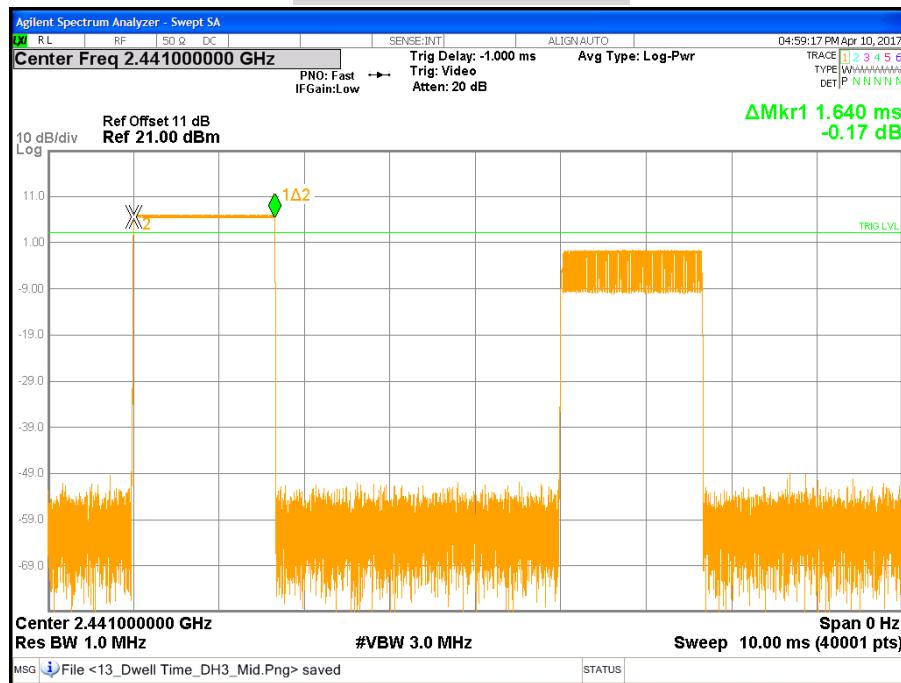


## DH5 CH Middle / GFSK




## DH1 CH High / GFSK

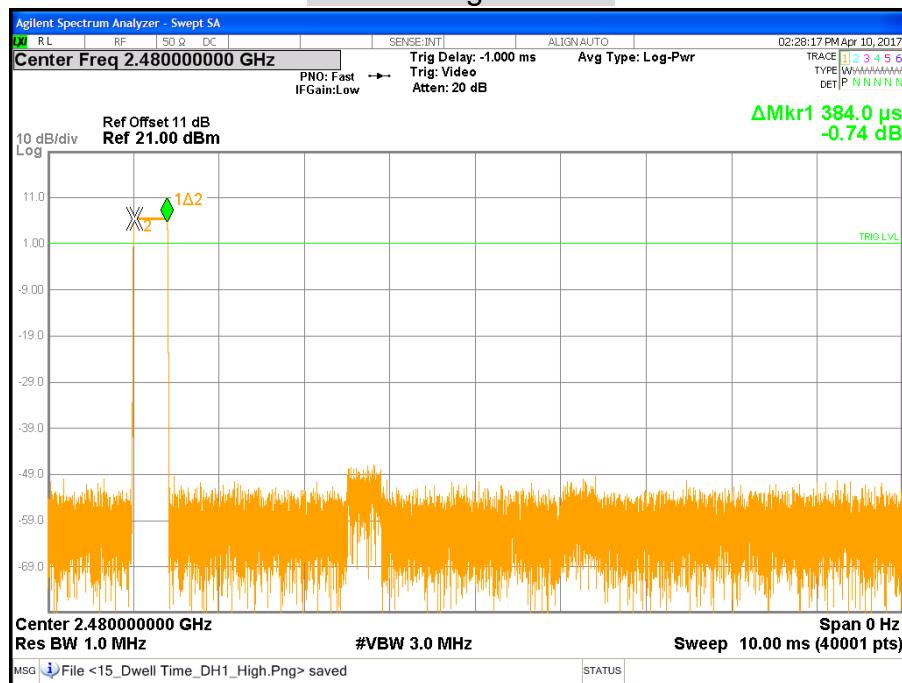

## DH3 CH High / GFSK

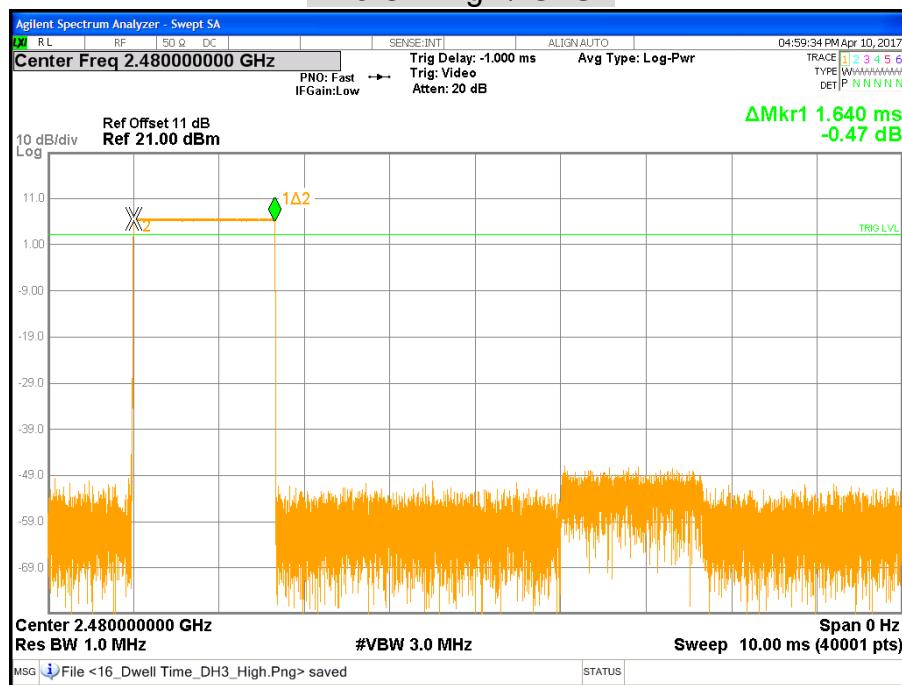


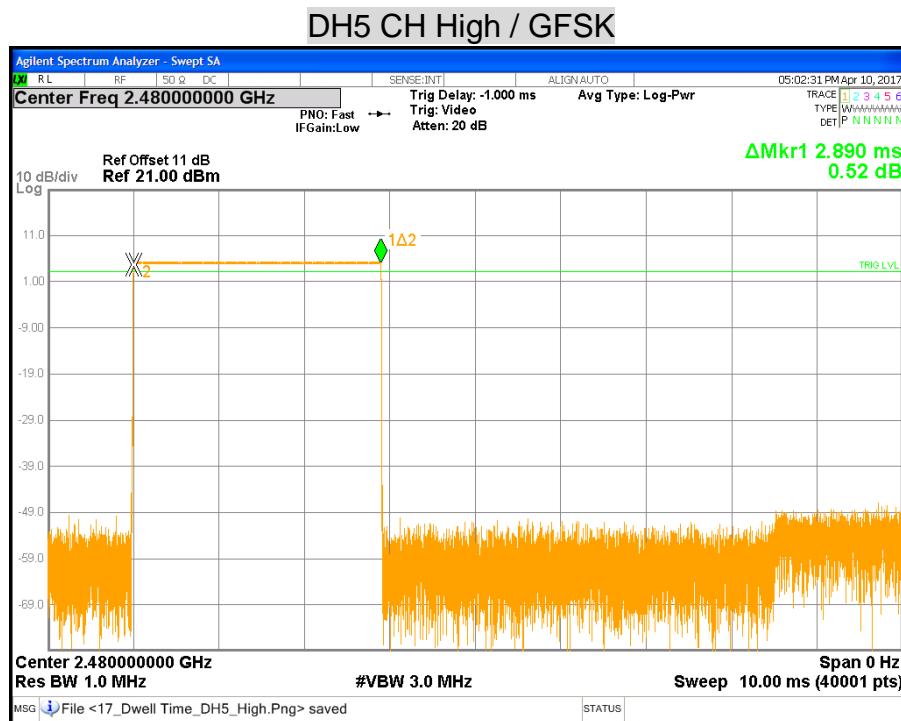


## DH1 CH Low / 8-DPSK




## DH3 CH Low / 8-DPSK

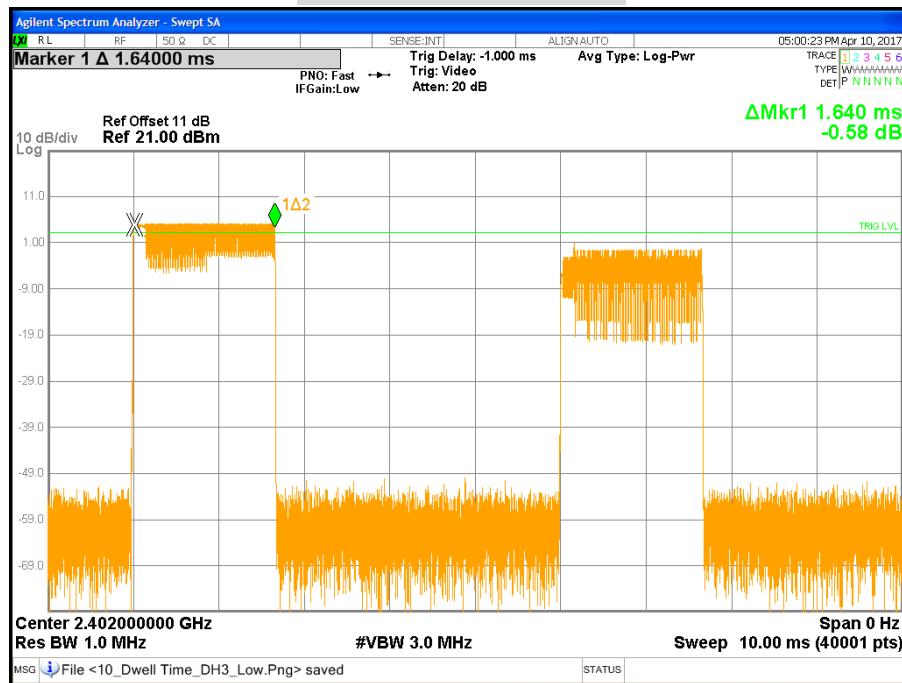


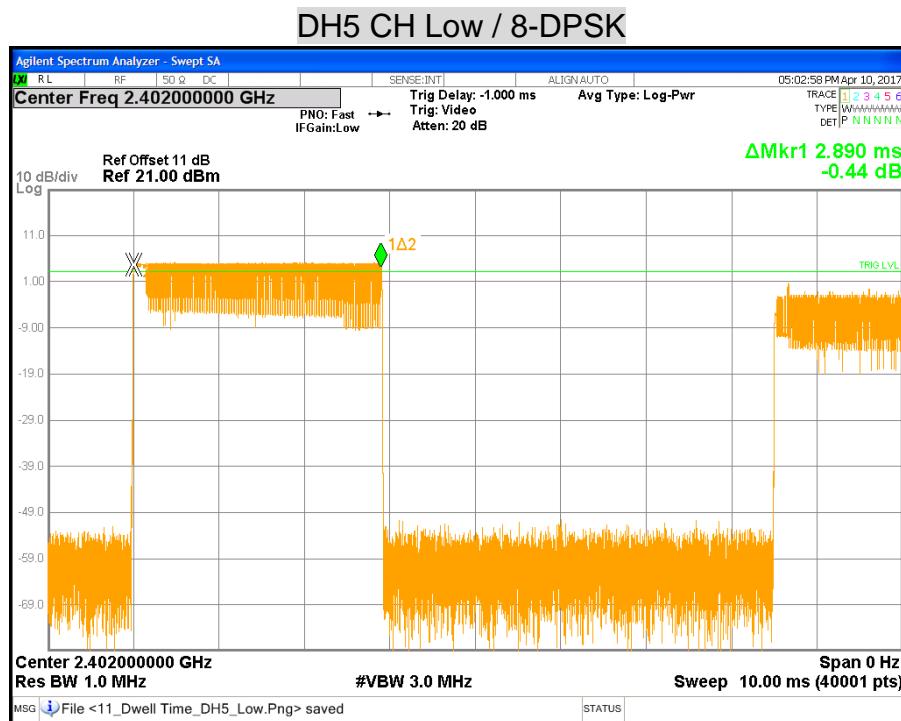

## DH1 CH Middle / 8-DPSK

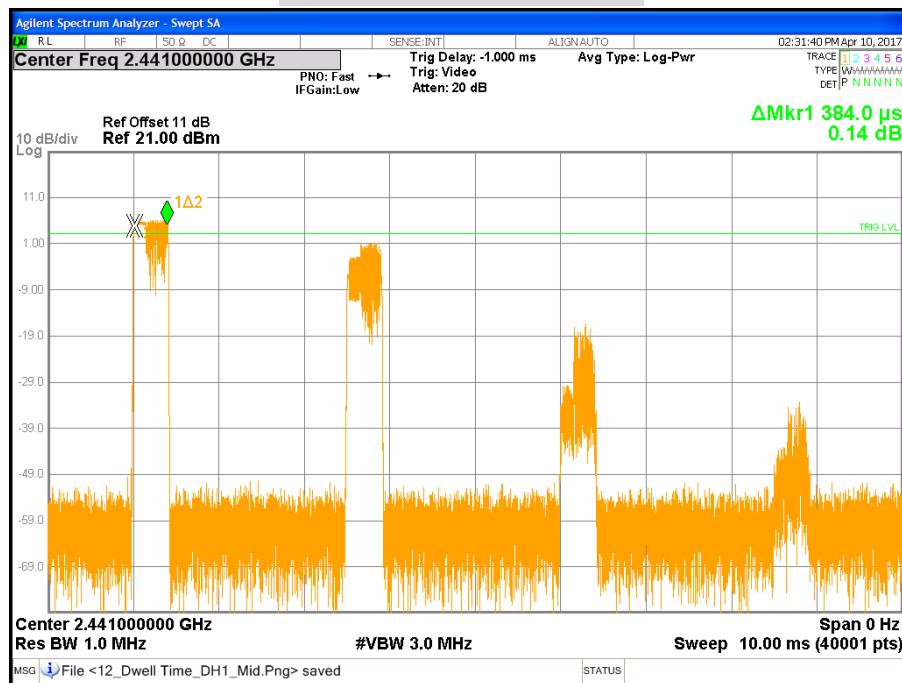

## DH3 CH Middle / 8-DPSK

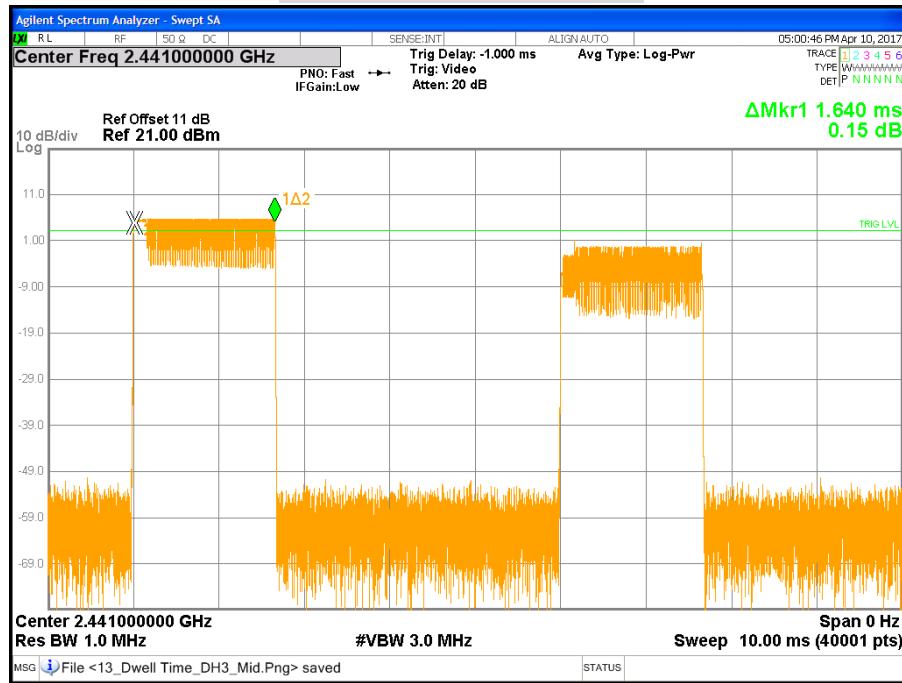


## DH5 CH Middle / 8-DPSK




## DH1 CH High / 8-DPSK



## DH3 CH High / 8-DPSK

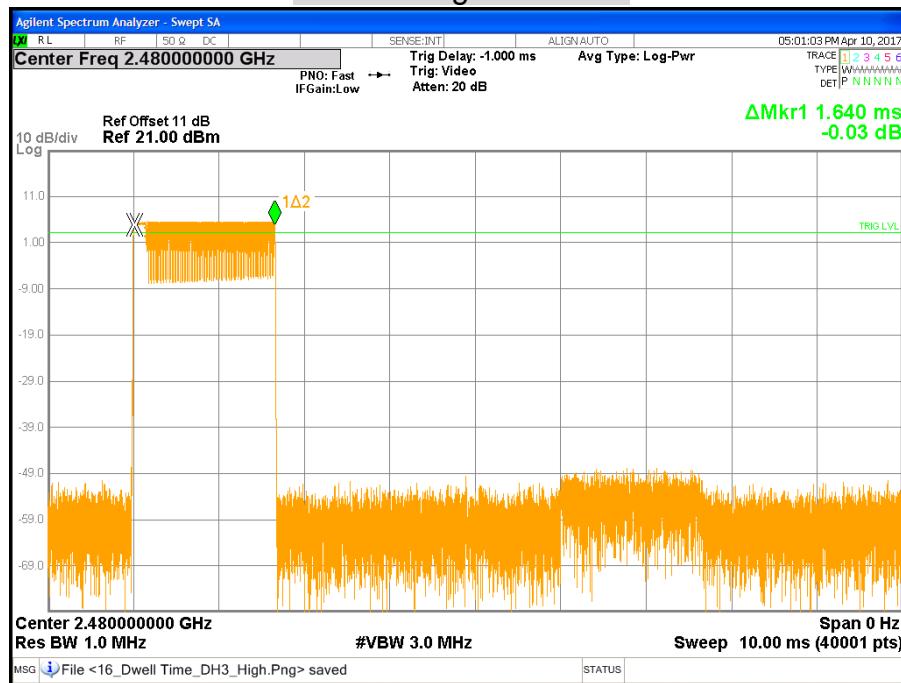

## DH5 CH High / 8-DPSK

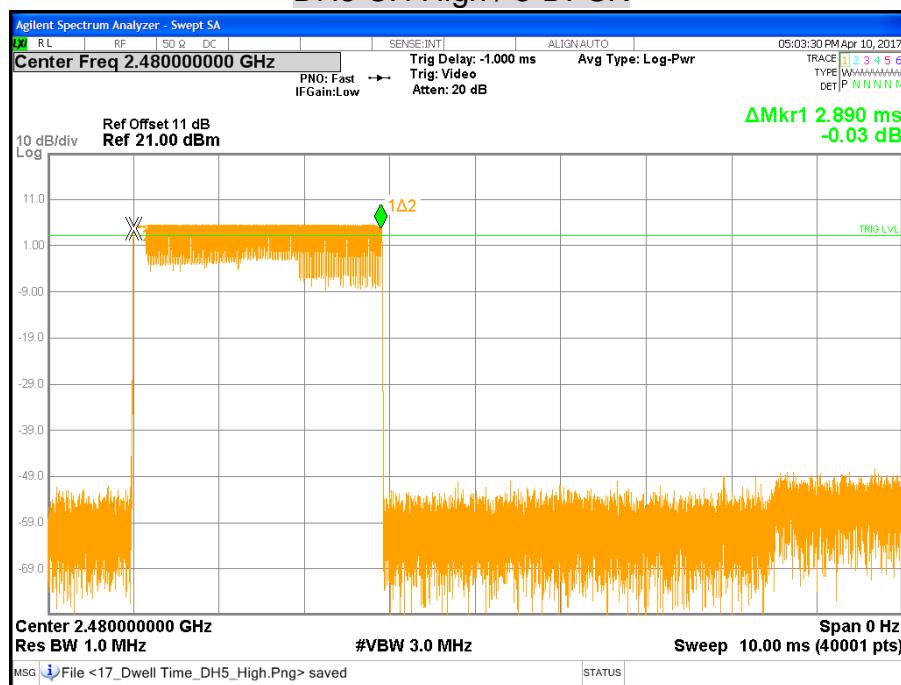

## 7.8 CONDUCTED SPURIOUS EMISSION

### LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY52220817	03/07/2018
Test S/W	N/A			

*Remark:* Each piece of equipment is scheduled for calibration once a year.

### TEST SETUP

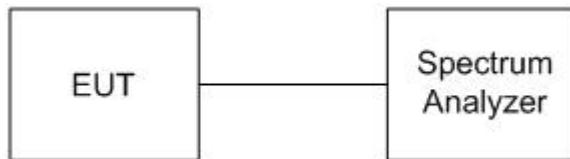

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

### TEST RESULTS


<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Waternal Guan
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/10
<b>Test Mode</b>	TX Mode	<b>Temp. &amp; Humidity</b>	25°C, 50%

## OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


### CH Low (2.38GHz ~ 2.5GHz / GFSK)

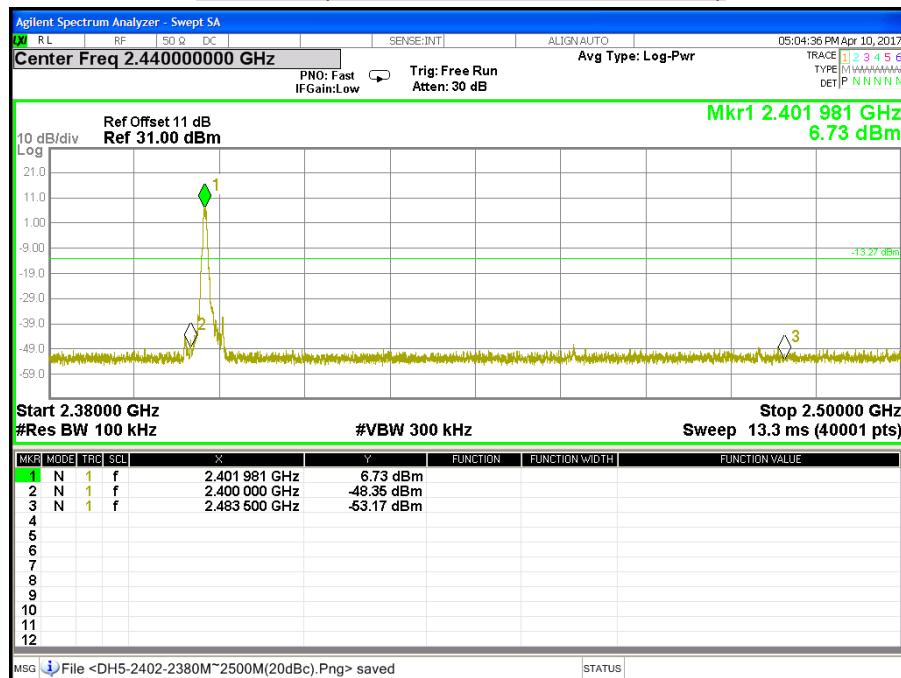


### CH Low (30MHz ~ 26.5GHz / GFSK)

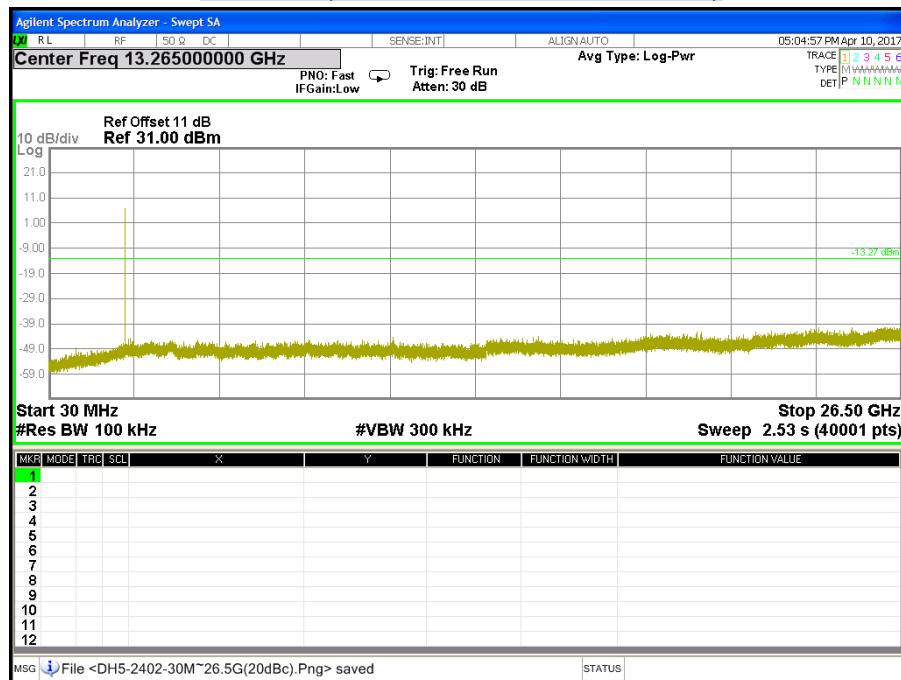


## CH Middle (2.38GHz ~ 2.5GHz / GFSK)

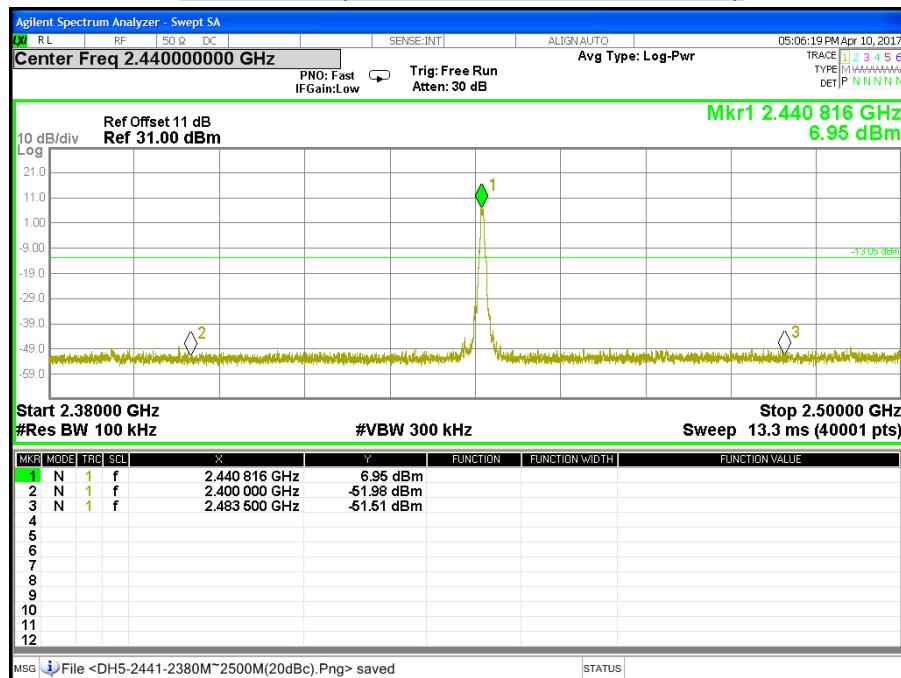


## CH Middle (30MHz ~ 26.5GHz / GFSK)

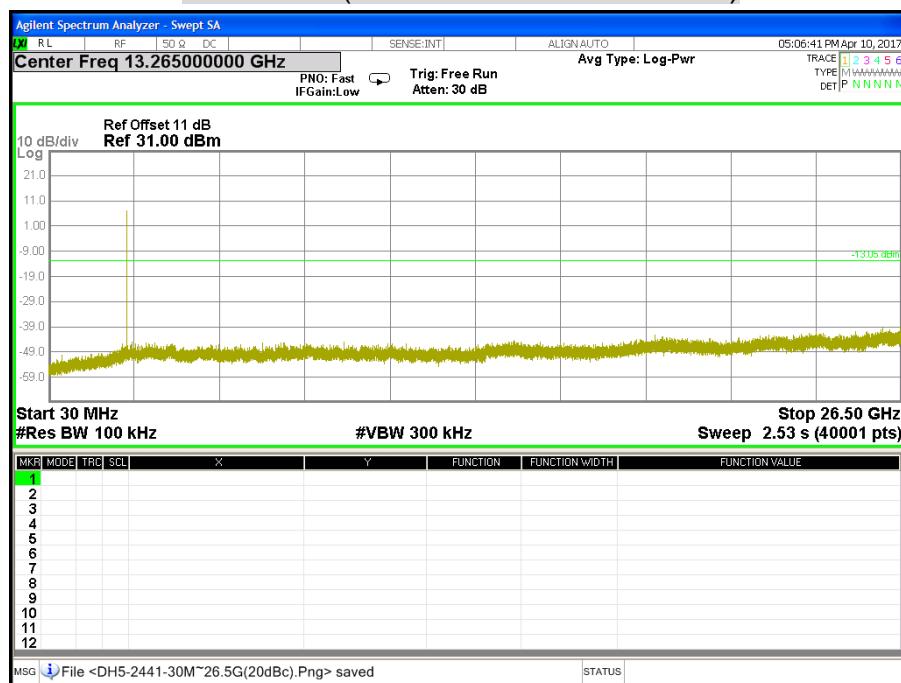


## CH High (2.38GHz ~ 2.5GHz / GFSK)

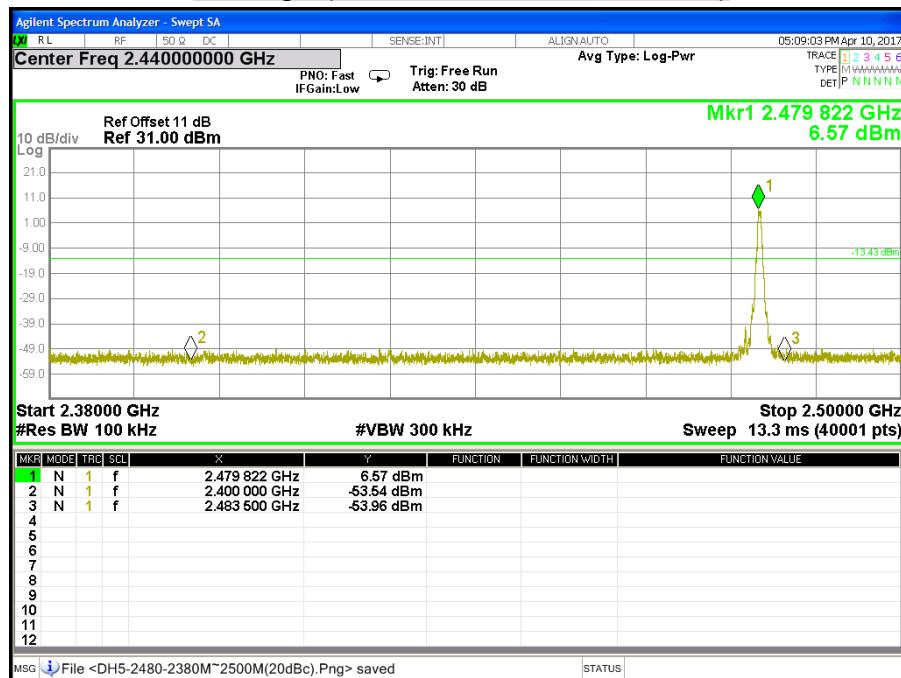


## CH High (30MHz ~ 26.5GHz / GFSK)

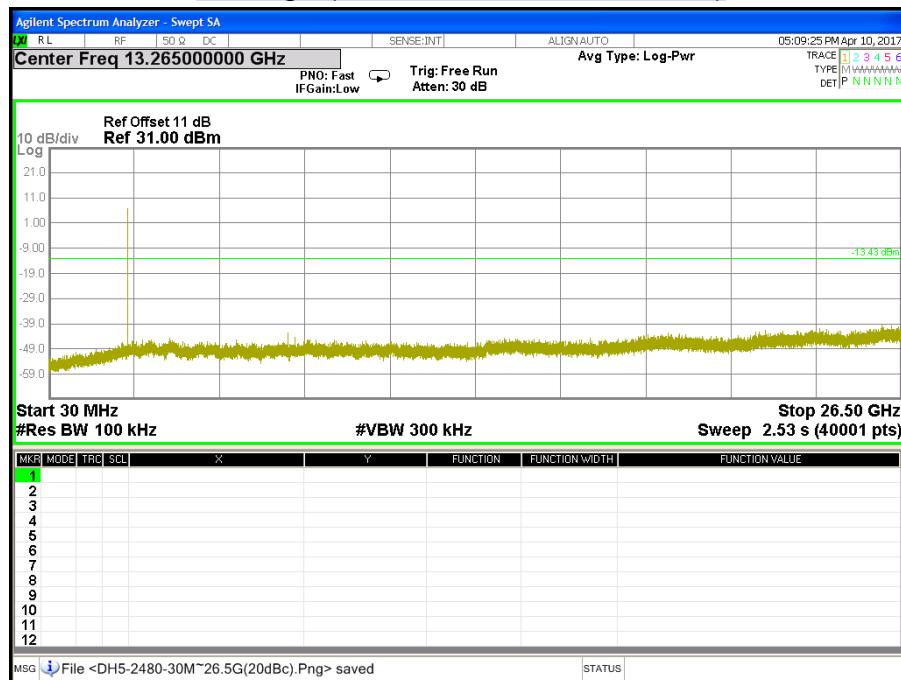


## CH Low (2.38GHz ~ 2.5GHz / 8-DPSK)

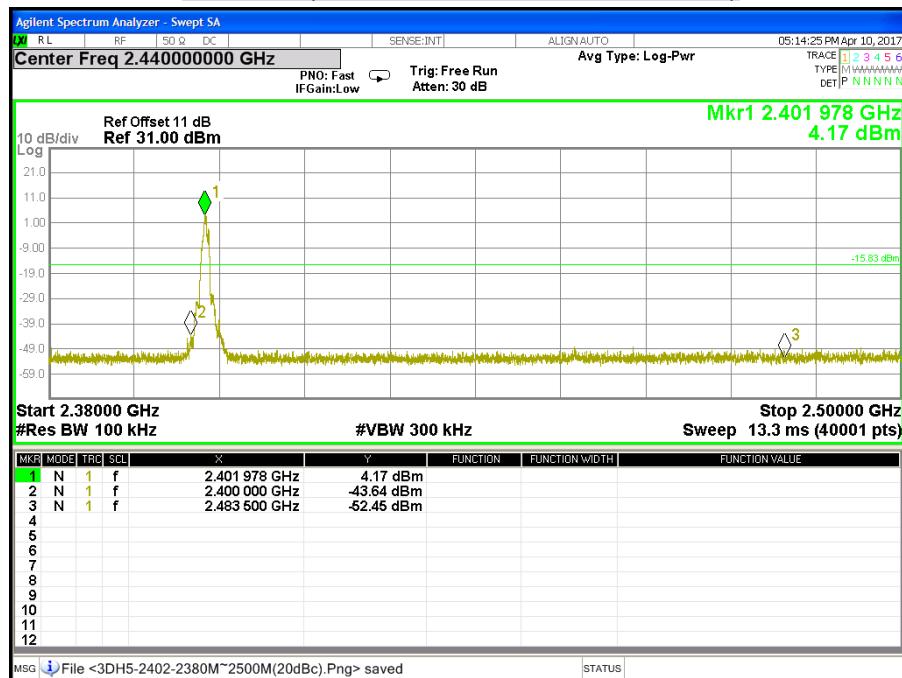


## CH Low (30MHz ~ 26.5GHz / 8-DPSK)

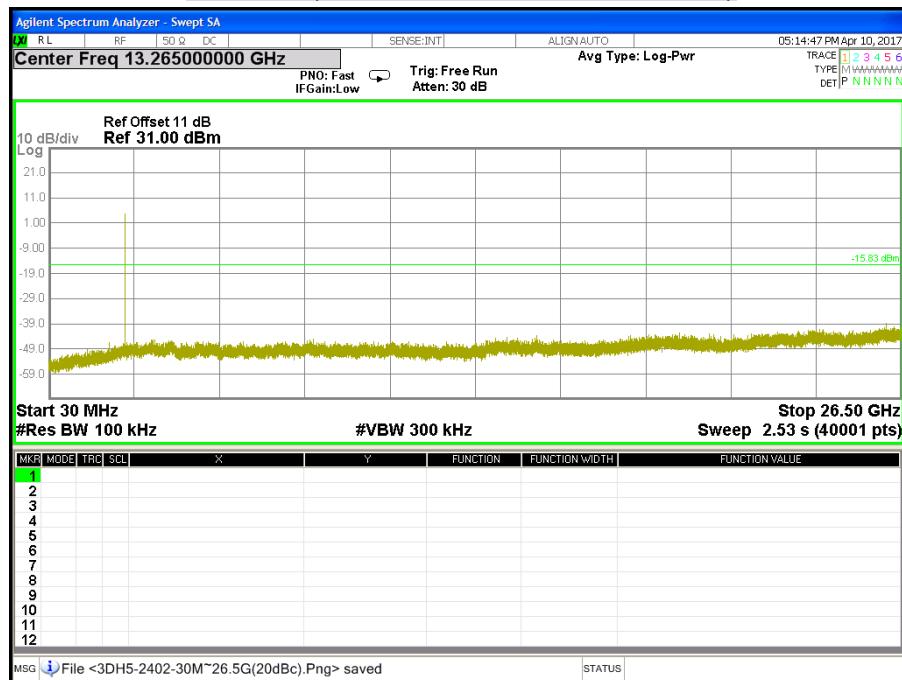


## CH Middle (2.38GHz ~ 2.5GHz / 8-DPSK)

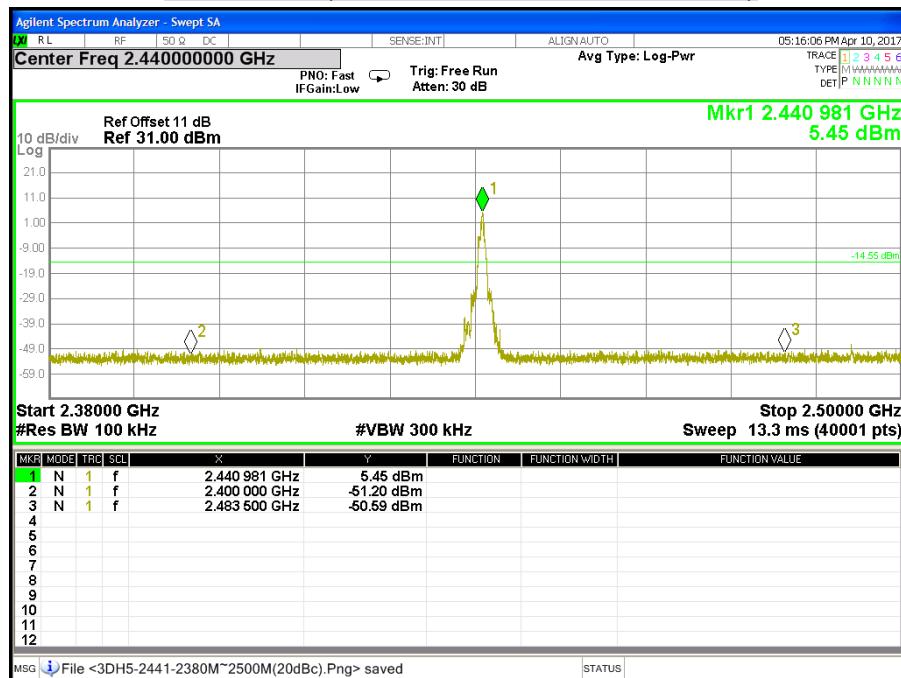


## CH Middle (30MHz ~ 26.5GHz / 8-DPSK)


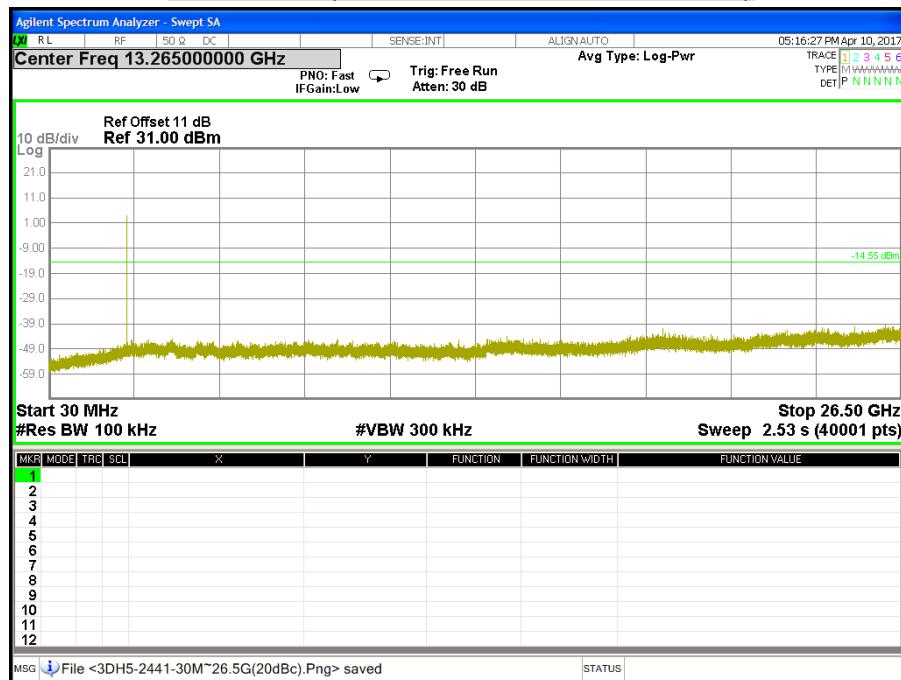


## CH High (2.38GHz ~ 2.5GHz / 8-DPSK)

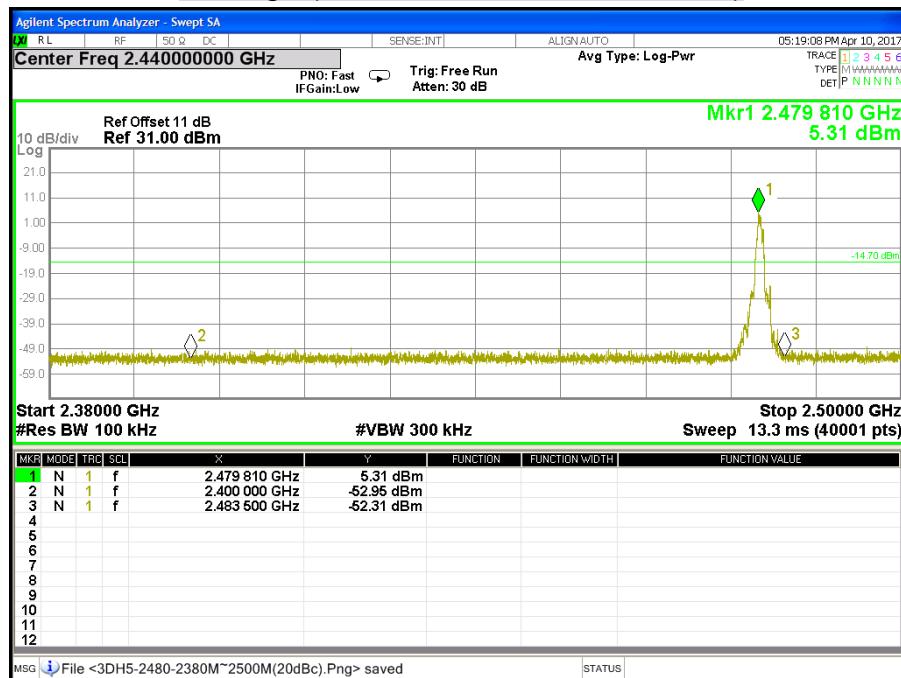

## CH High (30MHz ~ 26.5GHz / 8-DPSK)

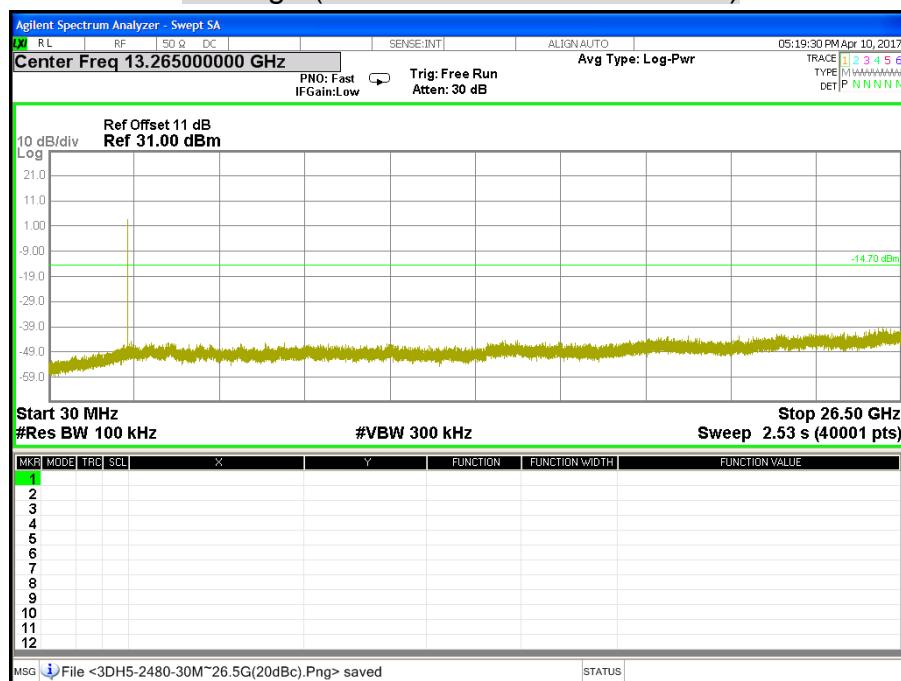

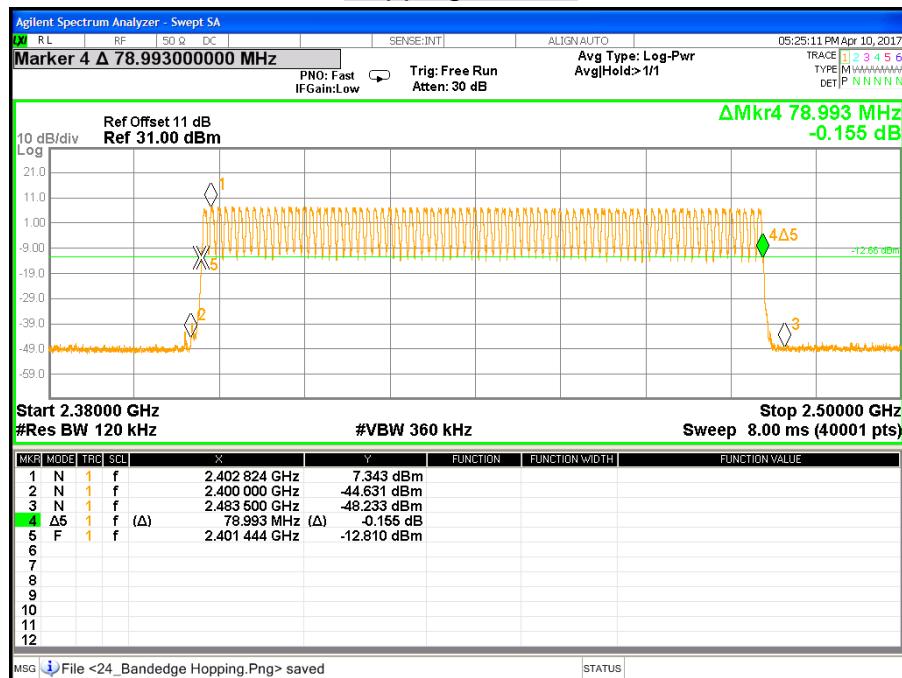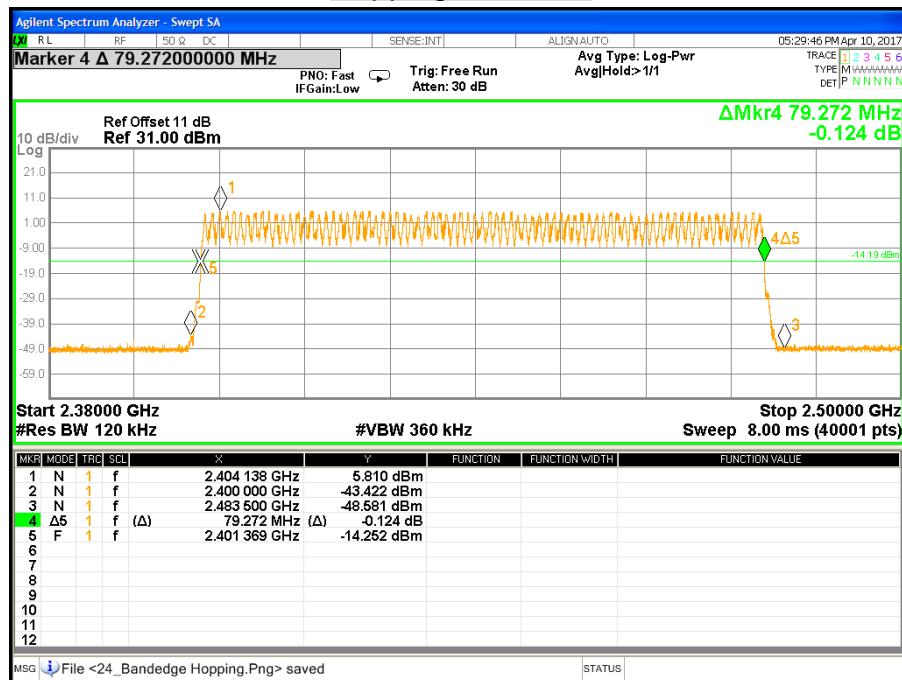**CONDUCTED MEASUREMENT HOPPING BAND EDGES****Hopping / GFSK****Hopping / 8-DPSK**

## 7.9 RADIATED EMISSION

### LIMITS

(1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

**Remark:**

1. <sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2. <sup>2</sup> Above 38.6

(2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

(3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

**Remark:** \*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(4) According to § 15.209 (b) in the emission table above, the tighter limit applies at the band edges.

## TEST EQUIPMENT

### Radiated Emission / 966Chamber\_B


Name of Equipment	Manufacture	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY46180323	03/16/2018
EMI Test Receiver	Rohde & Schwarz	ESCI	100221	04/26/2017
Bi-log Antenna	TESEQ	CBL 6112D	35403	07/02/2017
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-778	07/14/2017
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078733	11/16/2017
Horn Antenna	COM-POWER	AH-840	03077	12/01/2017
Pre-Amplifier	Agilent	8447D	2944A10052	07/12/2017
Pre-Amplifier	Agilent	8449B	3008A01916	07/12/2017
LOOP Antenna	COM-POWER	AL-130	121060	05/23/2017
Test S/W		E3.815206a		

**Remark:** Each piece of equipment is scheduled for calibration once a year.


## **TEST SETUP**

The diagram below shows the test setup that is utilized to make the measurements for emission below 1GHz.


### **9kHz ~ 30MHz**

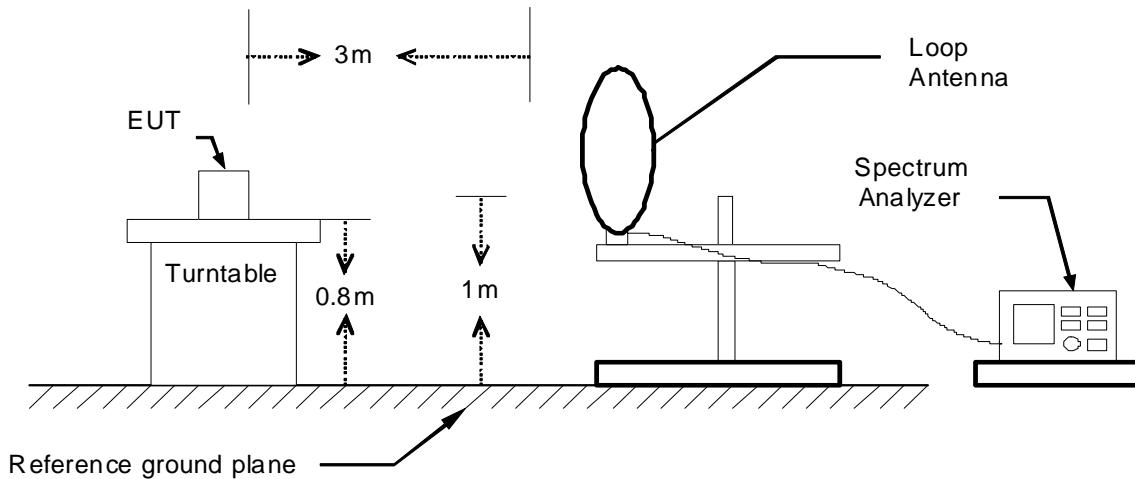

### **30MHz ~ 1GHz**

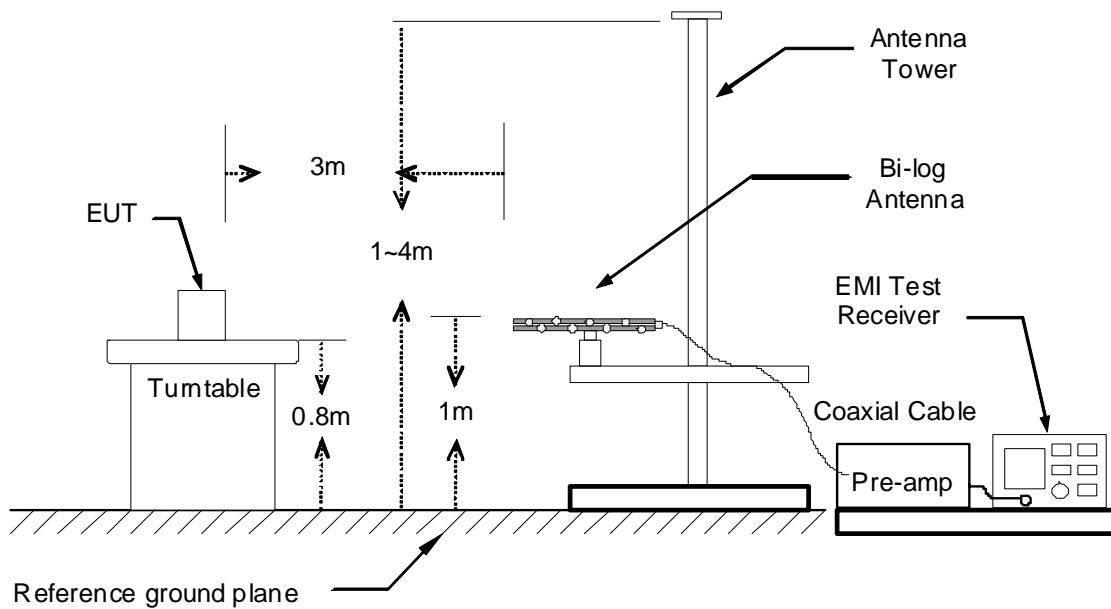

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

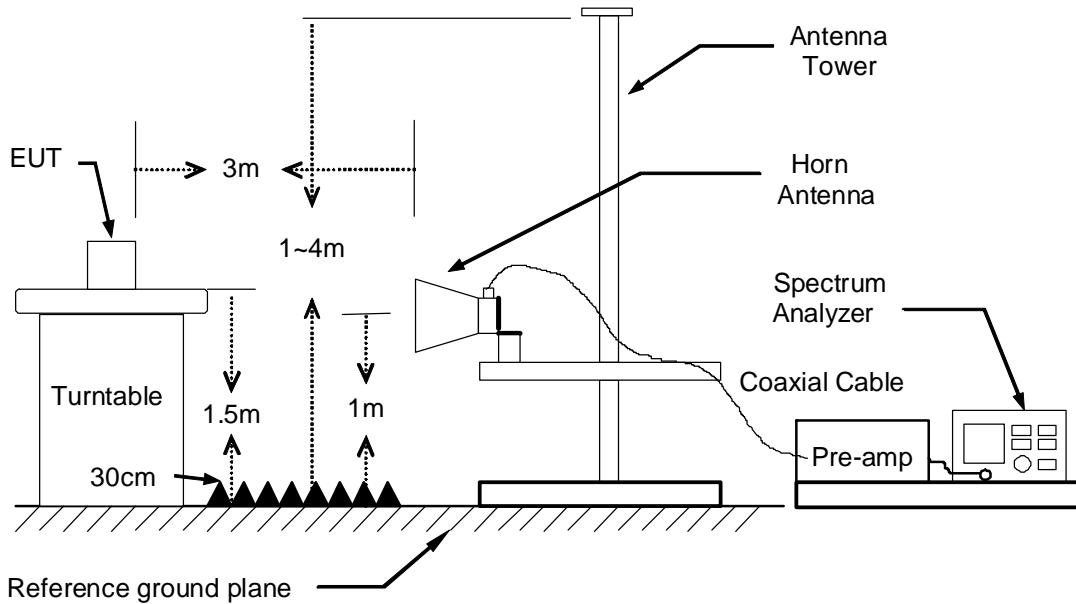

**TEST PROCEDURE**

1. The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

***Remark:***

1. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.*
2. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.*
3. *The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.*

**TEST RESULTS****Below 1 GHz (9kHz ~ 30MHz)**

No emission found between lowest internal used/generated frequency to 30MHz.

**Below 1 GHz (30MHz ~ 1GHz)**

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Rex Chiu
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/05
<b>Test Mode</b>	Mode 1	<b>Temp. &amp; Humidity</b>	25°C, 50%

**966Chamber\_B at 3Meter / Horizontal**

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
99.84	43.05	-12.23	30.82	43.50	-12.68	184	200	Peak
165.80	46.82	-12.80	34.02	43.50	-9.48	95	200	Peak
365.62	48.52	-6.91	41.61	46.00	-4.39	228	100	Peak
432.55	46.50	-5.51	40.99	46.00	-5.01	127	200	Peak
498.51	47.33	-4.73	42.60	46.00	-3.40	295	200	Peak
631.40	46.00	-3.04	42.96	46.00	-3.04	212	100	QP
765.26	43.20	-1.75	41.45	46.00	-4.55	242	100	Peak
997.09	39.84	1.53	41.37	54.00	-12.63	164	100	Peak

**966Chamber\_B at 3Meter / Vertical**

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
48.43	50.10	-14.72	35.38	40.00	-4.62	300	100	QP
66.86	53.20	-17.08	36.12	40.00	-3.88	125	200	QP
165.80	50.33	-12.80	37.53	43.50	-5.97	255	100	Peak
365.62	50.20	-6.91	43.29	46.00	-2.71	135	100	QP
375.32	49.24	-6.84	42.40	46.00	-3.60	110	100	Peak
432.55	50.10	-5.51	44.59	46.00	-1.41	189	100	QP
480.08	47.57	-4.86	42.71	46.00	-3.29	178	100	Peak
498.51	46.10	-4.73	41.37	46.00	-4.63	171	100	QP
864.20	41.60	-0.54	41.06	46.00	-4.94	264	100	Peak
997.09	43.12	1.53	44.65	54.00	-9.35	126	100	Peak

**Remark:**

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
3. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
4. Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).

**Above 1 GHz**

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Rex Chiu
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/05
<b>Test Mode</b>	GFSK TX / CH Low	<b>Temp. &amp; Humidity</b>	25°C, 50%

**966Chamber\_B at 3Meter / Horizontal**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1920.00	46.02	-4.51		41.51	74.00	-32.49	132	100	Peak
2558.00	47.09	-2.02		45.07	74.00	-28.93	289	100	Peak
4803.00	30.82	5.19	20	36.01	54.00	-17.99	215	200	Average
4803.00	50.82	5.19		56.01	74.00	-17.99	215	200	Peak
5496.00	39.27	6.82		46.09	74.00	-27.91	148	200	Peak
7200.00	24.67	12.37	20	37.04	54.00	-16.96	60	100	Average
7200.00	44.67	12.37		57.04	74.00	-16.96	60	100	Peak
9432.00	37.11	14.21		51.32	74.00	-22.68	307	200	Peak

**966Chamber\_B at 3Meter / Vertical**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1110.00	50.54	-8.62		41.92	74.00	-32.08	239	100	Peak
1662.00	46.70	-5.47		41.23	74.00	-32.77	48	100	Peak
4803.00	32.04	5.19	20	37.23	54.00	-16.77	230	200	Average
4803.00	52.04	5.19		57.23	74.00	-16.77	230	200	Peak
5406.00	39.95	6.62		46.57	74.00	-27.43	52	200	Peak
7200.00	28.23	12.37	20	40.60	54.00	-13.40	228	200	Average
7200.00	48.23	12.37		60.60	74.00	-13.40	228	200	Peak
9588.00	36.86	14.44		51.30	74.00	-22.70	33	200	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(PK)  
Remark AVG = Result(AV) - Limit(AV)
5. For Fundamental & Harmonics: Result-AV = Result(PK) - Duty Cycle Correction Factor.

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Rex Chiu
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/05
<b>Test Mode</b>	GFSK TX / CH Middle	<b>Temp. &amp; Humidity</b>	25°C, 50%

**966Chamber\_B at 3Meter / Horizontal**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1920.00	46.73	-4.51		42.22	74.00	-31.78	126	100	Peak
2598.00	45.61	-1.91		43.70	74.00	-30.30	283	200	Peak
4881.00	41.32	5.39		46.71	74.00	-27.29	70	100	Peak
5463.00	39.51	6.75		46.26	74.00	-27.74	217	200	Peak
7320.00	27.41	12.44	20	39.85	54.00	-14.15	47	200	Average
7320.00	47.41	12.44		59.85	74.00	-14.15	47	200	Peak
9300.00	36.83	14.06		50.89	74.00	-23.11	138	100	Peak

**966Chamber\_B at 3Meter / Vertical**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1032.00	51.01	-9.13		41.88	74.00	-32.12	267	100	Peak
1662.00	47.08	-5.47		41.61	74.00	-32.39	52	100	Peak
4881.00	42.43	5.39		47.82	74.00	-26.18	152	100	Peak
5637.00	39.22	7.10		46.32	74.00	-27.68	16	200	Peak
7320.00	28.40	12.44	20	40.84	54.00	-13.16	309	200	Average
7320.00	48.40	12.44		60.84	74.00	-13.16	309	200	Peak
9144.00	37.22	13.88		51.10	74.00	-22.90	111	200	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(PK)  
Remark AVG = Result(AV) - Limit(AV)
5. For Fundamental & Harmonics: Result-AV = Result(PK) - Duty Cycle Correction Factor.

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Rex Chiu
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/05
<b>Test Mode</b>	GFSK TX / CH High	<b>Temp. &amp; Humidity</b>	25°C, 50%

### 966Chamber\_B at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1920.00	44.54	-4.51		40.03	74.00	-33.97	127	100	Peak
2324.00	43.77	-2.90		40.87	74.00	-33.13	286	100	Peak
4959.00	28.33	5.59	20	33.92	54.00	-20.08	333	100	Average
4959.00	48.33	5.59		53.92	74.00	-20.08	333	100	Peak
5373.00	39.23	6.54		45.77	74.00	-28.23	305	200	Peak
7440.00	25.36	12.52	20	37.88	54.00	-16.12	0	200	Average
7440.00	45.36	12.52		57.88	74.00	-16.12	0	200	Peak
9492.00	36.73	14.28		51.01	74.00	-22.99	63	100	Peak

### 966Chamber\_B at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1112.00	51.90	-8.61		43.29	74.00	-30.71	238	200	Peak
1662.00	46.79	-5.47		41.32	74.00	-32.68	101	100	Peak
4959.00	28.55	5.59	20	34.14	54.00	-19.86	61	100	Average
4959.00	48.55	5.59		54.14	74.00	-19.86	61	100	Peak
5550.00	39.88	6.93		46.81	74.00	-27.19	326	100	Peak
7440.00	27.43	12.52	20	39.95	54.00	-14.05	247	200	Average
7440.00	47.43	12.52		59.95	74.00	-14.05	247	200	Peak
9336.00	36.70	14.10		50.80	74.00	-23.20	177	100	Peak

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(PK)  
Remark AVG = Result(AV) - Limit(AV)
5. For Fundamental & Harmonics: Result-AV = Result(PK) - Duty Cycle Correction Factor.

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Rex Chiu
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/05
<b>Test Mode</b>	8-DPSK TX / CH Low	<b>Temp. &amp; Humidity</b>	25°C, 50%

### 966Chamber\_B at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1996.00	43.95	-4.22		39.73	74.00	-34.27	146	100	Peak
2558.00	45.79	-2.02		43.77	74.00	-30.23	289	100	Peak
4803.00	28.22	5.19	20	33.41	54.00	-20.59	208	200	Average
4803.00	48.22	5.19		53.41	74.00	-20.59	208	200	Peak
5526.00	38.79	6.88		45.67	74.00	-28.33	16	200	Peak
7200.00	19.67	12.37	20	32.04	54.00	-21.96	58	100	Average
7200.00	39.67	12.37		52.04	74.00	-21.96	58	100	Peak
9768.00	35.94	14.76		50.70	74.00	-23.30	243	100	Peak

### 966Chamber\_B at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1662.00	47.11	-5.47		41.64	74.00	-32.36	104	100	Peak
1996.00	45.79	-4.22		41.57	74.00	-32.43	69	100	Peak
4803.00	46.75	5.19		51.94	74.00	-22.06	230	200	Peak
5496.00	39.29	6.82		46.11	74.00	-27.89	214	200	Peak
7212.00	20.58	12.38	20	32.96	54.00	-21.04	315	200	Average
7212.00	40.58	12.38		52.96	74.00	-21.04	315	200	Peak
9576.00	36.67	14.42		51.09	74.00	-22.91	147	200	Peak

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(PK)  
Remark AVG = Result(AV) - Limit(AV)
5. For Fundamental & Harmonics: Result-AV = Result(PK) - Duty Cycle Correction Factor.

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Rex Chiu
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/05
<b>Test Mode</b>	8-DPSK TX / CH Middle	<b>Temp. &amp; Humidity</b>	25°C, 50%

### 966Chamber\_B at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1920.00	46.03	-4.51		41.52	74.00	-32.48	128	100	Peak
2596.00	45.08	-1.91		43.17	74.00	-30.83	262	200	Peak
4881.00	44.15	5.39		49.54	74.00	-24.46	70	100	Peak
5502.00	39.29	6.83		46.12	74.00	-27.88	356	100	Peak
7320.00	23.16	12.44	20	35.60	54.00	-18.40	52	200	Average
7320.00	43.16	12.44		55.60	74.00	-18.40	52	200	Peak
9468.00	36.83	14.25		51.08	74.00	-22.92	115	200	Peak

### 966Chamber\_B at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1032.00	52.55	-9.13		43.42	74.00	-30.58	100	100	Peak
1996.00	46.35	-4.22		42.13	74.00	-31.87	82	100	Peak
4881.00	44.70	5.39		50.09	74.00	-23.91	150	100	Peak
5541.00	39.17	6.91		46.08	74.00	-27.92	260	100	Peak
7320.00	23.53	12.44	20	35.97	54.00	-18.03	318	200	Average
7320.00	43.53	12.44		55.97	74.00	-18.03	318	200	Peak
9348.00	37.24	14.11		51.35	74.00	-22.65	6	100	Peak

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(PK)  
Remark AVG = Result(AV) - Limit(AV)
5. For Fundamental & Harmonics: Result-AV = Result(PK) - Duty Cycle Correction Factor.

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Rex Chiu
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/05
<b>Test Mode</b>	8-DPSK TX / CH High	<b>Temp. &amp; Humidity</b>	25°C, 50%

### 966Chamber\_B at 3Meter / Horizontal


Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1496.00	44.85	-6.10		38.75	74.00	-35.25	138	200	Peak
1920.00	44.55	-4.51		40.04	74.00	-33.96	155	100	Peak
4959.00	25.95	5.59	20	31.54	54.00	-22.46	81	200	Average
4959.00	45.95	5.59		51.54	74.00	-22.46	81	200	Peak
5592.00	40.51	7.01		47.52	74.00	-26.48	198	100	Peak
7440.00	21.43	12.52	20	33.95	54.00	-20.05	239	200	Average
7440.00	41.43	12.52		53.95	74.00	-20.05	239	200	Peak
9456.00	37.87	14.24		52.11	74.00	-21.89	83	100	Peak

### 966Chamber\_B at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>									
1024.00	53.10	-9.18		43.92	74.00	-30.08	93	100	Peak
1662.00	47.58	-5.47		42.11	74.00	-31.89	48	100	Peak
4959.00	26.92	5.59	20	32.51	54.00	-21.49	72	200	Average
4959.00	46.92	5.59		52.51	74.00	-21.49	72	200	Peak
5490.00	39.93	6.81		46.74	74.00	-27.26	174	100	Peak
7440.00	21.39	12.52	20	33.91	54.00	-20.09	326	200	Average
7440.00	41.39	12.52		53.91	74.00	-20.09	326	200	Peak
9372.00	36.99	14.14		51.13	74.00	-22.87	39	100	Peak

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(PK)  
Remark AVG = Result(AV) - Limit(AV)
5. For Fundamental & Harmonics: Result-AV = Result(PK) - Duty Cycle Correction Factor.

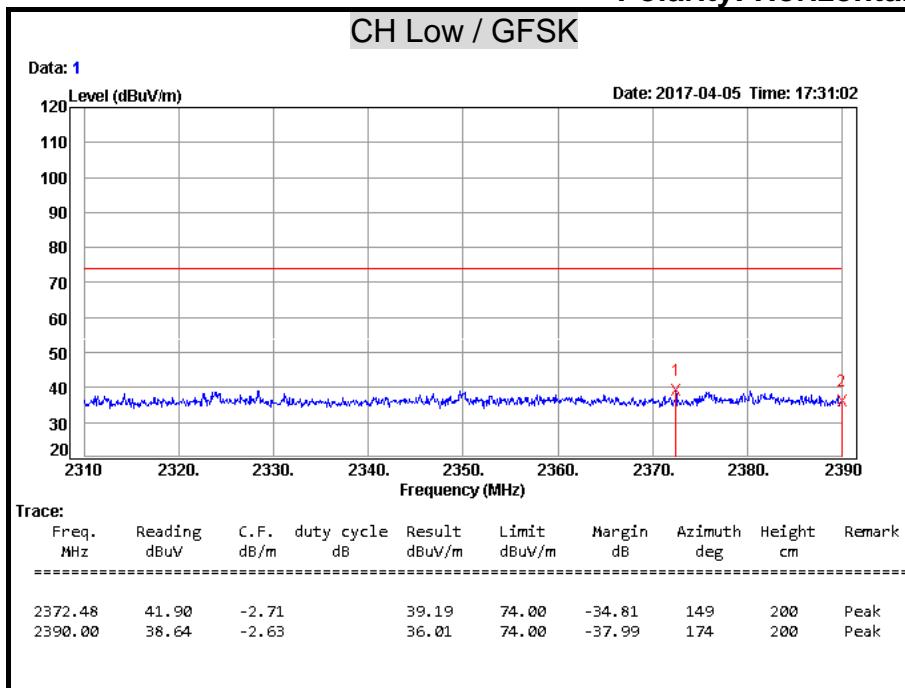Restricted Band Edges**Polarity: Horizontal**

**Remark:** Result = Reading + Correction Factor


Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark Peak = Result(AV) - Limit(AV)

For Fundamental & Harmonics:

Result-AV = Result(PK) - Duty Cycle Correction Factor

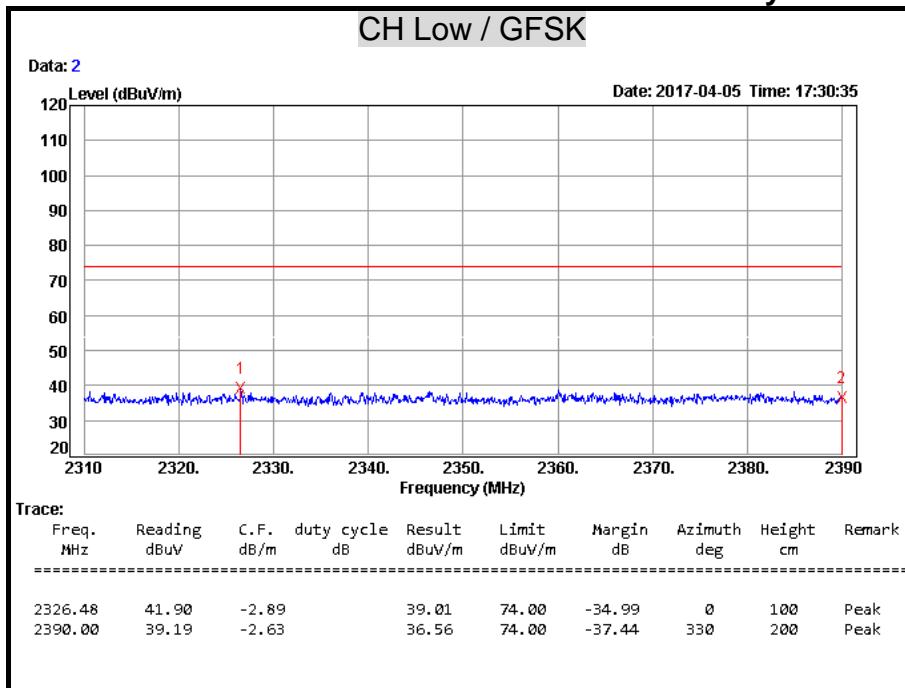**Polarity: Vertical**

**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark Peak = Result(AV) - Limit(AV)


For Fundamental & Harmonics:

Result-AV = Result(PK) - Duty Cycle Correction Factor

**Polarity: Horizontal****CH High / GFSK**

Data: 73

Date: 2017-04-07 Time: 09:47:30

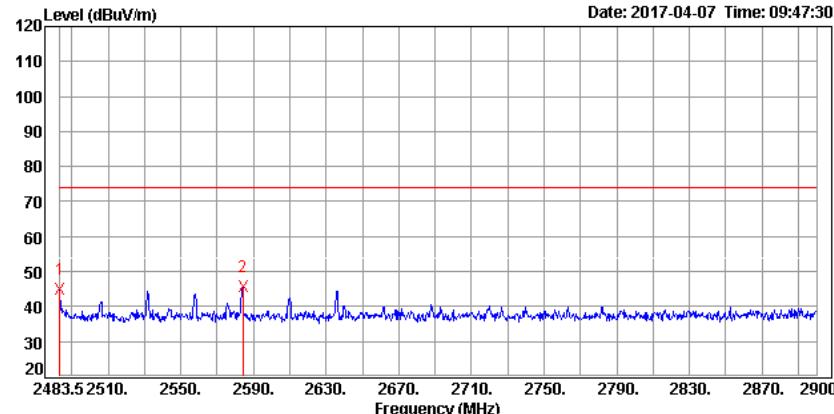**Trace:**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2483.50	47.15	-2.26		44.89	74.00	-29.11	267	100	Peak
2584.29	47.52	-1.95		45.57	74.00	-28.43	281	100	Peak

**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark Peak = Result(AV) - Limit(AV)


For Fundamental &amp; Harmonics:

Result-AV = Result(PK) - Duty Cycle Correction Factor

**Polarity: Vertical****CH High / GFSK**

Data: 74

Date: 2017-04-07 Time: 09:47:51

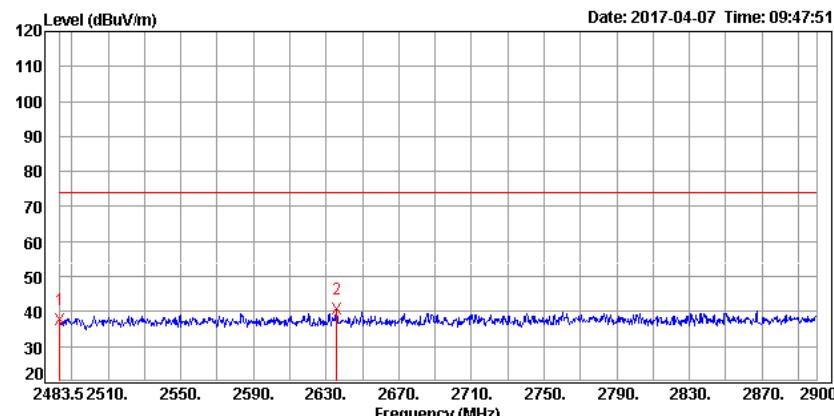**Trace:**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2483.50	40.11	-2.26		37.85	74.00	-36.15	276	200	Peak
2635.94	42.42	-1.80		40.62	74.00	-33.38	260	100	Peak

**Remark:** Result = Reading + Correction Factor


Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark Peak = Result(AV) - Limit(AV)

For Fundamental &amp; Harmonics:

Result-AV = Result(PK) - Duty Cycle Correction Factor

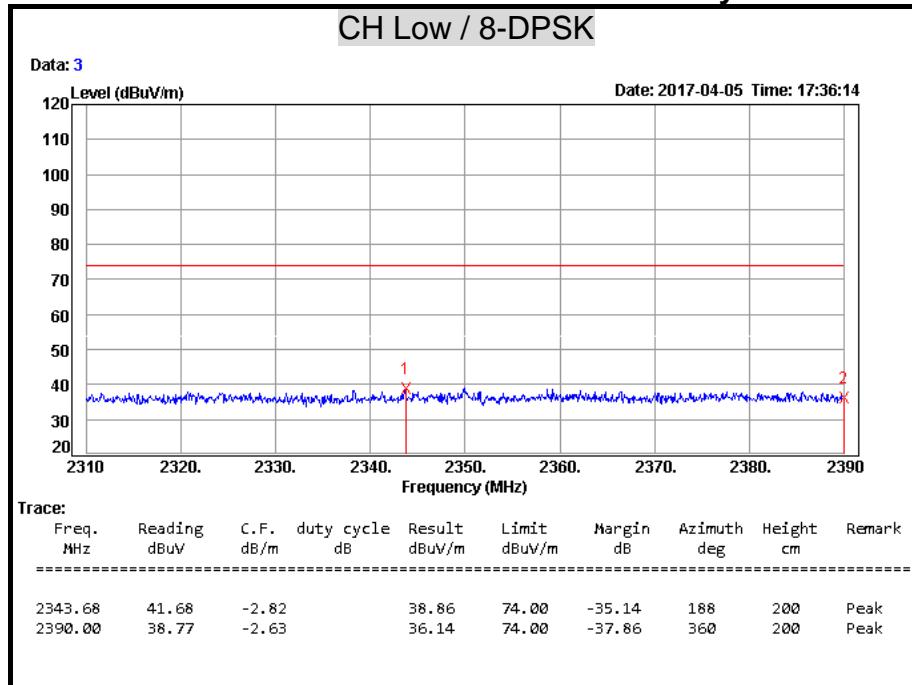**Polarity: Horizontal**

**Remark:** Result = Reading + Correction Factor


Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark Peak = Result(AV) - Limit(AV)

For Fundamental & Harmonics:

Result-AV = Result(PK) - Duty Cycle Correction Factor

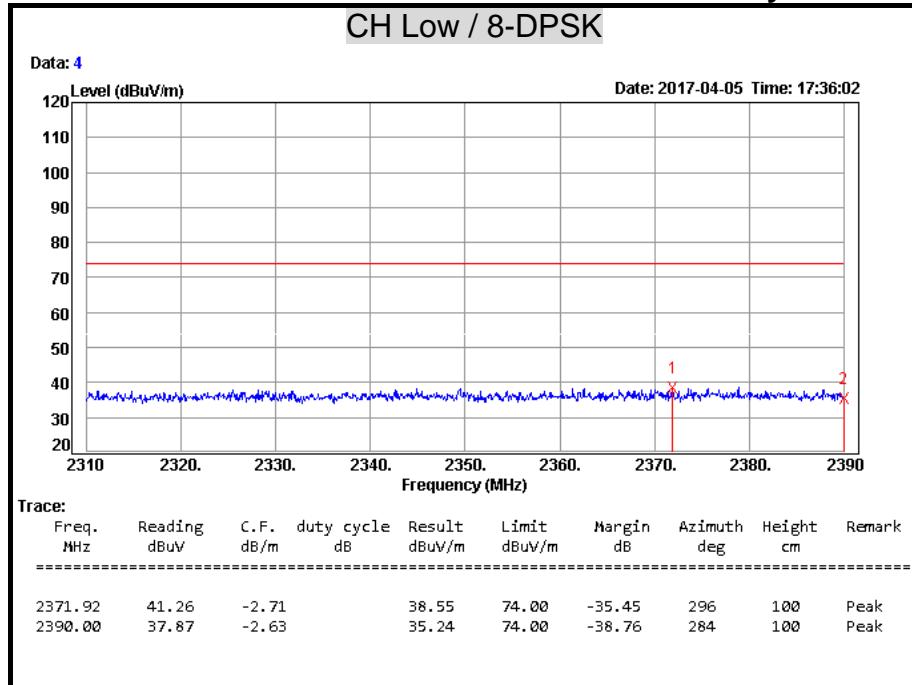**Polarity: Vertical**

**Remark:** Result = Reading + Correction Factor


Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark Peak = Result(AV) - Limit(AV)

For Fundamental & Harmonics:

Result-AV = Result(PK) - Duty Cycle Correction Factor

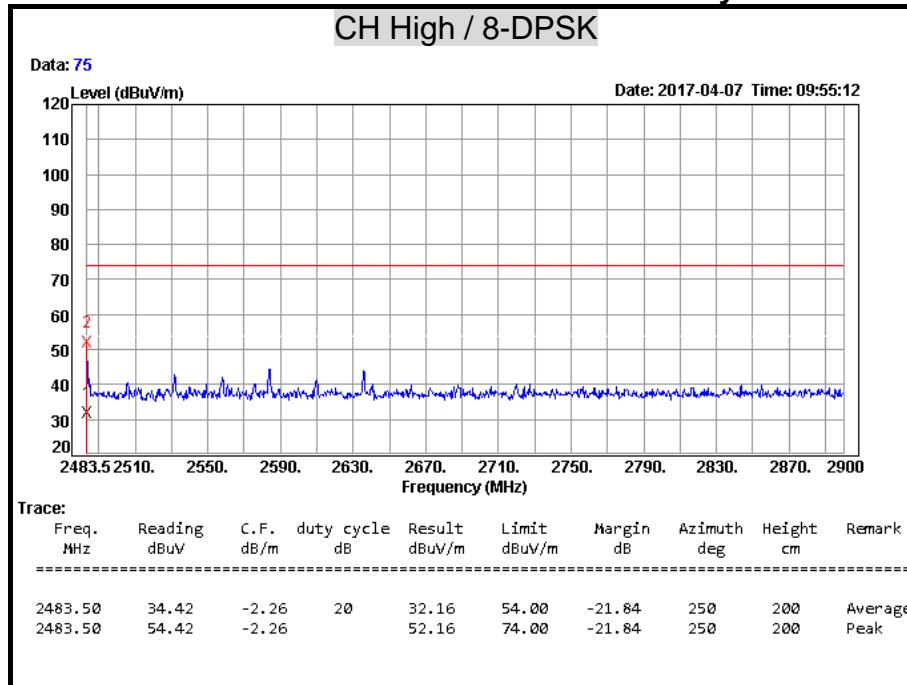**Polarity: Horizontal**

**Remark:** Result = Reading + Correction Factor


Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark Average = Result(AV) - Limit(AV)

For Fundamental & Harmonics:

Result-AV = Result(PK) - Duty Cycle Correction Factor

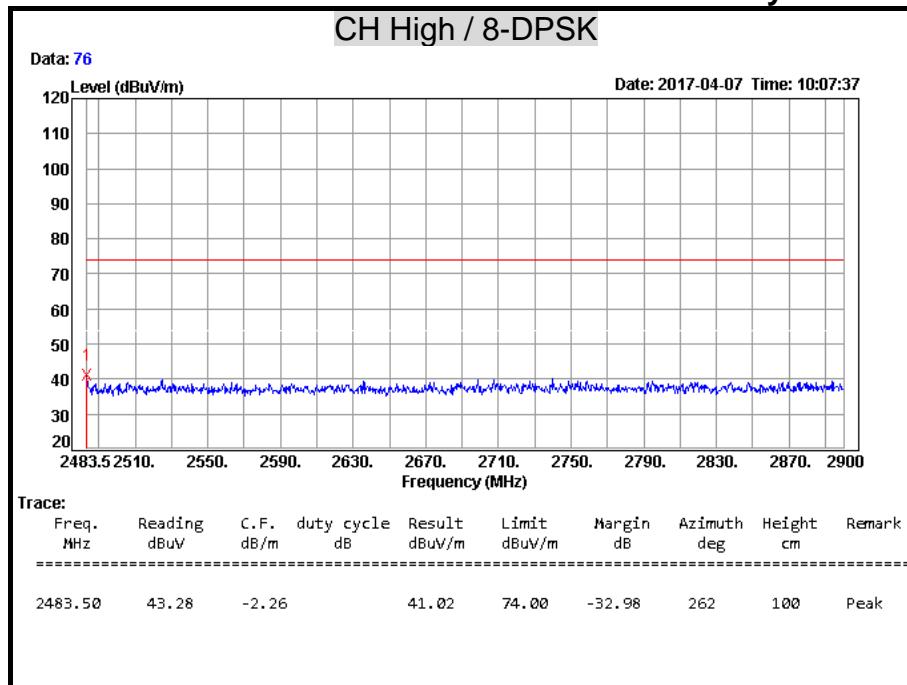**Polarity: Vertical**

**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark Average = Result(AV) - Limit(AV)

For Fundamental & Harmonics:

Result-AV = Result(PK) - Duty Cycle Correction Factor

## 7.10 CONDUCTED EMISSION

### LIMITS



§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5.00	56	46
5.00 - 30.0	60	50

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	Schwarzbeck	NSLK 8127	8127465	07/28/2017
L.I.S.N	Schwarzbeck	NSLK 8127	8127473	03/12/2018
EMI Test Receiver	Rohde & Schwarz	ESHS 30	838550/003	10/25/2017
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100111	06/27/2017
Test S/W		E3.815206a		

*Remark:* Each piece of equipment is scheduled for calibration once a year.

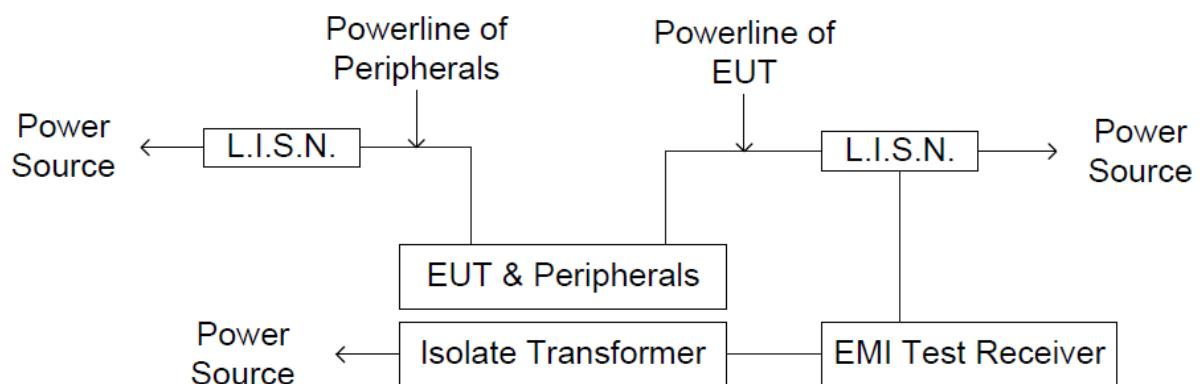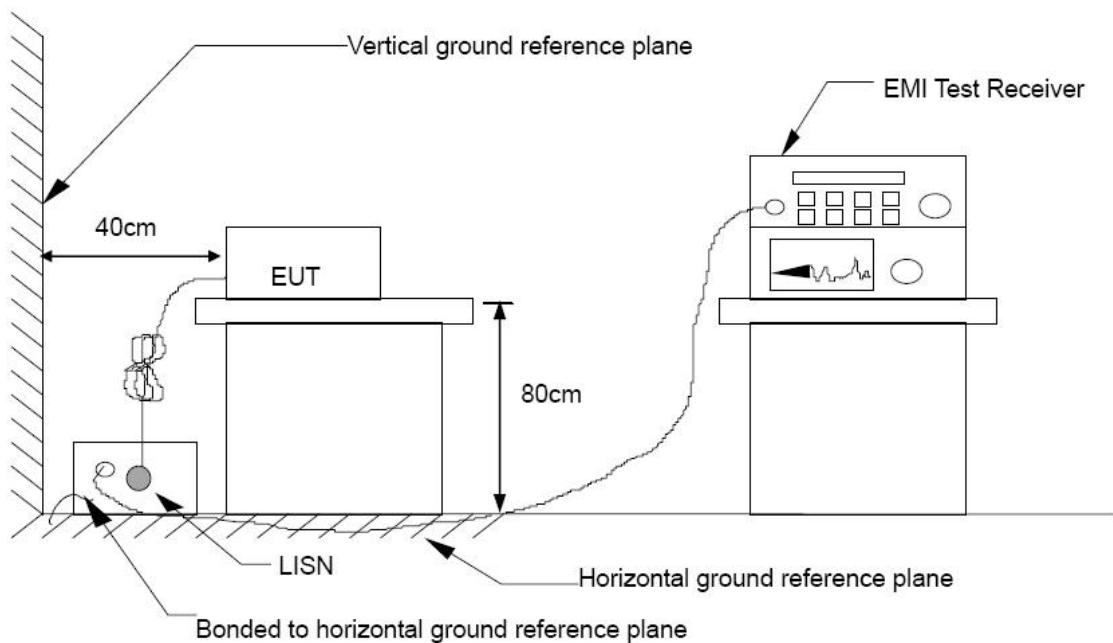**TEST SETUP**

**TEST PROCEDURE**

The basic test procedure was in accordance with ANSI C63.10:2013.

The test procedure is performed in a 4m x 3m x 2.4m (LxWxH) shielded room.


The EUT along with its peripherals were placed on a 1.0m (W) x 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.

The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.

The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.


**TEST RESULTS**

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Waternal Guan
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/06
<b>Test Mode</b>	Mode 2	<b>Temp. &amp; Humidity</b>	25°C, 59%

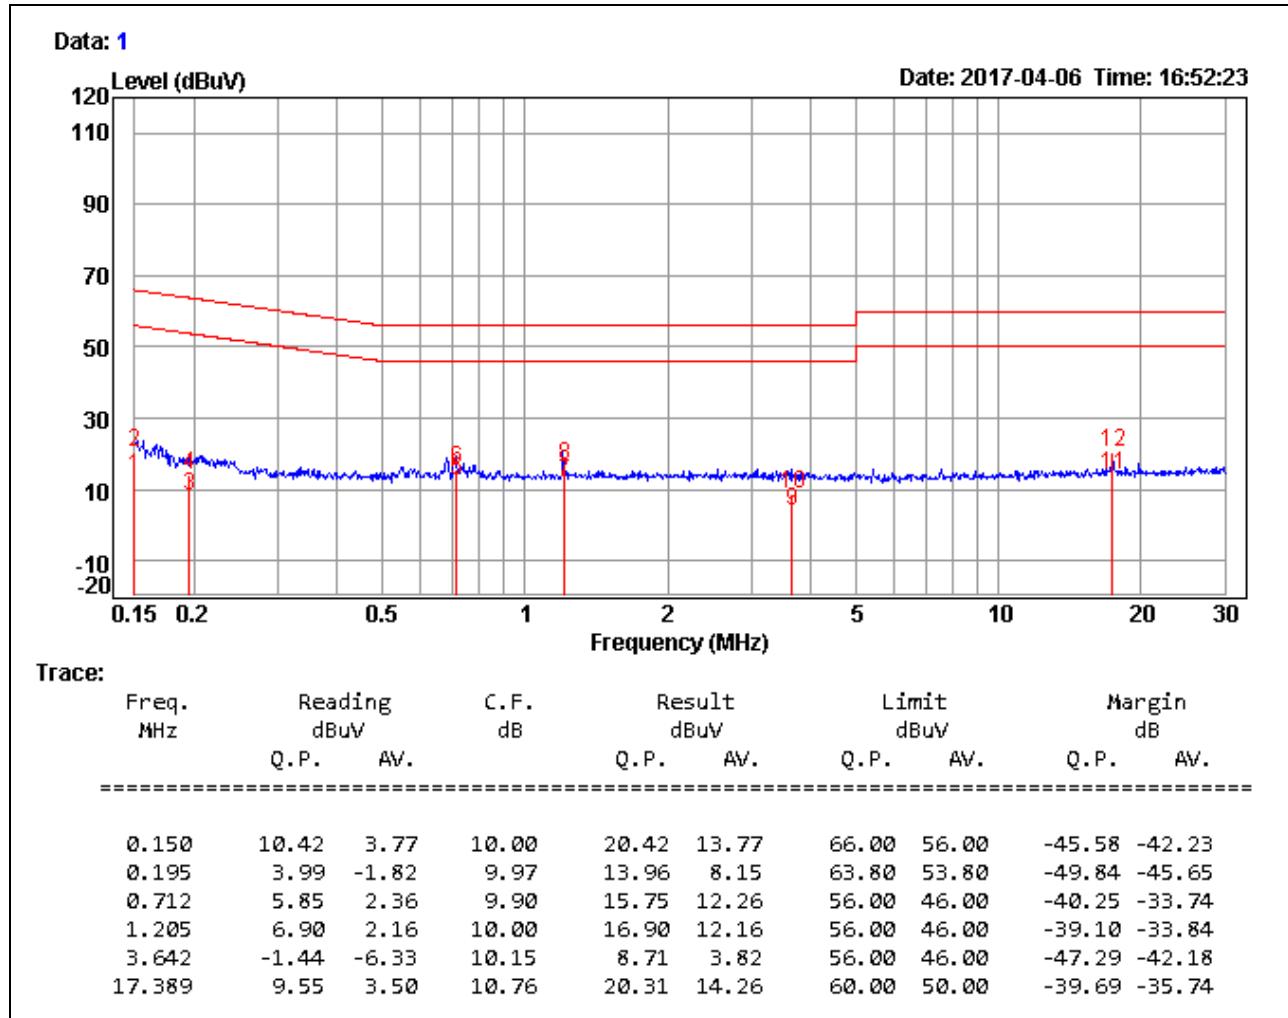**LINE****Remark:**

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value

<b>Product Name</b>	Bluetooth Amplifier	<b>Test By</b>	Waternal Guan
<b>Test Model</b>	BSS-005	<b>Test Date</b>	2017/04/06
<b>Test Mode</b>	Mode 2	<b>Temp. &amp; Humidity</b>	25°C, 59%

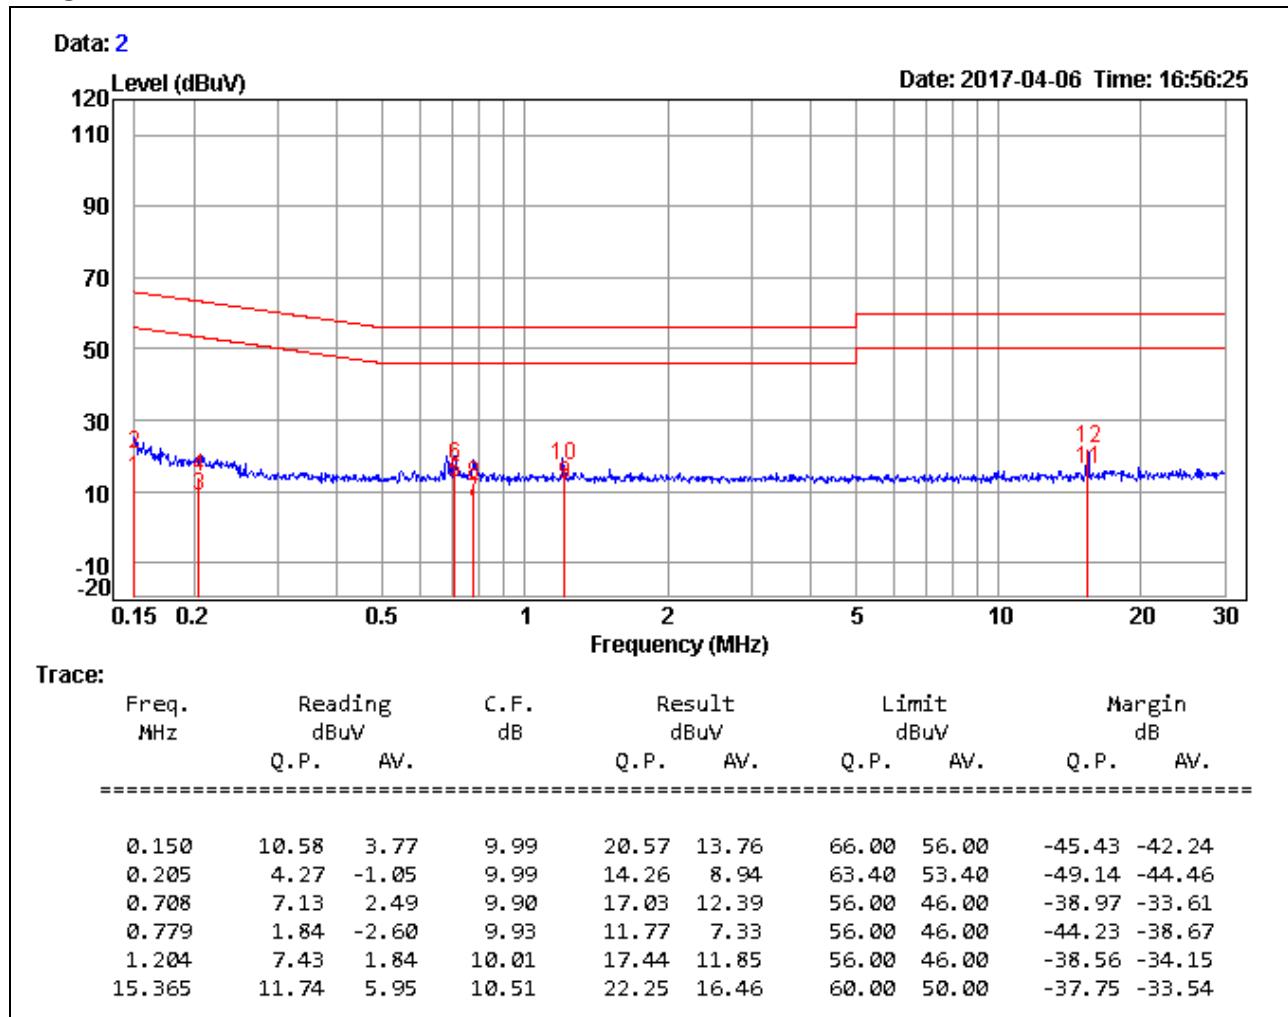**NEUTRAL****Remark:**

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value