



FCC RADIO TEST REPORT

According to

47 CFR FCC Part 15 Subpart C § 15.249

Equipment	: 2.4G Wireless Presenter
Brand Name	: ACROX
Model No.	: PRB / PRC / PR7
FCC ID	: PRDPR01
Applicant	: Acrox Technologies Co., Ltd
Manufacturer	4F., No.89, Minshan St., Neihu Dist., Taipei City 114, Taiwan, R.O.C.
Received Date	: Oct. 05, 2012
Final Test Date	: Nov. 06, 2012

Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1. SUMMARY OF THE TEST RESULT.....	2
2. GENERAL INFORMATION.....	3
2.1. Product Details.....	3
2.2. The Worst Case Measurement Configuration.....	3
2.3. Table for Test Modes	3
2.4. Table for Testing Locations	3
2.5. Table for Supporting Units	4
2.6. Test Configurations.....	4
3. TEST RESULT	5
3.1. AC Power Line Conducted Emissions Measurement.....	5
3.2. Field Strength of Fundamental Emissions Measurement.....	7
3.3. 20dB Spectrum Bandwidth Measurement	10
3.4. Radiated Emissions Measurement.....	14
3.5. Band Edge Emissions Measurement	26
3.6. Antenna Requirements	28
4. LIST OF MEASURING EQUIPMENTS.....	29
5. TEST LOCATION.....	31
6. TAF CERTIFICATE OF ACCREDITATION.....	32
APPENDIX A. TEST PHOTOS	A5
APPENDIX B. PHOTOGRAPHS OF EUT.....	B18



History of This Test Report

Original Issue Date: Nov. 09, 2012

Report No.: FR2N0211

- No additional attachment.
- Additional attachment were issued as following record:



CERTIFICATE OF COMPLIANCE

According to

47 CFR FCC Part 15 Subpart C § 15.249

Equipment : 2.4G Wireless Presenter


Brand Name : ACROX

Model No. : PRB / PRC / PR7

Applicant : Acrox Technologies Co., Ltd

4F., No.89, Minshan St., Neihu Dist.,
Taipei City 114, Taiwan, R.O.C.

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 05, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

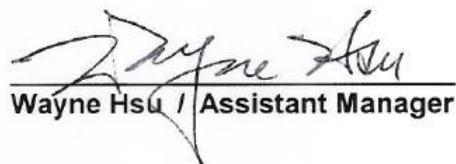

Wayne Hsu / Assistant Manager

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	N/A	-
3.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	16.17 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.249(a)/(d)	Radiated Emissions	Complies	4.15 dB
3.5	15.249(d)	Band Edge Emissions	Complies	12.27 dB
3.6	15.203	Antenna Requirements	Complies	-

Remark: The "N/A" is means not applicable.

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	$\pm 2.3\text{dB}$	Confidence levels of 95%
Field Strength of Fundamental Emissions	$\pm 0.8\text{dB}$	Confidence levels of 95%
20dB Spectrum Bandwidth	$\pm 8.5 \times 10^{-8}$	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	$\pm 0.8\text{dB}$	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Temperature	$\pm 0.7^\circ\text{C}$	Confidence levels of 95%
Humidity	$\pm 3.2\%$	Confidence levels of 95%
DC / AC Power Source	$\pm 1.4\%$	Confidence levels of 95%



2. GENERAL INFORMATION

2.1. Product Details

The device has following model names for different LEDs. Different between each mode is LED; RF portion is identical to each model.

Model name	LED type
PRB / PR7	Red
PRC / PR7	Green

Items	Description
Power Type	3V from battery x2
Modulation	GFSK
Frequency Range	2405MHz ~ 2476MHz
Channel Number	72
Channel Band Width (99%)	2.32 MHz
Max. Field Strength	77.83 dBuV/m at 3m (Average)
Antenna	Internal Antenna

2.2. The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests			
User Position	EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Z.		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane

2.3. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	2405 MHz / 2439 MHz / 2476 MHz
Radiated Emissions 9kHz~1GHz	Normal Mode	-
Radiated Emissions 1GHz~10 th Harmonic	CTX	2405 MHz / 2439 MHz / 2476 MHz
Band Edge Emissions	CTX	2405 MHz / 2439 MHz / 2476 MHz

Note: CTX=continuously transmitting. EUT will be placed in fixed position worst planes is Z plane.

2.4. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.
TH01-HY	OVEN Room	Hwa Ya	-
03CH05-HY	SAC	Hwa Ya	401354

Semi Anechoic Chamber (SAC).




2.5. Table for Supporting Units


The EUT was tested alone.

2.6. Test Configurations

For radiated emissions 9kHz~1GHz

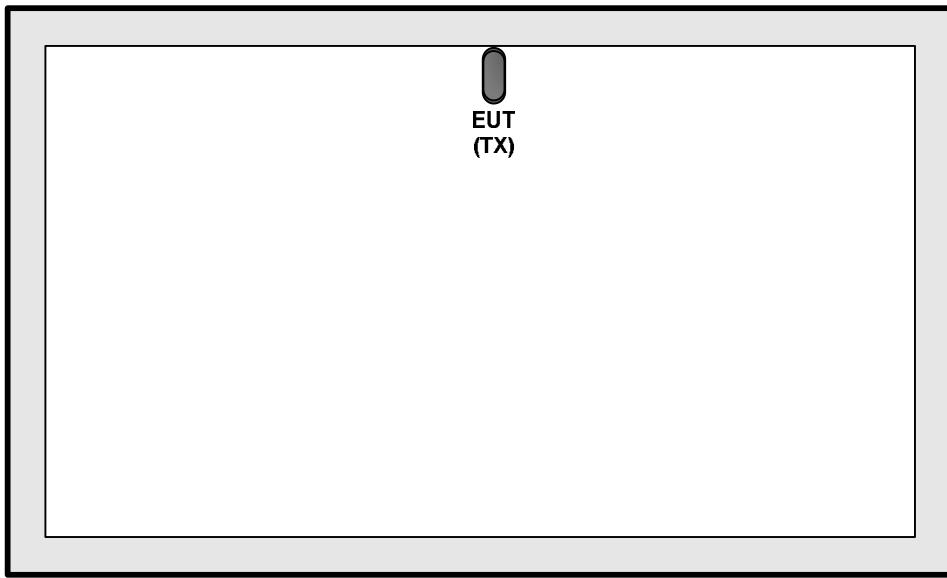

For radiated emissions above 1GHz

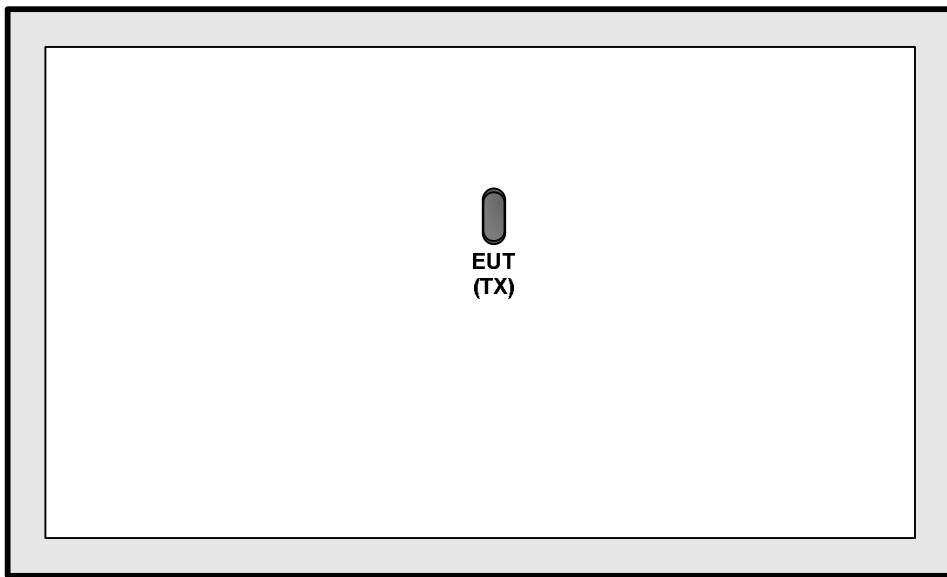



3. TEST RESULT

3.1. AC Power Line Conducted Emissions Measurement

3.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.3. Test Procedures

1. The EUT was warmed up for 15 minutes before testing started.
2. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. Connect telecommunication port to ISN (Impedance Stabilization Network).
5. All the support units are connect to the other LISN.
6. The LISN provides 50 ohm coupling impedance for the measuring instrument.
7. The CISPR states that a 50 ohm, 50 microhenry LISN should be used.
8. Both sides of AC line were checked for maximum conducted interference.
9. The frequency range from 150 kHz to 30 MHz was searched.

3.1.4. Test Setup Layout

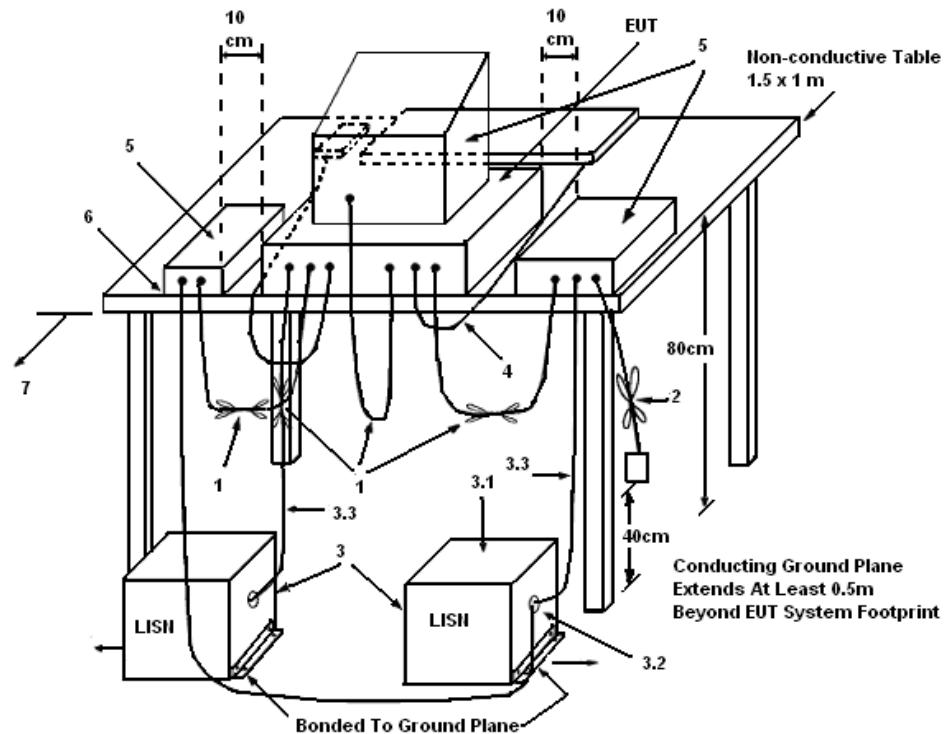

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5. Test Deviation

There is no deviation with the original standard.

3.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7. Results of AC Power Line Conducted Emissions Measurement

The transmitter is battery powered; there is no need to do this testing.



3.2. Field Strength of Fundamental Emissions Measurement

3.2.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94

3.2.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RB	1 MHz Peak / 1MHz Average
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

3.2.4. Test Setup Layout

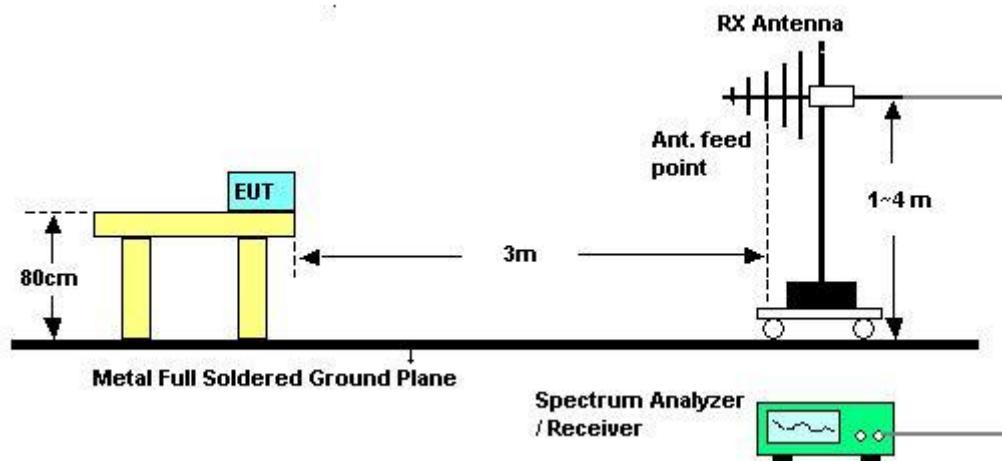

3.2.5. Test Deviation

There is no deviation with the original standard.

3.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



3.2.7. Test Result of Field Strength of Fundamental Emissions

Final Test Date	Oct. 30, 2012	Test Site No.	03CH05-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Eddie	Configurations	2405 MHz / 2439 MHz / 2476 MHz

2405 MHz
Horizontal

Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
3	2405.00	88.77	-25.23	114.00	87.90	32.19	4.58	35.90	144	171	Peak									
3	2405.00	77.53	-16.47	94.00	76.66	32.19	4.58	35.90	144	171	Average									

2439 MHz
Horizontal

Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2439.00	89.07	-24.93	114.00	88.10	32.23	4.60	35.86	139	237	Peak									
1	2439.00	77.83	-16.17	94.00	76.86	32.23	4.60	35.86	139	237	Average									

2476 MHz
Horizontal

Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2476.00	89.03	-24.97	114.00	87.95	32.27	4.63	35.82	108	237	Peak									
1	2476.00	77.79	-16.21	94.00	76.71	32.27	4.63	35.82	108	237	Average									

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

After pretest for Horizontal and Vertical direction, test result of Horizontal direction is worse than vertical. Therefore, only Horizontal direction is tested and presented on test report.

3.3. 20dB Spectrum Bandwidth Measurement

3.3.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band.

3.3.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	100 kHz
VB	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

3.3.4. Test Setup Layout

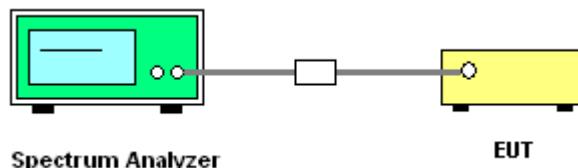

3.3.5. Test Deviation

There is no deviation with the original standard.

3.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.




3.3.7. Test Result of 20dB Spectrum Bandwidth

Final Test Date	Nov. 02, 2012	Test Site No.	TH01-HY
Temperature	224.4°C	Humidity	60%
Test Engineer	Ian	Configurations	2405 MHz / 2439 MHz / 2476 MHz

Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483\text{MHz}$	Test Result
2405 MHz	2.17	2.32	2403.9800	-	Complies
2439 MHz	1.59	1.38	-	-	Complies
2476 MHz	1.17	1.17	-	2476.7000	Complies




20 dB / 99% Bandwidth Plot on 2405 MHz

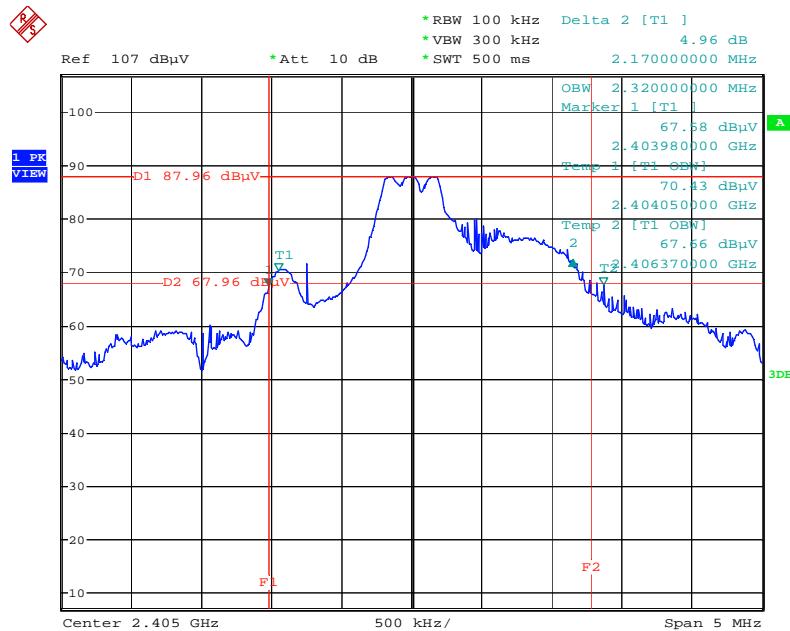

Date: 30.OCT.2012 17:02:57


20 dB / 99% Bandwidth Plot on 2439 MHz

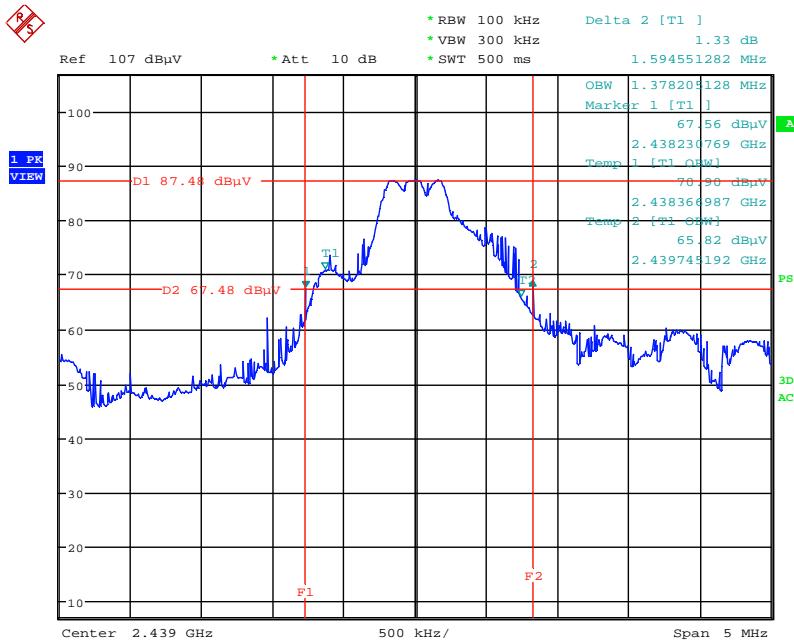

Date: 2.NOV.2012 15:18:47



20 dB / 99% Bandwidth Plot on 2476 MHz

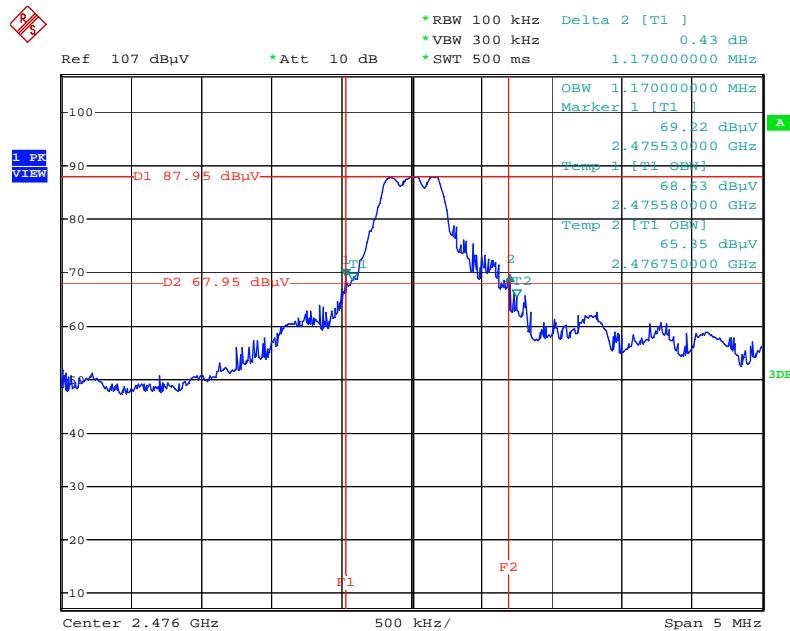

Date: 30.OCT.2012 17:19:29



3.4. Radiated Emissions Measurement

3.4.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.4.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP




3.4.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.4.4. Test Setup Layout

For radiated emissions below 30MHz

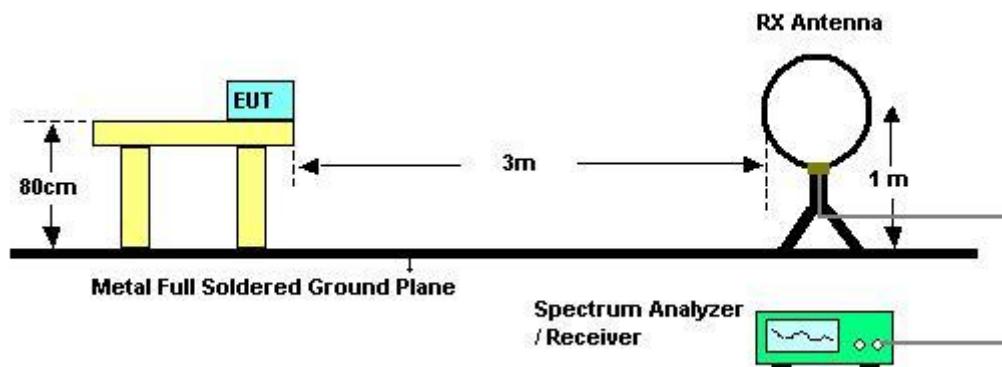

For radiated emissions above 30MHz

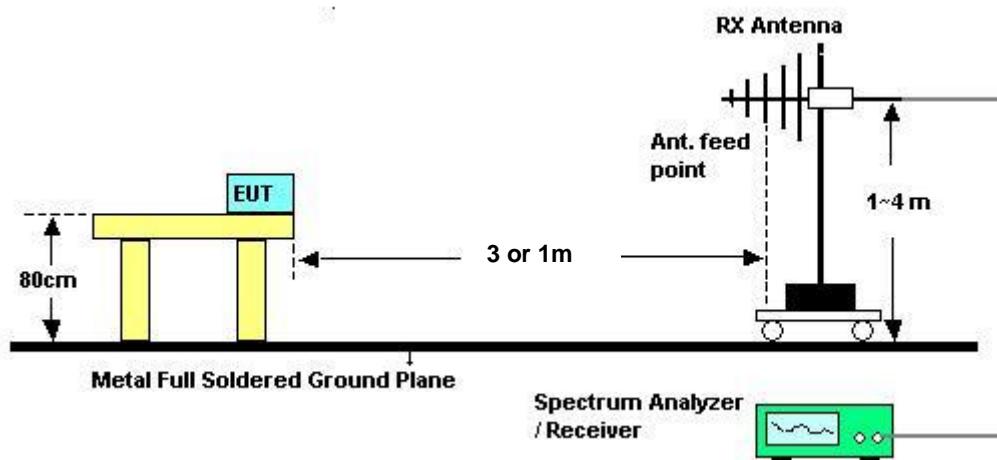

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.4.5. Test Deviation

There is no deviation with the original standard.

3.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.4.7. Results of Radiated Emissions (9kHz~30MHz)**

Final Test Date	Nov. 05, 2012	Test Site No.	03CH05-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Eddie		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor.




3.4.8. Results of Radiated Emissions (30MHz~1GHz)

Final Test Date	Nov. 05, 2012	Test Site No.	03CH05-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Eddie	Configurations	2439 MHz

Horizontal

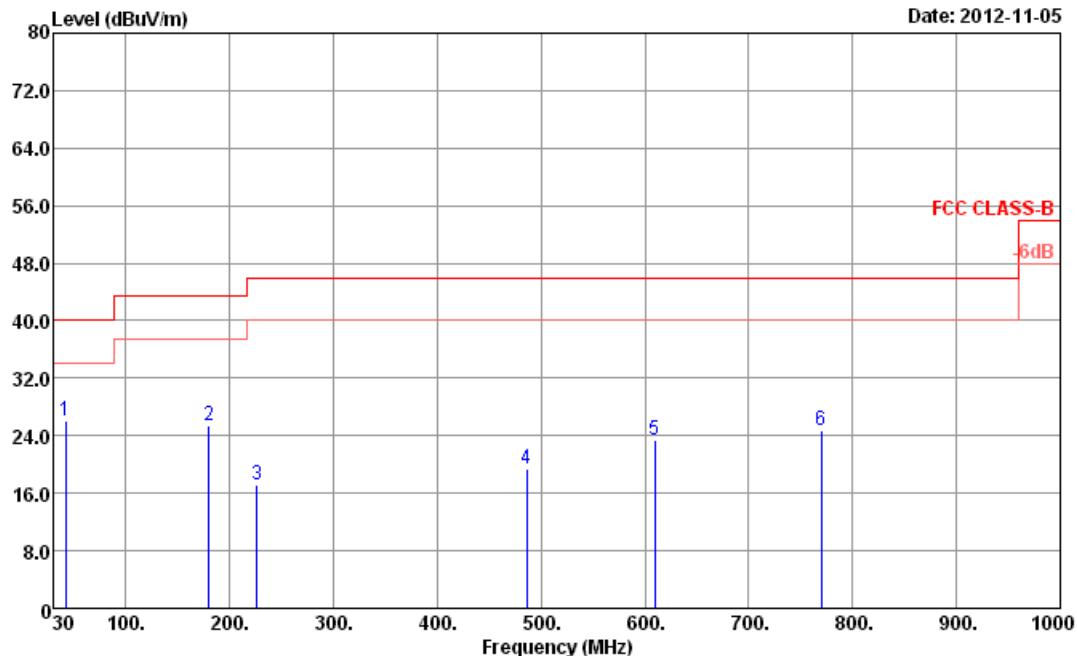

Freq MHz	Level dBuV/m	Over Limit		Read Line Level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	A/Pos cm	T/Pos deg	Remark
		Limit dB	Line dBuV/m							
1	41.64	26.01	-13.99	40.00	44.56	12.35	0.67	31.57	---	--- Peak
2	180.35	25.35	-18.15	43.50	46.02	8.89	1.42	30.98	---	--- Peak
3	225.94	17.23	-28.77	46.00	36.76	9.83	1.57	30.93	---	--- Peak
4	485.90	19.43	-26.57	46.00	29.92	17.82	2.35	30.66	---	--- Peak
5	609.09	23.38	-22.62	46.00	31.07	20.17	2.49	30.35	---	--- Peak
6	770.11	24.80	-21.20	46.00	29.84	22.20	2.79	30.03	---	--- Peak

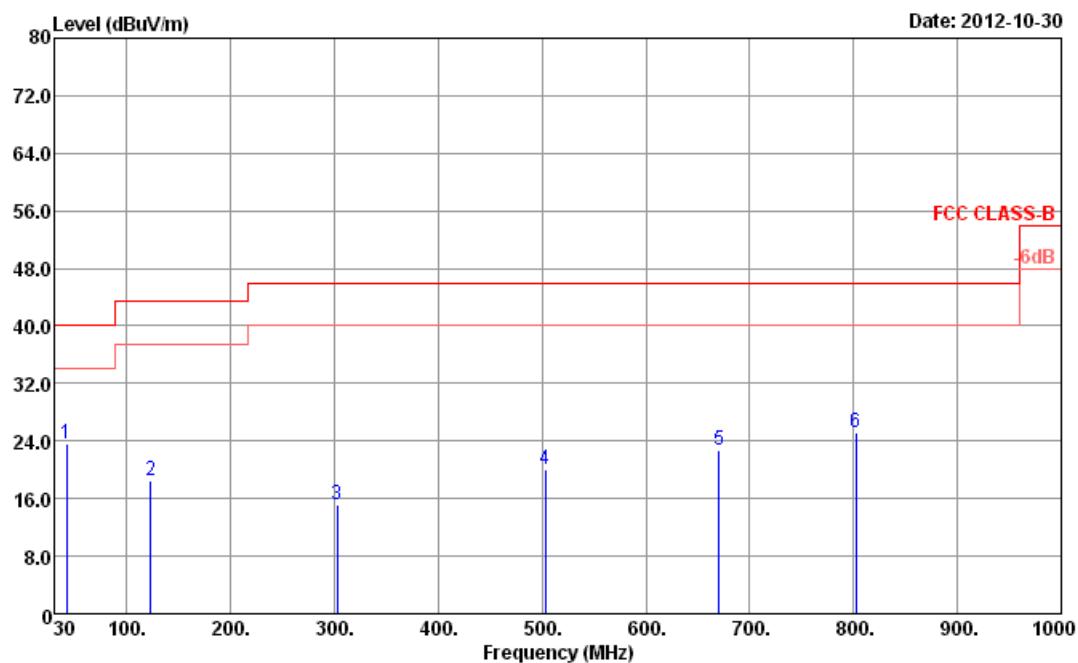**Vertical**

Freq MHz	Level dBuV/m	Over Limit		Read Level dBuV	Antenna Factor dB/m	Cable Loss Factor dB	Preamp Factor dB	A/Pos cm	T/Pos deg	Remark
		Limit dB	Line dBuV/m							
1	41.64	23.60	-16.40	40.00	42.15	12.35	0.67	31.57	---	--- Peak
2	123.12	18.40	-25.10	43.50	36.78	11.80	1.17	31.35	---	--- Peak
3	302.57	15.06	-30.94	46.00	30.73	13.37	1.89	30.93	---	--- Peak
4	503.36	19.99	-26.01	46.00	30.16	18.13	2.31	30.61	---	--- Peak
5	670.20	22.72	-23.28	46.00	30.06	20.30	2.51	30.15	---	--- Peak
6	802.12	25.27	-20.73	46.00	30.13	22.12	2.82	29.80	---	--- Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


3.4.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Final Test Date	Nov. 06, 2012	Test Site No.	03CH05-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Eddie	Configurations	2405 MHz

Horizontal

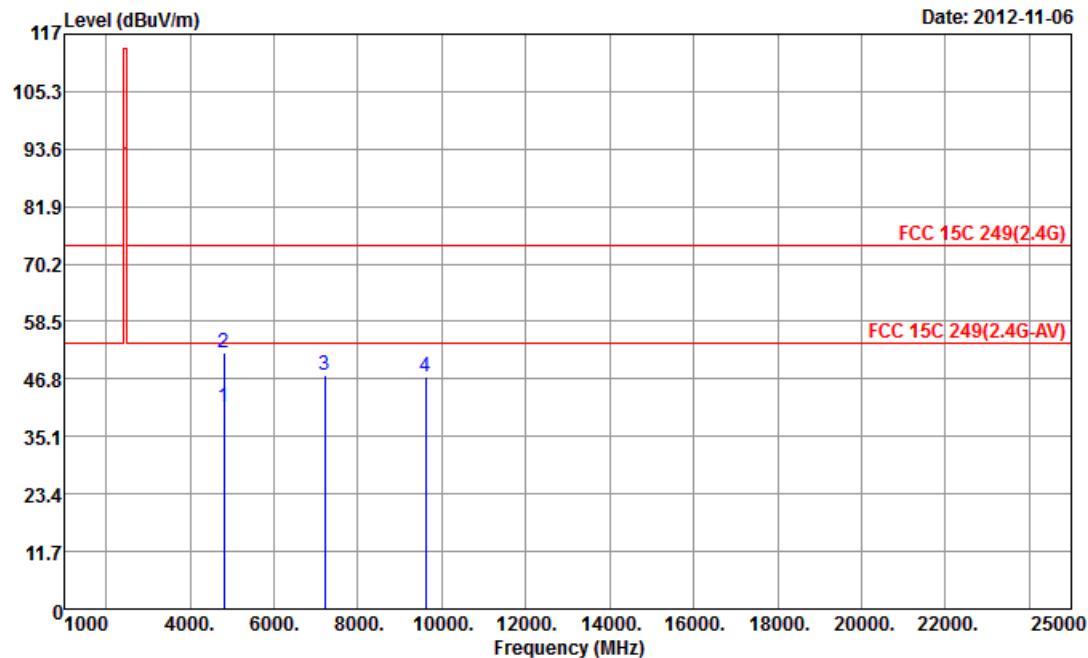

Freq	Level	Over Limit		Read Line	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
		MHz	dBuV/m							
1	4810.00	40.97	-13.03	54.00	35.17	34.26	6.50	34.96	101	67 Average
2	4810.00	52.21	-21.79	74.00	46.41	34.26	6.50	34.96	101	67 Peak
3	7215.00	47.44	-6.56	54.00	38.13	36.06	8.24	34.99	100	99 PK
4	9620.00	47.19	-6.81	54.00	36.32	37.04	9.48	35.65	100	163 PK

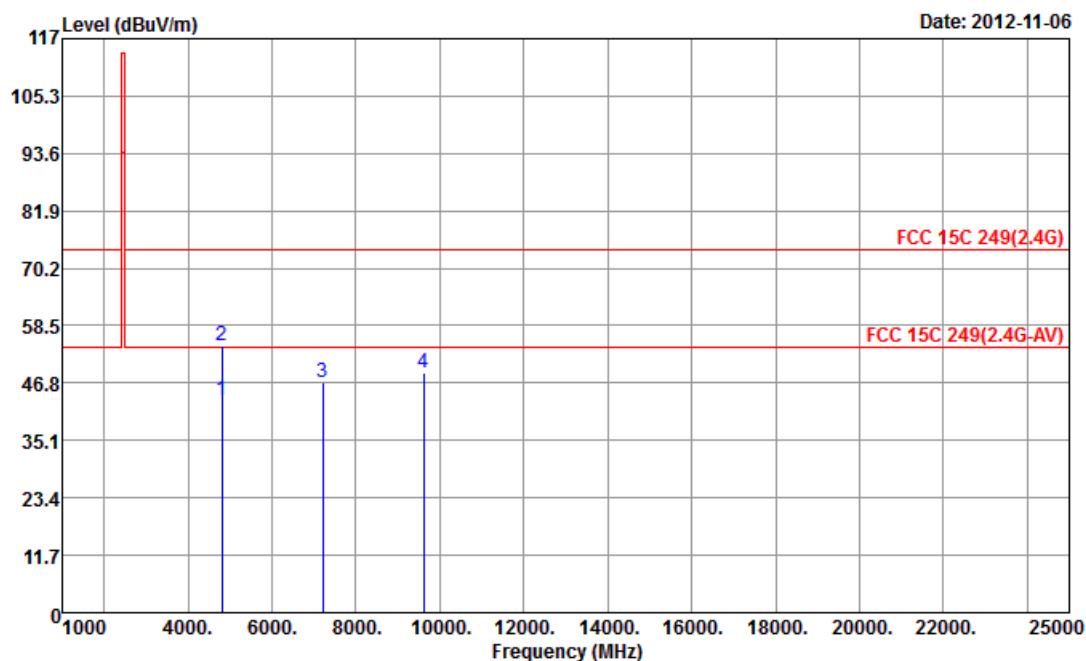**Vertical**

	Freq	Level	Over Limit	Limit Line	Read	Antenna Level	Cable Factor	Preamp Loss	dB	dB	cm	deg	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m							
1	4810.00	43.20	-10.80	54.00	37.40	34.26	6.50	34.96	104	178	Average		
2	4810.00	54.44	-19.56	74.00	48.64	34.26	6.50	34.96	104	178	Peak		
3	7215.00	46.92	-7.08	54.00	37.61	36.06	8.24	34.99	100	133	PK		
4	9620.00	48.85	-5.15	54.00	37.98	37.04	9.48	35.65	100	216	PK		




FCC RADIO TEST REPORT


Report No. : FR2N0211

Final Test Date	Nov. 06, 2012	Test Site No.	03CH05-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Eddie	Configurations	2439 MHz

Horizontal

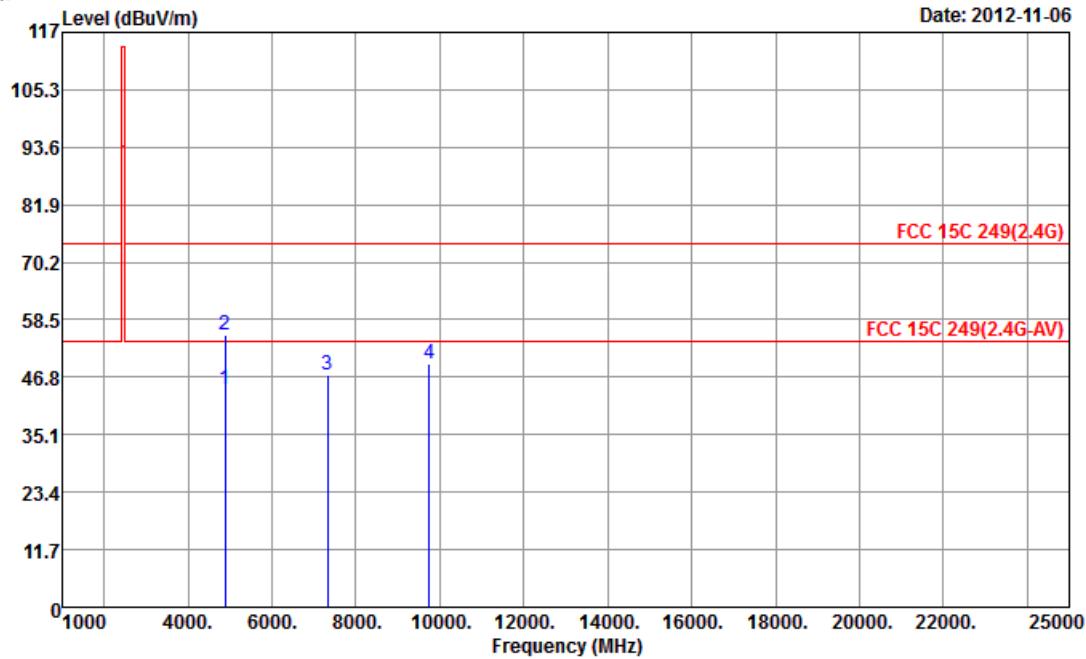

	Freq	Level	Over Limit	Limit Line	Read	Antenna Level	Cable Factor	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4878.00	44.28	-9.72	54.00	38.45	34.28	6.53	34.98	100	193	Average
2	4878.00	55.52	-18.48	74.00	49.69	34.28	6.53	34.98	100	193	Peak
3	7317.00	47.39	-6.61	54.00	37.96	36.04	8.42	35.03	100	112	PK
4	9756.00	49.52	-4.48	54.00	38.51	37.21	9.50	35.70	100	252	PK

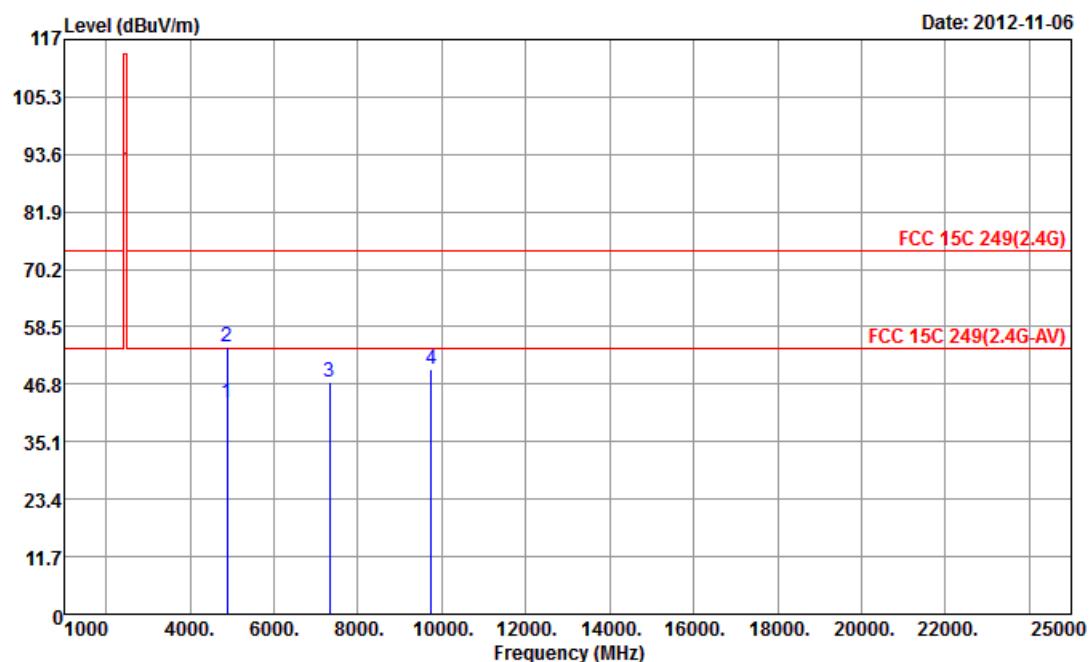**Vertical**

Freq	Level	Over Limit	Limit Line	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
1	4878.00	43.09	-10.91	54.00	37.26	34.28	6.53	34.98	104	122 Average
2	4878.00	54.33	-19.67	74.00	48.50	34.28	6.53	34.98	104	122 Peak
3	7317.00	47.17	-6.83	54.00	37.74	36.04	8.42	35.03	100	185 PK
4	9756.00	49.85	-4.15	54.00	38.84	37.21	9.50	35.70	100	199 PK




FCC RADIO TEST REPORT

Report No. : FR2N0211

Final Test Date	Nov. 06, 2012	Test Site No.	03CH05-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Eddie	Configurations	2476 MHz


Horizontal

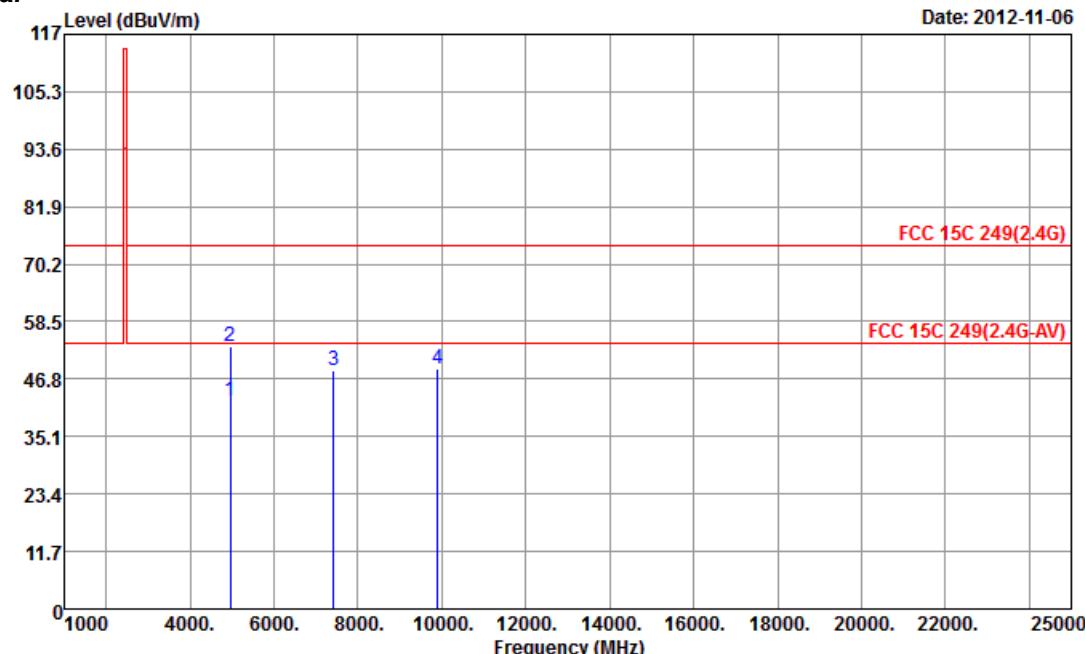

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4952.00	42.35	-11.65	54.00	36.48	34.29	6.57	34.99	100	67	Average
2	4952.00	53.59	-20.41	74.00	47.72	34.29	6.57	34.99	100	67	Peak
3	7428.00	48.44	-5.56	54.00	38.86	36.01	8.64	35.07	100	169	PK
4	9904.00	48.93	-5.07	54.00	37.80	37.38	9.51	35.76	100	133	PK



Vertical

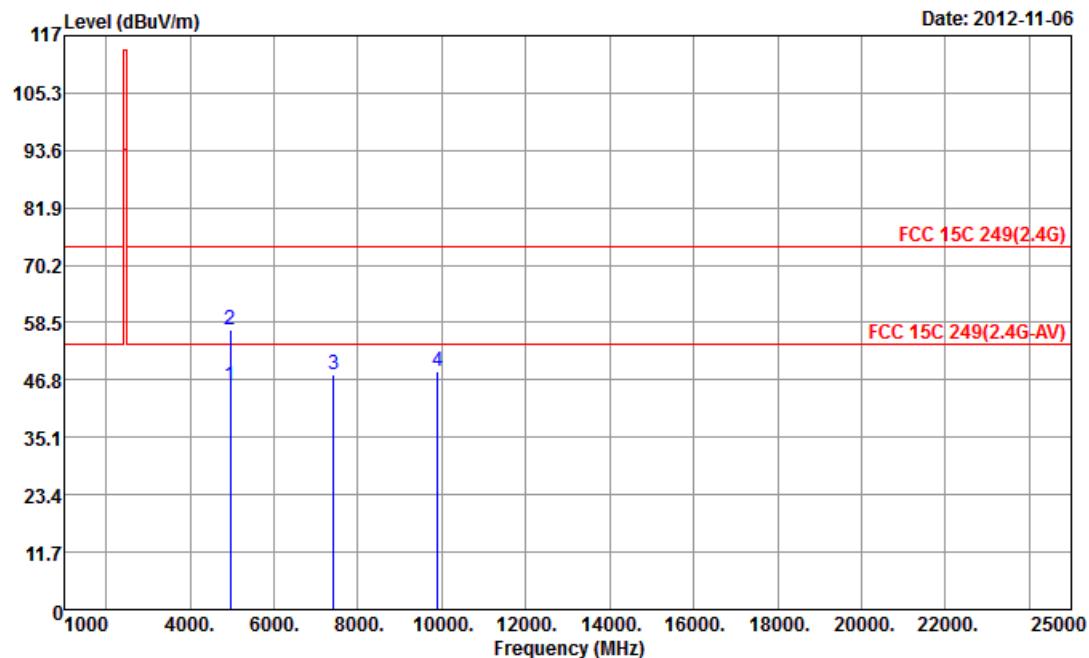

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4952.00	45.78	-8.22	54.00	39.91	34.29	6.57	34.99	123	212	Average
2	4952.00	57.02	-16.98	74.00	51.15	34.29	6.57	34.99	123	212	Peak
3	7428.00	48.04	-5.96	54.00	38.46	36.01	8.64	35.07	100	271	PK
4	9904.00	48.64	-5.36	54.00	37.51	37.38	9.51	35.76	100	271	PK



3.5. Band Edge Emissions Measurement

3.5.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

3.5.3. Test Procedures

1. The test procedure is the same as section 3.2.3, only the frequency range investigated is limited to 2MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 3.2.4.

3.5.5. Test Deviation

There is no deviation with the original standard.

3.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



3.5.7. Test Result of Band Edge

Final Test Date	Nov. 05, 2012	Test Site No.	03CH05-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Eddie	Configurations	2405 MHz / 2476MHz

2405 MHz

	Freq	Over Level	Limit	Read Line	Antenna Level	Cable Factor	Preamp Loss	A/Pos dB	T/Pos dB	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2390.00	45.00	-29.00	74.00	44.17	32.17	4.57	35.91	144	171 Peak
2	2400.00	52.97	-21.03	74.00	52.11	32.18	4.58	35.90	144	171 Peak
1	2390.00	33.35	-20.65	54.00	32.52	32.17	4.57	35.91	144	171 Average
2	2400.00	41.73	-12.27	54.00	40.87	32.18	4.58	35.90	144	171 Average

2476 MHz

	Freq	Over Level	Limit	Read Line	Antenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
2	2483.50	41.73	-32.27	74.00	40.64	32.28	4.63	35.82	108	237 Peak
2	2483.50	30.49	-23.51	54.00	29.40	32.28	4.63	35.82	108	237 Average

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

After pretest for Horizontal and Vertical direction, test result of Horizontal direction is worse than vertical. Therefore, only Horizontal direction is tested and presented on test report.



3.6. Antenna Requirements

3.6.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.6.2. Antenna Connector Construction

Please refer to section 2.1 in this test report; antenna connector complied with the requirements.



4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Feb. 21, 2012	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSV 40	15195-01-00	9KHz~40GHz	Jan. 06, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100302	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345672/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

**FCC RADIO TEST REPORT**

Report No. : FR2N0211

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP	100055	9Kz – 40GHz	Jun. 06, 2012	Radiation (03CH05-HY)
Receiver	R&S	ESU26	100390	20Hz – 26.5GHz	Dec. 08, 2011	Radiation (03CH05-HY)
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH05-HY	30 MHz - 1 GHz 3m	N/A	Radiation (03CH05-HY)
Amplifier	COM-POWER	PA-103	161075	1KHz - 1GHz	Feb. 27, 2012	Radiation (03CH05-HY)
Amplifier	Agilent	8449B	3008A02665	1GHz – 26.5 GHz	Aug. 28, 2012	Radiation (03CH05-HY)
Horn Antenna	ETS-LINDGREN	3117	66584	1GHz~18GHz	Aug. 09, 2012	Radiation (03CH05-HY)
RF Cable-R03m	Jye Bao	RG142	03CH05-HY	30 MHz - 1 GHz	Oct. 14, 2012	Radiation (03CH05-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX104	03CH05-HY	1GHz~40GHz	Oct. 14, 2012	Radiation (03CH05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2725	30 MHz - 1 GHz	Oct. 06, 2012	Radiation (03CH05-HY)
Turn Table	HD	HD100	420/611	0 - 360 degree	N/A	Radiation (03CH05-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012	Radiation (03CH05-HY)

Note: Calibration Interval of instruments listed above is two year.

**5. TEST LOCATION**

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei 221, Taiwan, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
LINKOU	ADD : No. 30-2, Dingfu Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C. TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei 114, Taiwan, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei 235, Taiwan, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085



6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-111208

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sportun International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
Accreditation Program for Telecommunication Equipment
Testing Laboratory
Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 08, 2011

P1, total 24 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix