



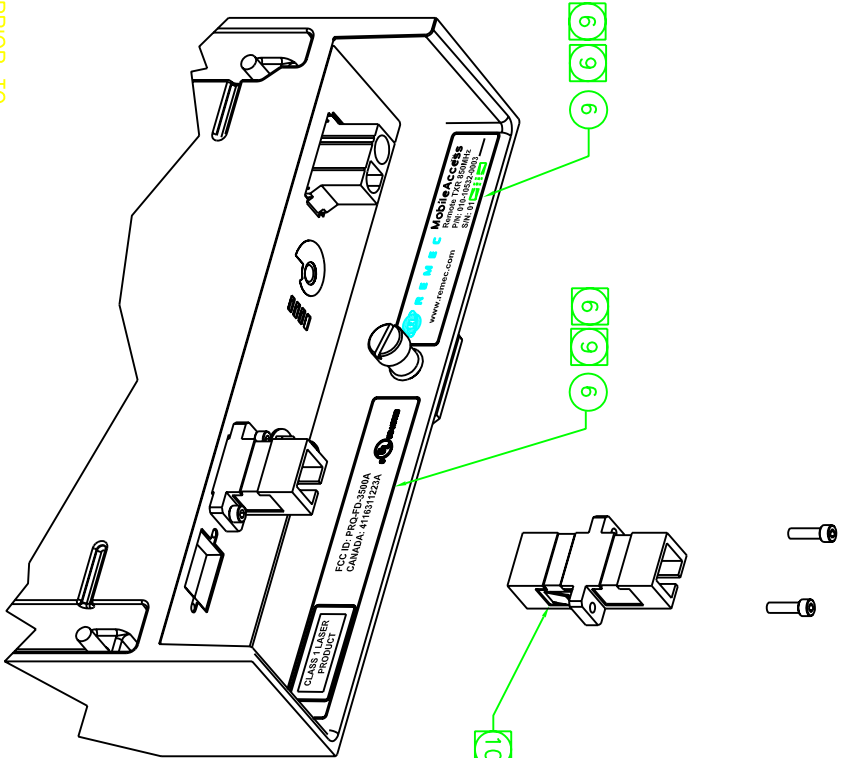

NOTES:

- 1 TIGHTEN NUT TO RF CONNECTOR PRIOR TO TIGHTENING MOUNTING SCREWS TO PCB.
- 2 INCLUDED WITH HOUSING
- 3 NUT AND WASHER INCLUDED WITH ASSY 187-1004-01; INSTALL AT THIS LEVEL; BODY TORQUE NOT TO EXCEED X LB-IN
- 4 NUTS AND WASHERS INCLUDED WITH ASSY 700-13245-0001; INSTALL AT THIS LEVEL
- 5 OBSERVE WIRING POLARITY; RED TO +; BLACK TO -
- 6 CLEAN SURFACE WITH ALCOHOL PRIOR TO AFFIXING LABEL
- 7 FIBER OPTIC CABLE; ADD AT THIS LEVEL (CLEAN CONNECTORS WITH ALCOHOL BEFORE INSERTING INTO OPTICAL ADAPTER).
- 8 TAPE FIBER OPTIC CABLES TO HOUSING; ALLOW SUFFICIENT PLAY FOR DISSASSEMBLY; DO NOT STRESS CABLE
- 9 ORIENT LABELS AS SHOWN
- 10 ORIENT OPTICAL SC CONNECTORS AS SHOWN SO THAT METAL CLIP IS INSERTED INTO CASTING
- 11 ORIENT MOLEX CONNECTOR AS SHOWN SO THAT POLARITY OF CABLE ASSEMBLY MATCHES POLARITY MARKINGS ON CASTING

- 12 6-32 INTO COVER INSERT; BODY TORQUE NOT TO EXCEED X LB-IN
- 13 4-40 INTO AL; BODY TORQUE NOT TO EXCEED 5 LB-IN
- 14 2-56 INTO AL; BODY TORQUE NOT TO EXCEED 2 LB-IN
- 15 LEGACY PART NUMBER: A90-8003-04 REV. A

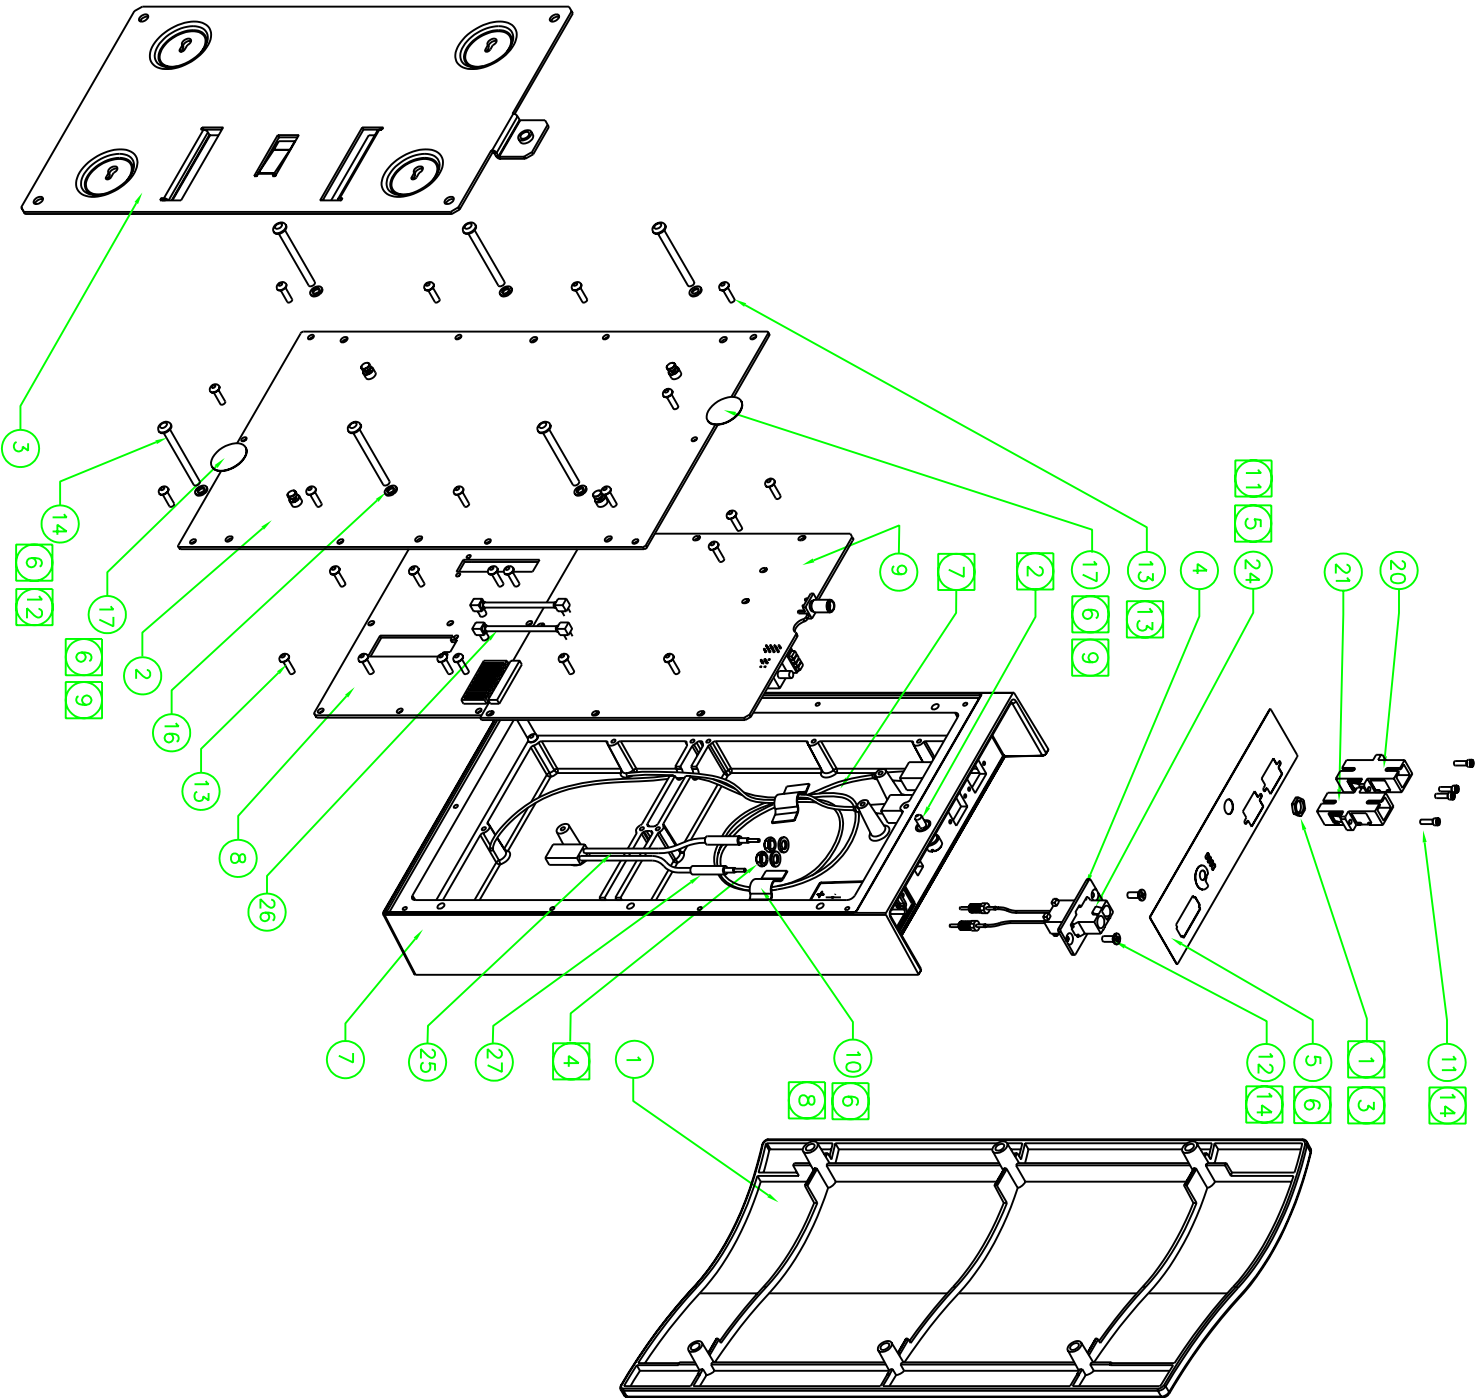

3RD ANGLE PROJECTION		SPECIFICATIONS: UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		300 S. HARBOR BLVD. SUITE 900, ANAHEIM, CALIFORNIA 92805	
TORQUE SPECIFICATION: 000067		TOLERANCES:		ASSY DWG: REMOTE	
MATERIAL:		FINISH:		TRANSCIVER 850 MHZ HP	
N/A		N/A		DRAWING NUMBER	
FINAL ASSEMBLY		USED ON		SIZE	
NEXT ASSY		APPLICATION		D	
DO NOT SCALE DRAWING		SCALE: N/A		FILE: 010-10532-0003-A	
PROPRIETARY INFORMATION		THE INFORMATION CONTAINED IN THE DRAWING IS THE SOLE PROPERTY OF REMEC. REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN PERMISSION OF REMEC IS PROHIBITED		SHEET 1 OF 1	