



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

Date of Report: August 15, 2001  
Date of Submission: August 20, 2001

Federal Communications Commission  
Via Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Microair Avionics PTY LTD  
Equipment: T2000 Transponder  
FCC ID: PS3T2000  
FCC Rules: 87Q (87.475(b)(6))

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.' The signature is fluid and cursive, with 'M. Flom' on top and 'P. Eng.' on the line below, both underlined.

Morton Flom, P. Eng.

enclosure(s)  
cc: Applicant  
MF/cvr

LIST OF EXHIBITS  
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Microair Avionics PTY LTD

FCC ID: PS3T2000

BY APPLICANT:

1. LETTER OF AUTHORIZATION	x
2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)	
<input checked="" type="checkbox"/> LABEL	
<input checked="" type="checkbox"/> LOCATION OF LABEL	
<input checked="" type="checkbox"/> COMPLIANCE STATEMENT	
<input checked="" type="checkbox"/> LOCATION OF COMPLIANCE STATEMENT	
3. PHOTOGRAPHS, 2.1033(c)(12)	x
4. DOCUMENTATION: 2.1033(c)	
(3) USER MANUAL	x
(9) TUNE-UP/ALIGNMENT PROCEDURE	x
(10) SCHEMATIC DIAGRAM	x
(10) OPERATIONAL DESCRIPTION	x
BLOCK DIAGRAM	x
PARTS LIST	x
ACTIVE DEVICES	x

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

T R A N S M I T T E R      C E R T I F I C A T I O N

of

FCC ID: PS3T2000  
MODEL: T2000 Transponder

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 87Q (87.475(b)(6))

DATE OF REPORT: August 15, 2001

ON THE BEHALF OF THE APPLICANT:

Microair Avionics PTY LTD

AT THE REQUEST OF:

P.O. Wire Transfer

Microair Avionics PTY LTD  
Airport Drive  
P.O. Box 5532  
Bundaberg West  
Queensland, Australia 4670

Attention of:

011 67 7 4155 3048; FAX: +3049  
sales@microair.com.au  
Nigel Andrews, Director  
email: n-andrews@microair.com.au  
and/or Neil Abernethy  
nabernethy@microair.com.au

SUPERVISED BY:

  
Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
	Summary of Calculations	7
2.1046(a)	Carrier Output Power (Conducted)	9
	Detected Pulses	11
2.1047(b)	Modulation Limiting	13
2.1051	Unwanted Emissions (Transmitter Conducted)	14
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	17
2.1053(a)	Field Strength of Spurious Radiation	19
2.1055(a)(1)	Frequency Stability (Temperature Variation)	23
2.1055(b)(1)	Frequency Stability (Voltage Variation)	25

PAGE NO.

1 of 26.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.  
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0180045

d) Client: Microair Avionics PTY LTD  
Airport Drive  
P.O. Box 5532  
Bundaberg West  
Queensland, Australia 4670

e) Identification: T2000 Transponder  
Description: FCC ID: PS3T2000  
VHF Transponder

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: August 15, 2001  
EUT Received: July 23, 2001

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:

  
Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO.

2 of 26.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,  
VOLUME II, PART 2 AND TO

87Q (87.475(b)(6))

Sub-part 2.1033(c)(1): NAME AND ADDRESS OF APPLICANT:

Microair Avionics PTY LTD  
Airport Drive  
P.O. Box 5532  
Bundaberg West  
Queensland, Australia 4670

MANUFACTURER:

Microair Avionics PTY LTD  
Research & Development Manufacturing  
Suite 2, Yeates Ave.  
Boonah QLD 4310

(c)(2): FCC ID: PS3T2000MODEL NO: T2000 Transponder(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 11M0P0N(c)(5): FREQUENCY RANGE, MHz: 960 to 1215(c)(6): POWER RATING, Watts: 158 Peak  
0.016116 Average  
 Switchable     Variable     N/A(c)(7): MAXIMUM POWER RATING, Watts: 200

PAGE NO.

3 of 26.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,  
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual  
COLLECTOR VOLTAGE, Vdc = per manual  
SUPPLY VOLTAGE, Vdc = 14

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

       ATTACHED EXHIBITS  
      x N/A


(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

4 of 26.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

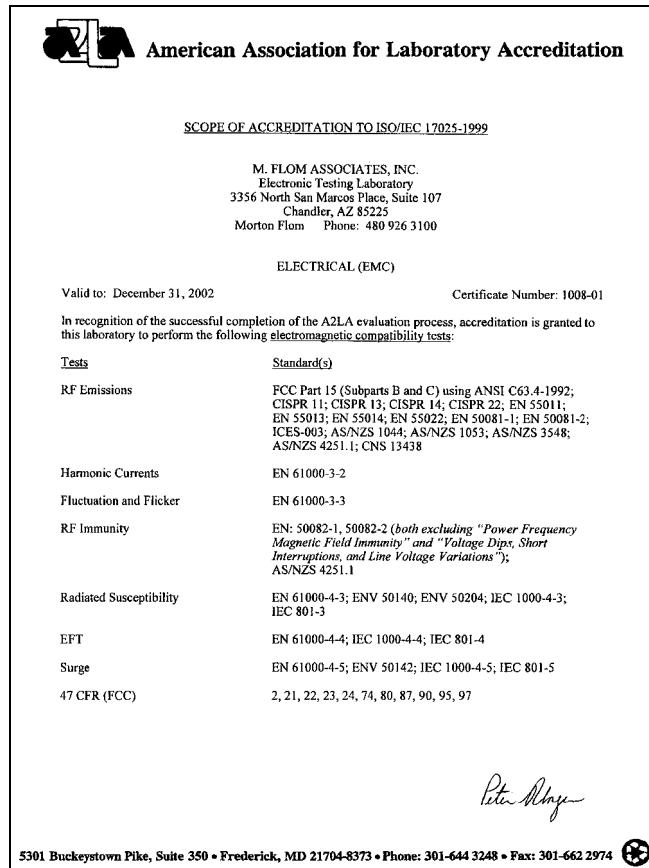

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

PAGE NO.

5 of 26.

Sub-part

2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- \_\_\_\_ 21 - Domestic Public Fixed Radio Services
- \_\_\_\_ 22 - Public Mobile Services
- \_\_\_\_ 22 Subpart H - Cellular Radiotelephone Service
- \_\_\_\_ 22.901(d) - Alternative technologies and auxiliary services
- \_\_\_\_ 23 - International Fixed Public Radiocommunication services
- \_\_\_\_ 24 - Personal Communications Services
- \_\_\_\_ 74 Subpart H - Low Power Auxiliary Stations
- \_\_\_\_ 80 - Stations in the Maritime Services
- \_\_\_\_ 80 Subpart E - General Technical Standards
- \_\_\_\_ 80 Subpart F - Equipment Authorization for Compulsory Ships
- \_\_\_\_ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- \_\_\_\_ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- \_\_\_\_ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- \_\_\_\_ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- \_\_\_\_ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- \_\_\_\_ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- \_\_\_\_ 80 Subpart X - Voluntary Radio Installations
- x 87 - Aviation Services
- \_\_\_\_ 90 - Private Land Mobile Radio Services
- \_\_\_\_ 94 - Private Operational-Fixed Microwave Service
- \_\_\_\_ 95 Subpart A - General Mobile Radio Service (GMRS)
- \_\_\_\_ 95 Subpart C - Radio Control (R/C) Radio Service
- \_\_\_\_ 95 Subpart D - Citizens Band (CB) Radio Service
- \_\_\_\_ 95 Subpart E - Family Radio Service
- \_\_\_\_ 95 Subpart F - Interactive Video and Data Service (IVDS)
- \_\_\_\_ 97 - Amateur Radio Service
- \_\_\_\_ 101 - Fixed Microwave Services

PAGE NO.

6 of 26.

STANDARD TEST CONDITIONS  
and  
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 26.

NAME OF TEST: Summary of Calculations

TEST EQUIPMENT: As per attached page

PROCEDURE

Tests and calculations for the indicated parameters were conducted and made as follows:


- (1) The average power, pulse widths, pulse rise and decay times, and the interval between successive output pulses were measured.
- (2) The pulse repetition frequency (P.R.F.) was then calculated from the reciprocal of the interval.
- (3) The duty cycle was calculated from the product of the P.R.F. and the pulse width.
- (4) The average power was corrected for attenuation.
- (5) The peak power was calculated by dividing the average power by the duty cycle.
- (6) The spurious and harmonic radiation characteristics, the occupied bandwidth and the receiver radiation were measured.
- (7) MEASUREMENT RESULTS: ATTACHED

PAGE NO.

8 of 26.

## TEST SET-UP FOR MEASUREMENT OF:

TEST A. AVERAGE POWER      TEST E. SPURIOUS AND HARMONIC EMISSIONS  
 TEST B. PULSE WIDTHS      TEST F. FREQUENCY STABILITY  
 TEST C. PULSE INTERVAL      TEST G. SPURIOUS RADIATION FIELD STRENGTH  
 TEST D. OCCUPIED BANDWIDTH

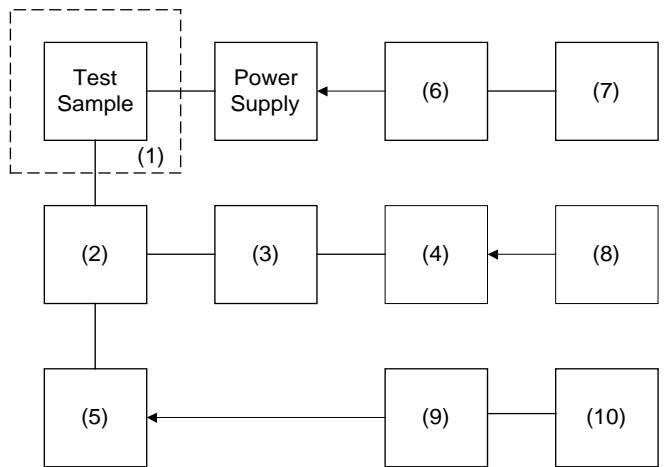

Asset Description (as applicable)	s/n
--------------------------------------	-----

(1) <u>TEMPERATURE CHAMBER:</u>	
i00027 Tenney Temp. Chamber	9083-765-234
(2) <u>DIRECTIONAL COUPLER:</u>	
i00187 Narda 1080 (S), 40 dB	50233
i00107 Narda 104 (X)	890627-001
(3) <u>ADAPTER:</u>	
i00185 HP S281A	16
i00188 HP X281A	17
(4) <u>FREQUENCY METER:</u>	
i00083 HP 536A (S)	1441A02335
i00082 HP 537A (X)	144102889
i00019 HP 5334B	2704A00347
(5) <u>LOAD TERMINATION:</u>	
i00186 Waveline 281 (S)	281
i00189 Narda 320B (X)	8107
(6) <u>SENSOR:</u>	
i00016 HP 8481A (S,X)	1926A25798
i00015 HP 8482H (S)	1545A00606
(7) <u>POWER METER:</u>	
i00039 HP 436A	2709A26776
(8) <u>SPECTRUM ANALYZER:</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104
(9) <u>CRYSTAL DETECTOR:</u>	
i00159 HP 8472B	1822A10054
(10) <u>OSCILLOSCOPE:</u>	
i00030 HP 54502A	2927A00209

PAGE NO. 9 of 26.

NAME OF TEST: R.F. Power Output

SPECIFICATION: 47 CFR 2.1051, 87.131

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

TEST EQUIPMENT: As per previous page, using:

HP435A/436A/E	Power meter
HP8481H/HP8482H	Sensor
HP8566B	Spectrum Analyzer
HP54502A	Oscilloscope
HP8470B	Detector
Narda 4779	Coaxial Attenuator
Tenney	Temperature Chamber

#### MEASUREMENT PROCEDURE

1. The EUT was adjusted in accordance with the manufacturer's tune-up procedure, the test sample and test equipment were set up as shown on the previously attached Test Setup.
2. The power output was measured with an accuracy of  $\pm 3\%$ .
3. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 10 of 26.

MEASUREMENT RESULTS: R.F. Power (Measured and Calculated)

SAMPLE CALCULATION

$$\begin{aligned}
 \text{Average Power} &= 0.16116 \text{ W} \\
 \text{PRF, Hz} &= 1200 \\
 \text{Pulse Width} &= 0.85 \\
 \text{Peak Power} &= \frac{0.16116}{1200 \times 0.85 \times 10^{-6}} \\
 &= 158 \text{ W Peak}
 \end{aligned}$$

Pulse Mode	Average Power, W	Corrected Power	PRF, Hz	Pulse, W - $\mu$ s	Peak P - KWP
Short	0.016116	0.16116	1200	0.85	158

SUPERVISED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 11 of 26.

NAME OF TEST: Detected Pulses

SPECIFICATION: 2.1046(a), 87.135, 87.137

TEST EQUIPMENT: As per previous page, using:  
HP 54502A HP 8472B NARDA 4779


MEASUREMENT PROCEDURE

1. In order to determine some of the characteristics of the various pulses, an HP 51502A Oscilloscope Measurement System was connected, through an HP 8472B Detector and a Narda 4779 Attenuator to the Test Setup (previously attached).
2. The detected pulse shapes are shown on the plots following.
3. MEASUREMENT RESULTS: ATTACHED.

PAGE NO.

12 of 26.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g0180033: 2001-Aug-08 Wed 15:46:00  
 STATE: 2:High Power

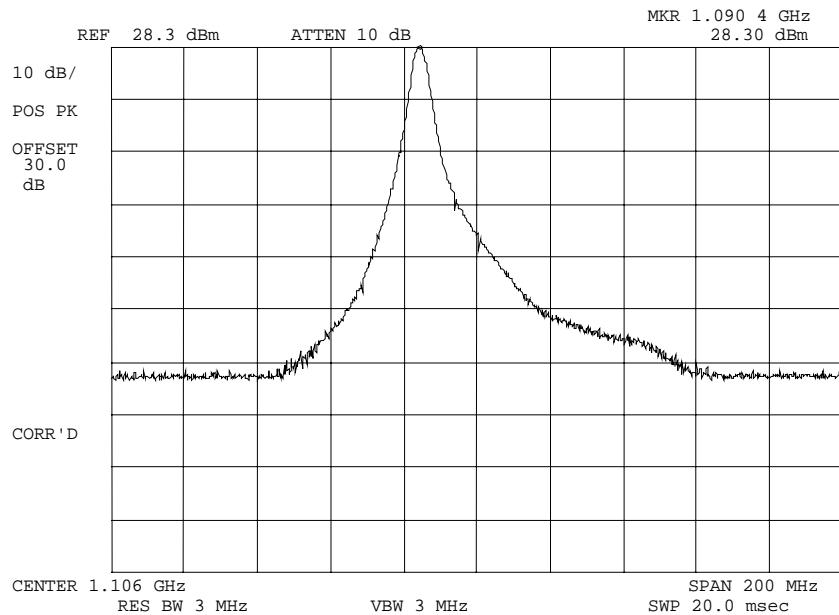

POWER: HIGH  
 MODULATION: INTERNAL  
 T2000SFL TRANSPONDER

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.

PAGE NO. 13 of 26.

NAME OF TEST: Modulation Limiting

SPECIFICATION: 47 CFR 2.1047, 87.141

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph

TEST EQUIPMENT: N/A

PLEASE SEE TECHNICAL DESCRIPTION, ATTACHED

PAGE NO. 14 of 26.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
  - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 1090

SPECTRUM SEARCHED, GHz = 0 to 10 x F<sub>c</sub>

MAXIMUM RESPONSE, Hz = N/A

ALL OTHER EMISSIONS =  $\geq$  20 dB BELOW LIMIT

PERFORMED BY:


  
Doug Noble, B.A.S. E.E.T.

PAGE NO.

15 of 26.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
 TEST B. OUT-OF-BAND SPURIOUS

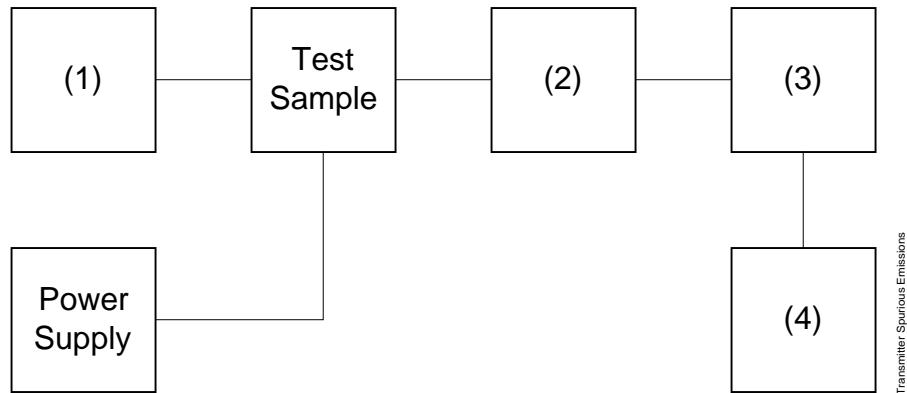

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO. 16 of 26.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

LIMIT(S), dBc  
-(43+10xLOG P) = -35

g0180035: 2001-Aug-08 Wed 15:59:00

STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1090.000000	2179.772000	-53.4	-81.7	-40.4
1090.000000	3269.714000	-55.4	-83.7	-42.4
1090.000000	4360.464000	-55.6	-83.9	-42.6
1090.000000	5449.805000	-55.6	-83.9	-42.6
1090.000000	6539.930000	-51	-79.3	-38
1090.000000	7629.730000	-49.9	-78.2	-36.9
1090.000000	8719.965000	-50.1	-78.4	-37.1
1090.000000	9810.385000	-50.2	-78.5	-37.2
1090.000000	10900.338000	-49.8	-78.1	-36.8
1090.000000	11990.237000	-49.1	-77.4	-36.1
1090.000000	13079.784000	-45.3	-73.6	-32.3
1090.000000	14169.569000	-44.7	-73	-31.7
1090.000000	15260.287000	-44.3	-72.6	-31.3
1090.000000	16349.792000	-44.6	-72.9	-31.6

PERFORMED BY:

  
 Doug Noble, B.A.S. E.E.T.

PAGE NO. 17 of 26.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1), 80.209(b), 80.211

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

TEST EQUIPMENT: As per page 9

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. The digital storage mode of the Spectrum Analyzer does not show internal detail of the pulse. Other analyzer settings were attempted in order to obtain a more "dense" pattern. The one presented here proved to be the optimum.
3. The 99% power bandwidth was measured for each pulse mode using HP "Programming note (MAR 1989) for HP 8566B, HP 8568B, Models 218, 226, 236-91".

MEASUREMENT SUMMARY

---

PULSE MODE	99% POWER BANDWIDTH, MHZ
Short	11.0

---

MEASUREMENT RESULTS: ATTACHED


SUPERVISED BY:

  
Doug Noble, B.A.S. E.E.T.

PAGE NO.

18 of 26.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g0180034: 2001-Aug-08 Wed 15:50:00  
 STATE: 2:High Power

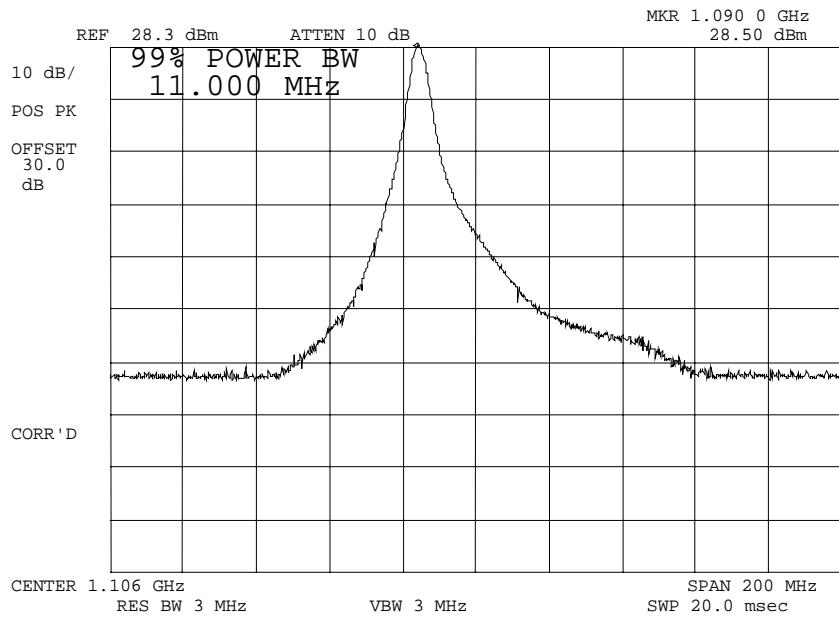

POWER: HIGH  
 MODULATION: INTERNAL  
 99 % POWER BANDWIDTH

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.

PAGE NO. 19 of 26.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 1.2.12

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
  - 1) Resolution Bandwidth  $\leq 3$  kHz.
  - 2) Video Bandwidth  $\geq 10$  kHz
  - 3) Sweep Speed  $\leq 2000$  Hz/second
  - 4) Detector Mode = Positive Peak
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

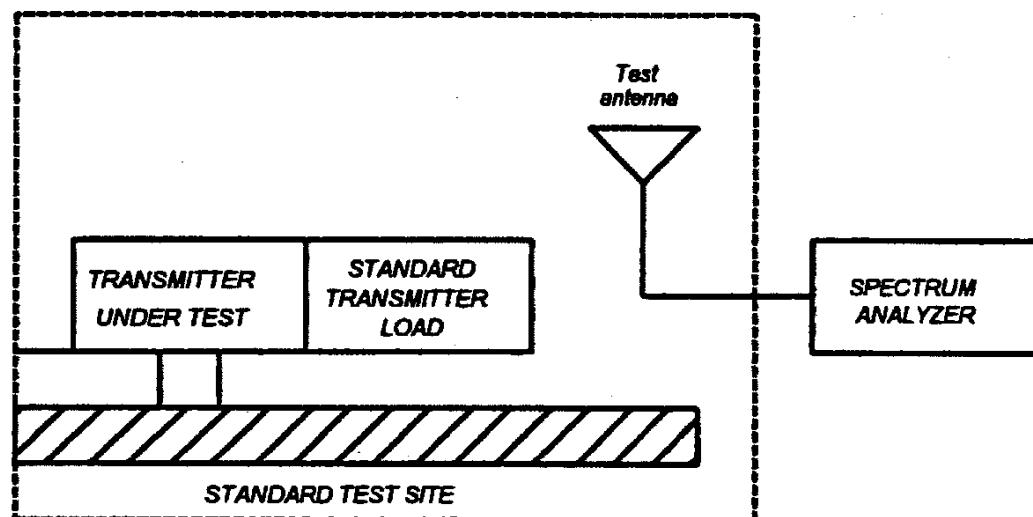

PAGE NO.


20 of 26.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).

E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

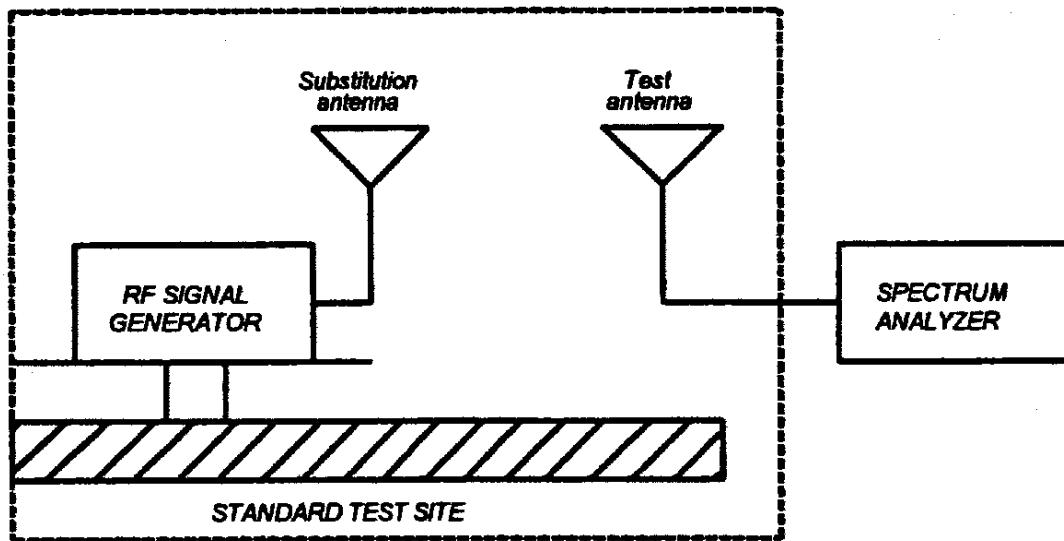

G) Reconnect the equipment as illustrated.

H) Keep the spectrum analyzer adjusted as in step B).

I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO.

21 of 26.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =  
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step 1}$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset (as applicable)	Description	s/n	Cycle	Last Cal
Per ANSI C63.4-1992/2000 Draft, 10.1.4				
<u>TRANSDUCER</u>				
i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-00
i00065	EMCO 3301-B Active Monopole	2635	12 mo.	Sep-00
i00089	Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-00
i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-00
<u>AMPLIFIER</u>				
i00028	HP 8449A	2749A00121	12 mo.	Mar-01
<u>SPECTRUM ANALYZER</u>				
i00029	HP 8563E	3213A00104	12 mo.	Aug-01
i00033	HP 85462A	3625A00357	12 mo.	May-01
i00048	HP 8566B	2511AD1467	6 mo.	May-01

PAGE NO.

22 of 26.

NAME OF TEST: Field Strength of Spurious Radiation  
 g0180039: 2001-Aug-09 Thu 08:54:00  
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	MARGIN, dB
1090.000000	2180.050000	42.17	1.65	-53.6	-38.4
1090.000000	3270.666667	50.5	5.53	-41.3	-26.2
1090.000000	4360.050000	43.17	7.92	-46.3	-31.1
1090.000000	5450.075000	41.67	10.07	-45.6	-30.5
1090.000000	6539.950000	41.17	11.95	-44.3	-29.1
1090.000000	7629.958333	40.67	13.65	-43.1	-27.9
1090.000000	8720.275000	41.83	14.91	-40.6	-25.5
1090.000000	9809.883333	42.5	15.85	-39	-23.9
1090.000000	10899.941667	42.5	17.19	-37.7	-22.5

SUPERVISED BY:

  
 Doug Noble, B.A.S. E.E.T.

PAGE NO. 23 of 26.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(d)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per page 9

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up in the temperature chamber as shown on the previously attached page.
2. With all power removed, the temperature was decreased to -20°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted after waiting the period recommended by the manufacturer. Measurement accuracy is  $\pm 200$  kHz.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted.
4. The temperature tests were performed for the worst case.
5. The frequency tolerance is determined by stabilization of voltages, voltage control feedback circuit, and mechanical tolerances controlled in the manufacture of the magnetron.

5. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 24 of 26.

NAME OF TEST: Frequency Stability (Temperature Variation)

<u>Degrees Celsius</u>	<u>Change in Hz</u>
-20	≤700
-10	≤700
0	≤700
10	≤700
20	≤700
30	≤700
40	≤700
50	≤700

SUPERVISED BY:

  
Doug Noble, B.A.S. E.E.T.

PAGE NO. 25 of 26.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(b)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at  $25\pm5^{\circ}\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

% of STV	Voltage	Change, Hz
85	11.815	0
100	13.9	0
115	15.985	0

SUPERVISED BY:



Doug Noble, B.A.S. E.E.T.

PAGE NO. 26 of 26.

NAME OF TEST: Special Requirements for Ship Radar Transmitters

TEST EQUIPMENT: N/A

1. Based on the test results, the radar transmitter should not produce harmful interference to any other service.
2. As demonstrated in the instruction manual and attached photographs, the radar transmitter does not have any means available for any external adjustment which can result in any deviation from the stipulated applicable technical requirements.

TESTIMONIAL  
AND  
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.