



SK TECH CO., LTD.

Page 1 of 13

## Certificate of Compliance

<b>Test Report No.:</b>	SKTOS-01092		
<b>NVLAP CODE :</b>	200220-0		
<b>Applicant:</b>	PentaMedia Co., Ltd.		
<b>Applicant Address:</b>	4Fl., Sooam Building 66-1, Yangjae-Dong, Seocho-Ku, Seoul, Korea		
<b>Product:</b>	MPEG CARD		
<b>FCC ID:</b>	PSCNAVIS-PRO	<b>Model No.:</b>	NAVIS-PRO
<b>Receipt No.:</b>	SKE20010703-539	<b>Date of receipt:</b>	July 03, 2001
<b>Date of Issue:</b>	July 12, 2001		
<b>Testing location:</b>	SK TECH CO., LTD. 820-2, Wolmoon-Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea		
<b>Test Standards:</b>	ANSI C63.4 / 1992		
<b>Rule Parts:</b>	FCC part 15 Subpart B		
<b>Equipment Class :</b>	Class B Digital Device Peripheral		
<b>Test Result:</b>	The above mentioned product has been tested and passed.		

Prepared by: E.K. Seong

Tested by: K.W. Song/Engineer

Approved by: J.Y. Hyun  
/Lab. Manager

Signature	Date	Signature	Date	Signature	Date
Other Aspects :					
Abbreviations :	· OK, Pass = passed · Fail = failed · N/A = not applicable				

- This test report is not permitted to copy partly without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of one sample of the above mentioned.
- This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.
- We certify that this test report has been based on the measurement standards that is traceable to the national or International standards.

NVLAP Lab. Code: 200220-0



## » » **Contents** « «

Contents	2
List of Tables	2
List of Figures	2
1. General	3
2. Test Site	3
2.1 Location	3
2.2 List of Test and Measurement Instruments	4
2.3 Test Date	4
2.4 Test Environment	4
3. Description of the tested samples	5
3.1 Rating and Physical Characteristics	5
3.2 Submitted Documents	5
4. Measurement Conditions	6
4.1 Modes of Operation	6
4.2 List of Peripherals	6
4.3 Type of Used cables	7
4.4 Test Setup	7
4.5 Uncertainty	7
5. EMISSION Test	8
5.1 Conducted Emissions	8
5.2 Radiated Emissions	12

## » **List of Tables**

Table 1 List of test and measurement Equipment	4
Table 2 Test Data, Conducted Emissions	11
Table 3 Test Data, Radiated Emissions	13

## » **List of Figures**

Figure 1 Spectral Diagram, LINE-PE	9
Figure 2 Spectral Diagram, Neutral-PE	10



## **1. General**

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. All measurements reported herein were performed by SK Tech Co., Ltd. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## **2. Test Site**

SK TECH Co., Ltd.

### **2.1 Location**

820-2, Wolmoon Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea

The test site is in compliance with ANSI C63.4/1992 for measurement of radio interference.



## 2.2 List of Test and Measurement Instruments

Table 1 : List of Test and Measurement Equipment

- Conducted Emissions

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESHS 10	862970/019	02.2002
Artificial Mains Network	ESH2-Z5	834549/001	10.2001
EMI Receiver	ESHS10	835871/002	10.2001
Artificial Mains Network	ESH3-Z5	836679/018	10.2001
Conducted Cable	N/A	N/A	11.2001

- Radiated Emissions

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESVS 10	825120/013	02.2002
EMI Receiver	ESVS 10	834468/008	11.2001
Spectrum Analyzer	R3361A	11730187	06.2001
Amplifier	8447F	3113A05153	05.2002
Log Periodic Antenna	UHALP9107	91071238	02.2002
Biconical Antenna	BBA9106	N/A	02.2002
Open Site Cable	N/A	N/A	N/A
Antenna Mast	5907	N/A	N/A
Antenna & Turntable controller	5906	91X519	N/A
Amp & Receiver connection cable	N/A	N/A	N/A
Amp & Spectrum connection cable	N/A	N/A	N/A
50Ω Switcher	MP59B	M93083	N/A

## 2.3 Test Date

Date of Application : July 03, 2001

Date of Test : July 06, 2001 ~ July 10, 2001

## 2.4 Test Environment

See each test item's description.



### **3. Description of the tested samples**

The EUT is the MPEG CARD.

#### **3.1 Rating and Physical Characteristics**

- PC Bus Type : PCI 2.1
- Video Input : 1 Composite
- Video Output : 1 Composite, 1S-VHS
- Video Input : type(format) : NTSC, PAL
- Audio Input : Analog stereo line input
- Audio Output : Analog stereo line output
- Compression : CBR (constant Bit Rate), VBR(Variable Bit Rate)
- High Quality Time GOP Structure : I, B, P Frames
- Frames : 30 Frames/sec
- Output Stream
  - VCD (MPEG1, 352 x 240, Video 1.15Mbps, Audio 224Kbps)
  - MPEG1-2M (MPEG1, 352 x 240, Video 2Mbps, Audio 224Kbps)
  - SVDC (MPEG2, 480 x 480, Video 2.5Mbps, Audio 224Kbps)
  - MPGE2-4M (MPEG2, 720 x 480, Video 4 Mbps, Audio 384Kbps)
  - MPEG2 -6M (MPGE2, 720 x 480, Video 6Mbps, Audio 384Kbps)
  - MPEG2-8M (MPEG2, 720 x 480, Video 8Mbps, Audio 384Kbps)
  - MPEG2-10M (MPEG2, 720 x 480, Video 10Mbps, Audio 384Kbps)
- Environment
  - Operating Temperature : 0 ~ 60 °C
  - Storing Temperature : -55 ~ 85 °C
  - Humidity : 10% ~ 90%
- Dimension : 170 x 105mm

#### **3.2 Submitted Documents**

N/A



## 4. Measurement Conditions

The operating voltage of EUT is supplied by the PC.

( The PC input voltage is AC 120V, 60Hz)

### 4.1 Modes of Operation

The EUT was in the following operation mode during all testing;

The EUT was installed on the PC and connected with the camera.

Test was made on the mode of displaying picture on the screen and saving AV file.

### 4.2 List of Peripherals

Description	Manufacturer	Model Name	Serial No.	FCC ID
Monitor	View Tech	VT-141	N/A	N/A
Keyboard	Jing Mold	LKB-0107	10209670	N/A
Mouse	Logitech	M-S48	LZH04608022	N/A
Printer	H.P.	2225C	3245512493	DSI6XU2225
Camera	LG	LC-AH40D	60800972	N/A
Adaptor 1 (Monitor)	L.S.E.	LSE9802131240	2K1711039	N/A
Adaptor 2 (Printer)	Dream Electronic	DR-05600U	N/A	N/A
Speaker	FAN HAI DIAN	CMK-660	N/A	DoC
MIC	LG Electronics	N/A	N/A	N/A
Joystick	Logitech	J-ZA10	LZS01651409	DoC
INNO Dispenser	Biopia	BD-2000	N/A	Doc
<b>Personal Computer</b>				
Mother board	Intel	PYRAMID-5E	N23921ER307358	N/A
Power supply	Samsung	PST-108DAM1	C0102008167	N/A
FDD Drive	Samsung	SFD-321B	6436DR300474	N/A
HDD	Samsung	SV3063H	0330JIFR201324	N/A
DVD ROM	Samsung	SD-616	3892D675	A3LSD616



## 4.3 Type of Used Cables

Description	Length	Type of shield	Manufacturer	Remark
PC Power cable	1.6m	Non-Shield	Samsung	
Monitor AC/DC Adaptor cable	1.7m	Non-Shield	View Tech	
Printer AC/DC Adaptor cable	2.0m	Non-Shield	H.P.	
Video Interface cable	1.8m	Shield	View Tech	
Printer Interface cable	1.7m	Shield	H.P.	
S-Video Interface cable	1.6m	Non-Shield	None	
AV Interface cable	1.0m	Shield	None	X 2
Audio Interface cable	1.0m	Shield	None	X 2
TV Antenna Interface cable	1.2m	Shield	None	
Keyboard Interface cable	1.2m	Shield	Jing Mold	
Mouse Interface cable	1.5m	Shield	Logitech	
Joystick Interface cable	1.5m	Shield	Logitech	
Speaker Interface cable	1.8m	Non-Shield	FAN HAI DIAN	
MIC Interface cable	2.0m	Shield	LG Electronics	
INNO Dispenser Interface cable	2.0m	Shield	Biopia	

## 4.4 Test Setup

The test setup photographs showed the external supply connections and interfaces.

## 4.5 Uncertainty

### 1) Radiated disturbance

$U_c$  (Combined standard Uncertainty) =  $\pm 1.9\text{dB}$

Expanded uncertainty  $U = KU_c$

$K = 2$

$\therefore U = \pm 3.8\text{dB}$

### 2) Conducted disturbance

$U_c = \pm 0.88\text{dB}$

$U = KU_c = 2 \times U_c = \pm 1.8\text{dB}$



## 5. EMISSION Test

### 5.1 Conducted Emissions

**Result:** **Pass**

The line-conducted facility is located inside a 2.0M x 3.6M x 7.2M shielded enclosure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 604-05.

A 1m x 1.5m wooden table 80cm. high is placed 40cm. away from the vertical wall and 1.5m away from the side wall of the shielded room. ROHDE & SCHWARZ Model ESH3-Z5 (10kHz-30MHz) 50ohm/50 uH Line-Impedance Stabilization Networks(LISNs) are bonded to the shielded room.

The EUT is powered from the ROHDE & SCHWARZ LISN and the support equipment is powered from the ROHDE & SCHWARZ LISN. Power to the LISNs are filtered by a high-current high-insertion loss Lindgren enclosures power line filters (100dB 14kHz-10GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2".

If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the ROHDE & SCHWARZ LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 450kHz to 30MHz with 100msec. sweep time.

The frequency producing the maximum level was reexamined using EMI/field Intensity Meter (ESHS 10) and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.

**SK TECH CO., LTD.**


Page 9 of 13

**Figure 1 : Spectral Diagram, LINE - PE**

MPEG CARD  
CONDUCTED DISTURBANCE  
EUT: NAVIS-PRO  
Manuf:  
Op Cond:  
Operator:  
Test Spec:  
Comment: LINE-PE

06 Jul 2001 20:01

Scan Settings (1 Range)			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	30MHz	10kHz	10kHz	PK	100msec	Auto	OFF	60dB
Final Measurement:								
		Detector:	X QP					
		Meas Time:	1sec					
		Peaks:	8					
		Acc Margin:	25 dB					

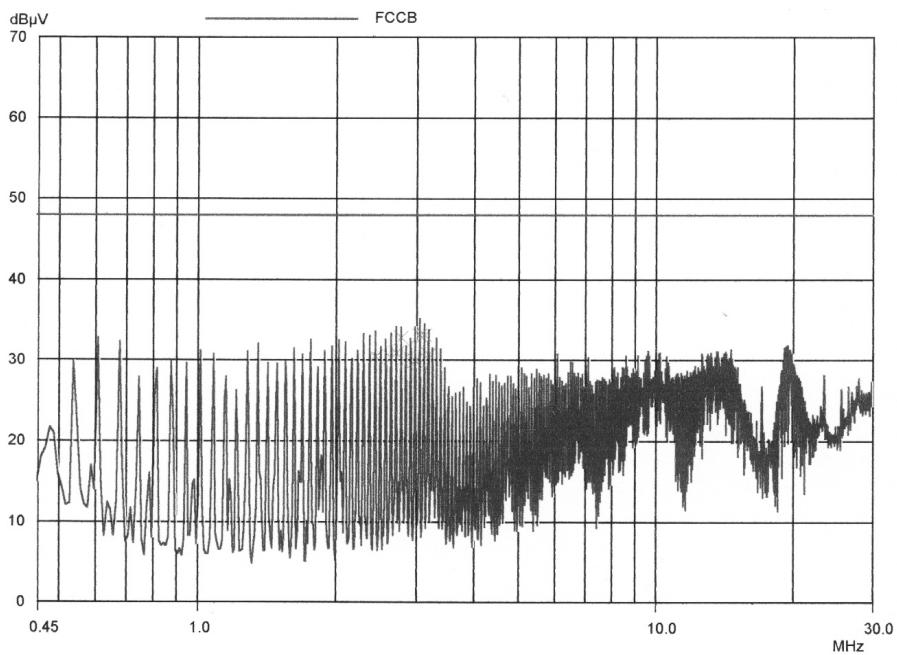

**SK TECH CO., LTD.**

Page 10 of 13


**Figure 2 : Spectral Diagram, NEUTRAL – PE**

**MPEG CARD**  
**CONDUCTED DISTURBANCE**  
EUT: NAVIS-PRO  
Manuf:  
Op Cond:  
Operator:  
Test Spec:  
Comment: NEUTRAL-PE

06 Jul 2001 19:20

Scan Settings		(1 Range)			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
450kHz	30MHz	10kHz	10kHz	PK	100msec	Auto	OFF	60dB	

Final Measurement:      Detector: X QP  
                                  Meas Time: 1sec  
                                  Peaks: 8  
                                  Acc Margin: 25 dB

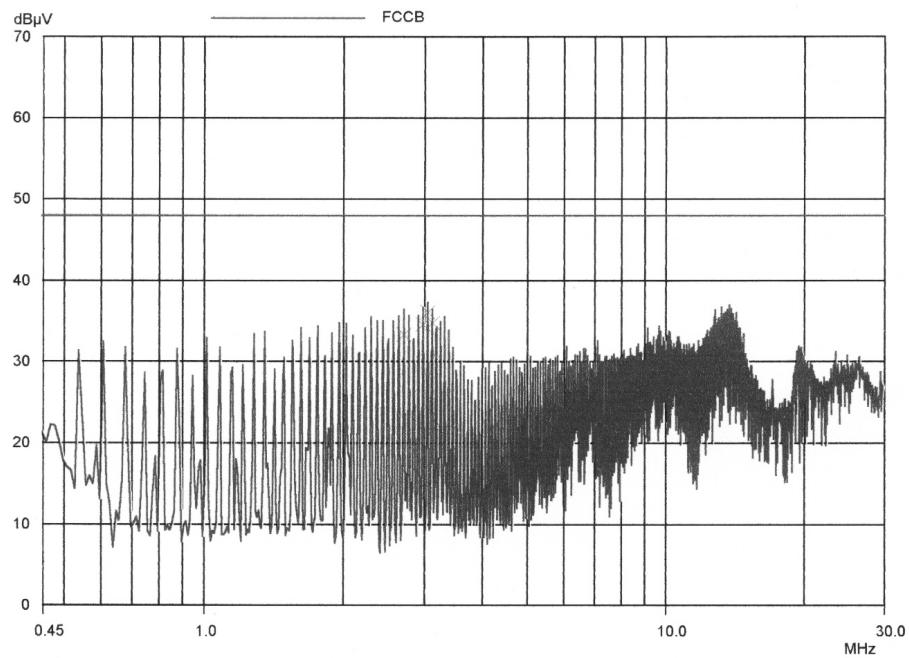

**Table 2: Test Data, Conducted Emissions**

Frequency (MHz)	(1)Reading (dB $\mu$ V)	Line	(2)C/F (dB)	(3)C/L (dB)	(4)Actual (dB $\mu$ V)	(5)Limit (dB $\mu$ V)	(6)Margin (dB)
2.45	30.49	A	0.1	0.3	30.89	48.0	17.11
2.72	33.37	B	0.1	0.4	33.87	48.0	14.13
2.99	34.60	B	0.1	0.4	35.10	48.0	12.90
3.06	36.15	B	0.1	0.4	36.65	48.0	11.35
3.13	34.79	B	0.1	0.4	35.29	48.0	12.71
13.94	33.65	B	0.3	0.6	34.55	48.0	13.45

**NOTES:**

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. Line A = LINE-PE, Line B = NEUTRAL-PE
6. C/F = Correction Factor
7. C/L = Cable Loss

**♠ Margin Calculation**

$$(6)\text{Margin} = (5)\text{Limit} - (4)\text{Actual}$$

$$[(4)\text{Actual} = (1)\text{Reading} + (2)\text{C/F} + (3)\text{C/L}]$$



## 5.2 Radiated Emissions

**Result :****Pass**

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME.

Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found.

The spectrum was scanned from 30 to 300 MHz using biconical antenna and from 300 to 1000 MHz using log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using SCHWARZBECK dipole antennas. The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with FRP.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter(ESVS 10) and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test.

Each EME reported was calibrated using self-calibrating mode.

**Table 3 : Test Data, Radiated Emissions**

Frequency (MHz)	Pol.	Height [m]	Angle [° ]	(1) Reading (dB $\mu$ V)	(2) AFCL (dB/m)	(3) Actual (dB $\mu$ V/m)	(4) Limit (dB $\mu$ V/m)	(5) Margin (dB)
108.30	V	1.0	219	25.3	13.0	38.3	43.5	5.2
135.50	V	1.0	168	22.8	16.2	39.0	43.5	4.5
162.30	V	1.0	94	21.3	17.4	38.7	43.5	4.8
243.30	V	1.0	174	18.9	20.2	39.1	46.0	6.9
433.20	V	1.0	227	19.2	21.7	40.9	46.0	5.1
646.30	V	1.0	318	13.2	26.9	40.1	46.0	5.9

Table. Radiated Measurements at 3-meters

### NOTES:

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emission are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. AFCL = Antenna factor and cable loss
6. H = Horizontal, V = Vertical Polarization

### ♦ Margin Calculation

$$\begin{aligned}
 (5)\text{Margin} &= (4)\text{Limit} - (3)\text{Actual} \\
 (3)\text{Actual} &= (1)\text{Reading} + (2)\text{AFCL}
 \end{aligned}$$