



FCC Test Report

Equipment : Sub 1GHz RF Module
Brand Name : AIRFONIX
Model No. : PCT-A7108-20D
FCC ID : PSH-A710820D
Standard : 47 CFR FCC Part 15.231
Operating Band : 433.3 MHz
Operation : Manually operated within 5 sec
FCC Classification : DSR
Applicant : Professional Computer Technology Limited
Manufacturer : 5F., No.75, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan

The product sample received on Apr. 30, 2013 and completely tested on Jun. 20, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager



Testing Laboratory
1190



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Testing Applied Standards	7
1.3	Testing Location Information	7
1.4	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Measurement Configuration	9
2.4	Test Setup Diagram	10
3	TRANSMITTER TEST RESULT	11
3.1	AC Power-line Conducted Emissions	11
3.2	Emission Bandwidth.....	13
3.3	Fundamental Emissions.....	15
3.4	Transmitter Radiated Unwanted Emissions	17
3.5	Operation Restriction	23
4	TEST EQUIPMENT AND CALIBRATION DATA.....	25

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	-	FCC 15.207	NA
3.2	15.231(c)	Emission Bandwidth	132 kHz	Fc(70~900MHz): BW ≤ fc x 0.25%	Complied
3.3	15.231(b)/(e)	Fundamental Emissions	[dBuV/m at 3m]: 67.20 (Margin 13.63dB) average	[dBuV/m at 3m]: average: 75.62	Complied
3.4	15.231(b)/(e)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]: 90.14 MHz 25.58 (Margin 17.92dB) - PK	FCC 15.231 (b)/(e) or FCC 15.209, whichever limit permits higher field strength.	Complied
3.5	15.231(a)/(e)	Operation Restriction	Operated time and silent time are less than limits.	Manually operated within 5 sec	Complied

The "NA" is not available.



Revision History



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	Modulation	Ch. Frequency (MHz)	Channel Number	Fundamental Field Strength (dBuV/m)	Co-location
433.05-434.79	FSK	433.3	1	67.20	N/A
Note 1: Field strength performed average level at 3m.					
Note 2: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other.					

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	External antenna (dedicated antennas) ; Unique antenna connector


1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input checked="" type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Battery

1.1.5 Test Signal Duty Cycle

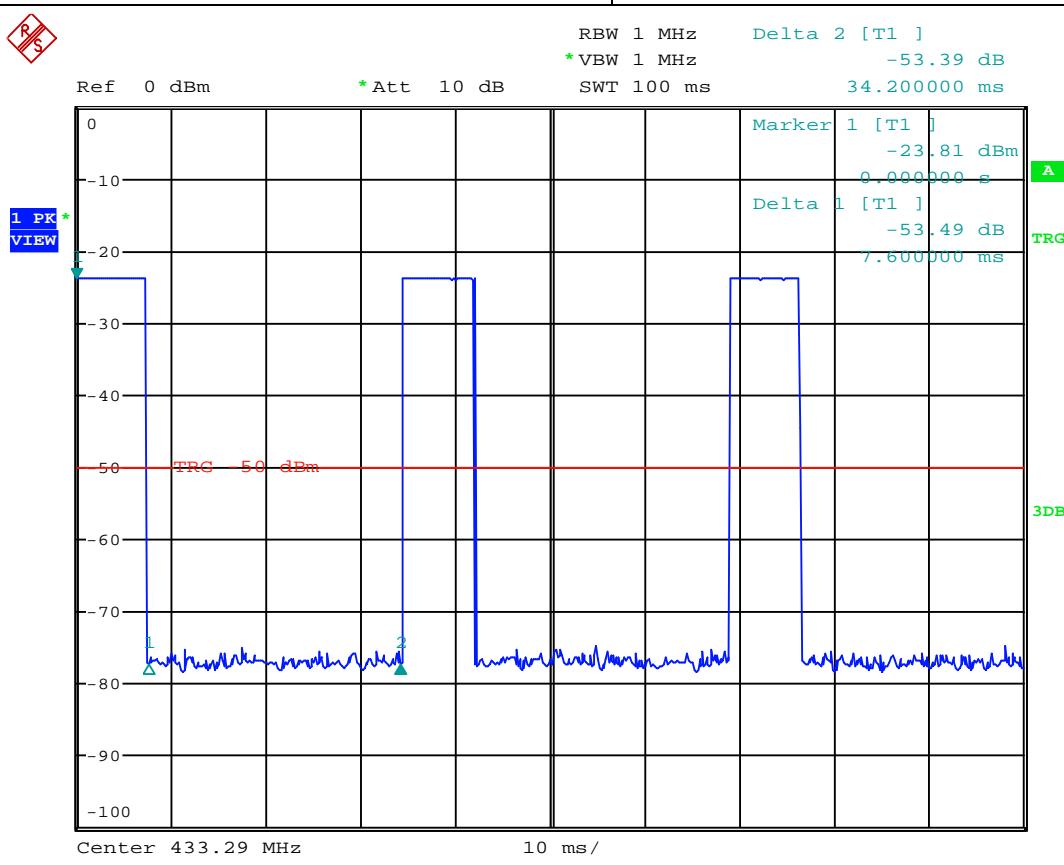Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Duty Cycle Correction Factor [dB] – (20 log x)
<input checked="" type="checkbox"/> 23%	12.77
 <p>RBW 1 MHz Delta 2 [T1] -53.39 dB * VBW 1 MHz 34.200000 ms Ref 0 dBm * Att 10 dB SWT 100 ms Marker 1 [T1] -23.81 dBm 0.000000 s Delta 1 [T1] -53.49 dB 7.600000 ms 1 PK * VIEW TRG 3DB</p>	
<p>Date: 20.JUN.2013 16:57:10</p> <p>Duty cycle = On time 23ms bin (1841) / Total Time 100ms bin (8001) = 23%</p> <p>If worst duty < 100%, average emission = peak emission + 20 log x</p>	



1.2 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Evaluation board	--	--	--

Remark : The EUT was mounted on evaluation board during test.

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test Condition		Test Site No.	Test Engineer	Test Environment
RF Conducted		TH01-HY	Shiming	25.9°C / 42%
Radiated Emission		03CH02-HY	Eddie	24°C / 60.2%
Test Date				Jun. 20, 2013
				Apr. 30, 2013



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Test Item	Uncertainty		Limit
AC power-line conducted emissions	± 2.26 dB		N/A
Emission bandwidth	± 1.42 %		N/A
RF output power, conducted	± 0.63 dB		N/A
Power density, conducted	± 0.81 dB		N/A
Unwanted emissions, conducted	30 – 1000 MHz	± 0.51 dB	N/A
	1 – 18 GHz	± 0.67 dB	N/A
	18 – 40 GHz	± 0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	± 2.56 dB	N/A
	1 – 18 GHz	± 3.59 dB	N/A
	18 – 40 GHz	± 3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature	± 0.8 °C		N/A
Humidity	± 3 %		N/A
DC and low frequency voltages	± 3 %		N/A
Time	± 1.42 %		N/A
Duty Cycle	± 1.42 %		N/A



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Test Mode	Field Strength (dBuV/m at 3 m)
FSK-Transmit	67.20

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Test Mode	Test Channel Frequencies (MHz)
FSK-Transmit	433.3-(F1)

2.3 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth, Fundamental Emissions, Radiated Unwanted Emissions
Test Condition	Radiated measurement
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. <input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is X.
Test Mode	FSK-Transmit

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane


The Worst Case Mode for Following Conformance Tests	
Tests Item	Operation Restriction (silent time and operated time)
Test Condition	Radiated measurement
Test Mode	Operated normally mode for worst duty cycle condition.

2.4 Test Setup Diagram

Test Setup Diagram - Radiated Test (Below 1GHz)

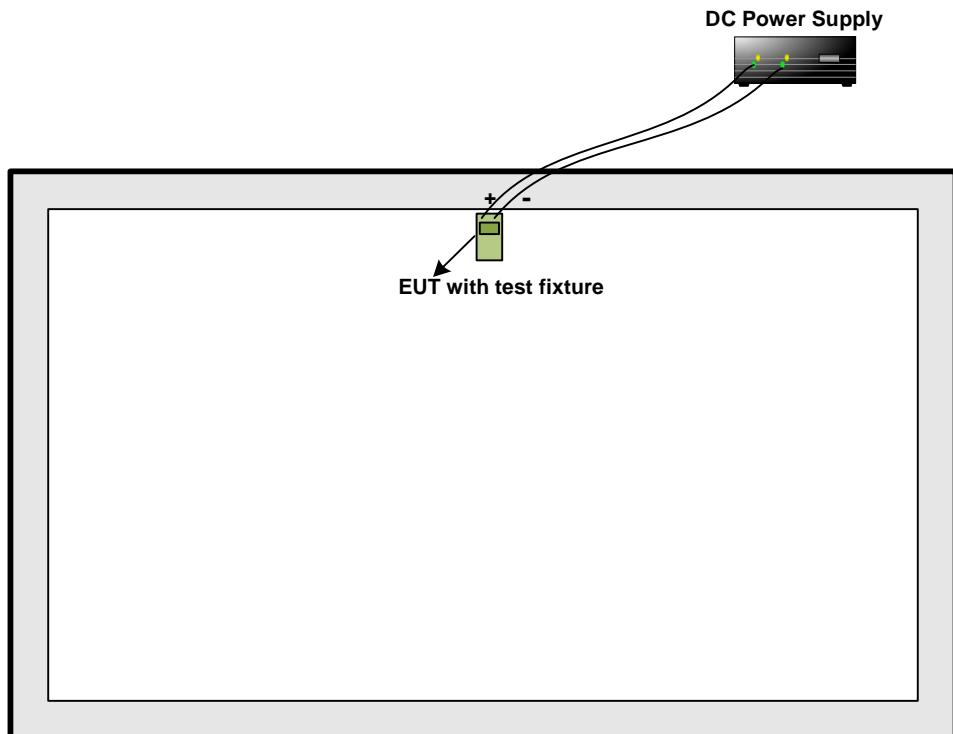

Test Setup Diagram - Radiated Test (Above 1GHz)

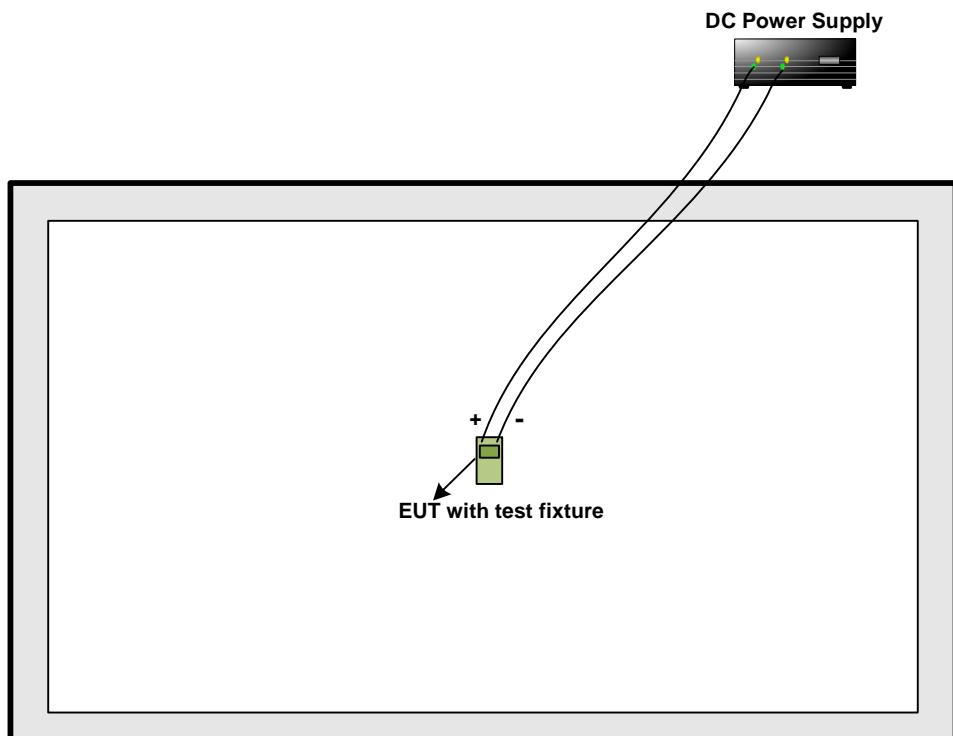

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

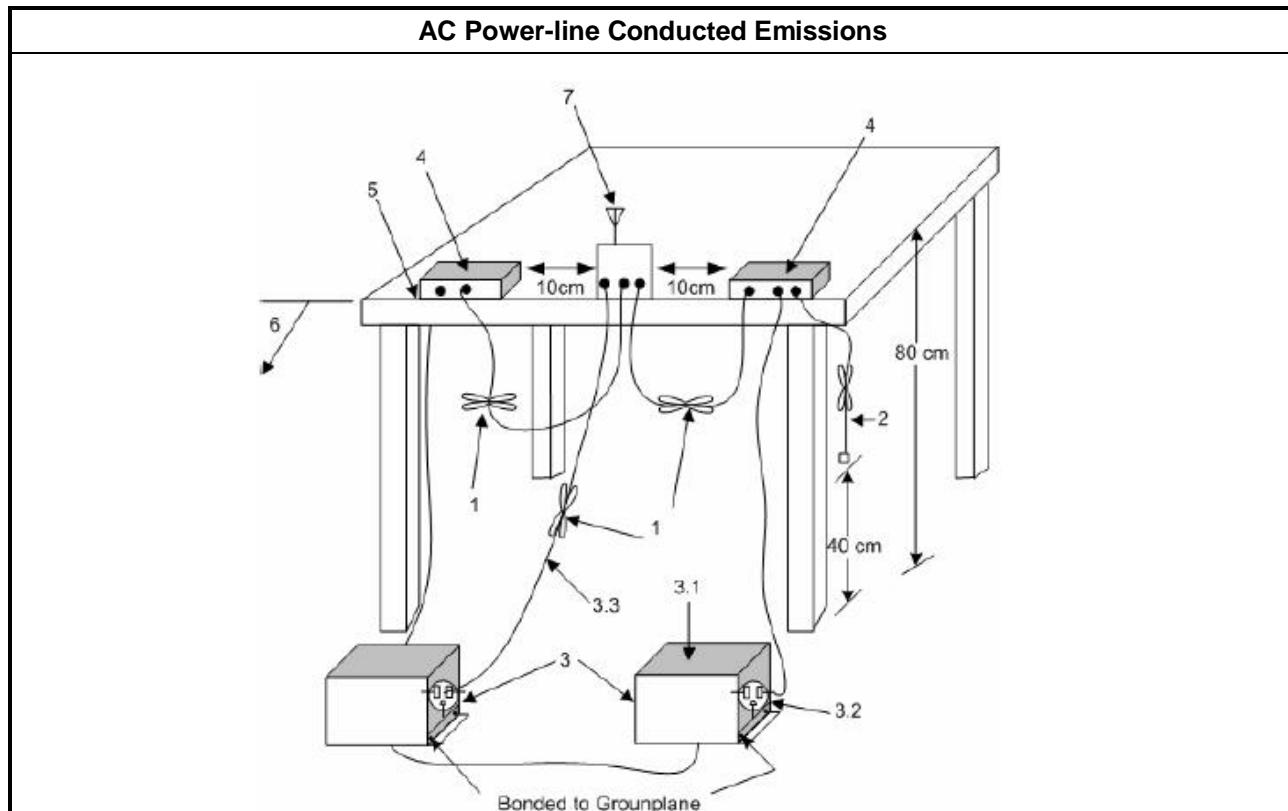



3.1.5 Test Result of AC Power-line Conducted Emissions

The EUT is power by DC source so there is no need to do this test.

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
<input checked="" type="checkbox"/>	Emission bandwidth falls completely within authorized band.
<input checked="" type="checkbox"/>	$F_c(70\text{~}900\text{MHz})$: $BW \leq f_c \times 0.25\%$
<input type="checkbox"/>	$F_c(>900\text{MHz})$: $BW \leq f_c \times 0.5\%$


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for 20 dB emission bandwidth and 99% occupied bandwidth measurement.

3.2.4 Test Setup

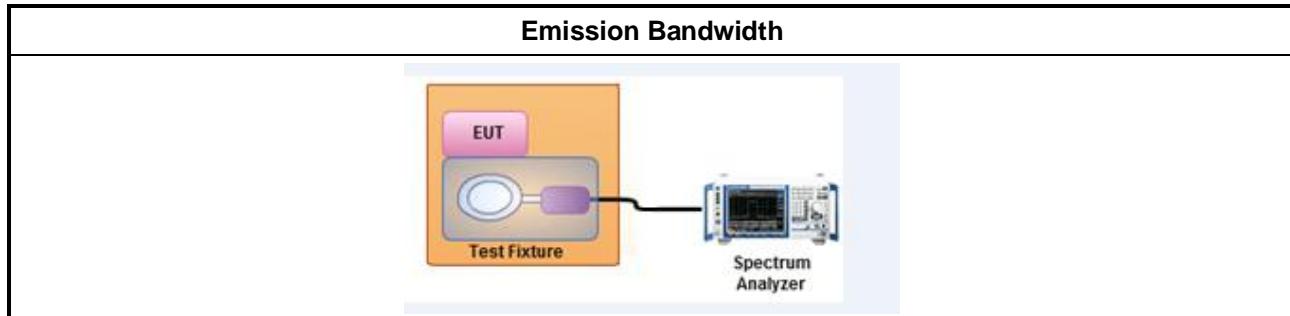

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result			
Modulation Mode	Frequency (MHz)	99% Bandwidth (kHz)	20dB BW (kHz)
FSK-Transmit	433.3	130	132
Limit			1083.23
Result			Complied

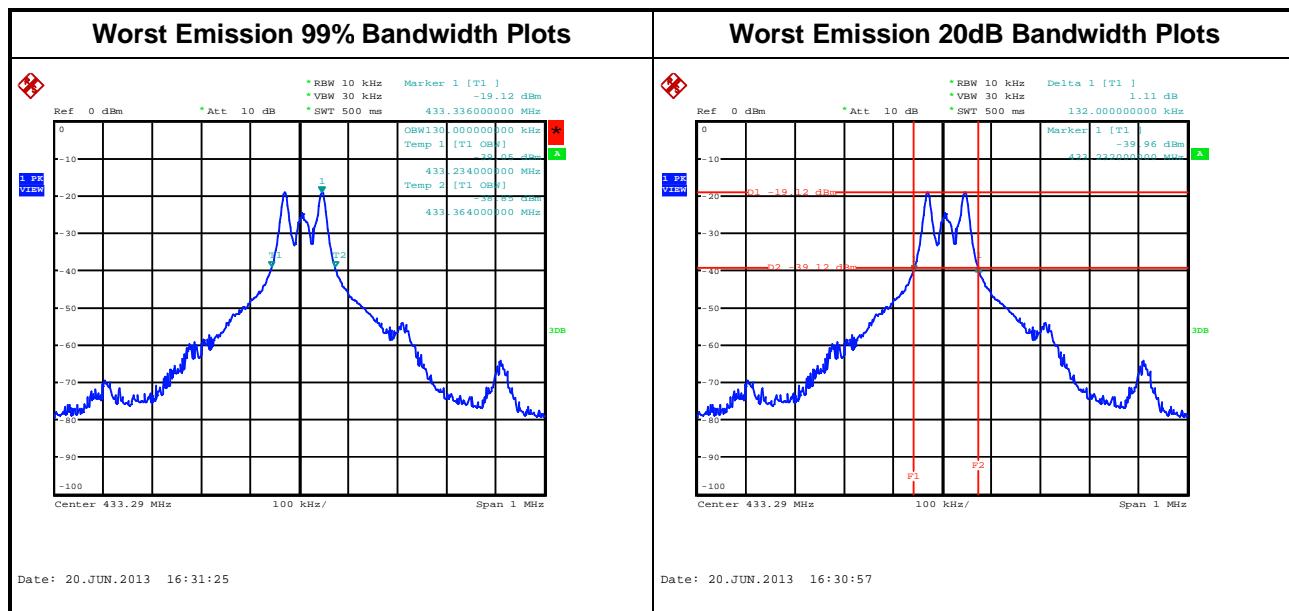



3.3 Fundamental Emissions

3.3.1 Fundamental Emissions Limit

For manually operated within 5 sec, activated automatically within 5 sec, periodic transmissions		
Frequency Band (MHz)	Fundamental Limit (uV/m) at 3m	Fundamental Limit (dBuV/m) at 3m
40.66-40.70	2250	67
70-130	1250	61.9
130-174	1250-3750(**)	61.9-71.5
174-260	3750	71.5
260-470	3750-12500(**)	71.5-81.9
Above 470	12500	81.9

**1. Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

(1) for the band 130 - 174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818 \times (\text{operating frequency, MHz}) - 6136.3636$;
 (2) for the band 260 - 470 MHz, $\mu\text{V/m}$ at 3 meters = $41.66667 \times (\text{operating frequency, MHz}) - 7083.3333$.
 Based on the average value of the measured emissions.

For periodic transmissions (lower field strength)		
Frequency Band (MHz)	Fundamental Limit (uV/m) at 3m	Fundamental Limit (dBuV/m) at 3m
40.66-40.70	1000	60
70-130	500	54
130-174	500-1500(**)	54-63.5
174-260	1500	63.5
260-470	1500-5000(**)	63.5-74
Above 470	5000	74

** 1. Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:
 (1) for the band 130 - 174 MHz, $\mu\text{V/m}$ at 3 meters = $22.72727 \times (\text{operating frequency, MHz}) - 2454.545$;
 (2) for the band 260 - 470 MHz, $\mu\text{V/m}$ at 3 meters = $16.66667 \times (\text{operating frequency, MHz}) - 2833.3333$.
 Based on the average value of the measured emissions.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

<input checked="" type="checkbox"/> For the transmitter emissions shall be measured using following options below:
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle $\geq 100\%$.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$. Average emission = peak emission + $20 \log(\text{duty cycle})$.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/> For radiated measurement, refer as ANSI C63.10, clause 6.5 for radiated emissions

3.3.4 Test Setup

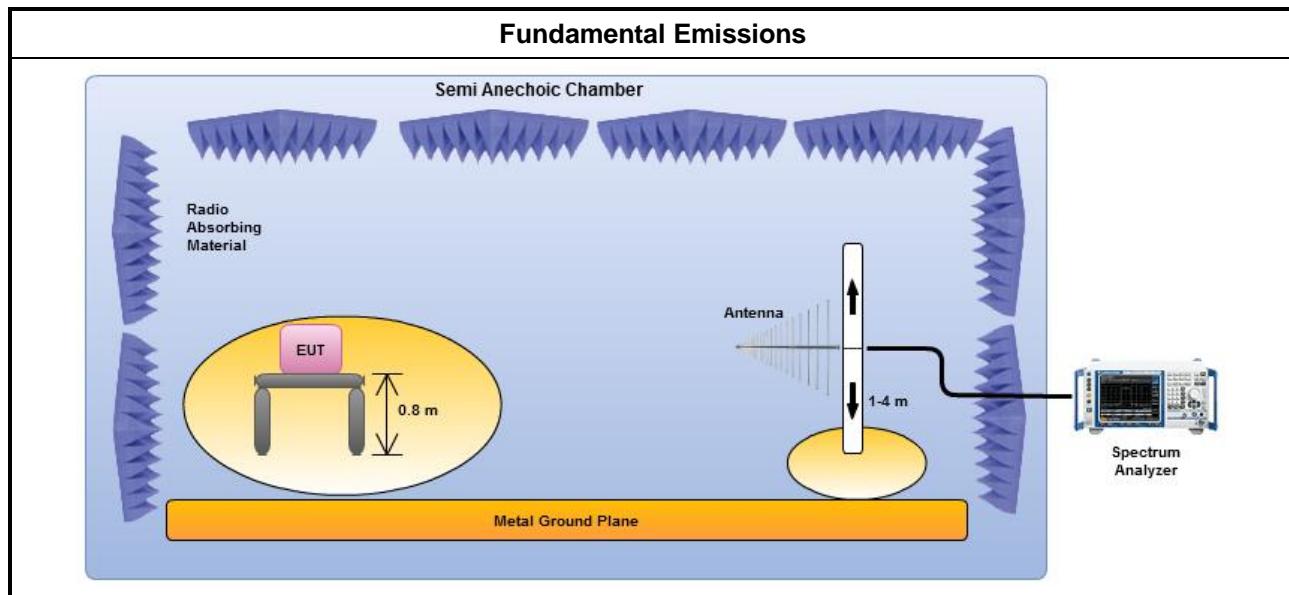

3.3.5 Test Result of Fundamental Emissions

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Margin (dB)	Limit (dBuV/m)@3m	Type
FSK-Transmit	433.3	79.97	20.86	100.83	peak
FSK-Transmit	433.3	67.20	13.63	80.83	average
Result		Complied			

Note 1: Measurement worst emissions of receive antenna polarization: Horizontal.
Note 2: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).



3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

For manually operated within 5 sec, activated automatically within 5 sec, periodic transmissions		
Unwanted emissions limit follow this table or the general limits FCC 15.209, whichever limit permits higher field strength.		
Frequency Band (MHz)	Spurious Limit (uV/m) at 3m	Spurious Limit (dBuV/m) at 3m
40.66-40.70	225	47
70-130	125	41.9
130-174	125-375(**)	41.9-51.5
174-260	375	51.5
260-470	375-1250(**)	51.5-61.9
Above 470	1250	61.9

**1. Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:
(1) for the band 130 - 174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818 \times (\text{operating frequency, MHz}) - 6136.3636$;
(2) for the band 260 - 470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667 \times (\text{operating frequency, MHz}) - 7083.3333$.
Based on the average value of the measured emissions.

For periodic transmissions (lower field strength)		
Unwanted emissions limit follow this table or the general limits FCC 15.209, whichever limit permits higher field strength.		
Frequency Band (MHz)	Spurious Limit (uV/m) at 3m	Spurious Limit (dBuV/m) at 3m
40.66-40.70	100	40
70-130	50	34
130-174	50-150(**)	34-43.5
174-260	150	43.5
260-470	150-500(**)	43.5-54
Above 470	500	54

** 1. Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:
(1) for the band 130 - 174 MHz, $\mu\text{V/m}$ at 3 meters = $22.72727 \times (\text{operating frequency, MHz}) - 2454.545$;
(2) for the band 260 - 470 MHz, $\mu\text{V/m}$ at 3 meters = $16.6667 \times (\text{operating frequency, MHz}) - 2833.333$.
Based on the average value of the measured emissions.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/> The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
<input checked="" type="checkbox"/> For the transmitter unwanted emissions shall be measured using following options below:	
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle \geq 100%.	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log$ (dwell time/100 ms). Average emission = peak emission + $20\log$ (duty cycle).	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.	
<input checked="" type="checkbox"/> For the transmitter bandedge emissions shall be measured using following options below:	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.	
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.	
<input checked="" type="checkbox"/> For radiated measurement.	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.	

3.4.4 Test Setup

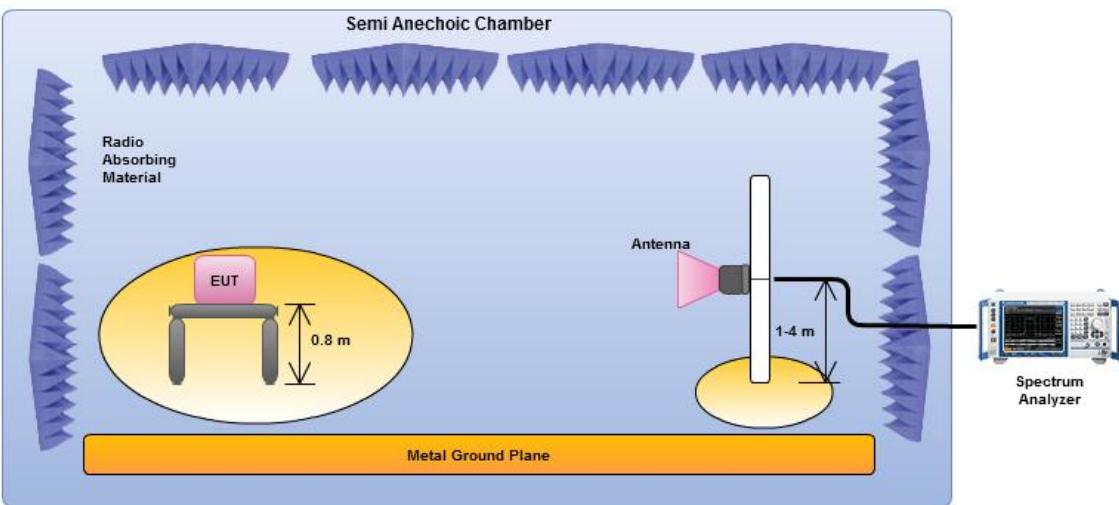Transmitter Radiated Bandedge Emissions	
	Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



3.4.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Test Freq. (FX)	F1
Operating Function	FSK-Transmit	Polarization	V

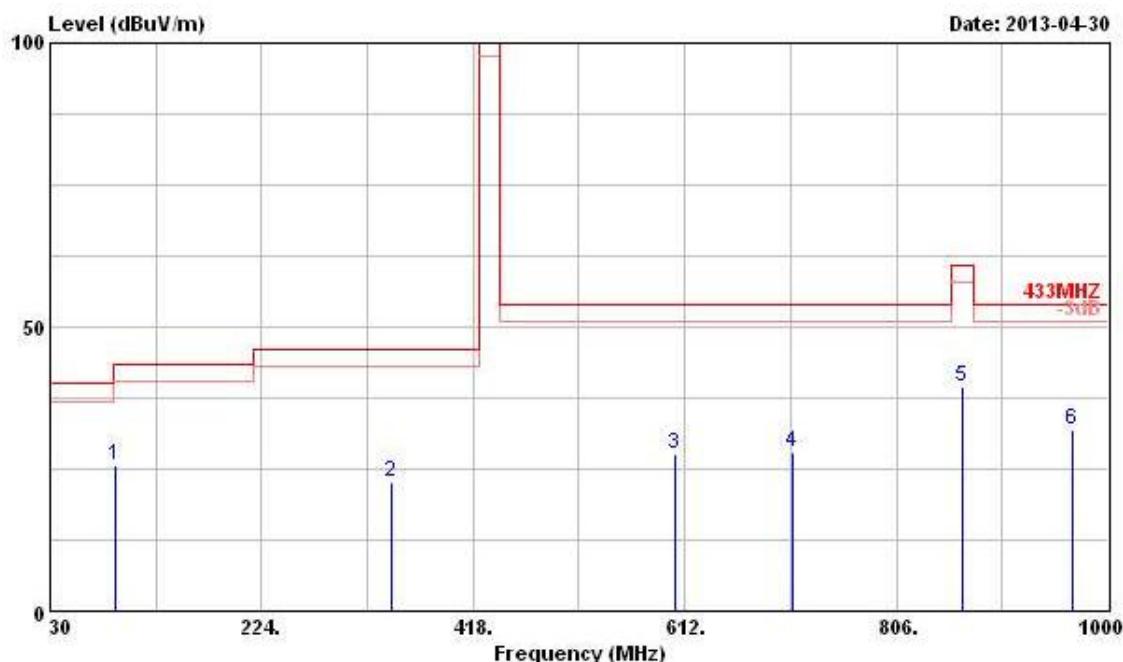


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
90.140	25.58	-17.92	43.50	42.63	9.50	1.34	27.89	Peak	---
343.310	22.65	-23.35	46.00	33.02	14.37	2.79	27.53	Peak	---
602.300	27.59	-26.41	54.00	32.31	20.15	3.69	28.56	Peak	---
710.940	27.91	-26.09	54.00	33.22	19.02	4.06	28.39	Peak	---
867.110	39.40	-21.39	60.79	42.61	20.11	4.55	27.87	Peak	---
967.990	31.80	-22.20	54.00	32.69	21.71	4.87	27.47	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).




Transmitter Radiated Unwanted Emissions (Below 1GHz)

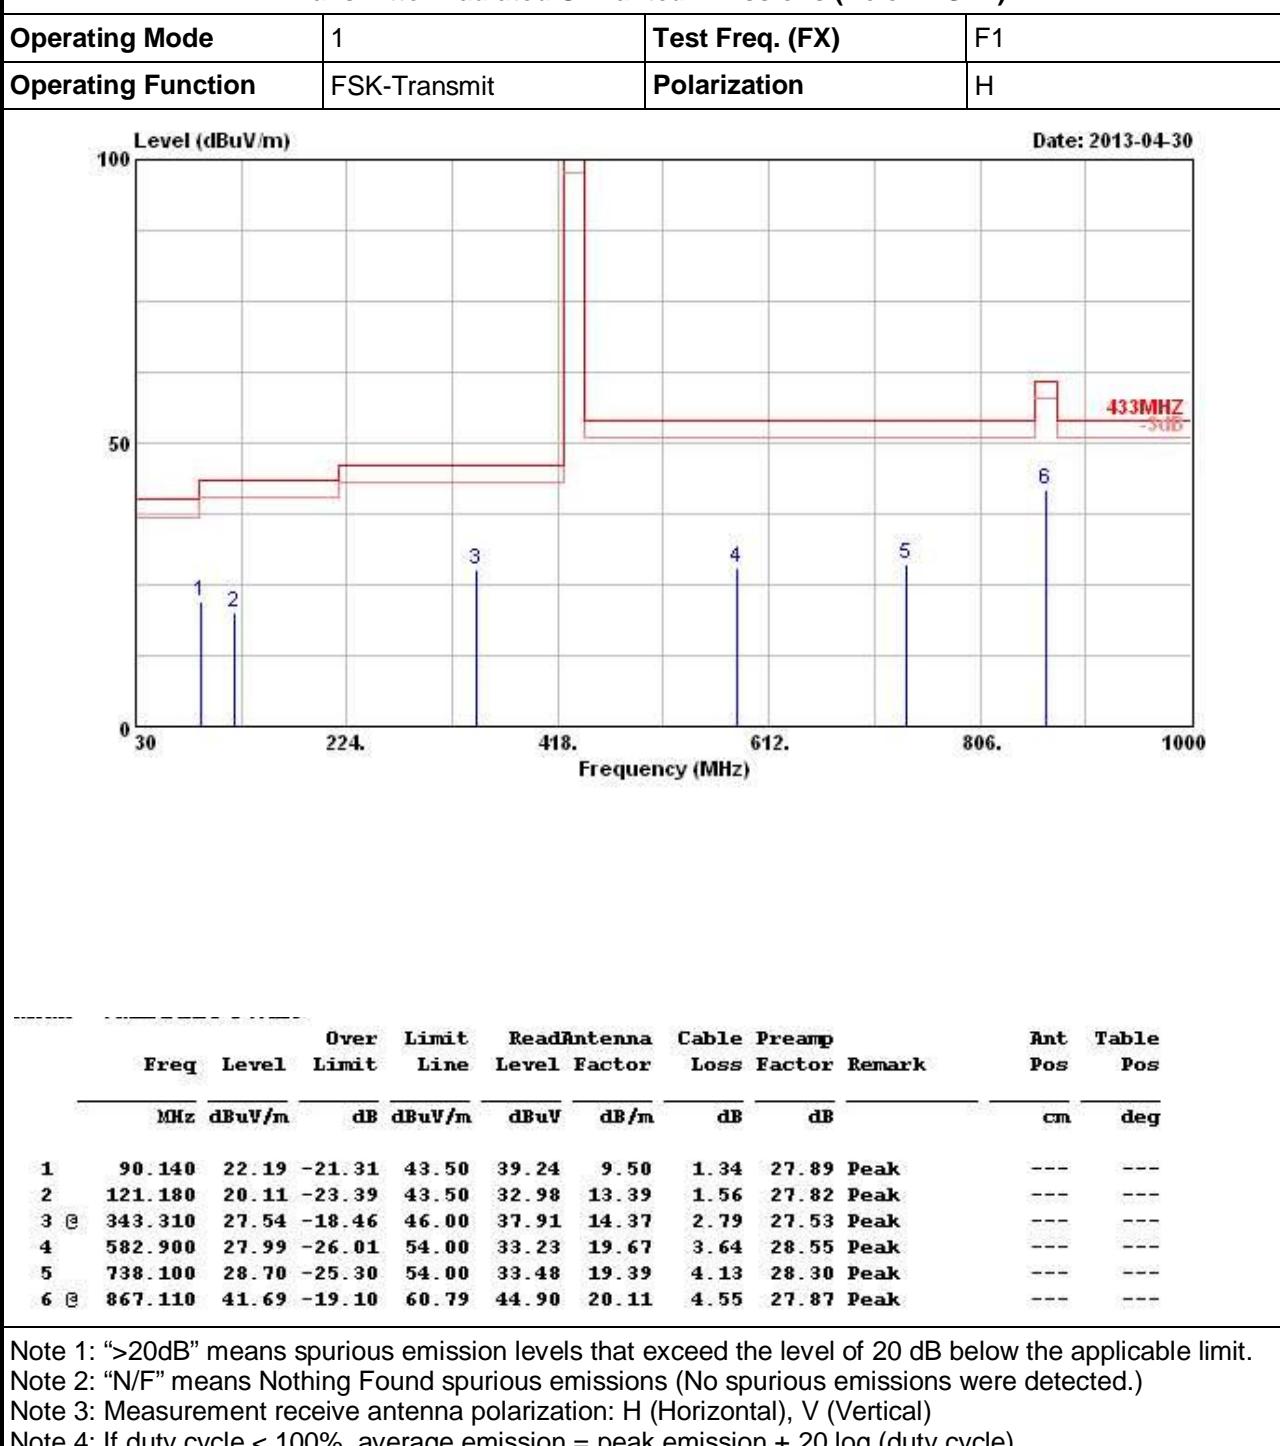




3.4.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

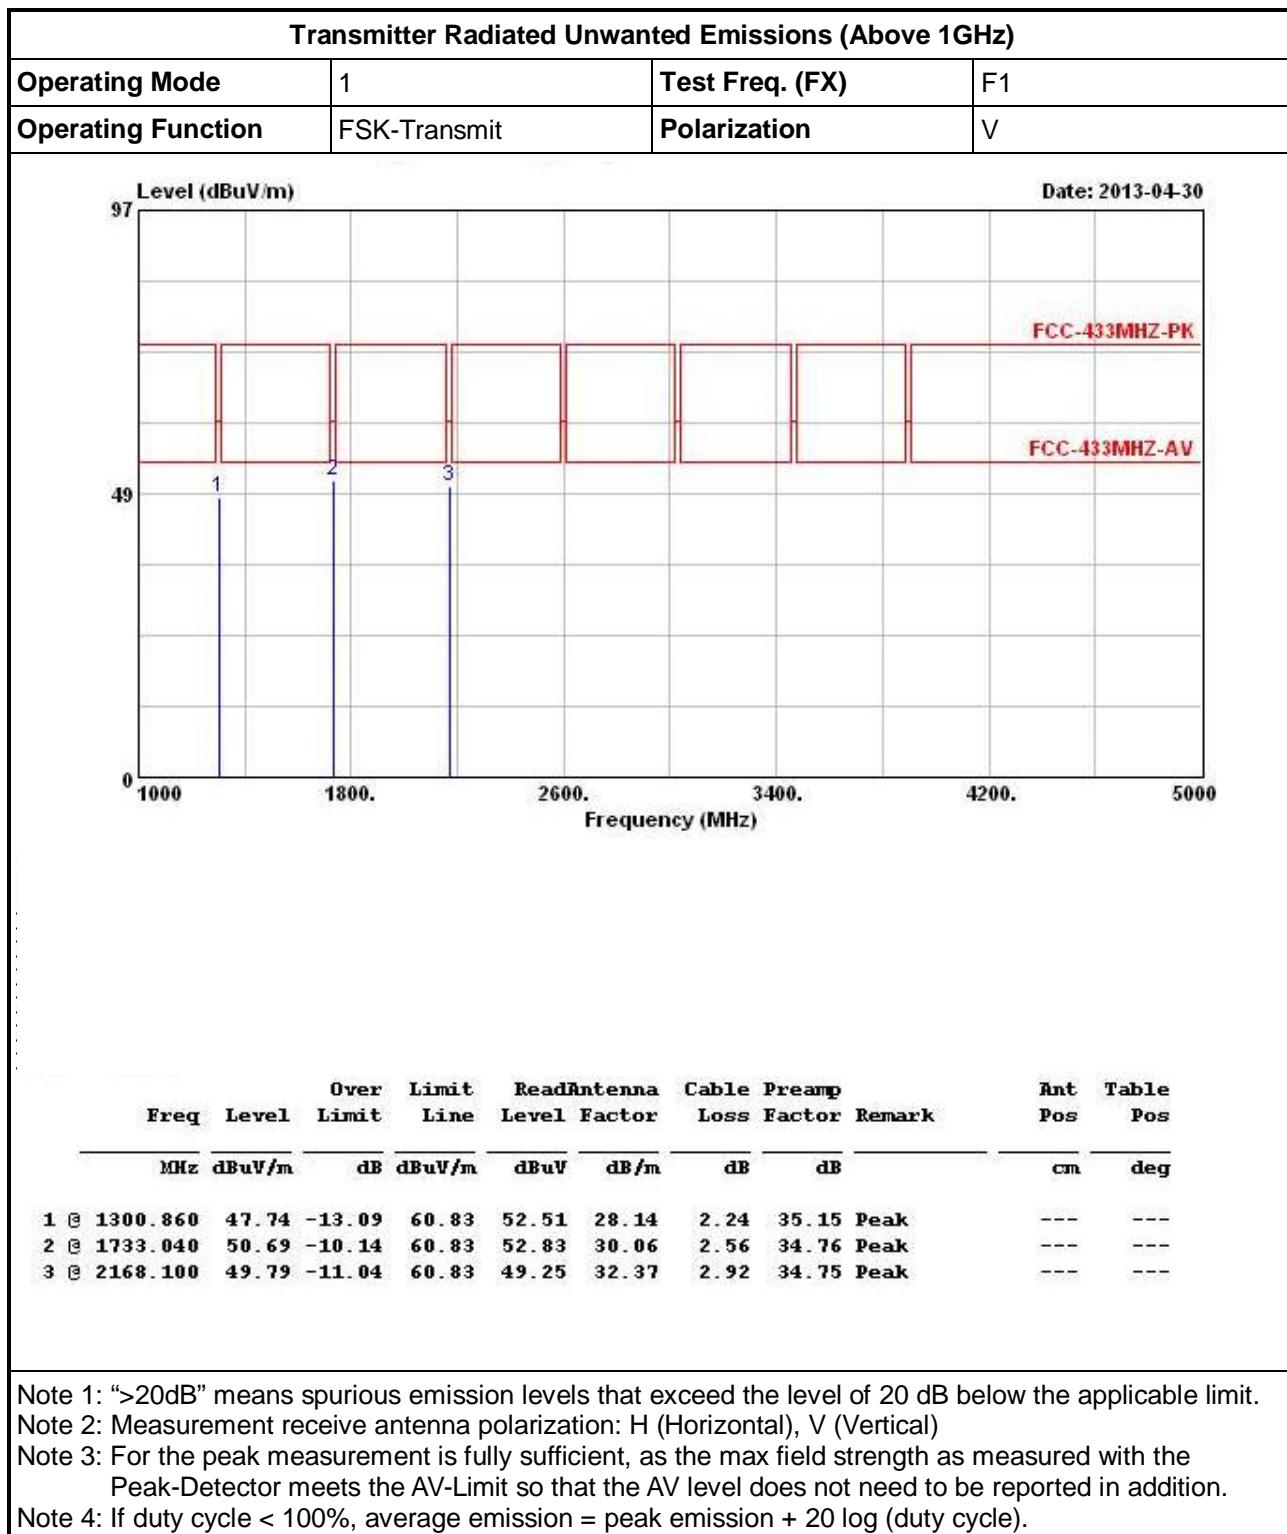



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	1	Test Freq. (FX)	F1
Operating Function	FSK-Transmit	Polarization	H

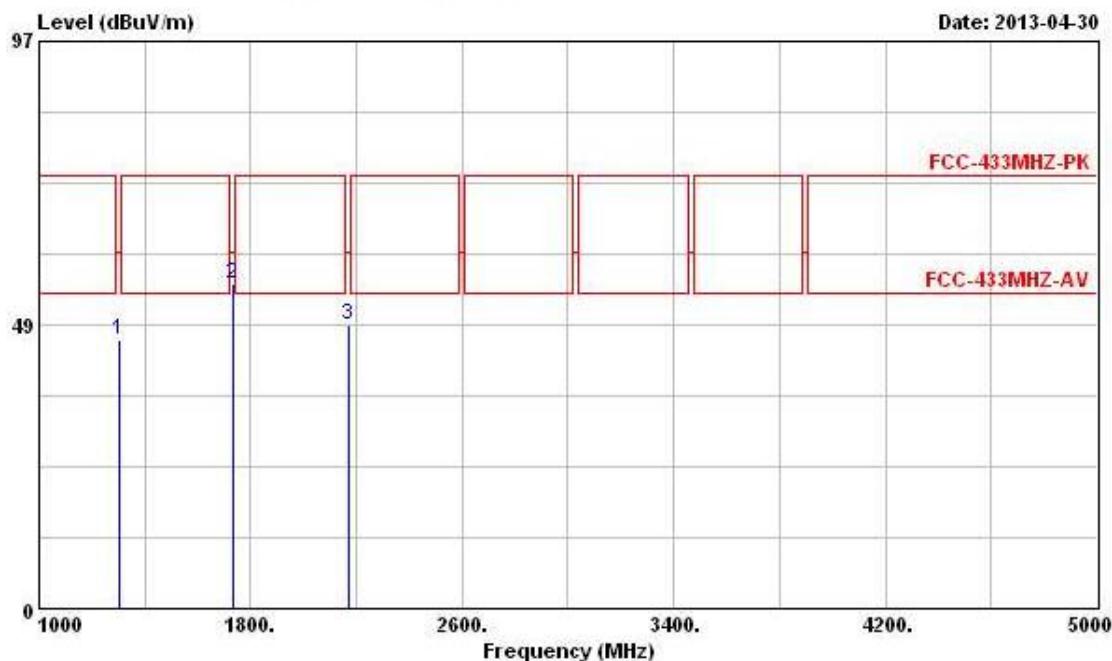

Freq	Level	Over Limit		Read		Ant Pos	Table Pos		
		Line	Limit	Antenna	Cable				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @ 1300.860	45.94	-14.89	60.83	50.71	28.14	2.24	35.15	Peak	---
2 @ 1733.040	55.49	-5.34	60.83	57.63	30.06	2.56	34.76	Peak	---
3 @ 2168.100	48.56	-12.27	60.83	48.02	32.37	2.92	34.75	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

3.5 Operation Restriction

3.5.1 Operation Restriction Limit

Operation Restriction Limit	
<input checked="" type="checkbox"/>	Manually operated: manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 sec of being released.
<input type="checkbox"/>	Activated automatically: transmitter activated automatically shall cease transmission within 5 sec after activation.
<input type="checkbox"/>	Periodic transmissions: permitted with total transmission time of 2 sec per hour or less.
<input type="checkbox"/>	Periodic transmissions (lower field strength): each transmission is not greater than 1 sec and the silent period between transmissions is at least 30 times the duration of the transmission but in no case less than 10 sec.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report. Activated automatically within 5 sec

3.5.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.4 for periodic operation measurement.

3.5.4 Test Setup

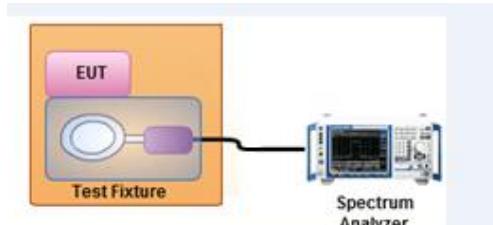Operation Restriction	
	

3.5.5 Test Result of Operation Restriction

Operation Restriction Limit	
<input checked="" type="checkbox"/>	Manually operated: manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 sec of being released.
<input type="checkbox"/>	Activated automatically: transmitter activated automatically shall cease transmission within 5 sec after activation.
<input type="checkbox"/>	Periodic transmissions: permitted with total transmission time of 2 sec per hour or less.
<input type="checkbox"/>	Periodic transmissions (lower field strength): each transmission is not greater than 1 sec and the silent period between transmissions is at least 30 times the duration of the transmission but in no case less than 10 sec.

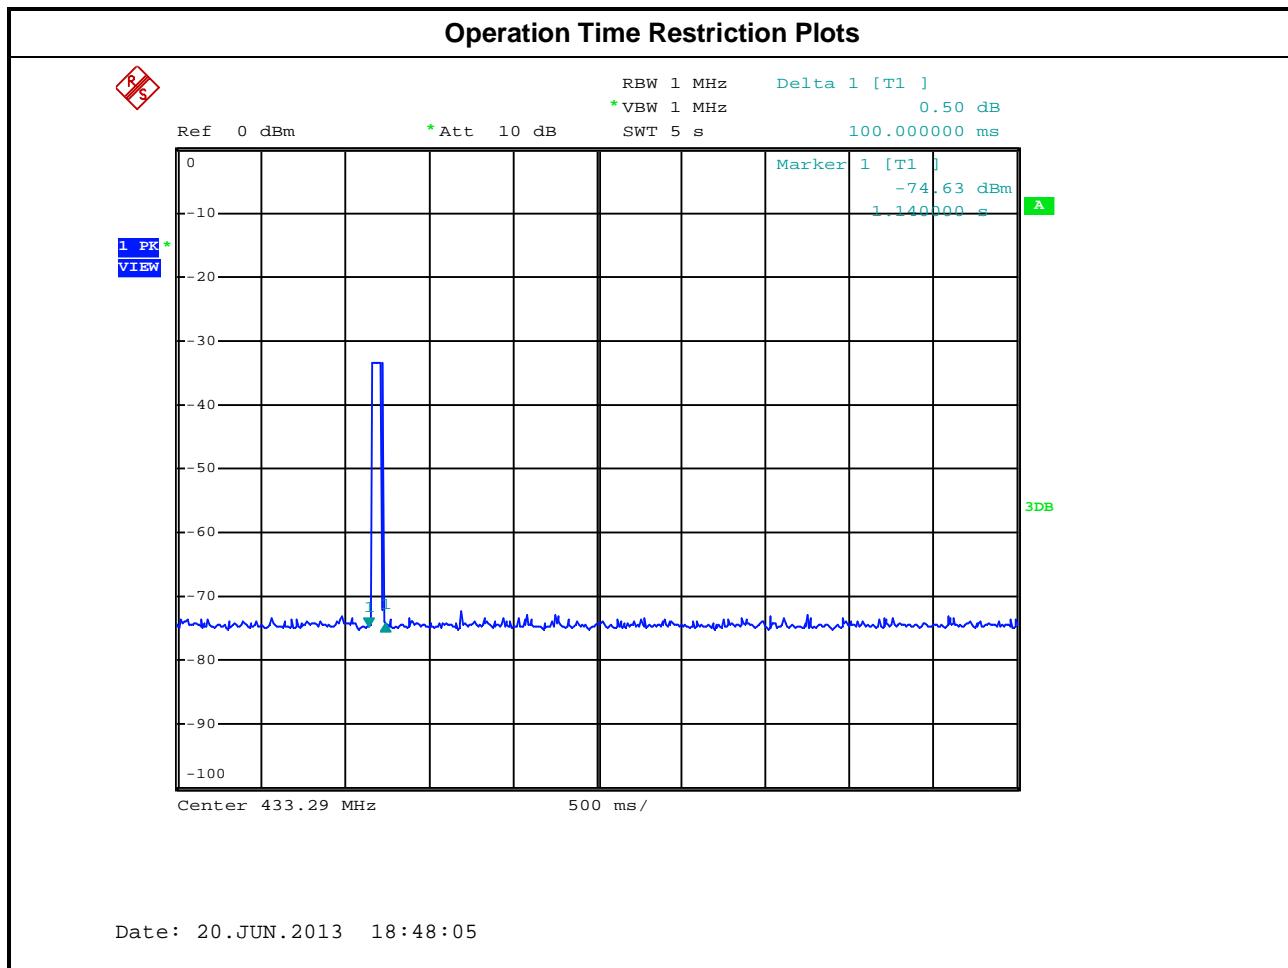



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9kHz~40GHz	Mar. 20, 2013	Conducted (TH01-HY)
Signal Generator	R&S	SMR 40	100116	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Pulse Power Sensor	NRITSU	MA2411B	0917017	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
Power Meter	ANRITSU	ML2495A	0949003	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
Laboratory DC Power Supply	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jul. 19, 2012	Conducted (TH01-HY)
TEMP & Humidity Chamber	GIANT FORCE	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 10, 2012	Radiation (03CH02-HY)
Amplifier	AGILENT	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 23, 2012	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz	May 10, 2012	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2012	Radiation (03CH02-HY)
Double Ridged Guide Horn Antenna	ETS · LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 19, 2012	Radiation (03CH02-HY)
Microwave Preamplifier	AGILENT	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 10, 2012	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2013	Radiation (03CH02-HY)
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

**FCC Test Report****Report No. : FR350605**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Magnetic Loop Antenna	Teseq GmbH	HLA 6120	31244	0.01MHz ~ 30MHz	Dec. 02, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.