


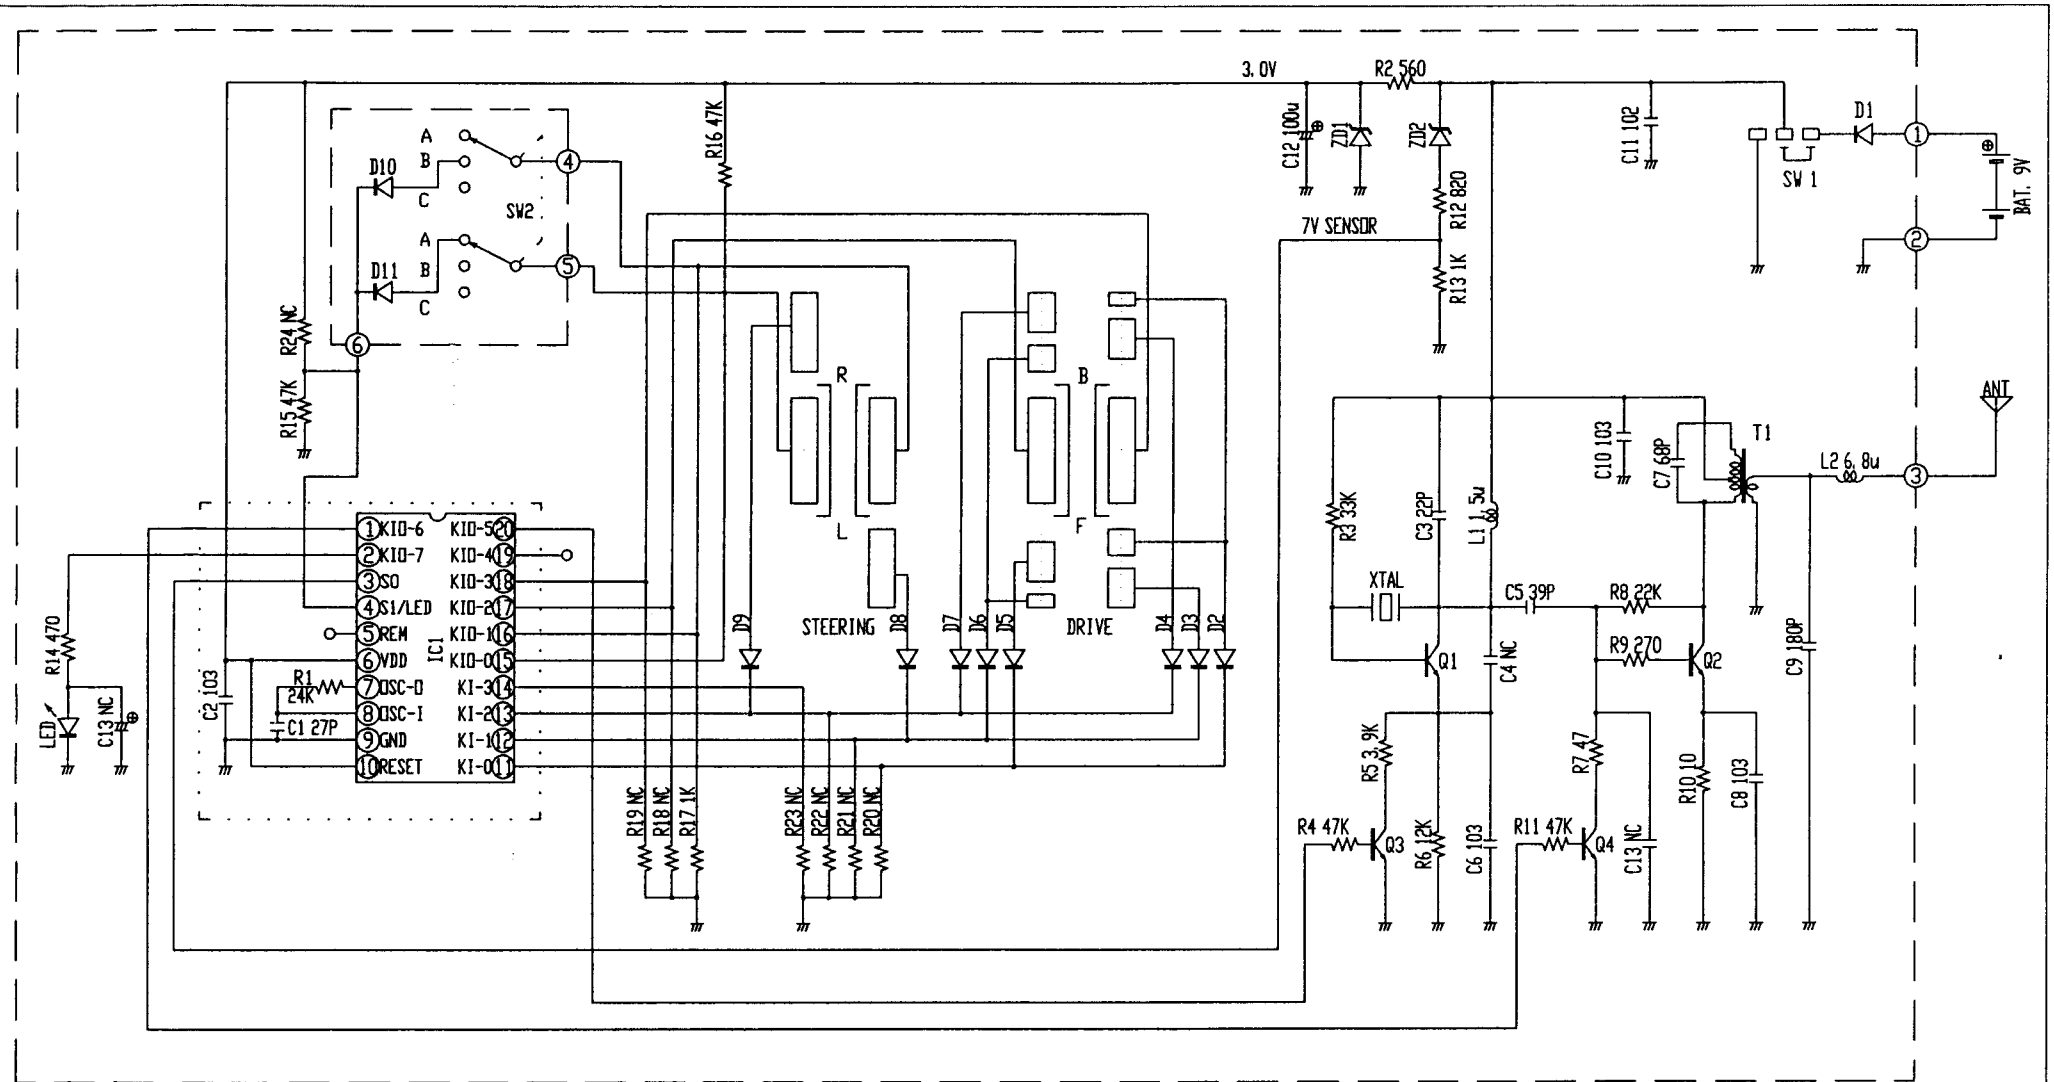

IC1 HAT3V1 (uPD6604)

Q1 2SC2458(Y)

Q2 2SC2458(Y)

Q3 2SC2458(Y)

Q4 2SC2458(Y)

XT 27.145MHz KDSC

T1 T100

L1 CECL1R5 (K)

L2 CECL6R8 (K)

ZD1 HZ3B2

ZD2 HZ5B2

D1-11 1N4148

LED D=5, RED

RESISTORS 1/6W $\pm 20\%$

MAIN PCB GK4150D

SUB PCB HA4300B

TX Frequency : 27.145 MHz

DIMENSIONAL	SCALE	CREATE DATE	VER. 1.0	DWG. No.
	mm	JAN-8-2004	JAN-8-2004	GK4052
THICKNESS	Q' TY	MATERIAL / FINISH		
SLIDE SLOPE	DESIGNED	MODEL CODE / NAME		
SHRINK	APPROVED	GK / 2950 HAT3V3(uPD6604-407)		
		PARTS CODE / NAME		
		2950 Tx SCHEMATIC 27MHz FCC		