


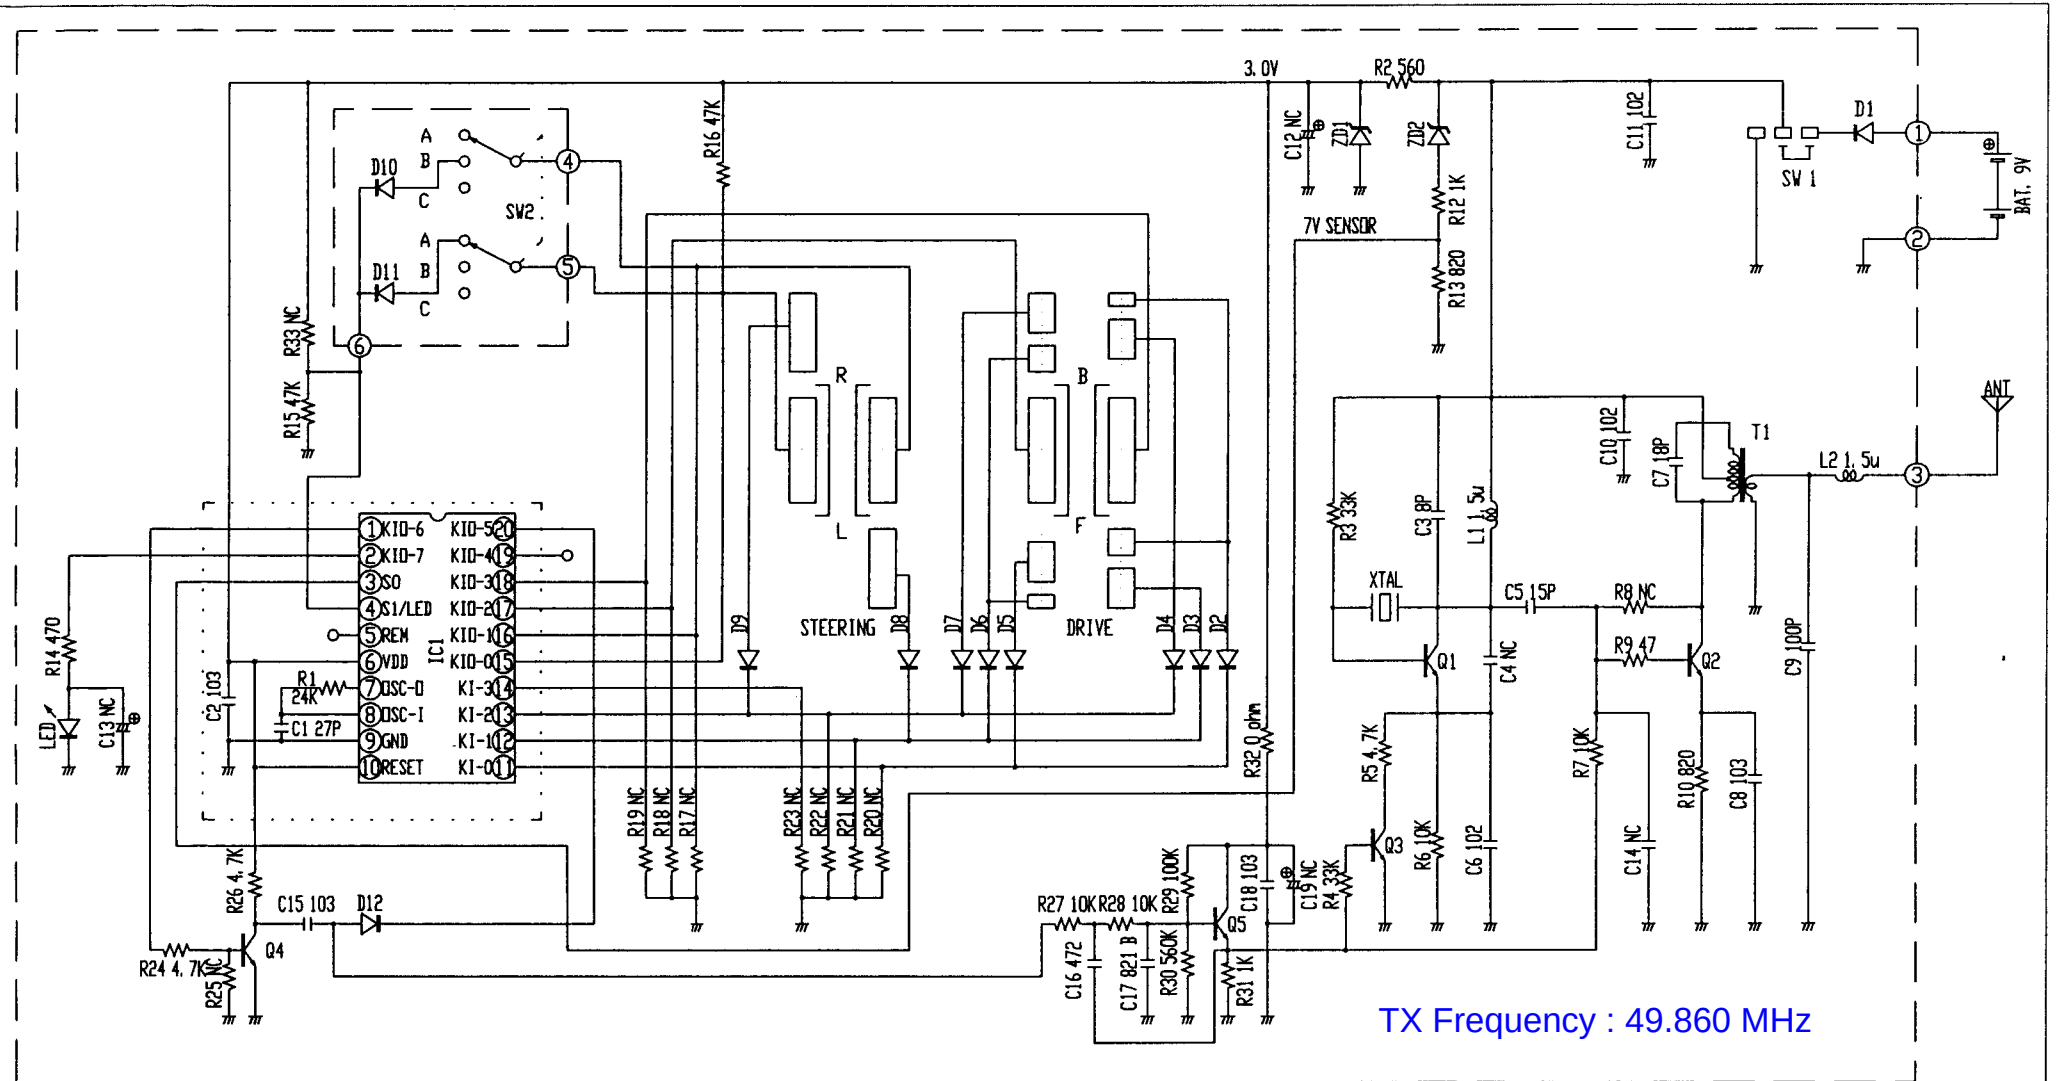

IC1 HAT3V3 (uPD6604-407)
Q1-5 2SC2458(Y)

ZD1 HZ3B2
ZD2 HZ5B2
D1-12 1N4148

LED D=5, RED

RESISTORS 1/6W +5%

R11 NO USE

C17 CERAMIC CAPACITOR +-20%

C15, C16 POLYESTER CAPACITOR +80%-20%

MAIN PCB GK4153

SUB PCB HA4300B

XT 49.860MHz KDS

T1 T100

L1 CECL1R5 (K)

L2 CECL1R5 (K)

TX Frequency : 49.860 MHz

DIMENSIONAL	SCALE	CREATE DATE	VER. 1.0	DWG. No.
① 1mm		JAN-8-2004	JAN-8-2004	GK4053
THICKNESS	QTY	MATERIAL / FINISH		
SLIDE SLOPE	DESIGNED	MODEL CODE / NAME		
SHRINK	APPROVED	GK / 2950 HAT3V3 (uPD6604-407)		
		PARTS CODE / NAME		
		2950 Tx SCHEMATIC 49MHz FCC		