


Cell Type HR-4U

Specifications

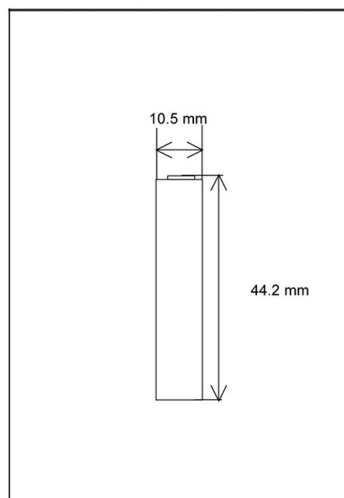

Type : Nickel-Metal Hydride Battery			Size : AAA Consumer Type
Capacity ¹⁾	Typical	750mAh	
	Minimum	700mAh	
Nominal Voltage			1.2V
Charging Current x Time		Fast Charge ²⁾	750mA x about1.1Hr.
Ambient Temperature	Charge Condition	Fast Charge ²⁾	0 ~ 40° C
	Discharge Condition		0 ~ 50° C
	Storage Condition	~30days	-20 ~ 50 °C
		30~90days	-20 ~ 40 °C
		90days~1year	-20 ~ 30 °C
Internal Impedance ³⁾ (after discharge to E.V. = 1.0V)			About 35mOhms (at 1000Hz)
Weight ⁴⁾			About 13g
Size : (Width) x (Thickness) x (Height) ⁴⁾			0.0(D) x 0.0(T) x 44.2(H)mm

C

o


2) Use recommended charging system

3) After a few charge and discharge cycles under the above 1) condition

4) With tube

Typical Characteristics

Charge

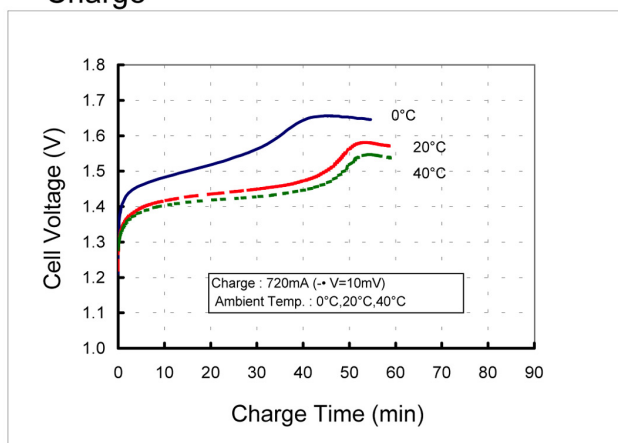

Discharge

