


PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road • Columbia, MD 21045 • U.S.A.

TEL (410) 290-6652 • FAX (410) 290-6654

<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE

Philips Industrial Activities Louvain
Interleuvenlaan 74-82
Leuven, 3001 Belgium
Attention: Gert Heysse

Dates of Tests: August 23, 2002
Test Report S/N: TX.220806418.PT5
Test Site: PCTEST Lab, MD U.S.A.

FCC ID

PT5RC9200

APPLICANT

Philips Industrial Activities Louvain

FCC Rule Part(s): § 15.231(b) Subpart C – Intentional Radiator
Classification: Remote Control Transmitter (DSC)
EUT Type: RF Transmitter Remote Control
Freq. Range: 418 MHz
Trade Name: PHILIPS
Model: RC9200

This device has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.





Randy Ortanez
President



TABLE OF CONTENTS

| | |
|---|----|
| ATTACHMENT A: COVER LETTER(S) | |
| ATTACHMENT B: ATTESTATION STATEMENT(S) | |
| ATTACHMENT C: TEST REPORT | |
| SCOPE | 1 |
| INTRODUCTION (SITE DESCRIPTION) | 2 |
| PRODUCTION INFORMATION | 3 |
| DESCRIPTION OF TESTS (CONDUCTED) | 4 |
| DESCRIPTION OF TESTS (RADIATED) | 5 |
| ANTENNA REQUIREMENT / BANDWIDTH MEASUREMENT | 6 |
| FREQUENCY MEASUREMENTS (SPURIOUS) | 7 |
| RADIATED TEST DATA (EMISSIONS) | 8 |
| LIST OF SUPPORT EQUIPMENT | 9 |
| PLOTS OF EMISSION | 10 |
| SAMPLE CALCULATIONS | 11 |
| ACCURACY OF MEASUREMENT | 12 |
| LIST OF TEST EQUIPMENT | 13 |
| CONCLUSION | 14 |
| ATTACHMENT D: TEST PLOTS | |
| ATTACHMENT E: FCC ID LABEL & LOCATION | |
| ATTACHMENT F: BLOCK DIAGRAM(S) | |
| ATTACHMENT G: SCHEMATIC DIAGRAM(S) | |
| ATTACHMENT H: TEST SETUP PHOTOGRAPHS | |
| ATTACHMENT I: EXTERNAL PHOTOGRAPHS | |
| ATTACHMENT J: INTERNAL PHOTOGRAPHS | |
| ATTACHMENT K: USER'S MANUAL | |

MEASUREMENT REPORT

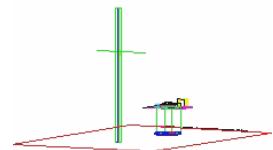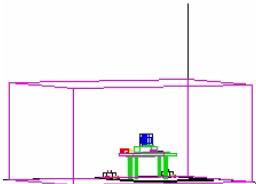

Scope - Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

| | |
|----------------------|--|
| Company Name: | Philips Industrial Activities Louvain |
| Address: | Interleuvenlaan 74-82 |
| | Leuven, 3001 Belgium |
| Attention: | Gert Heysse |

- FCC ID: **PT5RC9200**
- Model: **RC9200**
- Trade Name: **PHILIPS**
- EUT Type: RF Transmitter Remote Control
- Application Type: Transmitter Certification
- Freq. Range: 418 MHz
- FCC Rule Part(s): § 15.231(b) Subpart C – Intentional Radiator
- Dates of Tests: August 23, 2002
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: TX. 220806418.PT5

NVLAP[®]
Lab Code 100431-0

1.1 INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **PHILIPS (Model: RC9200) RF Transmitter Remote Control FCC ID: PT5RC9200**.

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

1.2 PCTEST Location

The map at right shows the location of the PCTEST Lab, its proximity to the FCC Lab, the Columbia vicinity area, the Baltimore-Washington International (BWI) airport, and the city of Baltimore, and the Washington, D.C. area. (see Figure1).

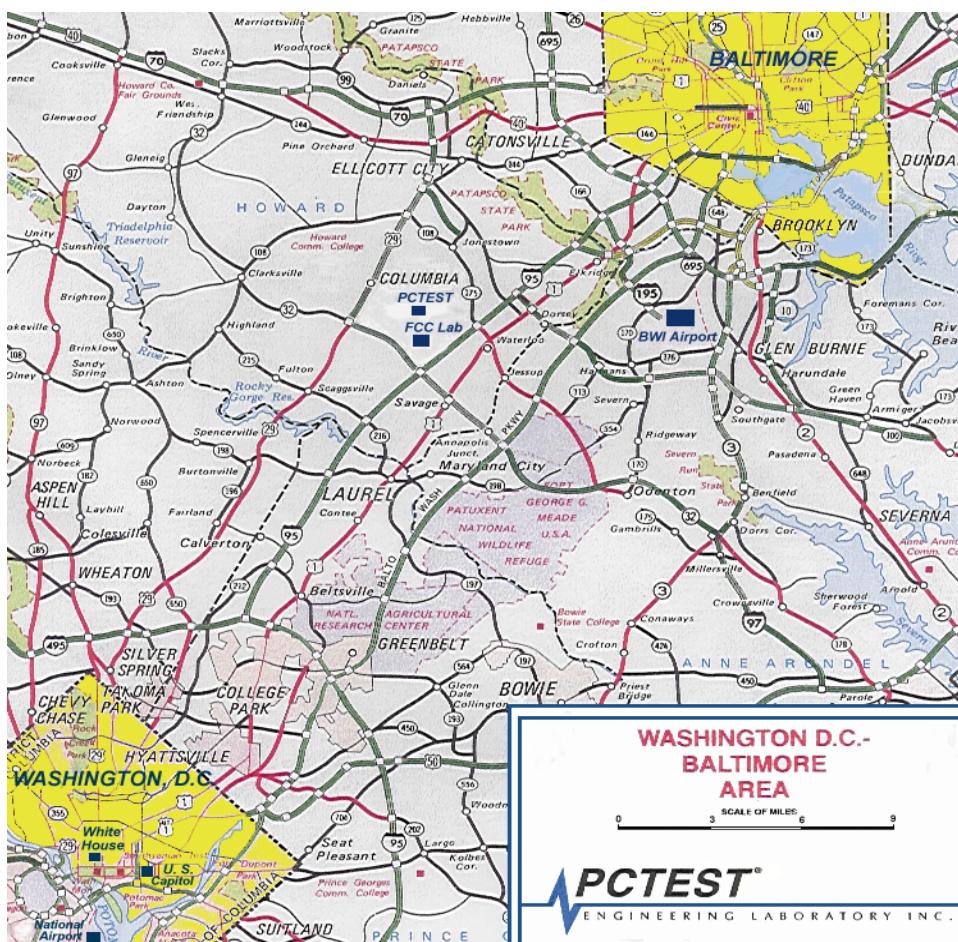


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

2.1 Product Information

2.2 Equipment Description

The Equipment Under Test (EUT) is the **PHILIPS** (Model: *RC9200*) RF Transmitter Remote Control
FCC ID: PT5RC9200.

- * Tx Freq. Range: 418 MHz
- * Oscillator(s): 418MHz
- * Antenna: Built-in internal looped antenna on-board
- * Power Supply: 4.8V Battery Pack

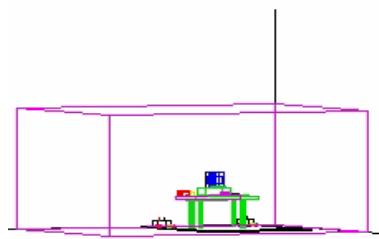


Figure 2. Shielded Enclosure Line-Conducted Test Facility

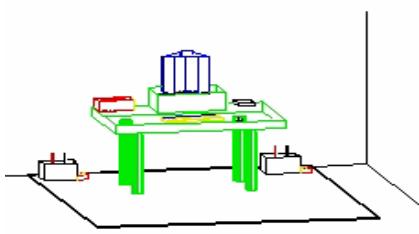


Figure 3. Line Conducted Emission Test Set-Up

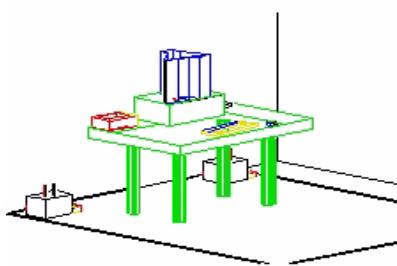


Figure 4. Wooden Table & Bonded LISNs

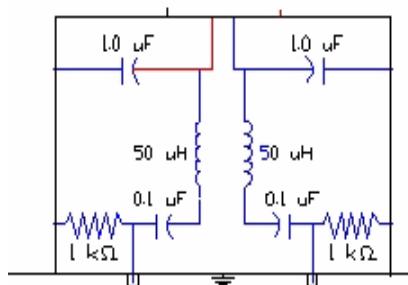


Figure 5. LISN Schematic Diagram

3.1 Description of Tests

3.2 Conducted Emissions (See Test Plots)

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure. It is manufactured by Ray Proof Series 81 (see Figure 2). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m. x 1.5m. wooden table 80cm. high is placed 40cm. away from the vertical wall and 1.5m away from the side wall of the shielded room (see Figure 3). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 4). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filters (100dB 14kHz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Solar LISN. LISN schematic diagram is shown in Figure 5. All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450kHz to 30MHz with 20 msec. sweep time. The frequency producing the maximum level was reexamined using EMI/ Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode. The bandwidth of the receiver was set to 10 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Appendix C. Each EME reported was calibrated using the HP8640B signal generator.

3.1 Description of Tests (continued)

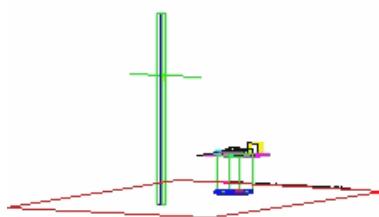


Figure 6. 3-Meter Test Site

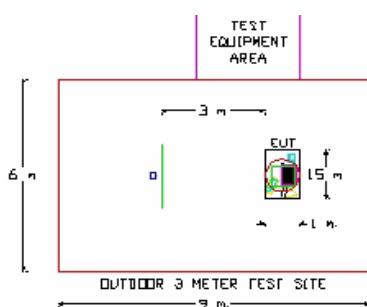


Figure 7. Dimensions of Outdoor Test Site

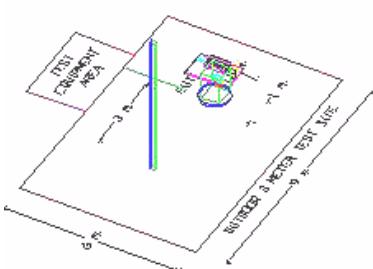


Figure 8. Turntable and System Setup

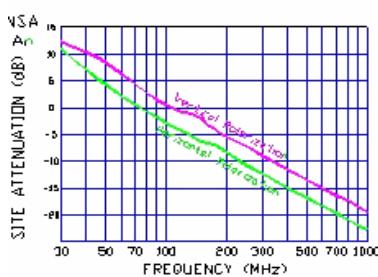


Figure 9. Normalized Site Attenuation Curves (H&V)

3.3 Radiated Emissions

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using biconical antenna and from 200 to 1000 MHz using log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antenna (see Figure 6). The test equipment was placed on a wooden and plastic bench situated on a 1.5 x 2 meter area adjacent to the measurement area (see Figure 7). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1 MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 8). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment; powering the monitor from the floor mounted outlet box and the computer aux AC outlet if applicable, and changing the polarity of the antenna; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Attachment H. Each EME reported was calibrated using the HP8640B signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 9 according to ANSI C63.4.

4.1 §15.203 Antenna Requirement

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

CONCLUSION

The PHILIPS RF Transmitter Remote Control complies with the requirement of §15.203 with a built-in looped antenna permanently attached to the transmitter.

5.1 Occupied Bandwidth Measurement

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. The bandwidth is determined at the points 20 dB down from the modulated carrier.

$$\begin{array}{l} @ 418 \text{ MHz} \\ 418 \text{ MHz} \times 0.0025 = 1.045 \text{ MHz} \end{array}$$

A sample transmitter output was fed into the R&S Spectrum Analyzer and was plotted.

| | |
|-------------------|------------|
| Span: | 2 MHz |
| Vertical Scale: | 5 dB/div |
| Center Frequency: | 417.77 MHz |

The bandwidth at 20 dB is **498 kHz**, which is within the allowable limit of **1,045 kHz** at 418 MHz.

6.1 Radiated Emissions Measurements

Operating Frequencies: 418 MHz
Distance of Measurements: 3 meters

| FREQ. (MHz) | Level* (dBm) | AFCL (dB) | POL (H/V) | (dB μ V/m) (PEAK) | FS (PEAK) | F/S (AVG) | (dB μ V/m) (AVG) | MARGIN (dB) |
|----------------|-----------------|--------------|--------------|--------------------------|--------------|--------------|-------------------------|----------------|
| 418 | - 42.0 | 24.1 | V | 89.1 | 28510.2 | 5416.935 | 74.6751 | 6.562957 |
| 836 | - 81.2 | 31.8 | V | 57.6 | 758.578 | 144.1297 | 43.1751 | 10.82493 |
| 1254 | - 88.2 | 31.2 | V | 50.0 | 316.228 | 60.08328 | 35.5751 | 18.42493 |
| 1672 | - 88.9 | 34.5 | V | 52.6 | 426.58 | 81.05011 | 38.1751 | 15.82493 |
| 2090 | - 92.0 | 36.7 | V | 51.7 | 384.592 | 73.07244 | 37.2751 | 16.72493 |

Table 1. Radiated Measurements at 3-meters.

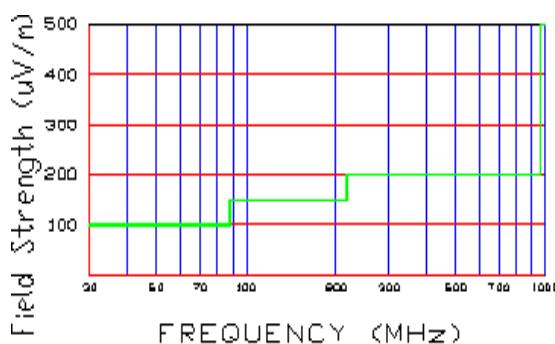


Figure 10. Spurious Radiated Limits at 3 meters

NOTES:

1. All channels were investigated and the worst-case is reported.
2. The EUT was tested with a new battery.
3. Radiated Limits per §15.231:

| Fund. Freq. (MHz) | F/S (μ V/m) | F/S Spurious (μ V/m) |
|-------------------|------------------|---------------------------|
| 40.66 ~ 40.70 | 2250 | 225 |
| 70 ~ 130 | 1250 | 125 |
| 130 ~ 174 | 1250 ~ 3750 | 125 ~ 375 |
| 174 ~ 260 | 3750 | 375 |
| 260 ~ 470 | 3750 ~ 12500 | 375 ~ 1250 |
| 470 & above | 12500 | 1250 |
4. Limit = 602.55 μ V/m
5. * Note: These frequencies fall under restricted bands according to §15.205. The field strength of emissions at these frequencies does not exceed the limits specified in §15.205.

ERP Measurements by Substitution Method: If applicable


The EUT was placed on a wooden turntable 3-meters away from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading that was measured with the EUT. This ERP level is recorded. Above 1 GHz, horn antenna is used and the difference between the gains of the horn and dipole antenna are taken into consideration to determine EIRP.

6.2 RADIATED TEST DATA AS A PERIPHERAL DEVICE

Radiated Emissions

| FREQ. (MHz) | Level* (dBm) | AFCL** (dB) | POL (H/V) | Height (m) | Azimuth (° angle) | F/S (μ V/m) | Margin*** (dB) |
|----------------|-----------------|----------------|--------------|---------------|----------------------|---------------------|-------------------|
| 84.1 | - 83.45 | 7.95 | V | 3.6 | 30 | 37.63 | - 8.5 |
| 158.9 | - 90.12 | 14.22 | V | 3.0 | 90 | 35.94 | - 12.4 |
| 260.1 | - 89.56 | 19.16 | H | 2.4 | 170 | 67.66 | - 9.4 |
| 329.0 | - 91.84 | 21.64 | V | 2.4 | 210 | 69.23 | - 9.2 |
| 357.0 | - 93.49 | 22.50 | V | 2.3 | 190 | 63.15 | - 10.0 |
| 649.0 | - 97.90 | 29.01 | V | 1.2 | 170 | 80.40 | - 7.9 |

Table 1. Radiated Measurements at 3-meters.

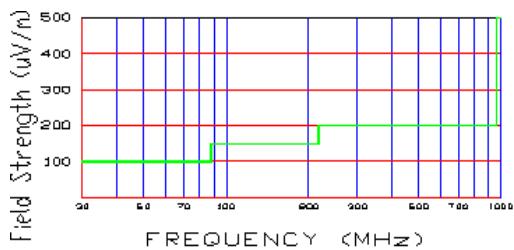

NOTES:

1. All modes of operation were investigated and the worst-case emissions are reported.
2. The radiated limits are shown on Figure 10. Above 1 GHz the limit is 500 μ V/m

Figure 11. Limits at 3 meters

* All readings are calibrated by HP8640B signal generator with accuracy traceable to the National Institute of Standards and Technology (formerly NBS).

** AFCL = Antenna Factor (Roberts dipole) and Cable Loss (30 ft. RG58C/U).

*** Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

7.1 SUPPORT EQUIPMENT USED

| | | |
|---|--|-----------------|
| 1. PHILIPS RF Transmitter Remote Control | FCC ID: PT5RC9200 Model: RC9200 1.8 m. unshielded AC power cord 2.4 m. unshielded serial cable | (EUT) |
| 2. H/P Thinkjet Printer | FCC ID: BS46XU2225C 1.8 m. unshielded AC power cord 1.5 m. shielded cable | S/N: 2604S10169 |
| 3. PANASONIC Toughbook | Model: CF-28 1.7 m. unshielded DC power cord w/ Ferrite on CPU end 1.8 m. unshielded AC power cord | |

(Please see "Attachment H - Test Setup Photographs" for actual system test setup.)

8.1 Plot(s) of Emissions

See Attachment D

9.1 Sample Calculations

$$\text{dB}\mu\text{V} = 20 \log_{10} (\mu\text{V}/\text{m})$$

9.2 Example 1:

Calculation of Limit @ 418MHz per Section 15.231

260 MHz Limit = 3750 μ V/m @ 3m

470 MHz Limit = 12500 μ V/m @ 3m

$$\begin{array}{r} \underline{12500-3750} \\ 470-260 \end{array} \quad = \quad \begin{array}{r} 8750 \\ 210 \end{array}$$

$$\frac{(418-260)(8750)}{(210)} = 6583.3 \mu\text{V/m}$$

6583.33+3750 = 10333.33µV/m (80.28dBµV/m) Limit @ 418MHz

9.3 Example 2:

Calculation of Duty Cycle per Section 15.35(c)

of Code Groups per 100ms = 11

of Wide Pulses = 4

of Narrow Pulses = 7

Maximum duty cycle = $1.7\text{ms} \times 11 \text{ pulses} = 18.7\text{ms}$ $18.7\text{ms}/100\text{ms} = 19\%$ Duty Cycle

10.1 Accuracy of Measurement

10.2 Measurement Uncertainty Calculations:

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

| Contribution (Line Conducted) | Probability Distribution | Uncertainty (\pm dB) | |
|--|-----------------------------|-------------------------|-----------|
| | | 9kHz-150MHz | 150-30MHz |
| Receiver specification | Rectangular | 1.5 | 1.5 |
| LISN coupling specification | Rectangular | 1.5 | 1.5 |
| Cable and input attenuator calibration | Normal (k=2) | 0.3 | 0.5 |
| Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8$ (9kHz) 0.2 (30MHz) Uncertainty limits $20\log(1 \pm \Gamma_1 \Gamma_R)$ | U-Shaped | 0.2 | 0.35 |
| System repeatability | Std. deviation | 0.2 | 0.05 |
| Repeatability of EUT | | - | - |
| Combined standard uncertainty | Normal | 1.26 | 1.30 |
| Expanded uncertainty | Normal (k=2) | 2.5 | 2.6 |

Calculations for 150kHz to 30MHz:

$$u_C(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \sqrt{\frac{1.5^2 + 1.5^2}{3} + \left(\frac{0.5}{2}\right)^2} + 0.35 = \pm 1.298 \text{ dB}$$

$$U = 2u_C(y) = \pm 2.6 \text{ dB}$$

| Contribution (Radiated Emissions) | Probability Distribution | Uncertainties (\pm dB) | |
|--|-----------------------------|---------------------------|-------------------|
| | | 3 m | 10 m |
| Ambient Signals | | - | - |
| Antenna factor calibration | Normal (k=2) | ± 1.0 | ± 1.0 |
| Cable loss calibration | Normal (k=2) | ± 0.5 | ± 0.5 |
| Receiver specification | Rectangular | ± 1.5 | ± 1.5 |
| Antenna directivity | Rectangular | $+ 0.5 / - 0$ | $+ 0.5$ |
| Antenna factor variation with height | Rectangular | ± 2.0 | ± 0.5 |
| Antenna phase centre variation | Rectangular | 0.0 | ± 0.2 |
| Antenna factor frequency interpolation | Rectangular | ± 0.25 | ± 0.25 |
| Measurement distance variation | Rectangular | ± 0.6 | ± 0.4 |
| Site imperfections | Rectangular | ± 2.0 | ± 2.0 |
| Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67$ (Bi) 0.3 (Lp) Uncertainty limits $20\log(1 \pm \Gamma_1 \Gamma_R)$ | U-Shaped | $+ 1.1$ $- 1.25$ | ± 0.5 |
| System repeatability | Std. Deviation | ± 0.5 | ± 0.5 |
| Repeatability of EUT | | - | - |
| Combined standard uncertainty | Normal | $+ 2.19 / - 2.21$ | $+ 1.74 / - 1.72$ |
| Expanded uncertainty U | Normal (k=2) | $+ 4.38 / - 4.42$ | $+ 3.48 / - 3.44$ |

Calculations for 3m biconical antenna. Coverage factor of k=2 will ensure that the level of confidence will be approximately 95%, therefore:

$$U=2u_C(y) = 2 \times \pm 2.19 = \pm 4.38 \text{ dB}$$

11.1 Test Equipment

| Type | Model | Cal. Due Date | S/N |
|----------------------------------|---|---------------|------------------------|
| Microwave Spectrum Analyzer | HP 8566B (100Hz-22GHz) | 12/05/02 | 3638A08713 |
| Microwave Spectrum Analyzer | HP 8566B (100Hz-22GHz) | 04/17/03 | 2542A11898 |
| Spectrum Analyzer/Tracking Gen. | HP 8591A (9kHz-1.8GHz) | 06/02/03 | 3144A02458 |
| Spectrum Analyzer | HP 8591A (9kHz-1.8GHz) | 10/15/02 | 3108A02053 |
| Spectrum Analyzer | HP 8594A (9kHz-2.9GHz) | 11/02/02 | 3051A00187 |
| Signal Generator* | HP 8640B (500Hz-1GHz) | 06/02/03 | 2232A19558 |
| Signal Generator* | HP 8640B (500Hz-1GHz) | 06/02/03 | 1851A09816 |
| Signal Generator* | Rohde & Schwarz (0.1-1000MHz) | 09/11/03 | 894215/012 |
| Ailtech/Eaton Receiver | NM 37/57A-SL (30-1000MHz) | 04/12/03 | 0792-03271 |
| Ailtech/Eaton Receiver | NM 37/57A (30-1000MHz) | 03/11/03 | 0805-03334 |
| Ailtech/Eaton Receiver | NM 17/27A (0.1-32MHz) | 09/17/03 | 0608-03241 |
| Quasi-Peak Adapter | HP 85650A | 08/09/03 | 2043A00301 |
| Ailtech/Eaton Adapter | CCA-7 CISPR/ANSI QP Adapter | 03/11/03 | 0194-04082 |
| RG58 Coax Test Cable | No. 167 | | n/a |
| Harmonic/Flicker Test System | HP 6841A (IEC 555-2/3) | | 3531A00115 |
| Broadband Amplifier (2) | HP 8447D | | 1145A00470, 1937A03348 |
| Broadband Amplifier | HP 8447F | | 2443A03784 |
| Transient Limiter | HP 11947A (9kHz-200MHz) | | 2820A00300 |
| Horn Antenna | EMCO Model 3115 (1-18GHz) | | 9704-5182 |
| Horn Antenna | EMCO Model 3115 (1-18GHz) | | 9205-3874 |
| Horn Antenna | EMCO Model 3116 (18-40GHz) | | 9203-2178 |
| Biconical Antenna (4) | Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design 1295, 1332, 0355 | | |
| Log-Spiral Antenna (3) | Ailtech/Eaton 93490-1 | | 0608, 1103, 1104 |
| Roberts Dipoles | Compliance Design (1 set) A100 | | 5118 |
| Ailtech Dipoles | DM-105A (1 set) | | 33448-111 |
| EMCO LISN (2) | 3816/2 | | 1077, 1079 |
| EMCO LISN | 3725/2 | | 2009 |
| Microwave Preamplifier 40dB Gain | HP 83017A (0.5-26.5GHz) | | 3123A00181 |
| Microwave Cables | MicroCoax (1.0-26.5GHz) | | |
| Ailtech/Eaton Receiver | NM37/57A-SL | | 0792-03271 |
| Spectrum Analyzer | HP 8591A | | 3034A01395 |
| Modulation Analyzer | HP 8901A | | 2432A03467 |
| NTSC Pattern Generator | Leader 408 | | 0377433 |
| Noise Figure Meter | HP 8970B | | 3106A02189 |
| Noise Figure Meter | Ailtech 7510 | | TE31700 |
| Noise Generator | Ailtech 7010 | | 1473 |
| Microwave Survey Meter | Holaday Model 1501 (2.450GHz) | | 80931 |
| Digital Thermometer | Extech Instruments 421305 | | 426966 |
| Attenuator | HP 8495A (0-70dB) DC-4GHz | | |
| Bi-Directional Coax Coupler | Narda 3020A (50-1000MHz) | | |
| Shielded Screen Room | RF Lindgren Model 26-2/2-0 | | 6710 (PCT270) |
| Shielded Semi-Anechoic Chamber | Ray Proof Model S81 | | R2437 (PCT278) |
| Environmental Chamber | Associated Systems Model 1025 (Temperature/Humidity) | | PCT285 |

* Calibration traceable to the National Institute of Standards and Technology (NIST).

12.1 Conclusion

The data collected shows that the **PHILIPS** (Model: **RC9200**) *RF Transmitter Remote Control* FCC ID: **PT5RC9200** complies with §15.231 Subpart C of the FCC Rules.

No modifications were made to the device.