

MEASUREMENT AND TECHNICAL REPORT

PHILIPS INDUSTRIAL ACTIVITIES REMOTE CONTROL SYSTEMS
Interleuvenlaan 74-76
3001 Leuven-Heverlee
Belgium

DATE: 15 October 2002

This Report Concerns:	Original Grant: X	Class II Change:
Equipment Type:	Pronto 2, Model TSU3000	
Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?	Yes: Defer until:	No: X
Company Name agrees to notify the Commission by:	N/A	
of the intended date of announcement of the product so that the grant can be issued on that date.		
Transition Rules Request per 15.37?	Yes:	No: X*
(*) FCC Part 15, Paragraph(s) 15.109(a); 15.231(a); 15.231(b); 15.231(c)		
Report Prepared by: TÜV AMERICA, INC 10040 Mesa Rim Road San Diego, CA 92121-2912 Phone: 858 546 3999 Fax: 858 546 0364		

TABLE OF CONTENTS

	Pages
1.0 GENERAL INFORMATION	3 - 7
1.1 Product Discription	3 - 6
1.2 Related Submittal Grant	7
1.3 Tested System Details	7
1.4 Test Methodology	7
1.5 Test Facility	7
1.6 Part 2 Requirements	7
2.0 SYSTEM TEST CONFIGURATION	8
2.1 Justification	8
2.2 EUT Exercise Software	8
2.3 Special Accessories	8
2.4 Equipment Modifications	8
2.5 Configuration of Test System	8
3.0 RADIATED EMISSIONS EQUIPMENT/DATA	9 - 12
4.0 DEACTIVATION EQUIPMENT/DATA	13 - 15
5.0 RADIATED SPURIOUS EMISSIONS EQUIPMENT/DATA	16 - 19
5.1 Field Strength Calculation	
6.0 EMISSIONS BANDWIDTH EQUIPMENT/DATA	20 - 22
7.0 DUTY CYCLE MEASUREMENTS EQUIPMENT/DATA	23 - 27
8.0 ATTESTATION STATEMENT	28

Report No. SC204920-03

1.0 GENERAL INFORMATION

1.1 Product Description

General Equipment Description -- NOTE: This information will be input into your test report as shown below.

EUT Description: RF Remote Control

EUT Name: Pronto 2

Model No.: TSU3000 Serial No.: --

Product Options: --

Configurations to be tested: --

Power Requirements

Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)

Voltage: Battery 6V (If battery powered, make sure battery life is sufficient to complete testing.)

of Phases: --

Current (Amps/phase(max)): -- Current (Amps/phase(nominal)): --

Other: --

Other Special Requirements

--

Typical Installation and/or Operating Environment

(ie. Hospital, Small Business, Industrial/Factory, etc.)

Home black and white touch screen remote control with RF functionality.

EUT Power Cable

☐ Permanent OR ☐ Removable Length (in meters): --

☐ Shielded OR ☐ Unshielded

☒ Not Applicable

EUT Interface Ports and Cables											
Interface				Shielding							
Type	Analog	Digital	Qty	Yes	No	Type	Termination	Connector Type	Port Termination	Length (in meters)	Removable Permanent
EXAMPLE: RS232	☐	☒	2	☒	☐	Foil over braid	Coaxial	Metallized 9-pin D-Sub	Characteristic Impedance	6	☒ ☐
USB	☐	☒	1	☒	☐	Foil over braid	Molded USB A plug	--	Molded USB mini B plug	1.8	☒ ☐

EUT Software.

Revision Level: --

Description: The touch screen remote can transmit IR (infra-red) as well as RF (418 MHz). The remote is also capable of learning an IR code from another remote. The user can upload and download his own personal made screen layouts. This can be done using a personal computer and the right editor. The RF can be received using a special dongle which is a separate device.

EUT Operating Modes to be Tested -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing. Consult with your TÜV Product Service Representative if additional assistance is required.

1. Normal operating: the touch screen of the device is on (the on time can be changed by the user). Together the backlight can be switched on.
2. The user can send IR code or also RF codes. This can be a different IR code than the normal RC5 code depending on the receiver. The device can also learn another remote IR code thanks through the learning capabilities.
3. A special mode is made for testing in an approbation center. This software is constantly switching on and off: The LCD, the backlight, transmitting IR code and transmitting RF at 418 MHz. (OTHER DEVICE IS WITH THIS SOFTWARE)

EUT System Components -- List and describe all components which are part of the EUT. For FCC testing a minimum configuration is required. (ie. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc.)

Description	Model #	Serial #	BSMI #
Pronto 2	--	--	--
USB Cable	--	--	--
4 AAA batteries for each device	--	--	--

Support Equipment -- List and describe all support equipment which is not part of the EUT. (i.e. peripherals, simulators, etc)

Description	Model #	Serial #	FCC ID #
Editor software	--	--	--

Oscillator Frequencies

Frequency	Derived Frequency	Component # / Location	Description of Use
418 MHz	--	7404	RF Murata module
3,4 MHz	--	1402	Slave IC
32 kHz	--	1102	Real time clock
7.3728 MHz	--	1101	Master IC
6 MHz	48 MHz	1307	USB IC
455 kHz	--	1403	IR 455 kHz Carrier

Power Supply

Manufacturer	Model #	Serial #	Type
DUREL Step-up converter	100381AA	160 V peak-peak AC	☒ Switched-mode (Frequency) 14 kHz ☐ Linear ☐ Other --
Motorola	MC34063AD	25V DC	☒ Switched-mode (Frequency) 135 kHz ☐ Linear ☐ Other --

Power Line Filters

Manufacturer	Model #	Location in EUT
--		

Critical EMI Components (Capacitors, ferrites, etc.)

<i>Description</i>	<i>Manufacturer</i>	<i>Part # or Value</i>	<i>Qty</i>	<i>Component # / Location</i>
USB termination resistor	--	22 ohm	2	3311 and 3312 on the schematic

EMC Critical Detail -- Describe other EMC Design details used to reduce high frequency noise.

--

Report No. SC204920-03

1.2 Related Submittal Grant

None

1.3 Tested System Details

The FCC ID's for all equipment, plus descriptions of all cables used in the tested system are:

None

1.4 Test Methodology

Purpose of Test: To demonstrate compliance with the following tests.

TEST	FCC CFR 47#	PASS/FAIL
Radiated Emissions	15.109(a)	Pass
Deactivation	15.231(a)	Pass
Radiated Spurious Emissions	15.231(b)	Pass
Emissions Bandwidth	15.231(c)	Pass
Duty Cycle Measurements	ANSI C63.4, Appendix 14, Para. 10	Pass

Both Conducted and Radiated testing were performed according to the procedures in FCC/ANSI C63.4 and CSA 108.8-M1983. Radiated testing was performed at an antenna-to-EUT distance of 3 meters (1 - 25 GHz).

1.5 Test Facility

The open area test site and conducted measurement data were tested by:

TÜV AMERICA, INC
10040 Mesa Rim Road
San Diego, CA 92121-2912
Phone: 858 546 3999
Fax: 858 546 0364

The Test Site Data and performance comply with ANSI C63.4 and are registered with the FCC, 7435 Oakland Mills Road, Columbia Maryland 21046. All Measurement Data is acquired according to the content of FCC Measurement Procedure and ANSI C63.4, unless supplemented with additional requirements as noted in the test report.

2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was initially tested for FCC emissions in the following configuration:

See Block Diagram

2.2 EUT Exercise Software

None

2.3 Special Accessories

None

2.4 Equipment Modifications

None

2.5 Configuration of Test System

See Block Diagram

Report No. SC204920-03

3.0 RADIATED EMISSIONS EQUIPMENT/DATA

See following page(s).

Report No. SC204920-03

Test Conditions: RADIATED EMISSIONS: FCC Part 15.109(a)**The RADIATED EMISSIONS measurements were performed at the San Diego Testing Facility:**☐ - Test not applicable

- - Canyon #2 (3- and 10-Meter Open Area Test Site), Carroll Canyon, San Diego
(Calibration Due Date: 12 July 2002)

Testing was performed at a test distance of:

- - 3 meters

Test Equipment Used:

Model No.	Prop. No.	Description	Manufacturer	Serial No.	Cal Date
LPB 2520/A	739	Antenna, Bilog	Antenna Research	1170	05/02
ESVS 30	427	EMI Test Receiver	Rohde & Schwarz	830350/006	12/01


Remarks: _____

REPORT NO. SC204920
COMPANY: Philips
EUT: Pronto 2 TSU3000
EUT MODE: EMC test mode
DATE: 20-Sep-02

SPEC: FCC Part 15 para 15.109(a)

TESTED BY: David Gray

TEST DISTANCE: 3 Meters

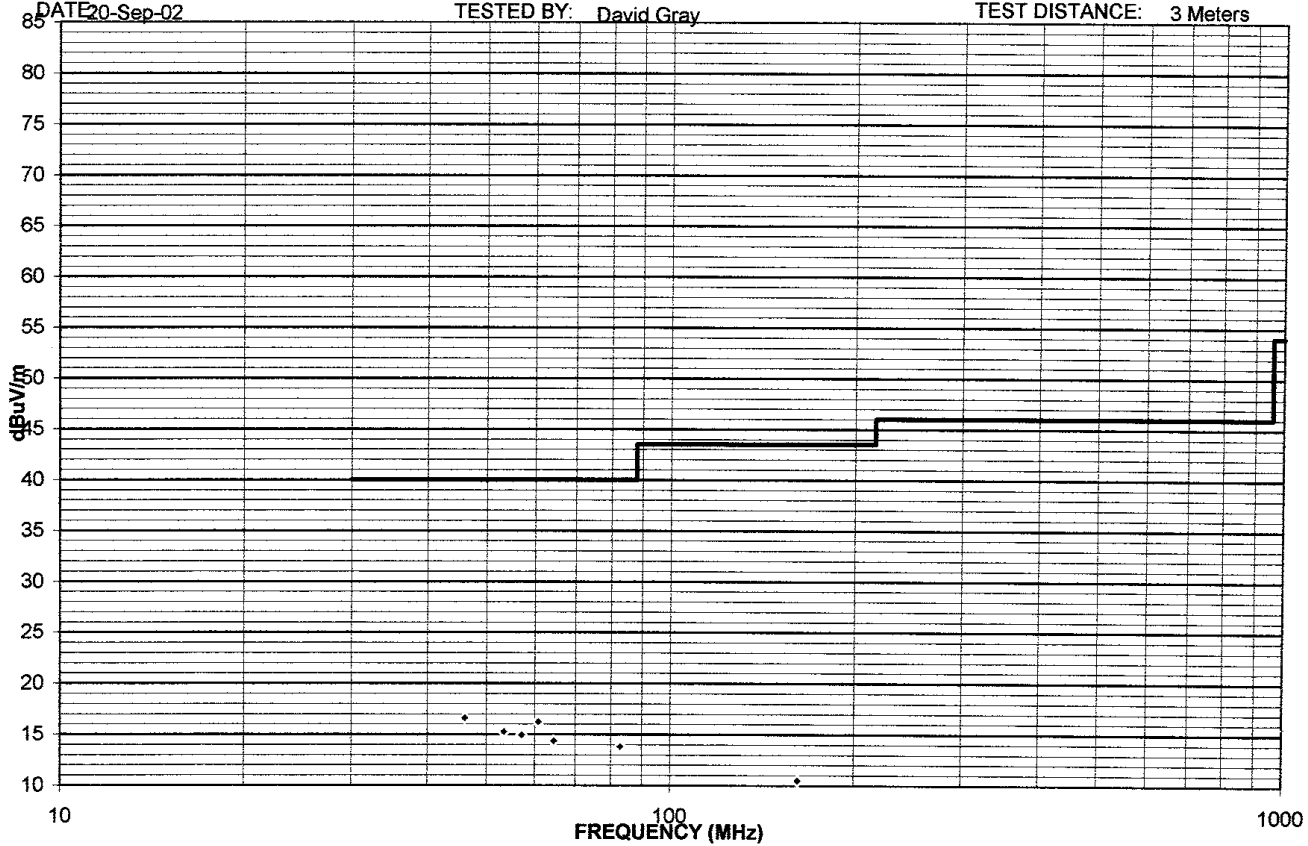

REPORT No: SC204920

SPEC: FCC Part 15 para 15.109(a)

CUSTOMER: Philips

TEST DIST: 3 Meters

E U T: Pronto 2 TSU3000

TEST SITE: 2

EUT MODE: EMC test mode

BICONICAL: 739

DATE: 20-Sep-02 TESTED BY: David Gray

LOG PERIODIC: 739

NOTES: Quasi-Peak with 120 KHz measurement bandwidth.
battery powered

RCVR: 427

Temperature: 22 Relative Humidity: 55

	Temperature	22
EUT MARGIN	-23.4	dB at 46.1 MHz

ver 1.8a

[illegible]

Report No. SC204920-03

4.0 DEACTIVATION EQUIPMENT/DATA

See following page(s).

Report No. SC204920-03

Test Conditions: DEACTIVATION: FCC Part 15.231(a)**The DEACTIVATION measurements were performed at the San Diego Testing Facility:**☐ - Test not applicable

■ - SR-2, Shielded Room, 12' x 24' x 10', Metal Chamber


Test Equipment Used:

Model No.	Prop. No.	Description	Manufacturer	Serial No.	Cal Date
8566B	823	Spectrum Analyzer	Hewlett Packard	2332A02751	08/02
CBL6111	460	Bilog Antenna	Chase Electronics	1013	VBU*

Remarks: (*) Verified before use.

15.231(a) Deactivation

23 Sept 02

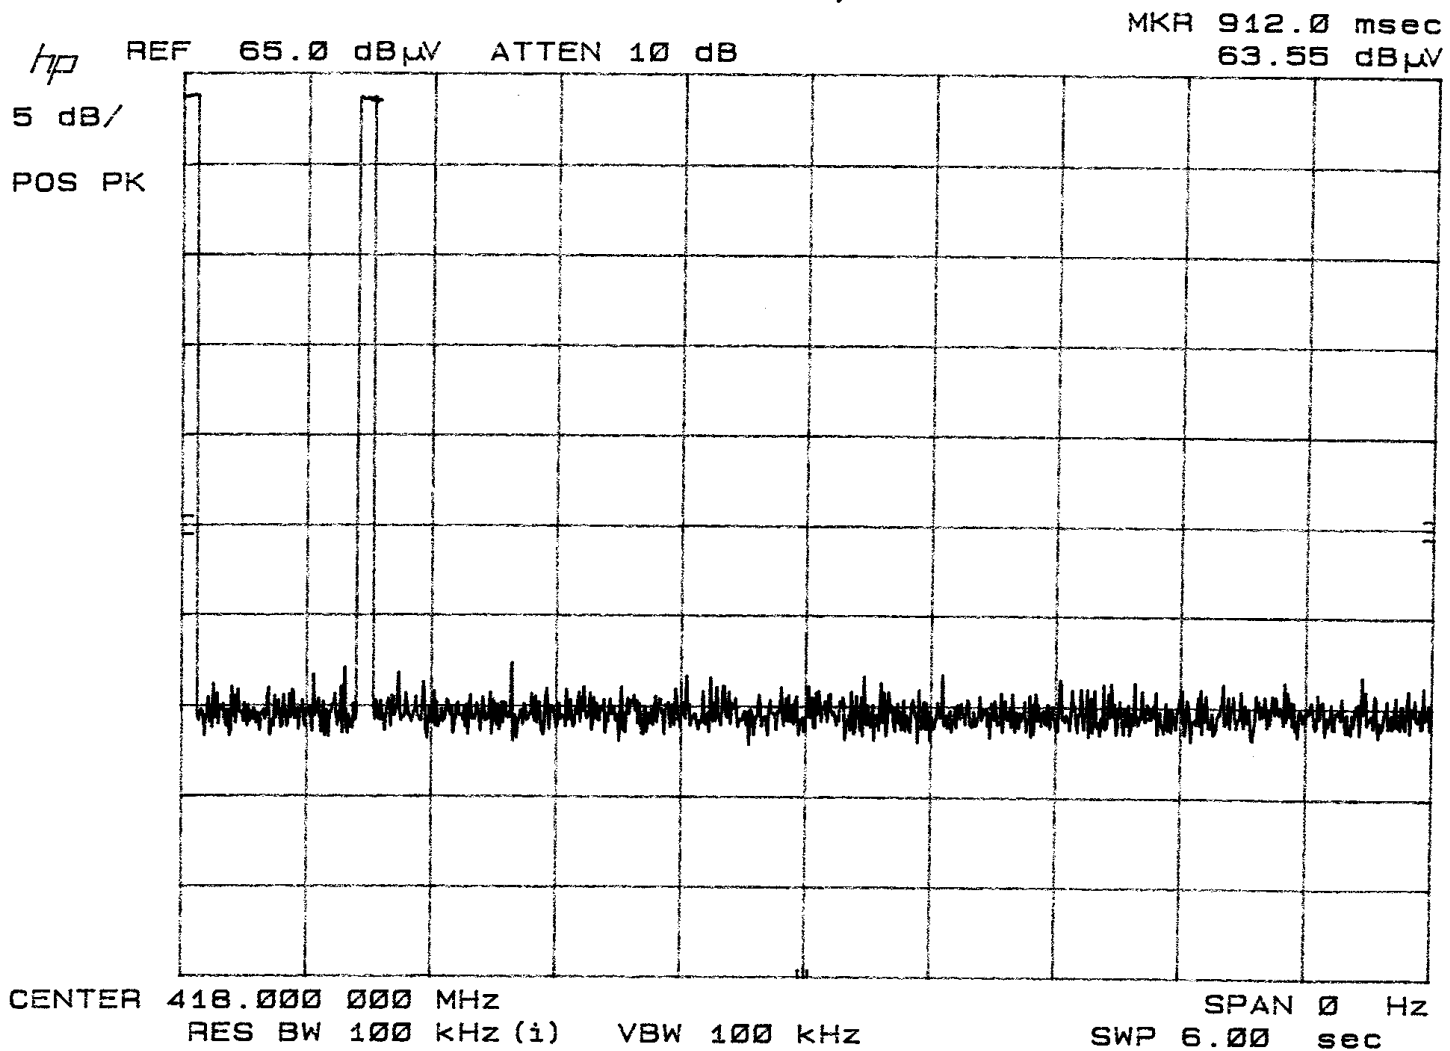

5.0 RADIATED SPURIOUS EMISSIONS EQUIPMENT/DATA

The following data lists the significant emission frequencies, measured levels, correction factor (which includes cable and antenna corrections), the corrected reading, and the limit.

See following page(s).

5.1 Field Strength Calculation

If a preamplifier was used during the Radiated Emission Testing, it is required that the amplifier gain must be subtracted from the Spectrum Analyzer (Meter) Reading. In addition, a correction factor for the antenna, cable used and a distance factor, if any, must be applied to the Meter Reading before a true field strength reading can be obtained. In the automatic measurement, these considerations are automatically presented as a part of the print out. In the case of manual measurements and for greater efficiency and convenience, instead of using these correlation factors for each meter reading, the specification limit was modified to reflect these correlation factors at each frequency value so that the meter readings can be compared directly to the modified specification limit. This modified specification limit is referred to as the "Corrected Meter Reading Limit" or simply the CMRL, which is the actual field strength present at the antenna. The quantity can be derived in the following manner:

$$\text{Corrected Meter Reading Limit (CMRL)} = \text{SAR} + \text{AF} + \text{CL} - \text{AG} - \text{DC}$$

Where, SAR = Spectrum Analyzer Reading

AF = Antenna Factor

CL = Cable Loss

AG = Amplifier Gain (if any)

DC = Distance Correction (if any)

Assume the following situation: A meter reading of 29.4 dBuV was obtained from a Class A computing device measured at 83 MHz. Assume an antenna factor of 9.2 dB, a cable loss of 1.4 dB and amplifier gain of 20.0 dB at 83 MHz. The final field strength would be determined as follows:

$$\text{CMRL} = 29.4 \text{ dBuV} + 9.2 \text{ dB} - 1.4 \text{ dB} - 20 \text{ dB/M} - 0.0 \text{ dB}$$

$$\text{CMRL} = 20.0 \text{ dBuV/M}$$

This result is well below the FCC and CSA Class A limit of 29.5 dbuV/m at 83 MHz.

For the manual mode of measurement, a table of corrected meter reading limit was used to permit immediate comparison of the meter reading to determine if the measure emission amplitude exceeded the specification limit at that specific frequency.

Report No. SC204920-03

Test Conditions: RADIATED SPURIOUS EMISSIONS: FCC Part 15.231(b)

The RADIATED SPURIOUS EMISSIONS measurements were performed at the San Diego Testing Facility:

☐ - Test not applicable

■ - Roof (Small Open Area Test Site)

Testing was performed at a test distance of:

■ - 3 meters

Test Equipment Used:

Model No.	Prop. No.	Description	Manufacturer	Serial No.	Cal Date
HP8566B	407	Spectrum Analyzer	Hewlett Packard	2311A02209	11/01
AMF-5D-010180-35-10P	719	PreAmp	TUV PS	--	VBU*
3115	251	Horn Antenna	Electro Mechanics Co	2595	12/01
Cable 1	732	30' Cable	United Microwave Pro	--	VBU*
Cable 2	6788	3' Cable	United Microwave Pro	--	VBU*
FF 6548-2	777	900 MHz High Pass Filter	Sage	006	VBU*
3146	243	Log Periodic Antenna	EMCO	106X	11/01

Remarks: (*) Verified before use.

v.beta231

Page 19 of 28
Rev.No 1.0

Report No. SC204920-03

6.0 EMISSIONS BANDWIDTH EQUIPMENT/DATA

See following page(s).

Report No. SC204920-03


Test Conditions: EMISSIONS BANDWIDTH: FCC Part 15.231(c)**The EMISSIONS BANDWIDTH measurements were performed at the San Diego Testing Facility in:**☐ - Test not applicable

■ - SR-2, Shielded Room, 12' x 24' x 10', Metal Chamber

Test Equipment Used:

Model No.	Prop. No.	Description	Manufacturer	Serial No.	Cal Date
8566B	823	Spectrum Analyzer	Hewlett Packard	2332A02751	08/02
CBL6111	460	Bilog Antenna	Chase Electronics	1013	VBU*

Remarks: (*) Verified before use.

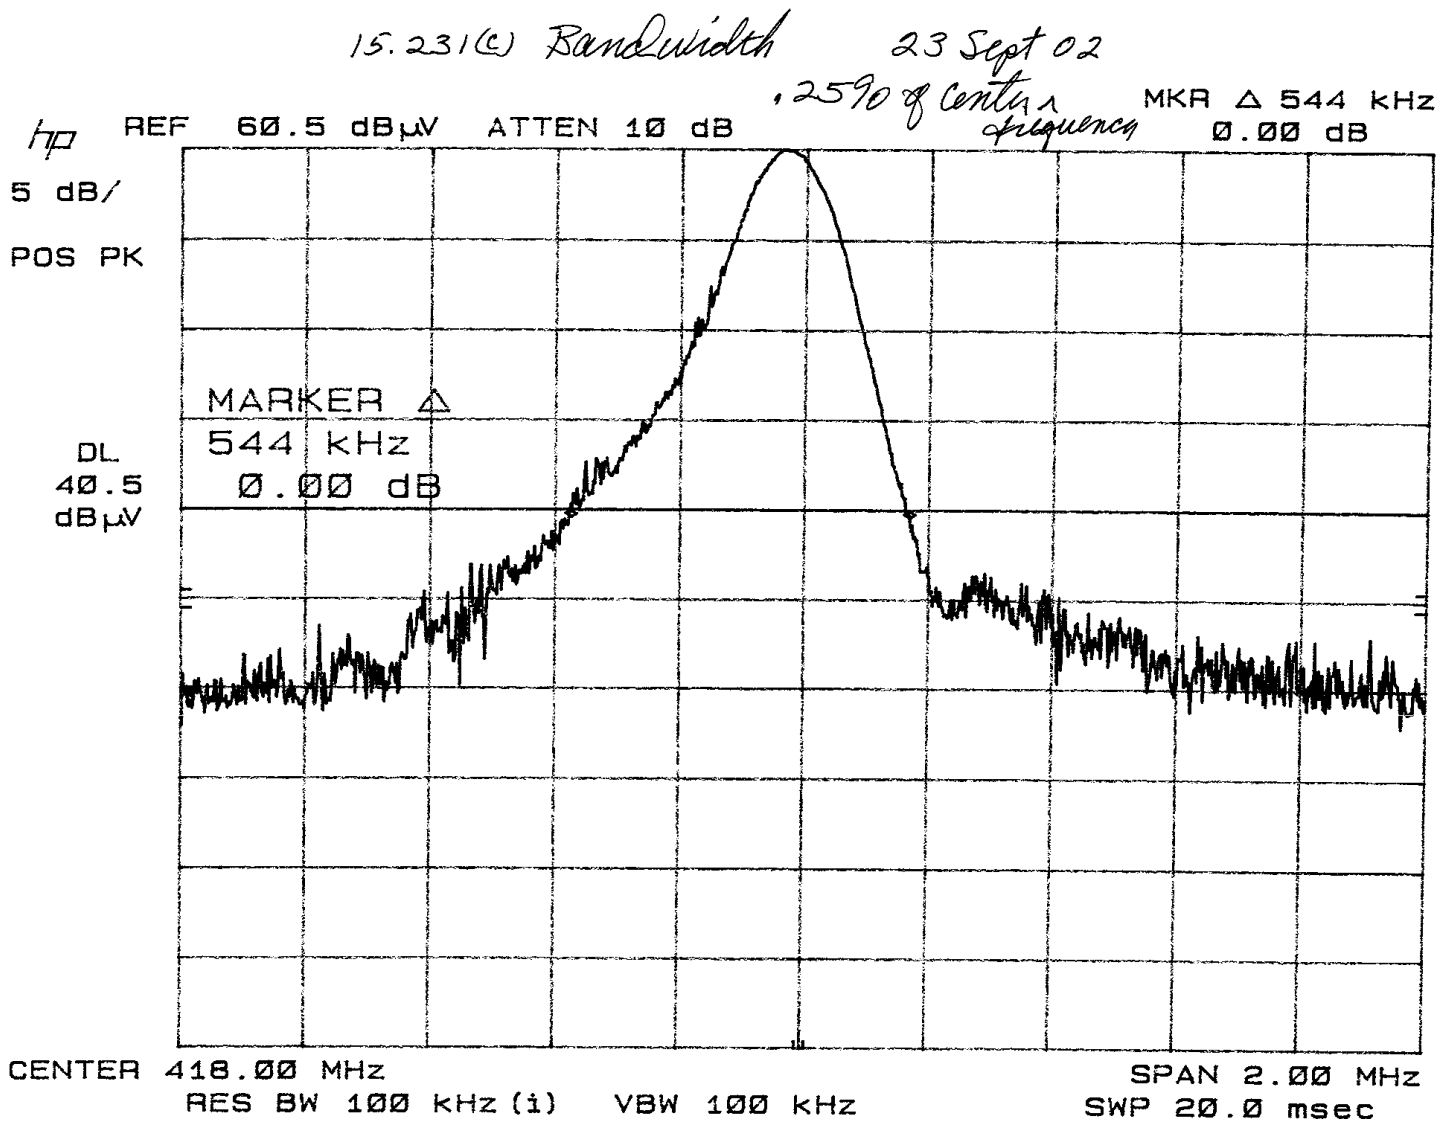

Report No. SC204920-03

7.0 DUTY CYCLE MEASUREMENTS EQUIPMENT/DATA

See following page(s).

Report No. SC204920-03

Test Conditions: DUTY CYCLE MEASUREMENTS: ANSI C63.4, Appendix 14, Para. 10**The DUTY CYCLE MEASUREMENTS were performed at the San Diego Testing Facility in:**☐ - Test not applicable

■ - SR-2, Shielded Room, 12' x 24' x 10', Metal Chamber

Test Equipment Used:

Model No.	Prop. No.	Description	Manufacturer	Serial No.	Cal Date
8566B	823	Spectrum Analyzer	Hewlett Packard	2332A02751	08/02
CBL6111	460	Bilog Antenna	Chase Electronics	1013	VBU*

Remarks: (*) Verified before use.

Pulse Duty Cycle Correction Factor

FCC 15.35(c) and ANSI C63.4:2000 Appendix I.4.

Calculation:

$$\text{Average Reading} = \text{Peak Reading (dBuV/m)} + 20\log(\text{duty cycle})$$

Where duty cycle correction is allowed, the following methods are employed to determine the correction factored allowed:

- 1) Turn on the transmitter and set it to transmit the pulse train continuously.
- 2) Tune the spectrum analyzer to the transmitter frequency and set the spectrum analyzer resolution bandwidth wide enough to encompass all significant components of the signal of interest. Video bandwidth is set to the widest bandwidth available.
- 3) Set the spectrum analyzer vertical scale to the linear mode and the frequency span to zero hertz moving if necessary the antenna closer to the device to obtain a convenient signal level.
- 4) Connect a storage scope to the video output of the spectrum analyzer. This will be used to demodulate and detect the pulse train.
- 5) Adjust the oscilloscope settings to observe the pulse train, and determine the number and width of the pulses, as well as the of the period.
- 6) Adjust the transmitter controls, jumper wires, or software to maximize the transmitted duty cycle.
- 7) Measure the pulse width by determining the time difference between the two half-voltage points on the pulse.
- 8) When the pulse train is less than 100 mS, including blanking intervals, calculate the duty cycle by averaging the sum of the pulse widths over one complete pulse train. When the pulse train exceeds 100 mS, calculate the duty cycle by averaging the sum of the pulse widths over the 100 mS width with the highest average value.
- 9) The duty cycle is the value of the sum of the pulse widths in one period or 100 mS, divided by the length of the period or 100 mS.
- 10) The result is the duty cycle and the factor is derived by multiplying the $\log(10)$ of the duty cycle by 20. This factor is then added to the peak detector reading and then compared to the average detector limit.

A) Period (mS) = 25.75 (100 mS Maximum)

B) Long Pulse (mS) = 2

C) Nr. Of Long Pulses = 2

D) Short Pulse (mS) = 1


E) Nr. Of Short Pulses = 10


F) Duty Cycle = 14% (14dB) (Maximum Allowance is 20 dB)

Representative Plots Located on Pages: _____

$$\text{Duty Cycle (F)} = (2\text{mS} \times 2) + (1\text{mS} \times 10) = 14\text{mS} / 100\text{mS}$$

14% duty cycle allowance

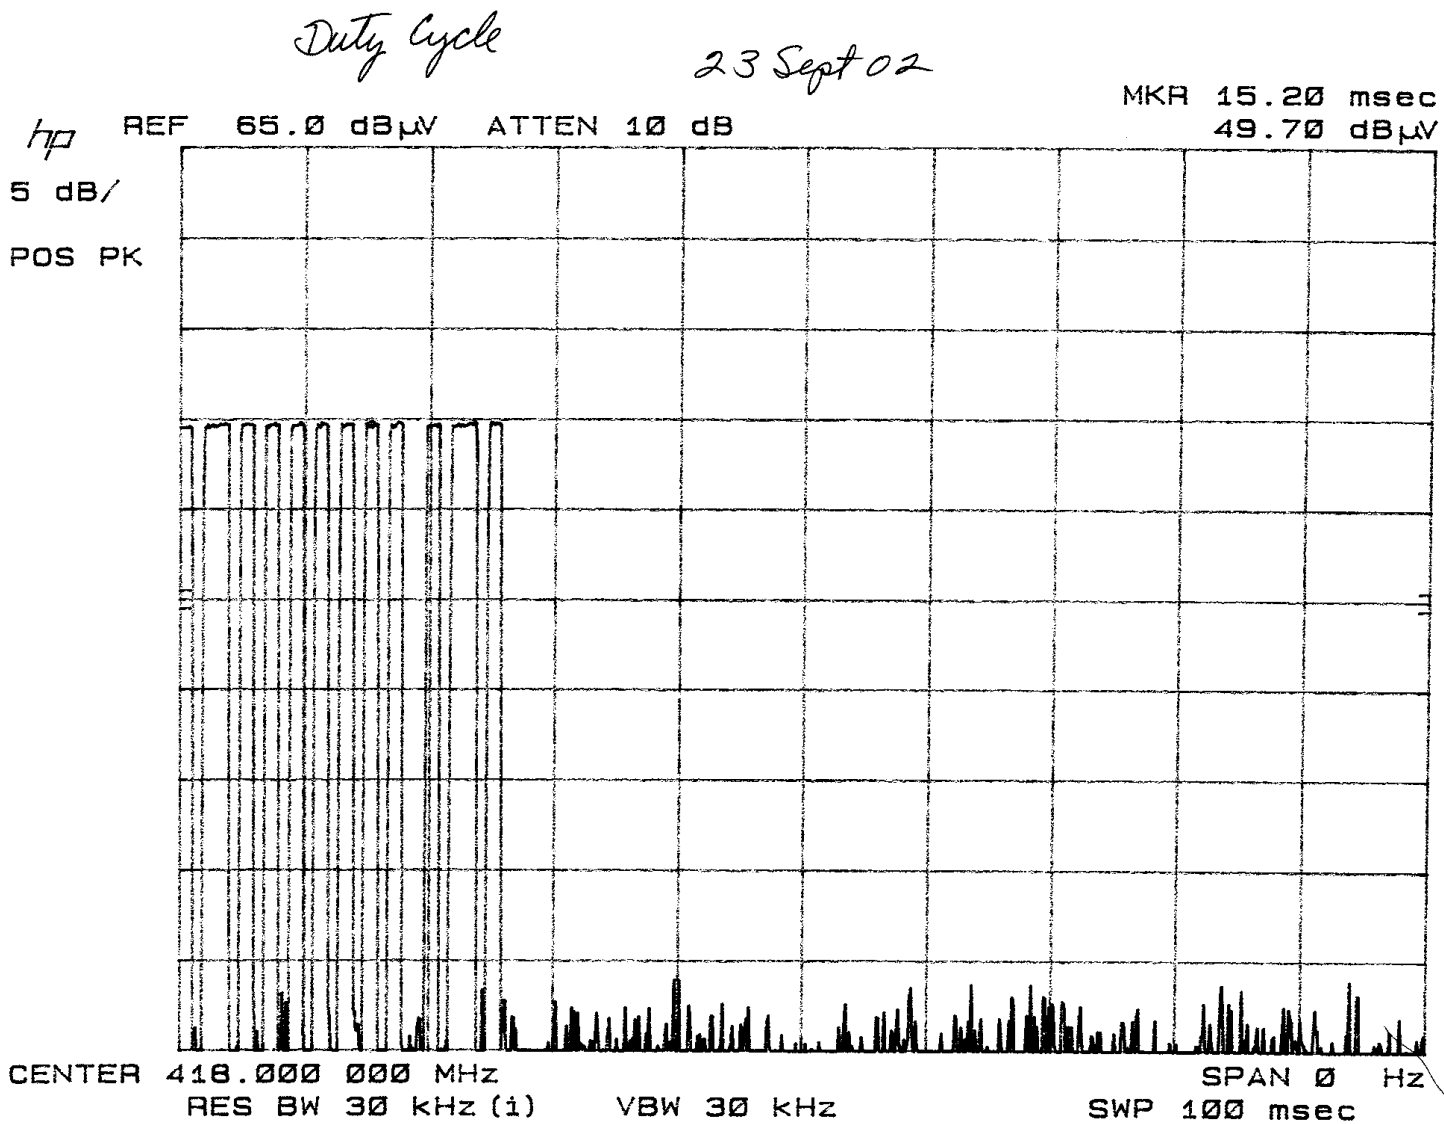

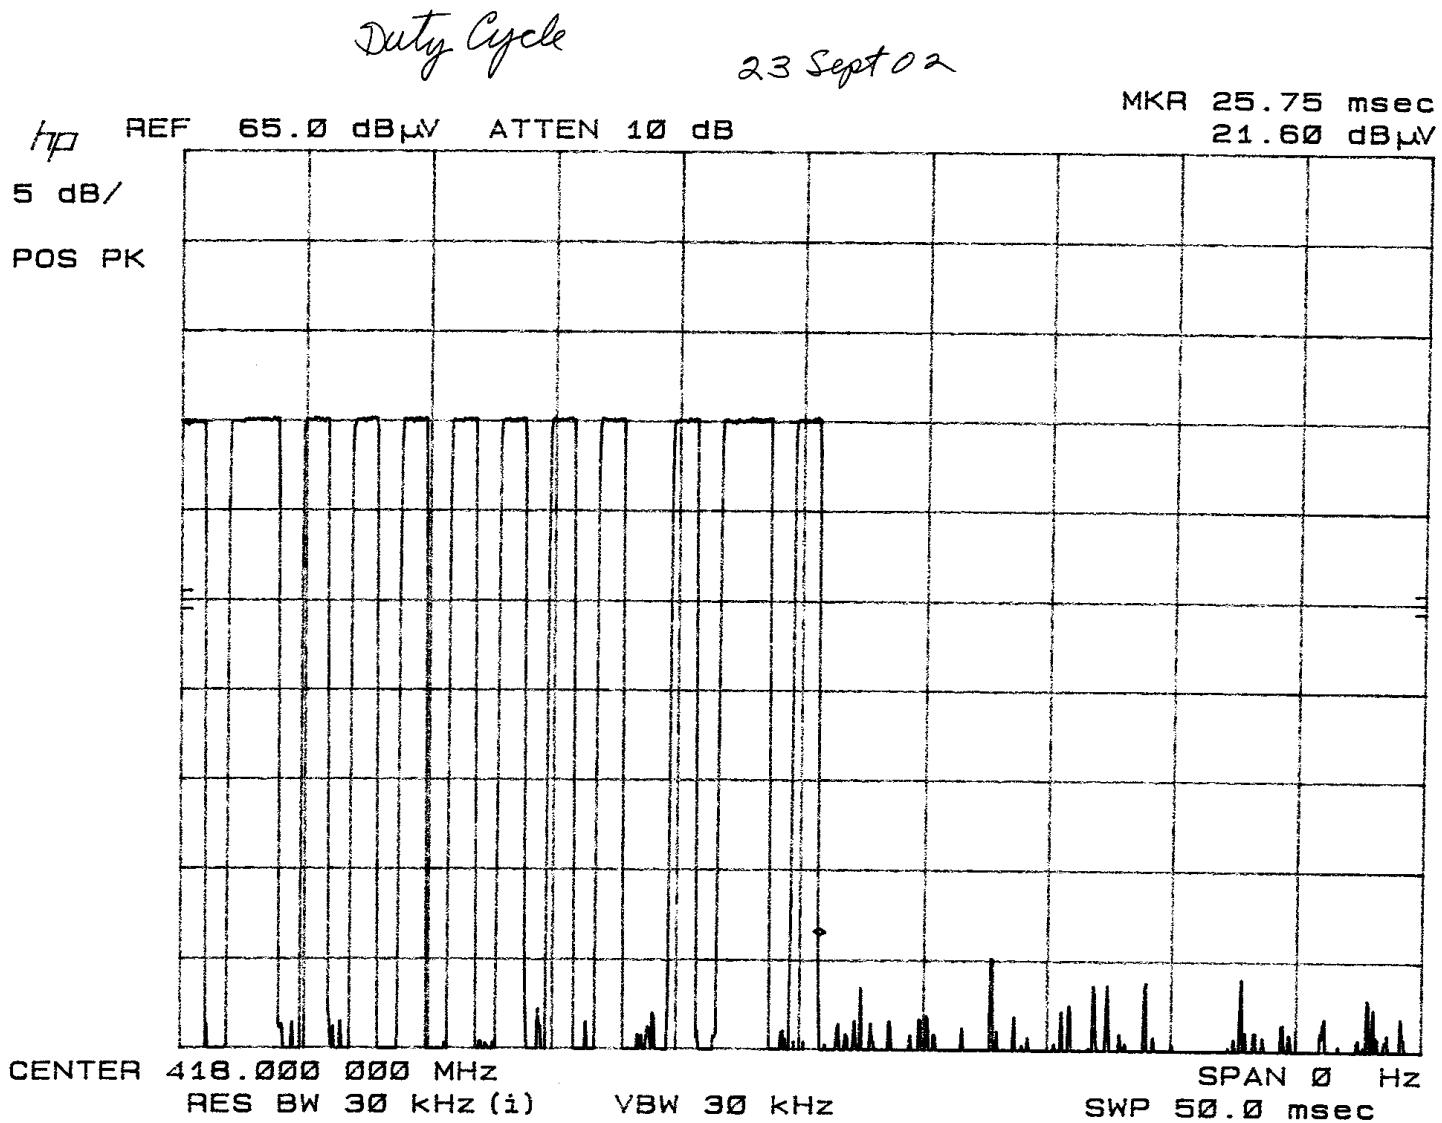

Report No. SC204920-03

8.0 ATTESTATION STATEMENT

GENERAL REMARKS:

SUMMARY:

All tests were performed per CFR 47, Part(s) 15.109(a); 15.231(a); 15.231(b); 15.231(c)

■ - Performed

The Equipment Under Test

■ - **Fulfills** the requirements of CFR 47, Part(s) 15.109(a); 15.231(a); 15.231(b); 15.231(c)


- TÜV AMERICA, INC. -

Responsible Engineer:



Jim Owen
(EMC Chief Engineer)

Responsible Engineer:



David Gray
(EMC Engineer)