

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
PIPO TECHNOLOGY CO., LIMITED

Media box
Model No.: X9

FCC ID: PT7-X9

Prepared for : PIPO TECHNOLOGY CO., LIMITED
Address : Area C, 3F, Bao Yun Da Logistics Centre, Warehouse Building,
Xi Xiang Avenue, Bao An District, Shenzhen, China.
Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A&D, Chan Yuan New Material Port, Keyuan Rd.
Science & Industry Park, Nan Shan, Shenzhen, Guangdong P.R.
China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report No. : ATE20161169
Date of Test : Jun 13-27, 2016
Date of Report : Jun 28, 2016

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	6
1.3. Special Accessory and Auxiliary Equipment	6
1.4. Description of Test Facility	6
1.5. Measurement Uncertainty	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. POWER LINE CONDUCTED MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	12
5.6. Power Line Conducted Emission Measurement Results	12
6. 6DB BANDWIDTH MEASUREMENT	19
6.1. Block Diagram of Test Setup.....	19
6.2. The Requirement For Section 15.247(a)(2).....	19
6.3. EUT Configuration on Measurement	19
6.4. Operating Condition of EUT	19
6.5. Test Procedure	19
6.6. Test Result	20
7. MAXIMUM PEAK OUTPUT POWER	22
7.1. Block Diagram of Test Setup.....	22
7.2. The Requirement For Section 15.247(b)(3).....	22
7.3. EUT Configuration on Measurement	22
7.4. Operating Condition of EUT	22
7.5. Test Procedure	22
7.6. Test Result	23
8. POWER SPECTRAL DENSITY MEASUREMENT.....	25
8.1. Block Diagram of Test Setup.....	25
8.2. The Requirement For Section 15.247(e).....	25
8.3. EUT Configuration on Measurement	25
8.4. Operating Condition of EUT	25
8.5. Test Procedure	26
8.6. Test Result	27
9. BAND EDGE COMPLIANCE TEST	29
9.1. Block Diagram of Test Setup.....	29
9.2. The Requirement For Section 15.247(d)	29
9.3. EUT Configuration on Measurement	29
9.4. Operating Condition of EUT	29

9.5.	Test Procedure	30
9.6.	Test Result	30
10.	RADIATED SPURIOUS EMISSION TEST	37
10.1.	Block Diagram of Test Setup.....	37
10.2.	The Limit For Section 15.247(d)	38
10.3.	Restricted bands of operation	39
10.4.	Configuration of EUT on Measurement	39
10.5.	Operating Condition of EUT	40
10.6.	Test Procedure	40
10.7.	The Field Strength of Radiation Emission Measurement Results	40
11.	ANTENNA REQUIREMENT.....	53
11.1.	The Requirement	53
11.2.	Antenna Construction	53

Test Report Certification

Applicant : PIPO TECHNOLOGY CO., LIMITED
Manufacturer : PIPO TECHNOLOGY CO., LIMITED
EUT Description : Media box
Model No. : X9
Trade Mark : N/A

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2015
ANSI C63.10: 2013

The EUT was tested according to DTS test procedure of Apr 08, 2016 KDB558074 D01 DTS Meas Guidance v03r05 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Jun 13-27, 2016

Date of Report: Jun 28, 2016

Prepared by :


(Mark Chen, Engineer)

Approved & Authorized Signer :


(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Media box
Model Number	:	X9
Bluetooth version	:	BT V4.0 Dual Mode This report is for BT V4.0 LE mode
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40 for BT V4.0 LE 79 for BT classic mode
Antenna Gain	:	2dBi
Antenna type	:	External Antenna
Power Supply	:	AC 100-240V~50/60Hz
Adapter information	:	Model:KA1433-1202400JP Input: 100-240V~50/60Hz 1.0A Max Out: 12V/2400mA
Modulation mode	:	GFSK for BT V4.0 LE GFSK, $\pi/4$ DQPSK, 8DPSK for BT classic mode
Applicant	:	PIPO TECHNOLOGY CO., LIMITED
Address	:	Area C, 3F, Bao Yun Da Logistics Centre, Warehouse Building, Xi Xiang Avenue, Bao An District, Shenzhen, China.
Manufacturer	:	PIPO TECHNOLOGY CO., LIMITED
Address	:	Area C, 3F, Bao Yun Da Logistics Centre, Warehouse Building, Xi Xiang Avenue, Bao An District, Shenzhen, China.
Date of sample received	:	Jun 13, 2016
Date of Test	:	Jun 13-27, 2016

1.2.Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.3.Special Accessory and Auxiliary Equipment

N/A

1.4.Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC

The Registration Number is 752051

Listed by Industry Canada

The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories

The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.5.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 9, 2016	1 Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 9, 2016	1 Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 9, 2016	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 9, 2016	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 14, 2016	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 14, 2016	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 14, 2016	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 14, 2016	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 9, 2016	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 9, 2016	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 9, 2016	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 9, 2016	1 Year

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

3.2.Configuration and peripherals

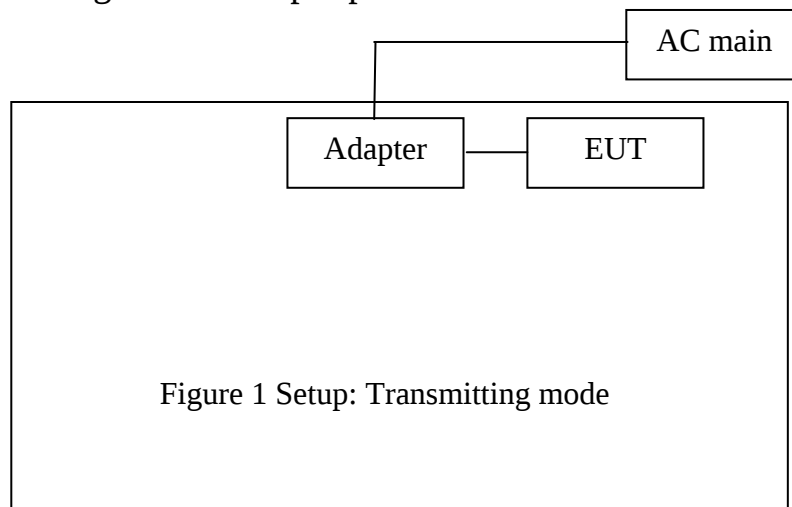



Figure 1 Setup: Transmitting mode

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. POWER LINE CONDUCTED MEASUREMENT

5.1. Block Diagram of Test Setup

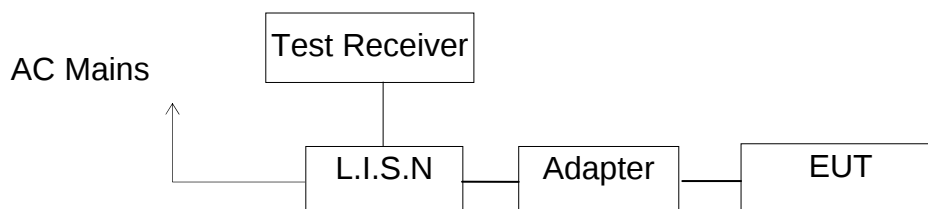

(EUT: Media box)

5.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0
NOTE1: The lower limit shall apply at the transition frequencies.		
NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

5.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in test mode and measure it.

5.5.Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

5.6.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : BT communicating(AC 120V/60Hz)

EUT mode : X9

MEASUREMENT RESULT: "PIPO617012_fin"

6/17/2016 10:06AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.555000	41.00	10.7	56	15.0	QP	L1	GND
1.110000	27.00	10.9	56	29.0	QP	L1	GND
25.150000	38.10	11.5	60	21.9	QP	L1	GND

MEASUREMENT RESULT: "PIPO617012_fin2"

6/17/2016 10:06AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.555000	34.90	10.7	46	11.1	AV	L1	GND
1.080000	19.90	10.9	46	26.1	AV	L1	GND
24.925000	33.50	11.5	50	16.5	AV	L1	GND

MEASUREMENT RESULT: "PIPO617011_fin"

6/17/2016 10:02AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.550000	39.00	10.7	56	17.0	QP	N	GND
1.110000	28.70	10.9	56	27.3	QP	N	GND
24.940000	35.90	11.5	60	24.1	QP	N	GND

MEASUREMENT RESULT: "PIPO617011_fin2"

6/17/2016 10:02AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.555000	33.20	10.7	46	12.8	AV	N	GND
1.130000	20.80	10.9	46	25.2	AV	N	GND
24.715000	31.20	11.5	50	18.8	AV	N	GND

Test mode : BT communicating(AC 240V/60Hz)

EUT mode : X9

MEASUREMENT RESULT: "PIPO617013_fin"

6/17/2016 10:11AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.560000	40.90	10.7	56	15.1	QP	L1	GND
0.900000	32.20	10.8	56	23.8	QP	L1	GND
25.960000	40.00	11.5	60	20.0	QP	L1	GND

MEASUREMENT RESULT: "PIPO617013_fin2"

6/17/2016 10:11AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.570000	33.80	10.7	46	12.2	AV	L1	GND
0.895000	26.30	10.8	46	19.7	AV	L1	GND
25.960000	36.00	11.5	50	14.0	AV	L1	GND

MEASUREMENT RESULT: "PIPO617014_fin"

6/17/2016 10:14AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.555000	38.70	10.7	56	17.3	QP	N	GND
1.065000	30.10	10.9	56	25.9	QP	N	GND
26.590000	37.80	11.5	60	22.2	QP	N	GND

MEASUREMENT RESULT: "PIPO617014_fin2"

6/17/2016 10:14AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.550000	31.20	10.7	46	14.8	AV	N	GND
1.015000	24.10	10.8	46	21.9	AV	N	GND
26.485000	33.60	11.5	50	16.4	AV	N	GND

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Media box M/N:X9
 Manufacturer: PIPO TECHNOLOGY CO., LTD
 Operating Condition: BT Communicating
 Test Site: 1#Shielding Room
 Operator: STAR
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20161169
 Start of Test: 6/17/2016 / 10:03:10AM

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 Average
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

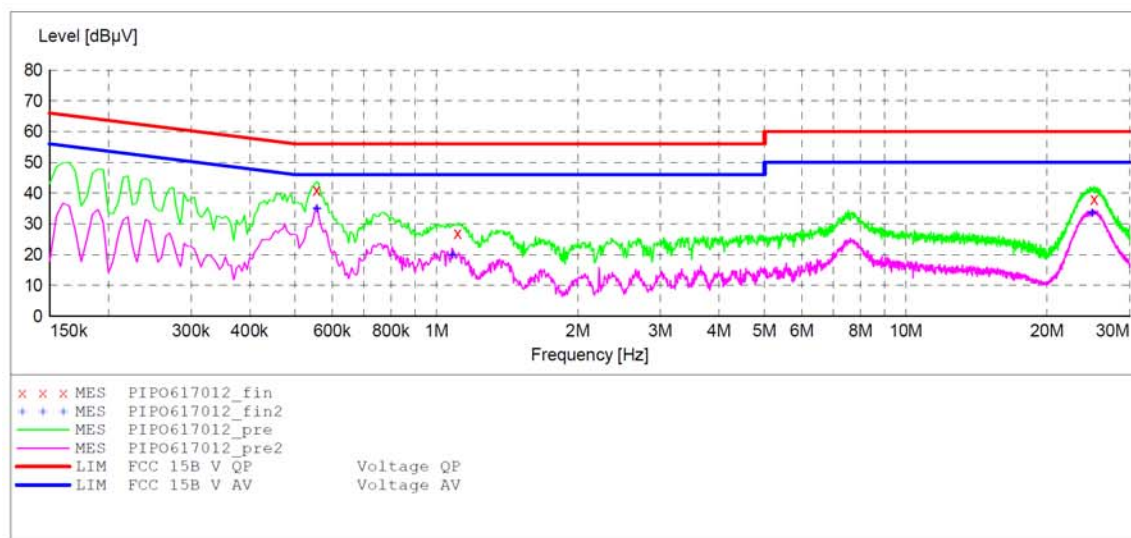

MEASUREMENT RESULT: "PIPO617012_fin"

6/17/2016 10:06AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.555000	41.00	10.7	56	15.0	QP	L1	GND
1.110000	27.00	10.9	56	29.0	QP	L1	GND
25.150000	38.10	11.5	60	21.9	QP	L1	GND

MEASUREMENT RESULT: "PIPO617012_fin2"

6/17/2016 10:06AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.555000	34.90	10.7	46	11.1	AV	L1	GND
1.080000	19.90	10.9	46	26.1	AV	L1	GND
24.925000	33.50	11.5	50	16.5	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Media box M/N:X9
 Manufacturer: PIPO TECHNOLOGY CO., LTD
 Operating Condition: BT Communicating
 Test Site: 1#Shielding Room
 Operator: STAR
 Test Specification: N 120V/60Hz
 Comment: Report No.: ATE20161169
 Start of Test: 6/17/2016 / 9:58:39AM

SCAN TABLE: "V 9K-30MHz fin"

Short Description:			SUB STD VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008	
			Average				
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008	
			Average				

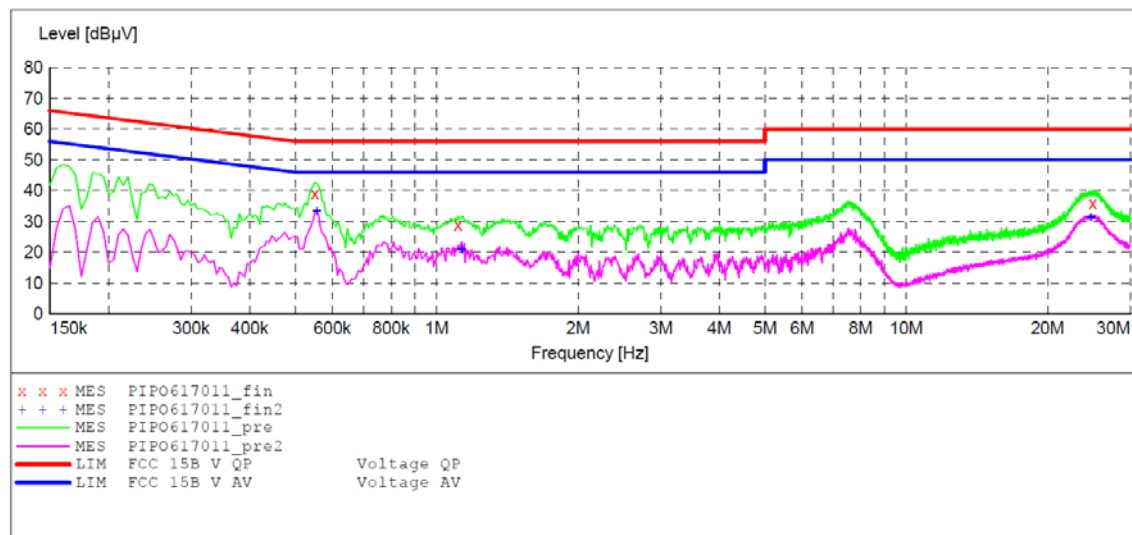

MEASUREMENT RESULT: "PIPO617011_fin"

6/17/2016 10:02AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.550000	39.00	10.7	56	17.0	QP	N	GND
1.110000	28.70	10.9	56	27.3	QP	N	GND
24.940000	35.90	11.5	60	24.1	QP	N	GND

MEASUREMENT RESULT: "PIPO617011_fin2"

6/17/2016 10:02AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.555000	33.20	10.7	46	12.8	AV	N	GND
1.130000	20.80	10.9	46	25.2	AV	N	GND
24.715000	31.20	11.5	50	18.8	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Media box M/N:X9
 Manufacturer: PIPO TECHNOLOGY CO., LTD
 Operating Condition: BT Communicating
 Test Site: 1#Shielding Room
 Operator: STAR
 Test Specification: L 240V/60Hz
 Comment: Report No.:ATE20161169
 Start of Test: 6/17/2016 / 10:07:41AM

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
Average						
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						

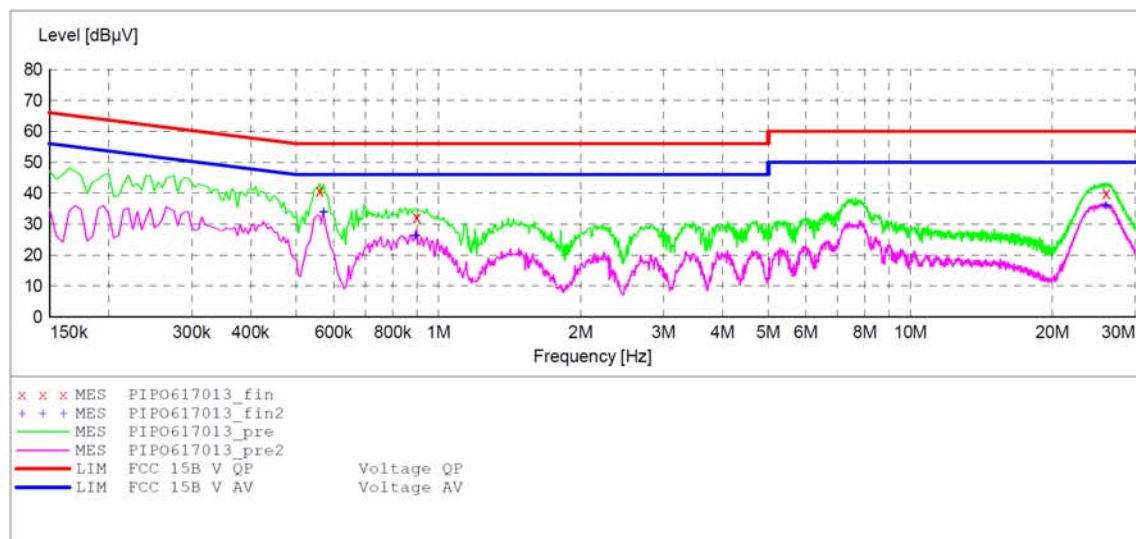

MEASUREMENT RESULT: "PIPO617013_fin"

6/17/2016 10:11AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.560000	40.90	10.7	56	15.1	QP	L1	GND
0.900000	32.20	10.8	56	23.8	QP	L1	GND
25.960000	40.00	11.5	60	20.0	QP	L1	GND

MEASUREMENT RESULT: "PIPO617013_fin2"

6/17/2016 10:11AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.570000	33.80	10.7	46	12.2	AV	L1	GND
0.895000	26.30	10.8	46	19.7	AV	L1	GND
25.960000	36.00	11.5	50	14.0	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Media box M/N:X9
 Manufacturer: PIPO TECHNOLOGY CO., LTD
 Operating Condition: BT Communicating
 Test Site: 1#Shielding Room
 Operator: STAR
 Test Specification: N 240V/60Hz
 Comment: Report No.: ATE20161169
 Start of Test: 6/17/2016 / 10:11:47AM

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
Average						
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						

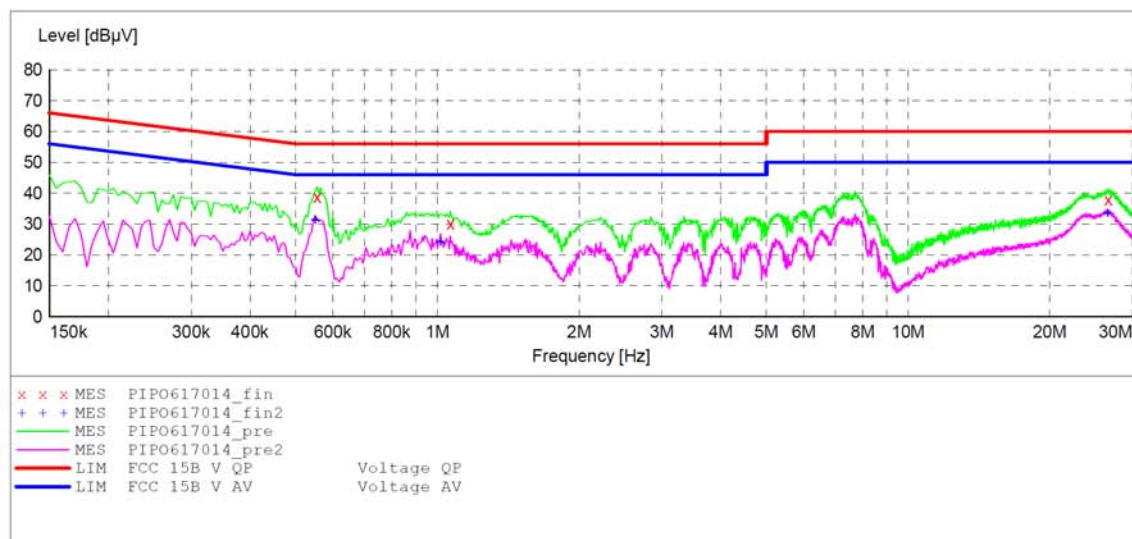

MEASUREMENT RESULT: "PIPO617014_fin"

6/17/2016 10:14AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.555000	38.70	10.7	56	17.3	QP	N	GND
1.065000	30.10	10.9	56	25.9	QP	N	GND
26.590000	37.80	11.5	60	22.2	QP	N	GND

MEASUREMENT RESULT: "PIPO617014_fin2"

6/17/2016 10:14AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.550000	31.20	10.7	46	14.8	AV	N	GND
1.015000	24.10	10.8	46	21.9	AV	N	GND
26.485000	33.60	11.5	50	16.4	AV	N	GND

6. 6DB BANDWIDTH MEASUREMENT

6.1. Block Diagram of Test Setup



(EUT: Media box)

6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.


6.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

6.6.Test Result


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	PASS/FAIL
0	2402	0.678	0.5	PASS
19	2440	0.672	0.5	PASS
39	2480	0.660	0.5	PASS

The spectrum analyzer plots are attached as below.


channel 0

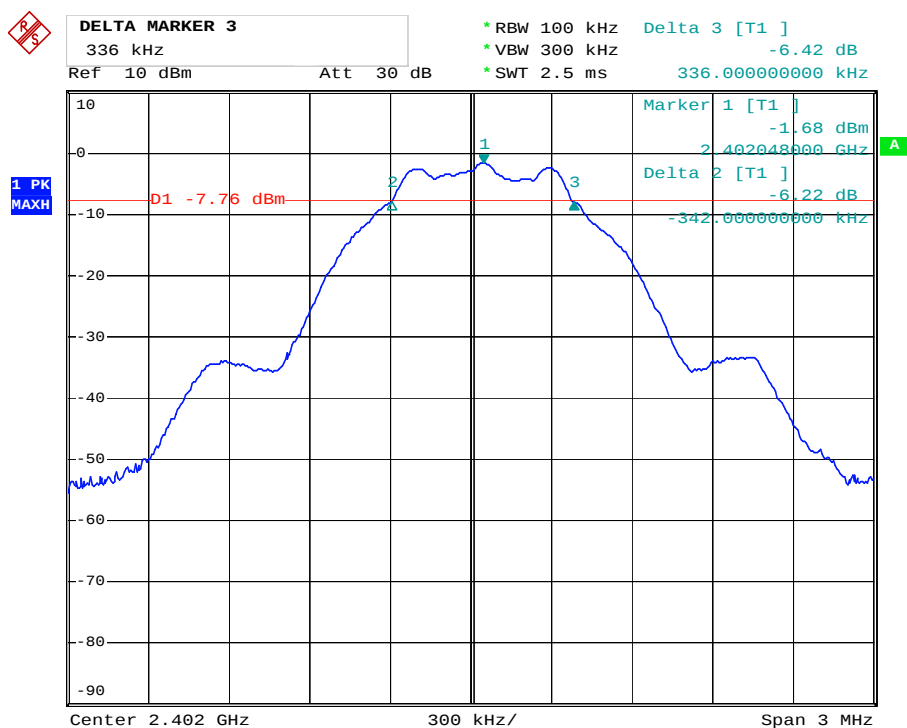

channel 19

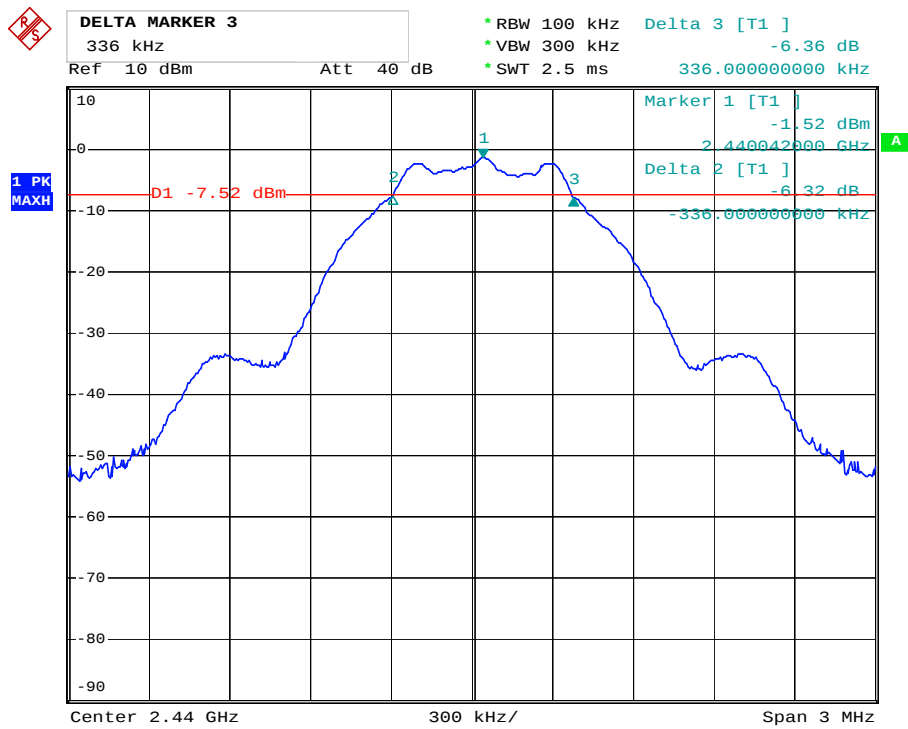

channel 39

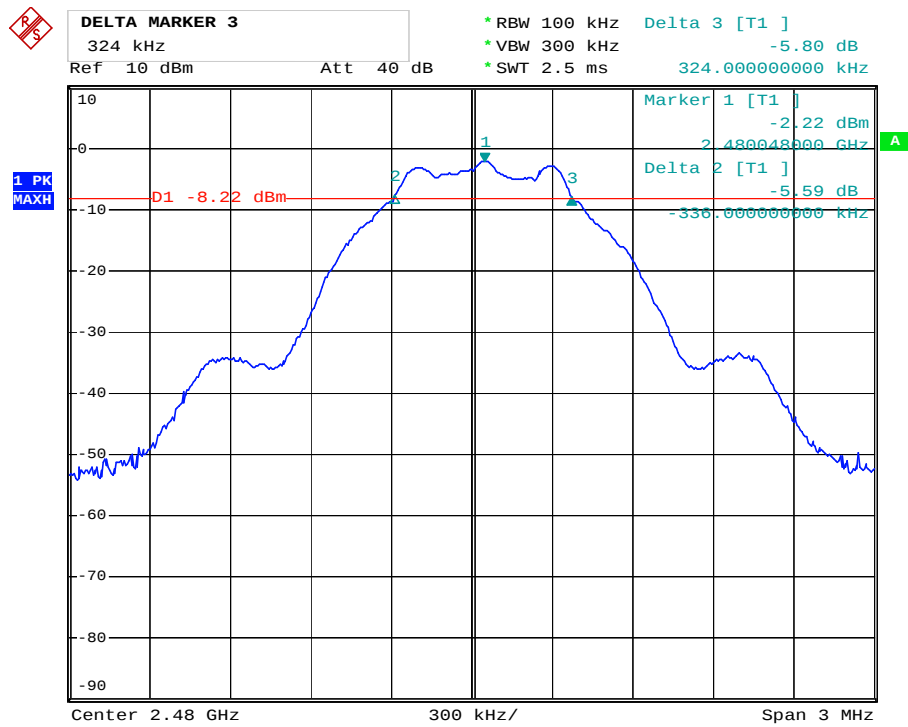

7. MAXIMUM PEAK OUTPUT POWER

7.1. Block Diagram of Test Setup



(EUT: Media box)

7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.


7.5.2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.

7.5.3. Measurement the maximum peak output power.


7.6.Test Result

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-0.01	30	PASS
19	2440	-1.38	30	PASS
39	2480	-2.21	30	PASS


The spectrum analyzer plots are attached as below.

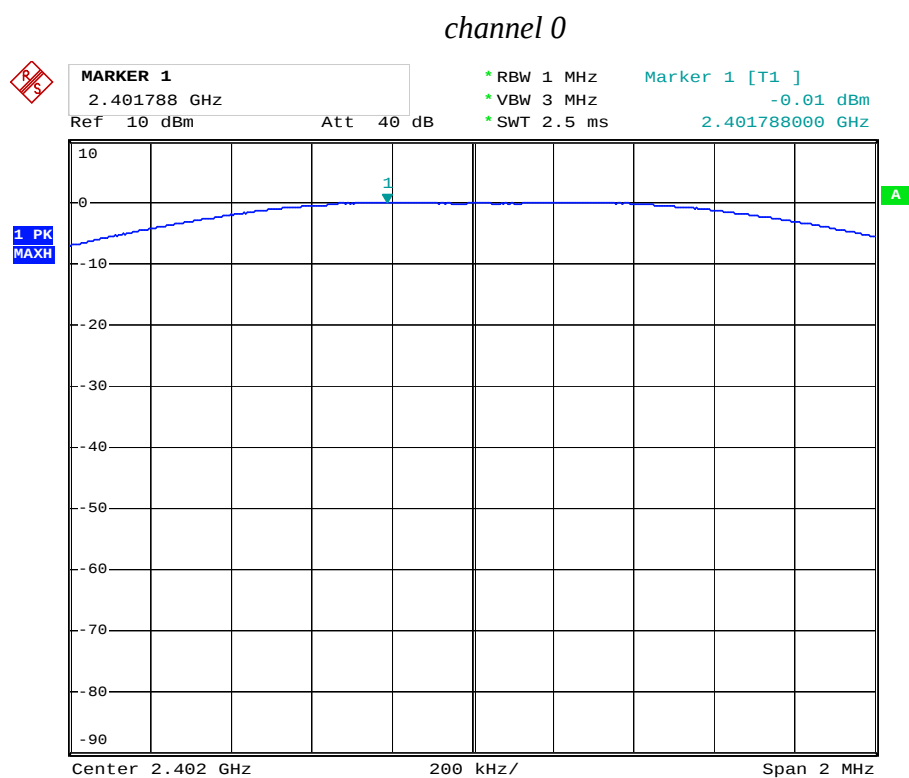

channel 19

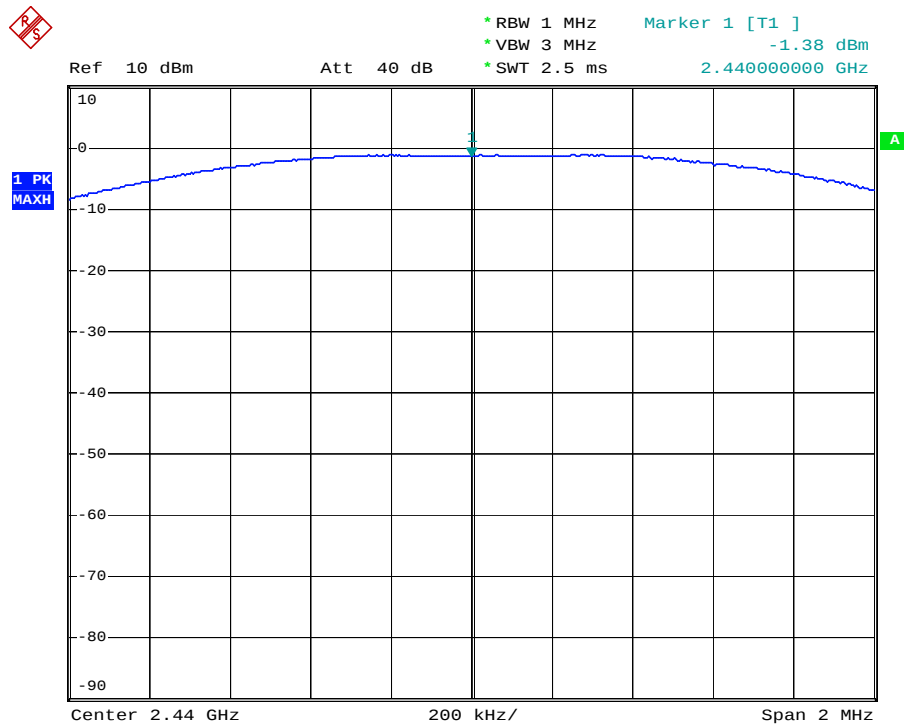

channel 39

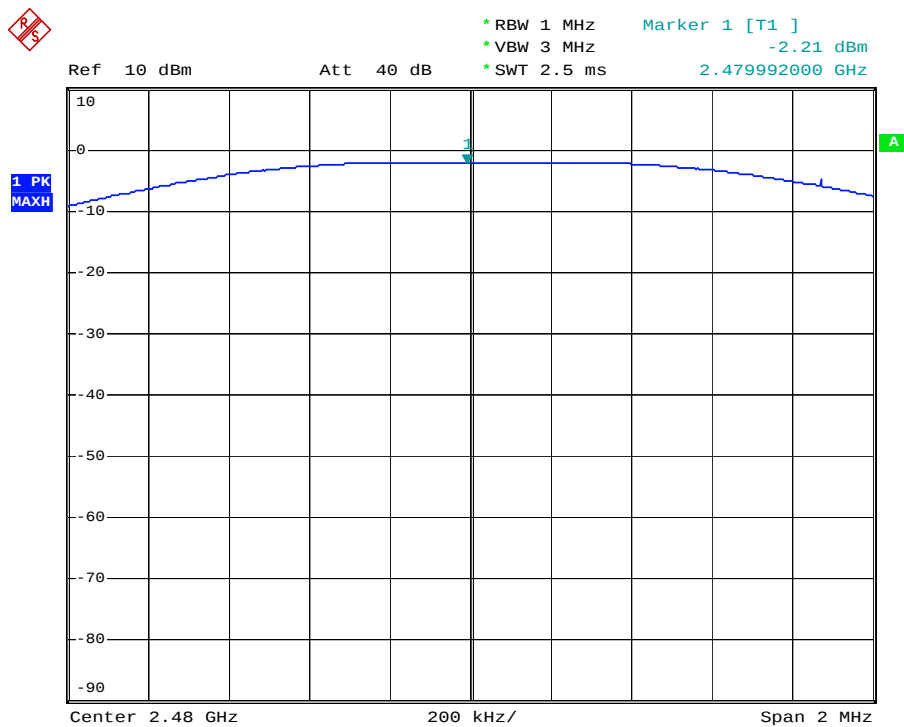

8. POWER SPECTRAL DENSITY MEASUREMENT

8.1. Block Diagram of Test Setup



(EUT: Media box)

8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Measurement Procedure PKPSD:

8.5.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


8.5.4. Measurement the maximum power spectral density.

8.6.Test Result


CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
0	2402	-16.23	8	PASS
19	2440	-16.53	8	PASS
39	2480	-17.04	8	PASS

The spectrum analyzer plots are attached as below.


channel 0

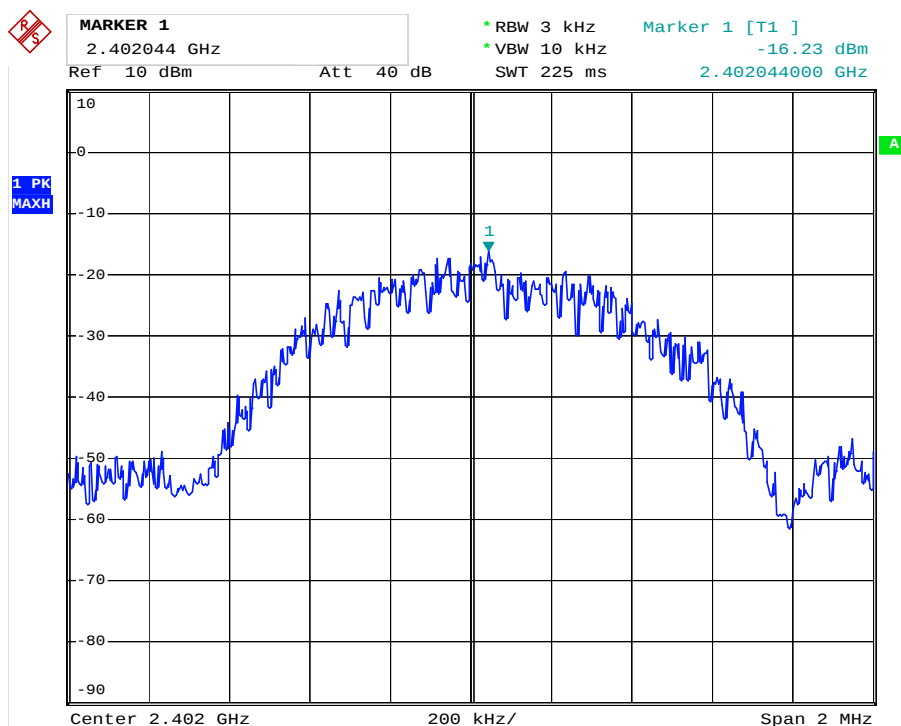

channel 19

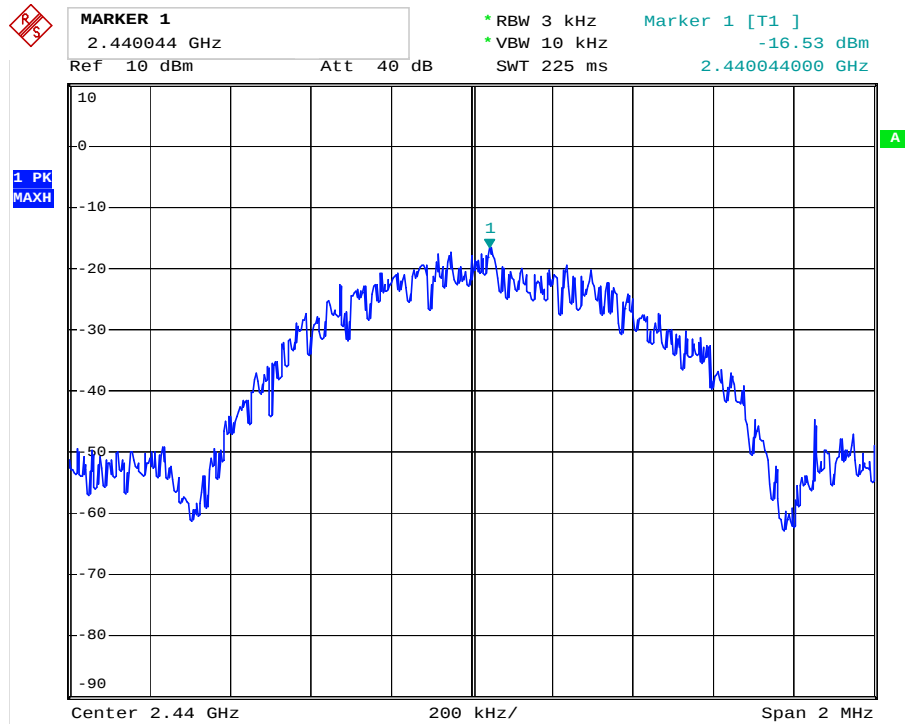

channel 39

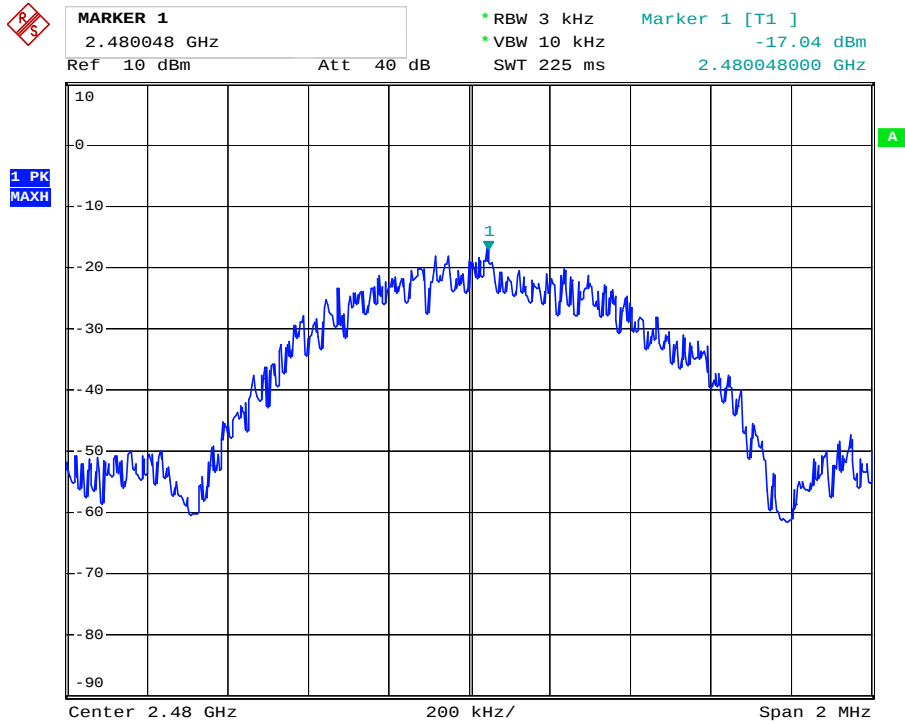

9. BAND EDGE COMPLIANCE TEST

9.1. Block Diagram of Test Setup



(EUT: Media box)

9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

9.5. Test Procedure

Conducted Band Edge:

9.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

9.5.3. Radiate Band Edge:

9.5.4. The EUT is placed on a turntable, which is 0.1m above the ground plane and worked at highest radiated power.

9.5.5. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.5.6. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.5.7. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

9.5.8. RBW=1MHz, VBW=1MHz


9.5.9. The band edges was measured and recorded.

9.6. Test Result


Pass

Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2.4GHz	52.40	20
39	2.4835GHz	52.31	20

channel 0

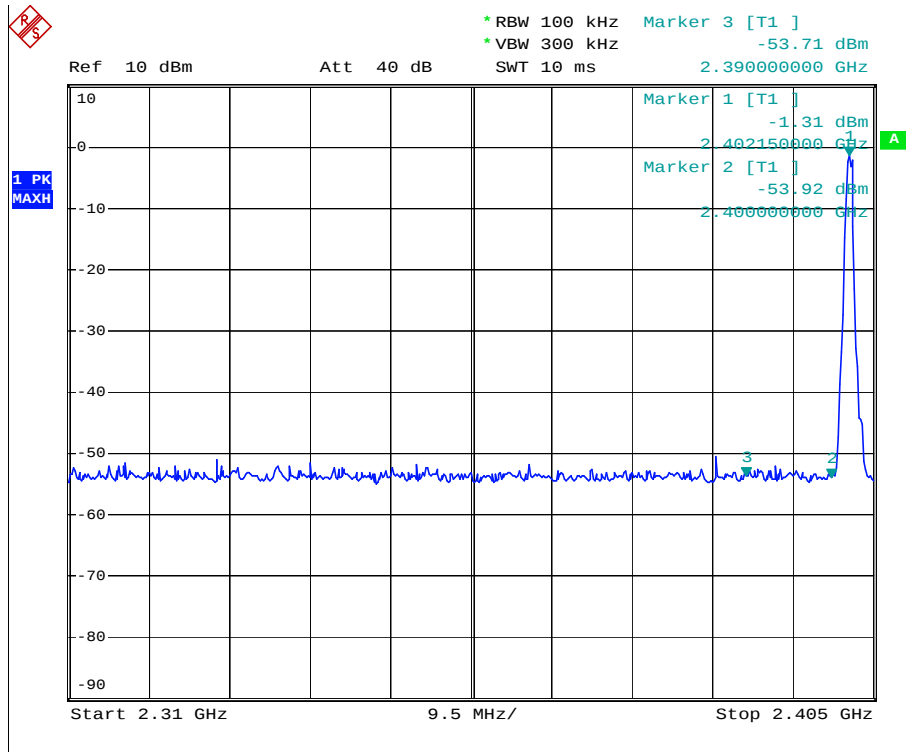

channel 39

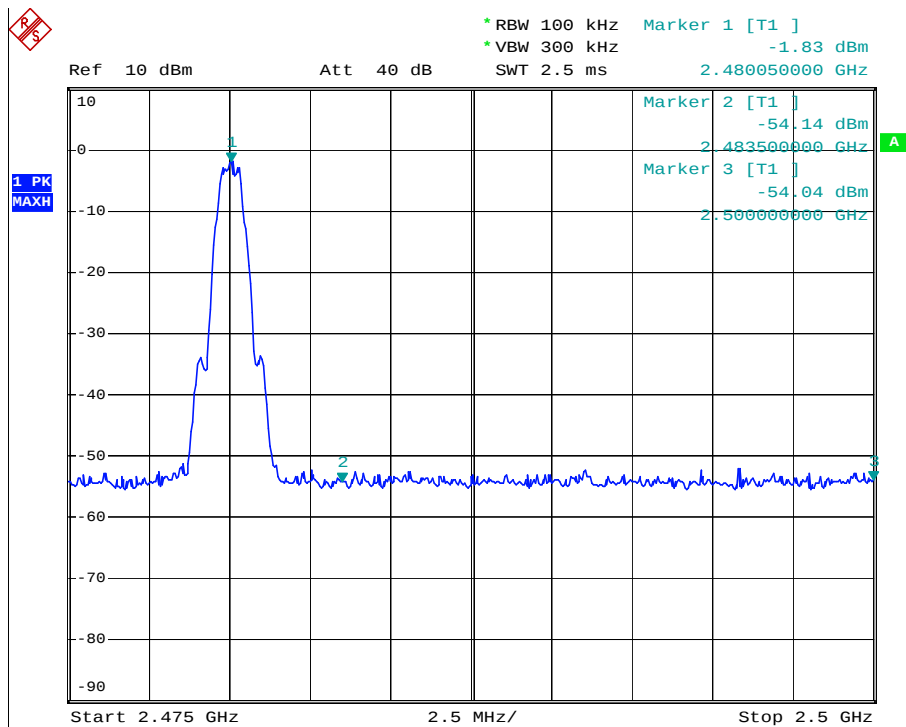

Radiated Band Edge Result

Date of Test:	Jun 15, 2016	Temperature:	25°C
EUT:	Media box	Humidity:	50%
Model No.:	X9	Power Supply:	AC 120V/60Hz
Test Mode:	TX (2402MHz) GFSK	Test Engineer:	Star

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2390.000	33.14	41.40	-7.64	25.50	33.76	54.00	74.00	-28.50	-40.24	Vertical
2400.000	57.00	66.27	-7.41	49.39	58.66	54.00	74.00	-4.61	-15.34	Vertical
2390.000	35.67	42.20	-7.64	28.03	34.56	54.00	74.00	-25.97	-39.44	Horizontal
2400.000	57.49	65.60	-7.61	49.88	57.99	54.00	74.00	-4.12	-16.01	Horizontal

Date of Test:	Jun 15, 2016	Temperature:	25°C
EUT:	Media box	Humidity:	50%
Model No.:	X9	Power Supply:	AC 120V/60Hz
Test Mode:	TX (2480MHz) GFSK	Test Engineer:	Star

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	35.61	43.96	-7.37	28.24	36.59	54.00	74.00	-25.76	-37.41	Vertical
2500.000	34.78	42.08	-7.32	27.46	34.76	54.00	74.00	-26.54	-39.24	Vertical
2483.500	36.71	44.05	-7.37	29.34	36.68	54.00	74.00	-24.66	-37.32	Horizontal
2500.000	33.97	41.16	-7.32	26.65	33.84	54.00	74.00	-27.35	-40.16	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Job No.: STAR2016 #1224

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2402MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/41/23

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

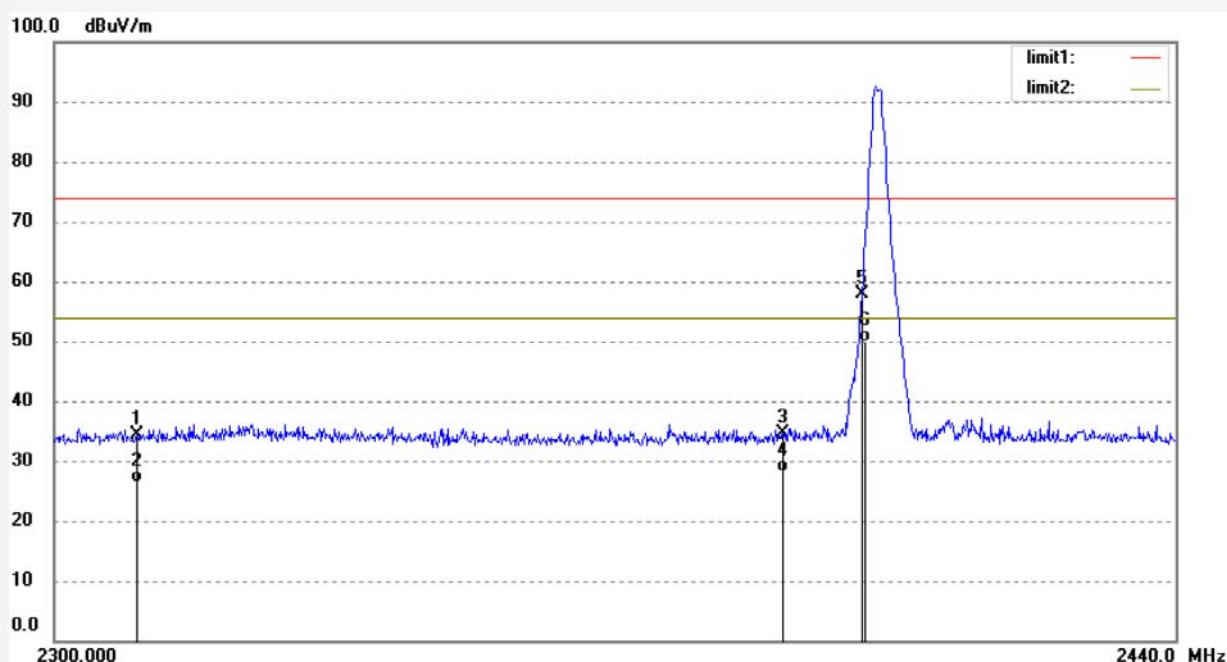

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	42.13	-7.87	34.26	74.00	-39.74	peak			
2	2310.000	34.28	-7.87	26.41	54.00	-27.59	AVG			
3	2390.000	42.20	-7.64	34.56	74.00	-39.44	peak			
4	2390.000	35.67	-7.64	28.03	54.00	-25.97	AVG			
5	2400.000	65.60	-7.61	57.99	74.00	-16.01	peak			
6	2400.000	57.49	-7.61	49.88	54.00	-4.12	AVG			

Job No.: STAR2016 #1225

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2402MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/42/12

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

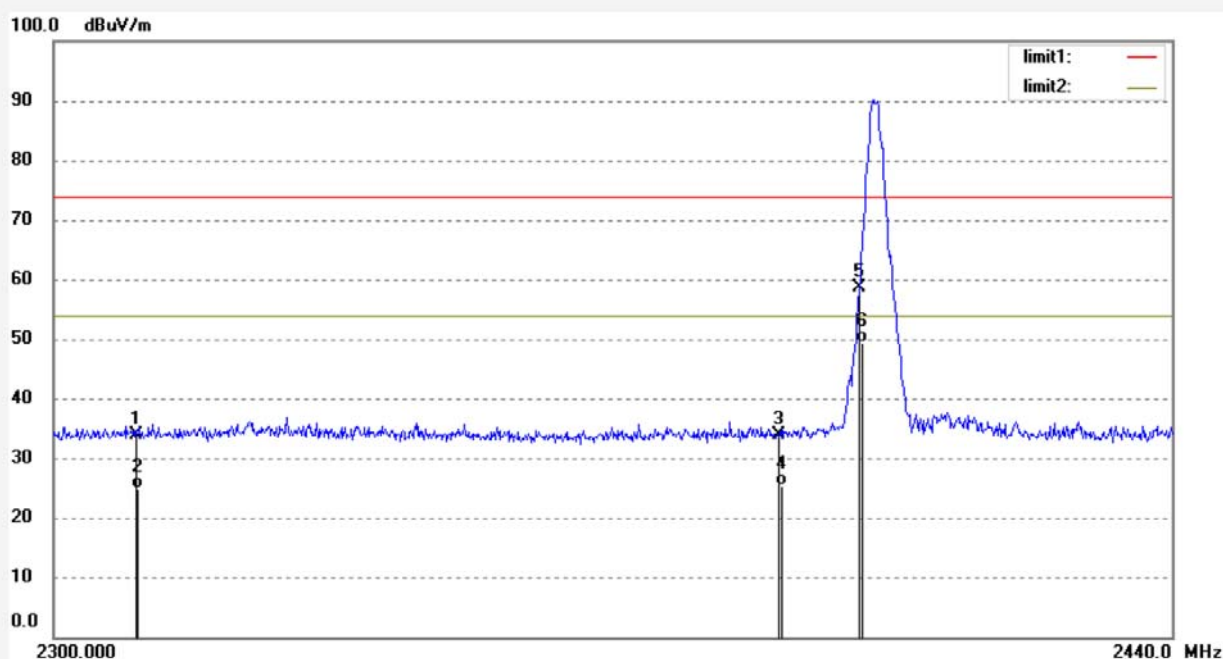

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	41.86	-7.87	33.99	74.00	-40.01	peak			
2	2310.000	32.67	-7.87	24.80	54.00	-29.20	AVG			
3	2390.000	41.40	-7.64	33.76	74.00	-40.24	peak			
4	2390.000	33.14	-7.64	25.50	54.00	-28.50	AVG			
5	2400.000	66.27	-7.61	58.66	74.00	-15.34	peak			
6	2400.000	57.00	-7.61	49.39	54.00	-4.61	AVG			

Job No.: STAR2016 #1223

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2480MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/39/27

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

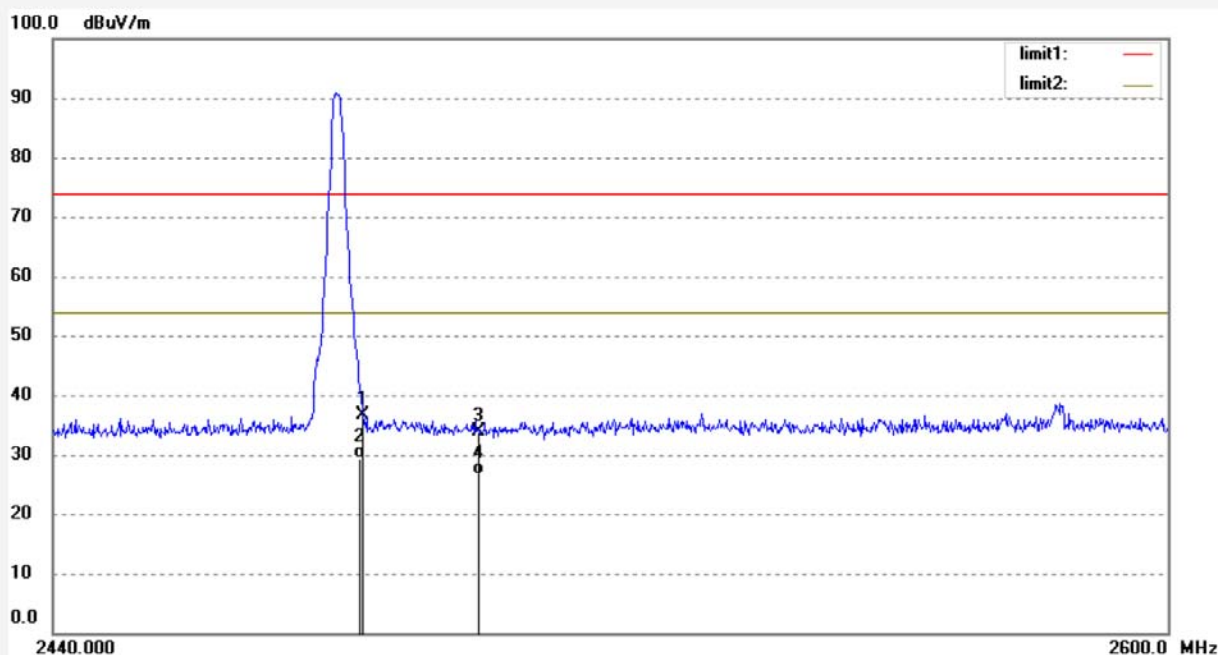

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.05	-7.37	36.68	74.00	-37.32	peak			
2	2483.500	36.71	-7.37	29.34	54.00	-24.66	AVG			
3	2500.000	41.16	-7.32	33.84	74.00	-40.16	peak			
4	2500.000	33.97	-7.32	26.65	54.00	-27.35	AVG			

Job No.: STAR2016 #1222

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2480MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/38/43

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

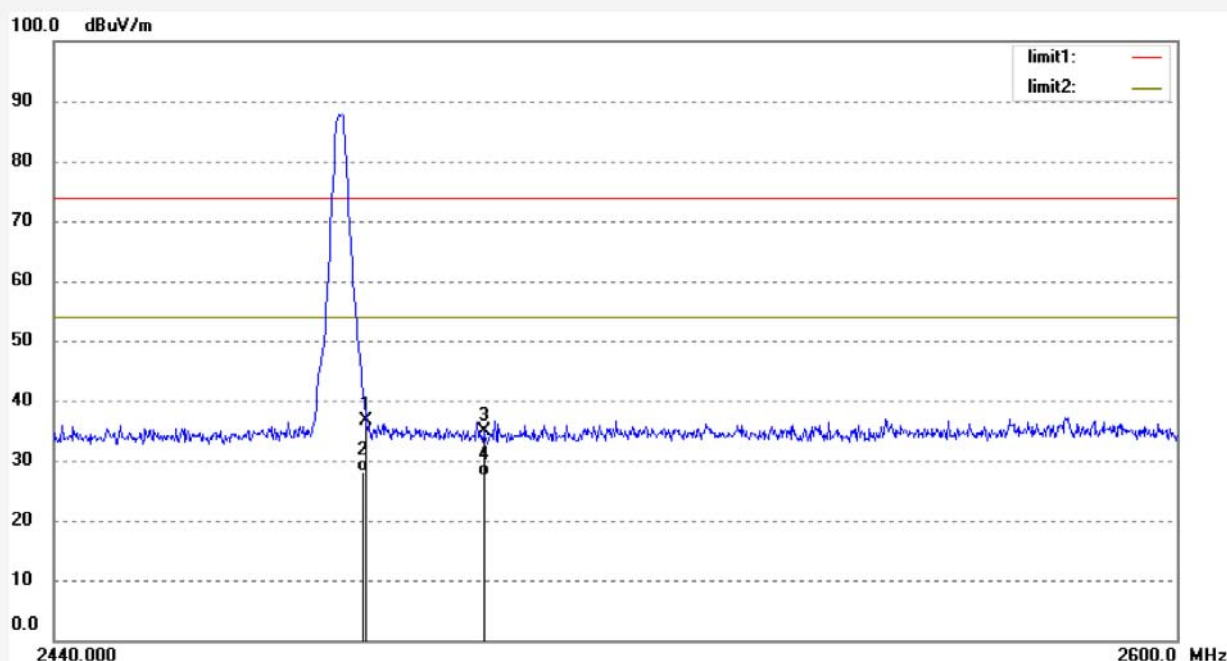

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	43.96	-7.37	36.59	74.00	-37.41	peak			
2	2483.500	35.61	-7.37	28.24	54.00	-25.76	AVG			
3	2500.000	42.08	-7.32	34.76	74.00	-39.24	peak			
4	2500.000	34.78	-7.32	27.46	54.00	-26.54	AVG			


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

10.RADIATED SPURIOUS EMISSION TEST

10.1.Block Diagram of Test Setup

10.1.1.Block diagram of connection between the EUT and peripherals

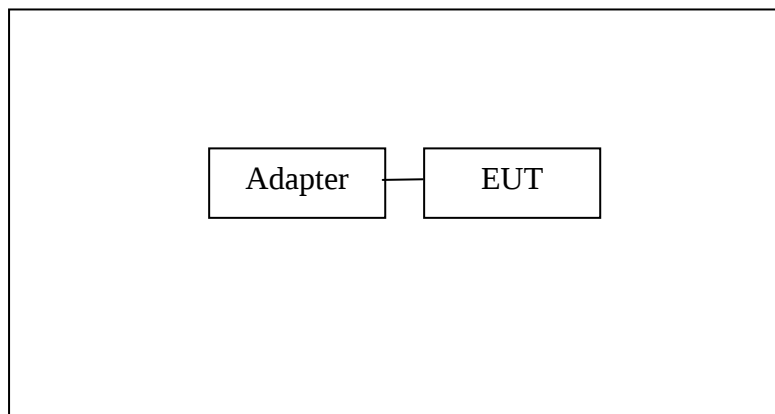


Setup: Transmitting mode


(EUT: Media box)

10.1.2.Semi-Anechoic Chamber Test Setup Diagram


(A)Radiated Emission Test Set-Up, Frequency below 30MHz

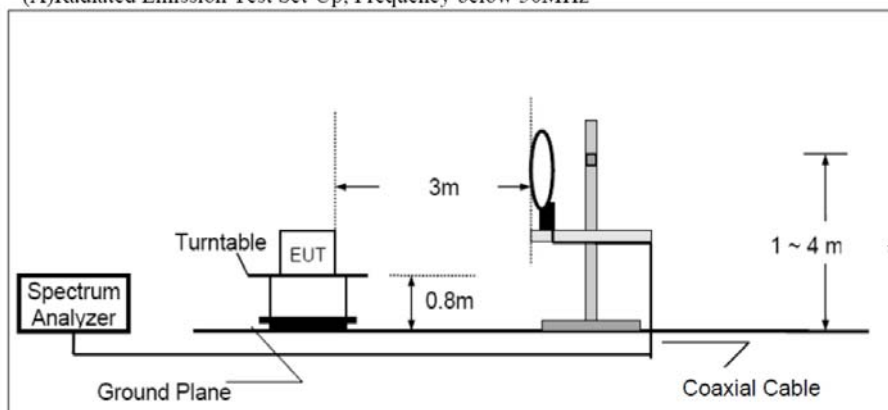

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

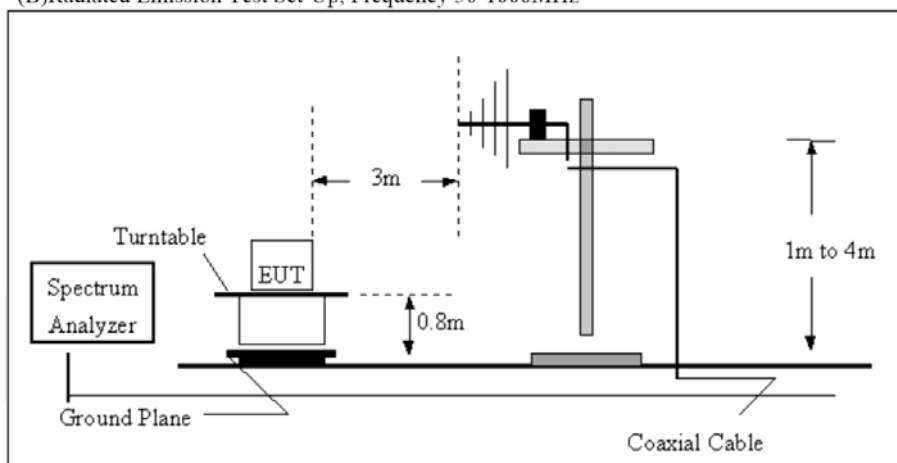

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

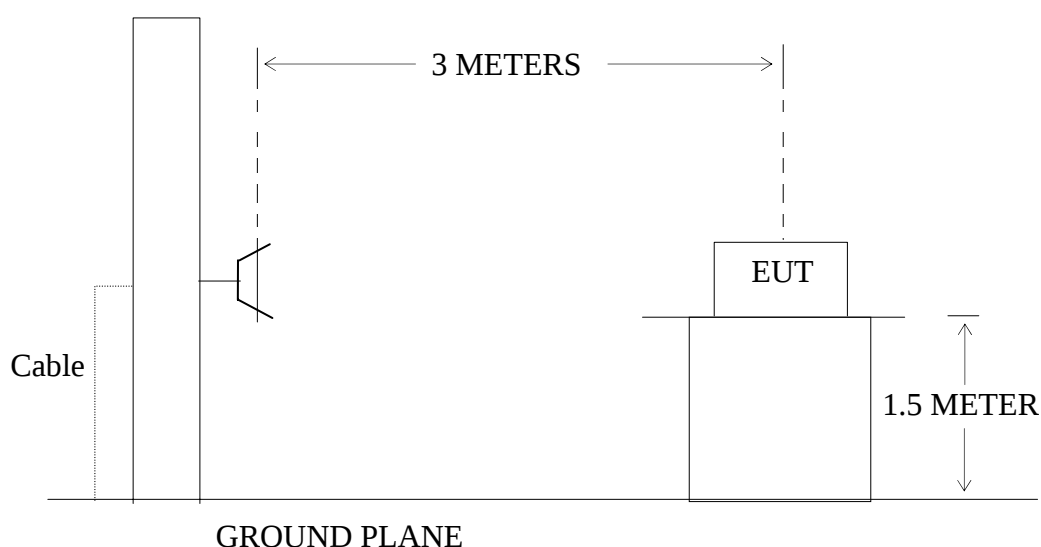

10.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5. Operating Condition of EUT

10.5.1. Setup the EUT and simulator as shown as Section 10.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

10.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.1 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

10.7. The Field Strength of Radiation Emission Measurement Results

PASS.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The radiation emissions from 18-25GHz are not reported, because the test values lower than the limits of 20dB.

Below 1GHz(X9)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #1198

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2402MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Horizontal

Power Source: AC 120V/60Hz

Date: 16/06/15/

Time: 10/57/32

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	247.8595	59.55	-18.19	41.36	46.00	-4.64	QP			
2	268.7212	56.31	-17.16	39.15	46.00	-6.85	QP			
3	427.2920	56.27	-13.59	42.68	46.00	-3.32	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20161169

Page 42 of 53

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #1199

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2402MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 10/58/12

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

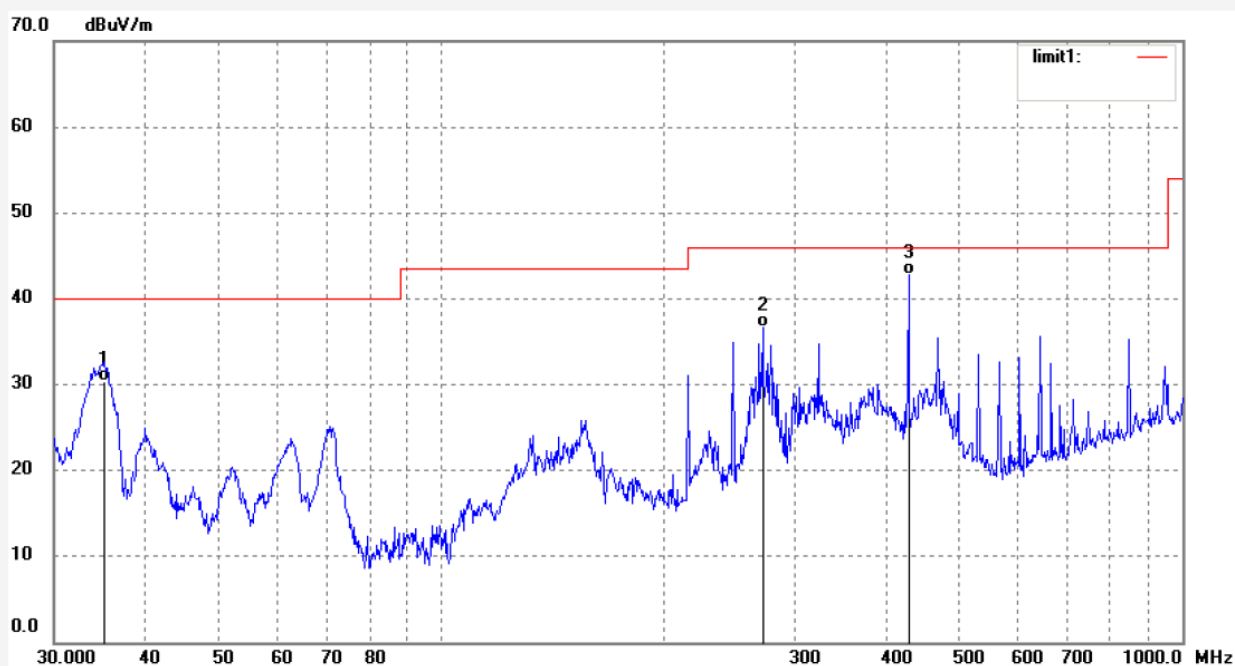

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.0157	47.96	-17.51	30.45	40.00	-9.55	QP			
2	271.5687	53.72	-17.09	36.63	46.00	-9.37	QP			
3	427.2920	56.43	-13.59	42.84	46.00	-3.16	QP			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #1201

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2440MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/00/09

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

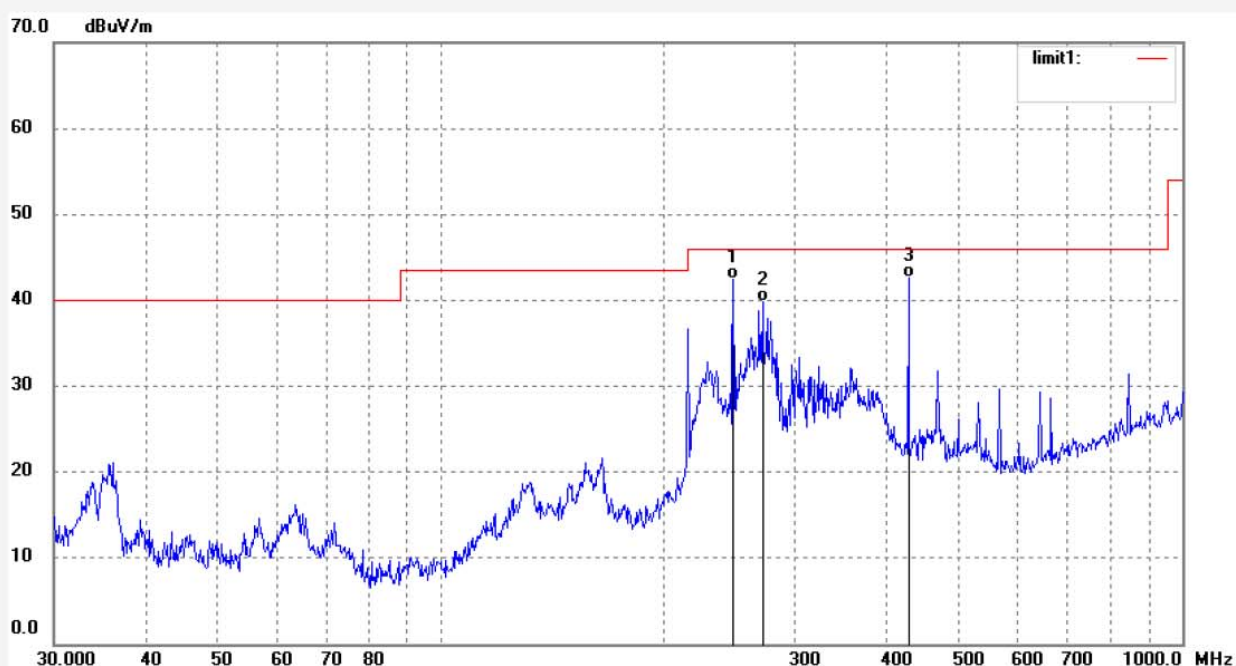

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	247.8594	60.57	-18.19	42.38	46.00	-3.62	QP			
2	271.5686	56.83	-17.09	39.74	46.00	-6.26	QP			
3	427.2919	56.19	-13.59	42.60	46.00	-3.40	QP			

Job No.: STAR2016 #1200

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2440MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 10/58/48

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

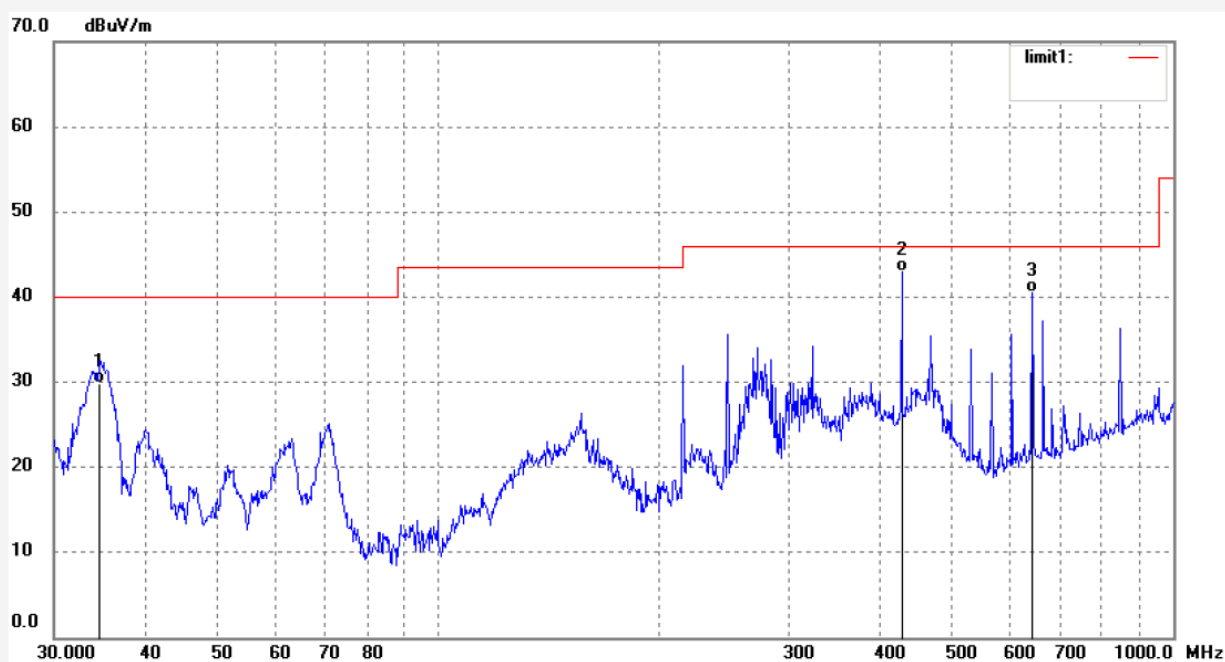

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.6484	47.33	-17.45	29.88	40.00	-10.12	QP			
2	427.2919	56.52	-13.59	42.93	46.00	-3.07	QP			
3	642.2922	49.54	-9.00	40.54	46.00	-5.46	QP			

Job No.: STAR2016 #1202

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2480MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/01/26

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

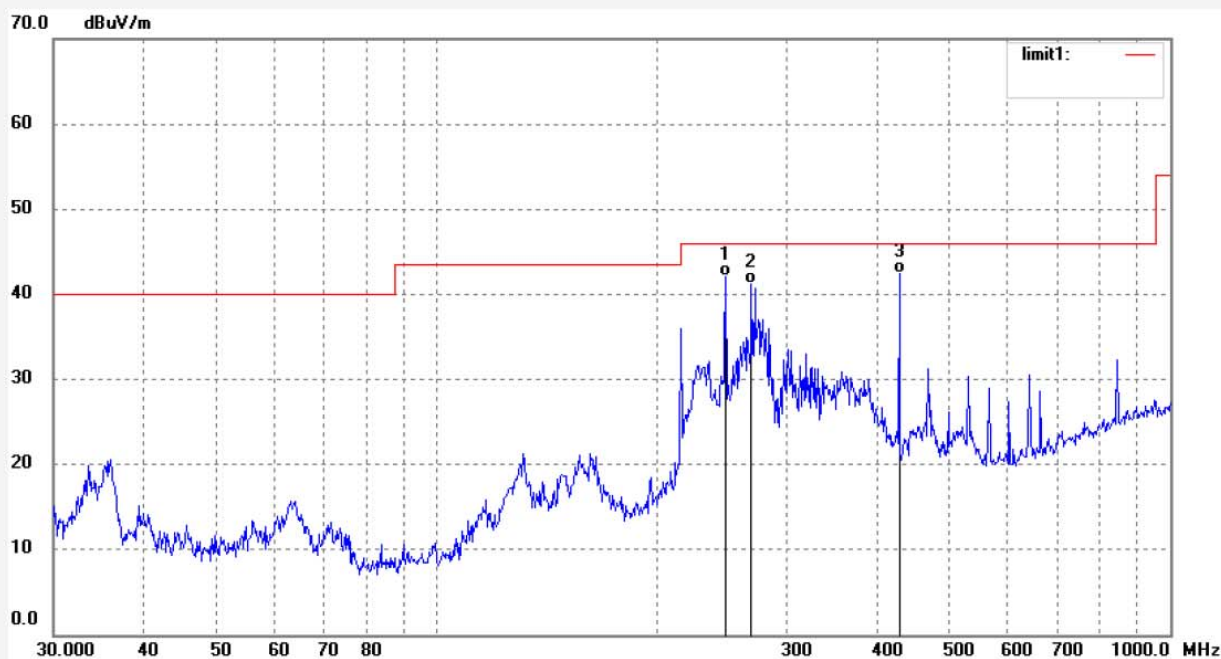

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	247.8594	60.33	-18.19	42.14	46.00	-3.86	QP			
2	268.7212	58.38	-17.16	41.22	46.00	-4.78	QP			
3	427.2919	55.95	-13.59	42.36	46.00	-3.64	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20161169

Page 46 of 53

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #1203

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2480MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/02/13

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

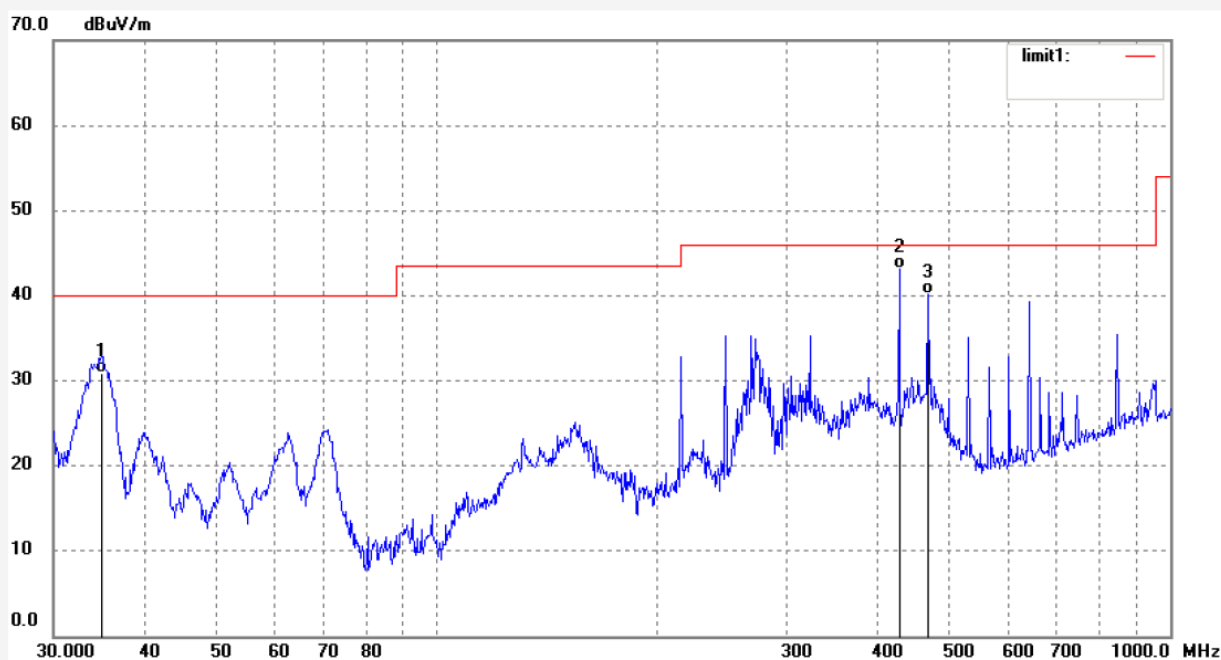

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.8928	48.30	-17.49	30.81	40.00	-9.19	QP			
2	427.2919	56.66	-13.59	43.07	46.00	-2.93	QP			
3	468.1650	52.77	-12.60	40.17	46.00	-5.83	QP			

Above 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #1216

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2402MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/27/32

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

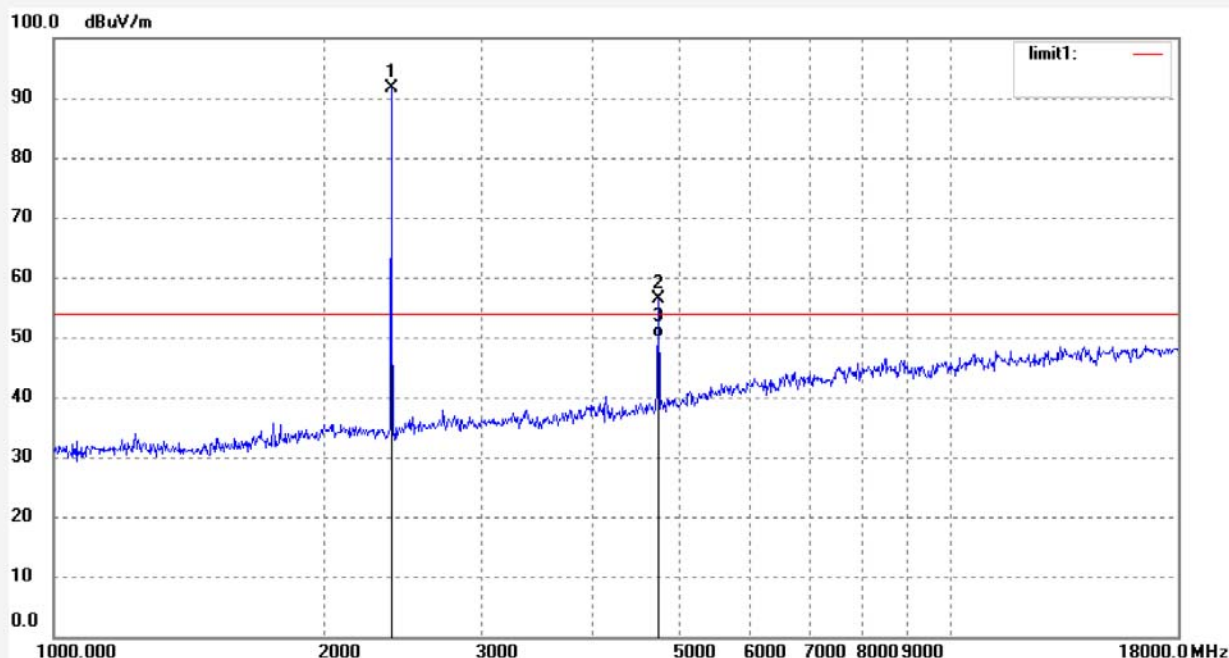

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	99.30	-7.67	91.63			peak			
2	4804.000	58.15	-1.77	56.38	74.00	-17.62	peak			
3	4804.000	51.70	-1.77	49.93	54.00	-4.07	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20161169

Page 48 of 53

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #1217

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2402MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/28/28

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

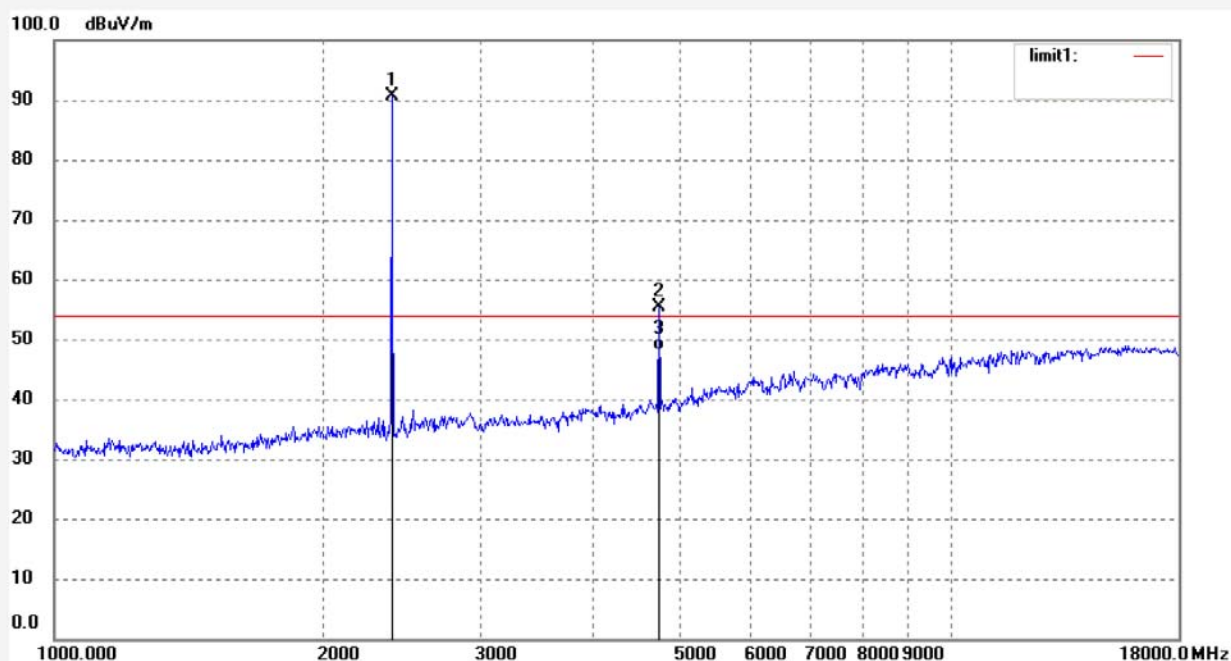

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	98.33	-7.67	90.66			peak			
2	4804.000	57.21	-1.77	55.44	74.00	-18.56	peak			
3	4804.000	50.00	-1.77	48.23	54.00	-5.77	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20161169

Page 49 of 53

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #1219

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2440MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/30/57

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

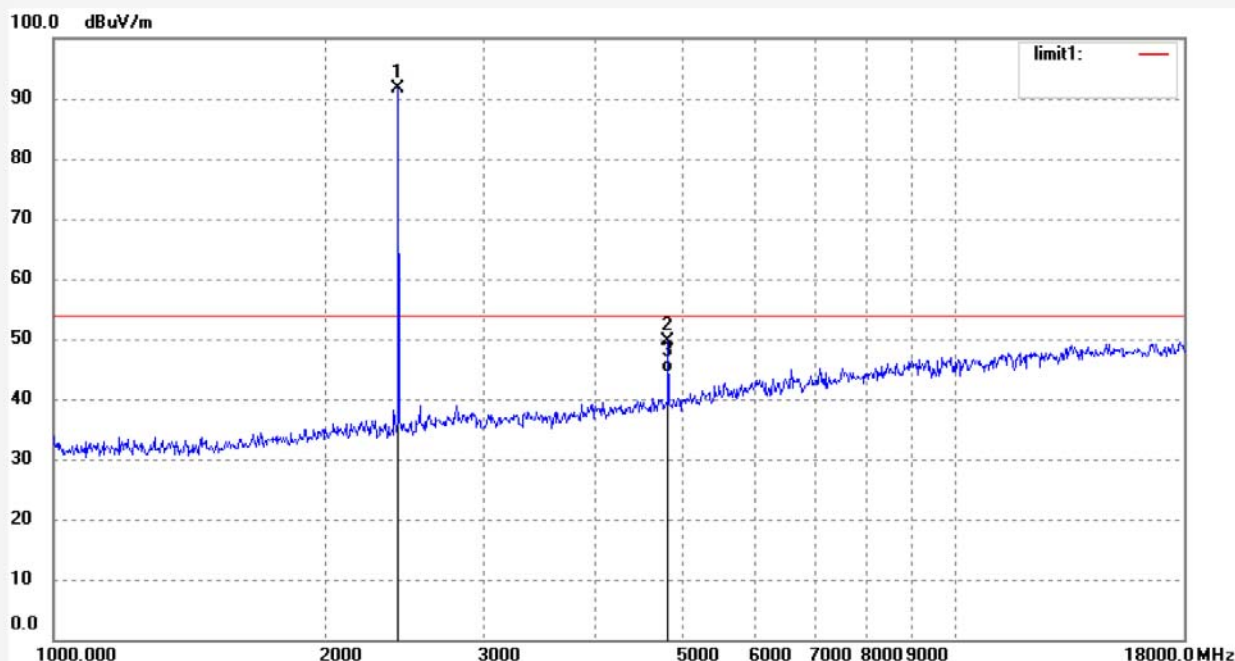

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	99.15	-7.56	91.59			peak			
2	4880.000	51.06	-1.50	49.56	74.00	-24.44	peak			
3	4880.000	45.76	-1.50	44.26	54.00	-9.74	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20161169

Page 50 of 53

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #1218

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2440MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/29/50

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

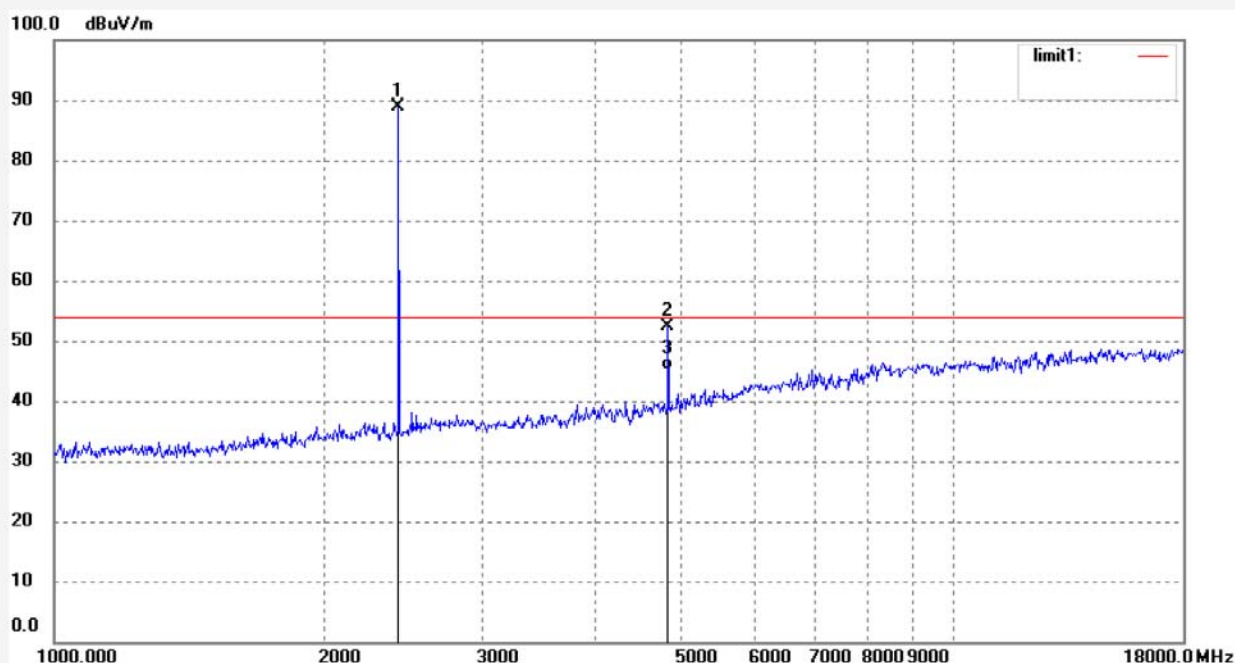

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	96.40	-7.56	88.84			peak			
2	4880.000	53.83	-1.50	52.33	74.00	-21.67	peak			
3	4880.000	46.70	-1.50	45.20	54.00	-8.80	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20161169

Page 51 of 53

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #1220

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2480MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/34/22

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

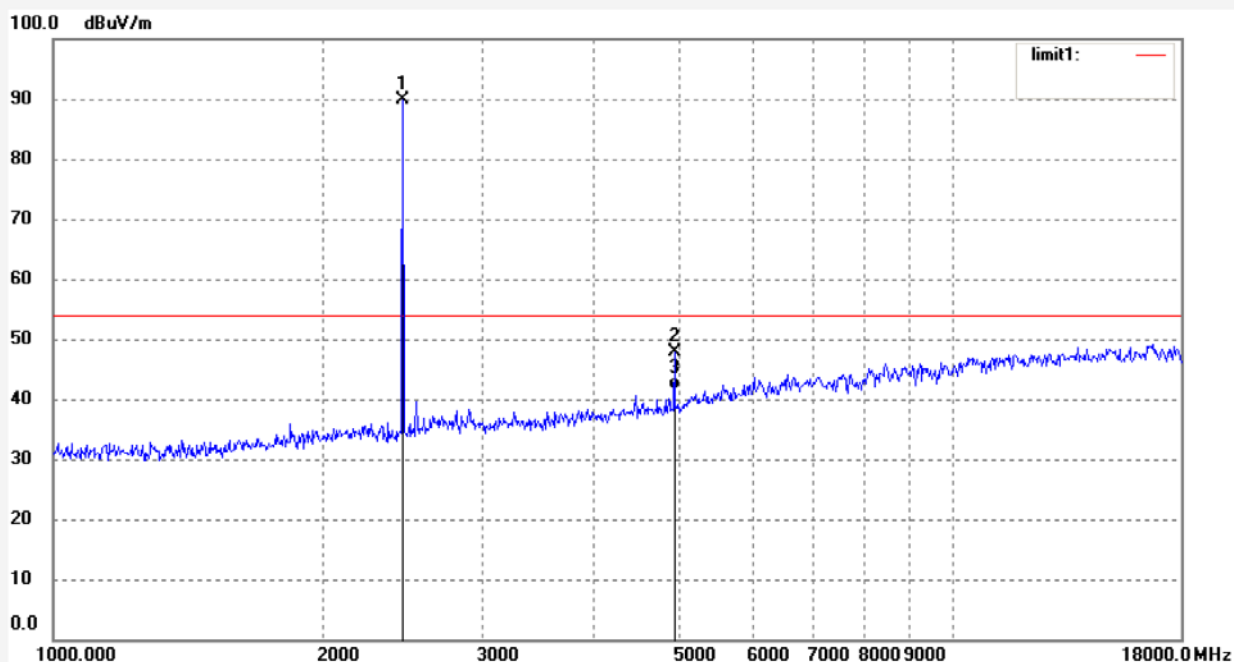

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	97.32	-7.47	89.85			peak			
2	4960.000	49.04	-1.17	47.87	74.00	-26.13	peak			
3	4960.000	42.78	-1.17	41.61	54.00	-12.39	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20161169

Page 52 of 53

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #1221

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Media box

Mode: TX 2480MHz

Model: X9

Manufacturer: PIPO TECHNOLOGY CO., LTD

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/06/15/

Time: 11/35/33

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161169

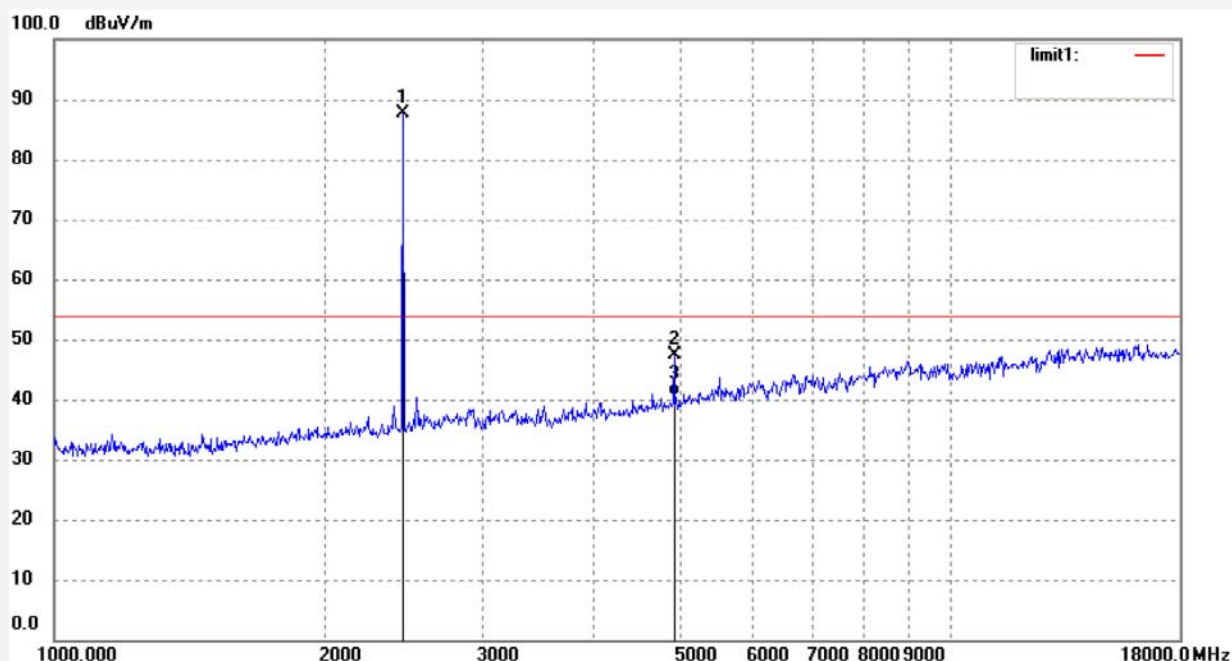

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	95.16	-7.47	87.69			peak			
2	4960.000	48.62	-1.17	47.45	74.00	-26.55	peak			
3	4960.000	41.78	-1.17	40.61	54.00	-13.39	AVG			

11.ANTENNA REQUIREMENT

11.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2.Antenna Construction

Device is equipped with external Antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 2dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.



Antenna