

Certification of Compliance

CFR 47 Part 15 Subpart B

Test Report File No. : 01-IST-101 Date of Issue :August 7, 2001
Model(s) : Hi210
Kind of Product : PDA with electronic book and MP3 player
Applicant : Korea ebook, Inc.
Address : Koryo Bldg., 4th fl., 904-14, Daechi-Dong, Kangnam-Gu,
Seoul, Korea, 135-280
Manufacturer : Korea ebook, Inc.
Address : Koryo Bldg., 4th fl., 904-14, Daechi-Dong, Kangnam-Gu,
Seoul, Korea, 135-280

Test Result Positive Negative

Reviewed By



J.H. Lee / General Manager of EMC

Approved By



G. Chung / Chief

- The test report with appendix consists of 15 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST EMC Laboratory.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 1992.



TABLE OF CONTENTS

Table of contents		2
Information of test laboratory, Environmental condition,		
Power used		3
Description of test		
Conducted Emission	0.45 MHz – 30 MHz	4
Radiated Emission		5
Summary		6
Test conditions and data		
Conducted emissions	0.45 MHz – 30 MHz	Applicable
Test equipment		7
Data and plots		8-11
Radiated emissions	30 MHz – 1 GHz	Applicable
Test equipment		12
Data and plots		13-15

Appendix

INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd.
San 21-8, Goan-Ri, Baekam-Myun, Yongin-City
Kyonggi-Do, 449-860, Korea
TEL : +82 31 333 4093 FAX : +82 31 333 4094

ENVIRONMENTAL CONDITIONS

Temperature	32 degree
Humidity	40 percent
Atmospheric pressure	998 mbar

POWER SUPPLY SYSTEM USED

Power supply system 120Vac, 60Hz(For Desktop PC and AC/DC adapter)



DESCRIPTIONS OF TEST

Conducted Emissions:

The measurement were performed over the frequency range of 0.45MHz to 30MHz using a 50? /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

- Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1m X 1.5m wooden table 80cm height is placed 40cm away from the vertical wall and 1.5m away from the other wall of the shielded room. The R/S ESH3-Z5 and EMCO 3825/2 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80cm from the LISN and powered from the EMCO LISN .The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.45 to 30MHz. The bandwidth of the receiver was set to 10kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

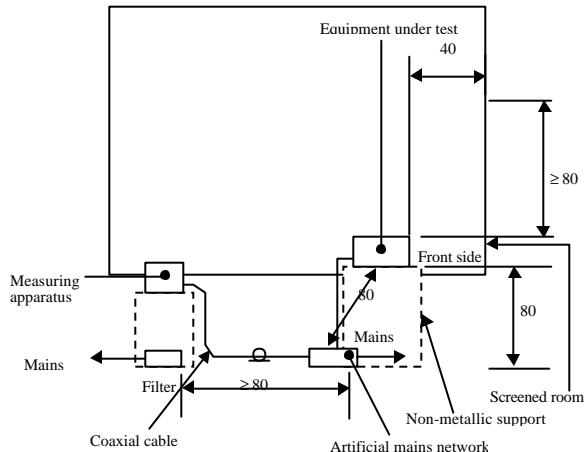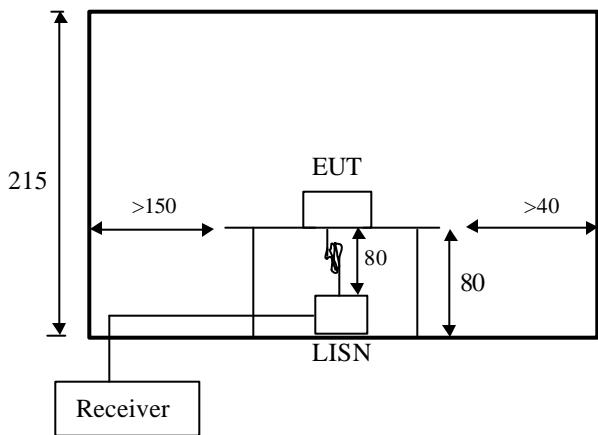



DESCRIPTION OF TEST

Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120KHz.

- Procedure of Test

Preliminary measurements were made at 3 meter using bi-conical and log-periodic antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 300MHz using S/B bi-conical antenna and 300 to 1000MHz using S/B log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using S/B bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

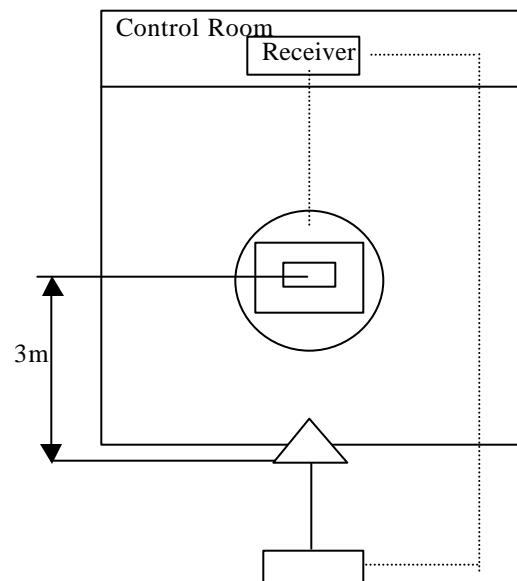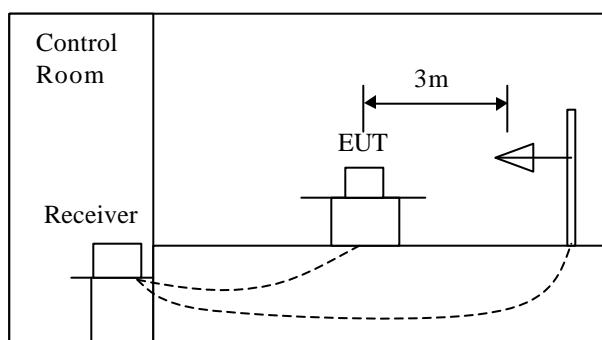

SUMMARY

Conducted Emission

The requirements are (*) MET () Not MET

Minimum limit margin

Maximum limit exceeding

Remarks : The requirements are kept with more than 10dB margin for all frequency and operating mode.

See the tested plots in pages 8 to 11.

Radiated Emission

The requirements are (*) MET () Not MET

Minimum limit margin 3.2 dB at

Maximum limit exceeding

Remarks :

Reported By

2013

H.C. Kim / EMC Engineer

Note : It was only performed without connecting of AC/DC adapter for radiated emission since the result of compact chamber pretest of AC/DC adapter connection was better than only battery operation.

☒ means the test is applicable, ☐ is not applicable.

TEST CONDITIONS AND DATA

Conducted Emissions

[Applicable]

? Test Equipment Used

<u>Model Name</u>	<u>Manufacture</u>	<u>Description</u>	<u>Serial Number</u>	<u>Next Cal. Date</u>
ESH3	Rohde Schwarz	Receiver	861742/018	Oct. 8, 2001
ESH3-Z2	Rohde Schwarz	Pulse Limiter	357.8810.52	Dec. 18, 2001
EZM	Rohde Schwarz	Spectrum monitor	861192/018	-
3825/2	EMCO	LISN	9103-1788	Dec. 18, 2001
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

The equipment used is calibrated in regular for every year.

? Test Program Playback of MP3 files / Upload and download to desktop PC

? Test Date August 3, 2001

? Test Area Shielded Room #3


Note : The cable loss is negligible since its value is extremely small for frequency range tested.

The final measurement with quasi-peak detect mode was not performed since the peak value measured are less than 37dBuV for all frequency.

- Find the test data in following pages 8 to 11.

Conducted Emissions

(Mains Terminal Disturbance Voltages)

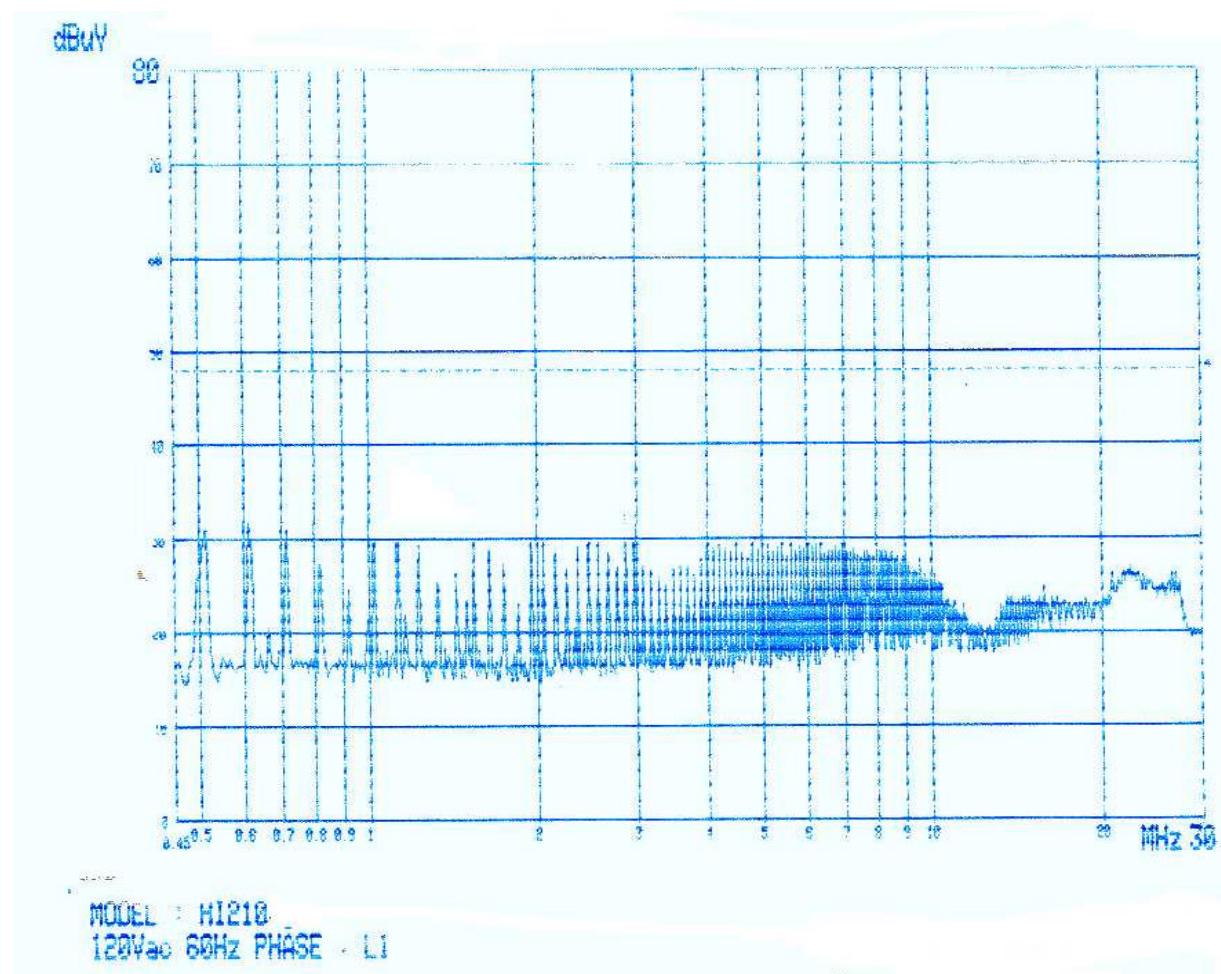

MP3 Playback Mode

Quasi-Peak, [dBuV]

Frequency [MHz]	Measurement	Cable Loss	Insertion Loss	Result	Limit	Margin
--------------------	-------------	------------	-------------------	--------	-------	--------


All range < 37.0 - 0.8 < 38.0 48.0 > 10.0

Note :

There was no point to be measured.

Conducted Emissions

(Mains Terminal Disturbance Voltages)

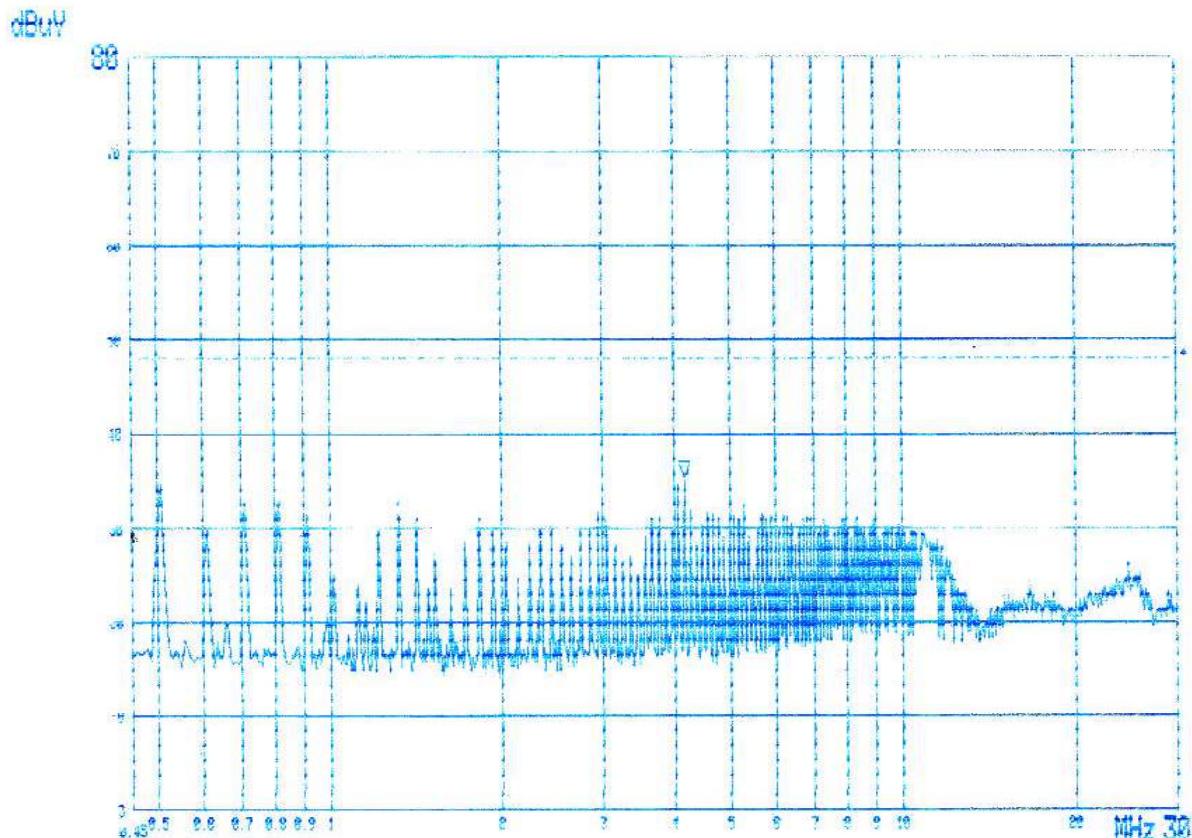

MODEL : HI210
120Vac 60Hz PHASE : L2

MP3 Playback Mode

Quasi-Peak, [dBuV]

Frequency [MHz]	Measurement	Cable Loss	Insertion Loss	Result	Limit	Margin
--------------------	-------------	------------	-------------------	--------	-------	--------


All range < 37.0 - 0.8 < 38.0 48.0 > 10.0

Note :

There was no point to be measured.

Conducted Emissions

(Mains Terminal Disturbance Voltages)

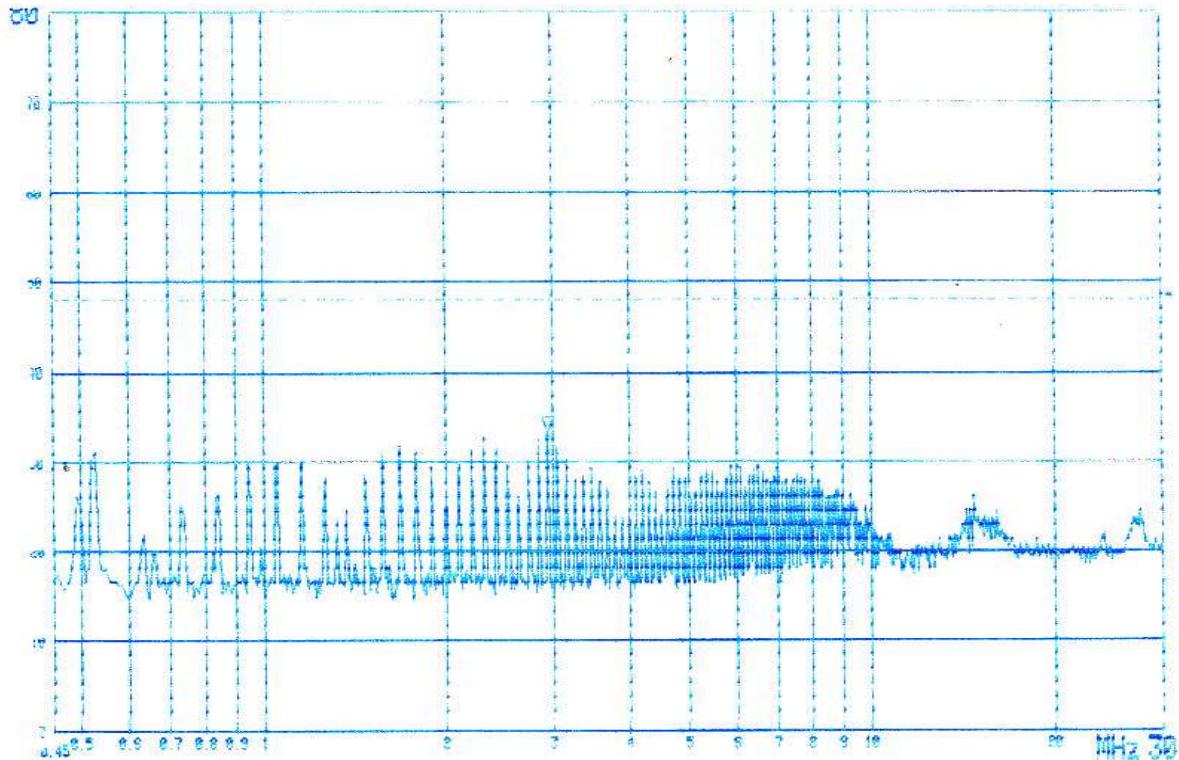

MODEL : MI210
120Vac 60Hz PHASE : L1

Up/Download to Desktop PC

Quasi-Peak, [dBuV]

Frequency [MHz]	Measurement	Cable Loss	Insertion Loss	Result	Limit	Margin
-----------------	-------------	------------	----------------	--------	-------	--------


All range < 37.0 - 0.8 < 38.0 48.0 > 10.0

Note :

There was no point to be measured.

Conducted Emissions

(Mains Terminal Disturbance Voltages)

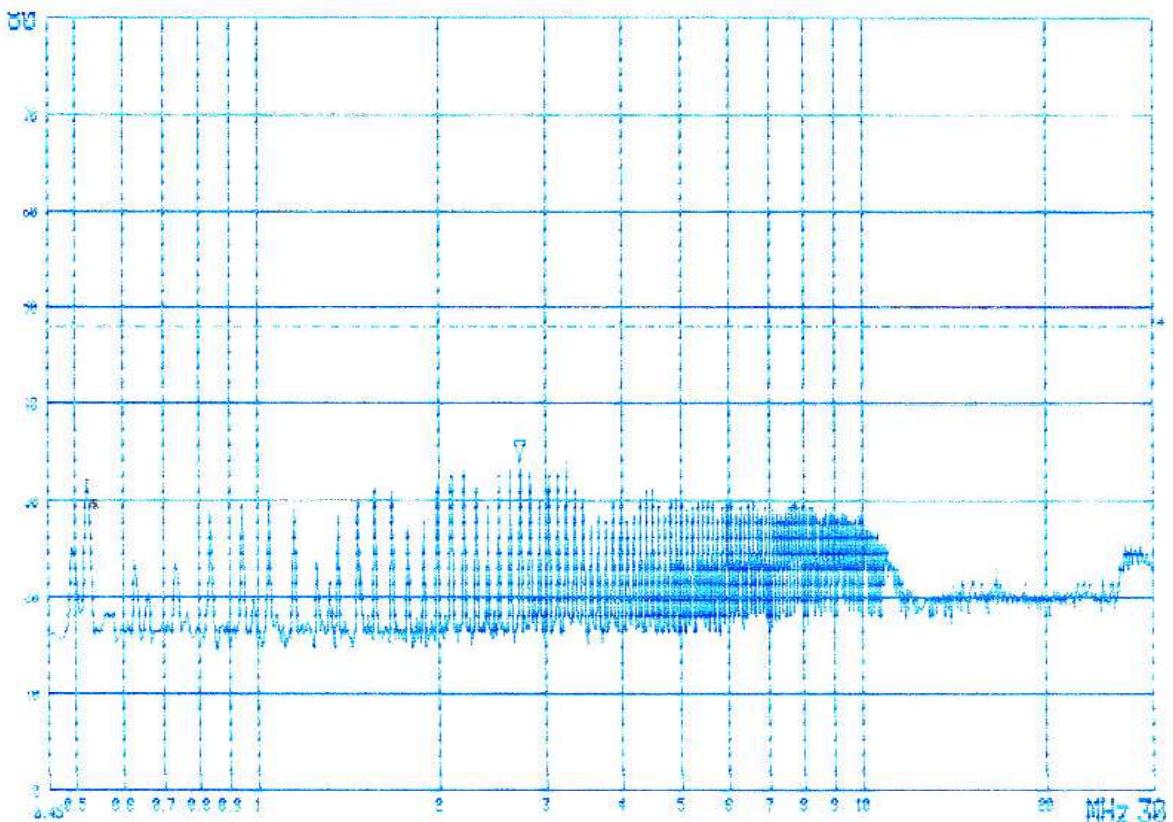

MODEL : HI210
120Vac 60Hz PHASE : L2

Up/Download to Desktop

Quasi-Peak, [dBuV]

Frequency [MHz]	Measurement	Cable Loss	Insertion Loss	Result	Limit	Margin
--------------------	-------------	------------	-------------------	--------	-------	--------

All range < 37.0 - 0.8 < 38.0 48.0 > 10.0

Note :

There was no point to be measured.

TEST CONDITIONS AND DATA

Radiated Emission

[Applicable]

? Test Equipment Used

Model Name	Manufacture	Description	Serial Number	Next Cal. Date
ESVP	Rohde Schwarz	Receiver	861744/0188	June 12, 2002
VULB9160	Schwarzbeck	Antenna	3048	June 6, 2002
EZM	Rohde Schwarz	Spectrum monitor	863183/008	
-	-	-		
-	-	-		
-	-	-		
-	-	-		

The equipment used is calibrated in regular for every year.

[X] Test Program Playback of MP3 files / Upload and download to desktop PC

[X] Test Date August 3, 2001

[X] Test Area Open Field Test Site #1

Note : The play mode was operated with connection of earphone.

*The peripheral equipment of mobile PC is a model of COMPAQ,
LNL020-D55 which is complied with FCC rules.*

- Find the test data in following pages 13 to 15.

Radiated Emissions

(Disturbance Radiation)

[Applicable]

Playback

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB]	Cable Loss [dB]	Angle [deg]	Height [cm]	Polar. [H/V]	Result [dBuV]	Limit [dBuV]	Margin [dB]
66.6	23.4	10.3	1.5	245	220	H	33.7	40	6.3
67.7	24.2	10.1	1.6	124	216	H	34.3	40	5.7
70.0	19.8	9.7	1.6	133	248	H	29.5	40	10.5
120.0	25.9	9.9	2.0	7	245	H	35.8	43.5	7.7
135.5	23.4	11.0	2.1	324	245	H	34.4	43.5	9.1
136.7	21.4	11.1	2.1	321	214	H	32.5	43.5	11.0
140.0	22.2	11.6	2.2	124	220	H	33.8	43.5	9.7
143.4	23.4	11.7	2.2	354	235	H	35.1	43.5	8.4
146.7	23.6	11.9	2.3	320	256	H	35.5	43.5	8.0
150.0	24.5	12.2	2.3	314	224	H	36.7	43.5	6.9
156.3	23.3	12.3	2.3	145	216	H	35.6	43.5	7.9
160.0	24.4	12.3	2.3	160	218	H	36.7	43.5	6.8
163.4	25.0	12.3	2.3	12	220	H	37.3	43.5	6.2
166.7	23.0	12.3	2.4	26	220	H	35.3	43.5	8.2
170.0	24.5	12.3	2.4	0	189	H	36.8	43.5	6.7
180.0	26.8	10.5	2.4	80	280	H	37.3	43.5	6.2
183.3	23.2	10.1	2.4	224	315	H	33.3	43.5	10.2
186.7	23.1	9.6	2.5	250	332	H	32.7	43.5	10.8
190.0	23.2	9.1	2.5	314	314	H	32.3	43.5	11.2
193.3	25.1	9.0	2.5	322	282	H	34.1	43.5	9.4
196.7	24.0	8.8	2.5	125	190	H	32.8	43.5	10.7
200.0	26.5	8.5	2.5	128	191	H	35.0	43.5	8.5
203.4	25.3	8.5	2.5	14	167	H	33.8	43.5	9.7
206.7	26.2	8.4	2.5	34	167	H	34.6	43.5	8.9
210.0	26.4	8.3	2.5	44	170	H	34.7	46.40	11.7
220.0	27.7	8.5	2.8	224	254	H	36.2	46.0	9.8
225.8	28.3	9.1	2.8	282	250	H	37.4	46.0	8.6
230.0	26.1	9.6	2.8	311	234	H	35.7	46.0	10.3

Radiated Emissions

(Disturbance Radiation)

[Applicable]

Upload

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB]	Cable Loss [dB]	Angle [deg]	Height [cm]	Polar. [H/V]	Result [dBuV]	Limit [dBuV]	Margin [dB]
61.4	13.7	11.1	1.4	278	378	H	24.8	40	15.2
66.8	19.9	10.3	1.5	0	388	H	30.2	40	9.8
103.3	9.4	8.6	1.8	336	249	V	18.0	43.5	25.5
110.5	9.4	9.4	1.9	315	220	V	18.8	43.5	24.7
133.3	13.6	10.7	2.1	316	233	V	24.3	43.5	19.2
136.6	12.6	11.1	2.1	16	376	V	23.7	43.5	19.8
149.3	25.9	12.1	2.3	10	370	V	38.0	43.5	5.5
169.9	15.6	12.3	2.4	124	228	V	27.9	43.5	15.6
179.9	18.2	10.6	2.4	11	245	V	28.8	43.5	14.7
186.6	17.0	9.6	2.5	354	398	V	26.6	43.5	16.9
190.0	19.4	9.1	2.5	345	380	V	28.5	43.5	15.0
193.3	22.6	9.0	2.5	12	375	V	31.6	43.5	11.9
196.6	22.6	8.8	2.5	316	254	V	31.4	43.5	12.1
199.9	22.7	8.6	2.5	254	262	H	31.3	43.5	12.2
203.3	19.9	8.5	2.5	354	345	H	28.4	43.5	15.1

Radiated Emissions

(Disturbance Radiation)

[Applicable]

Download

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB]	Cable Loss [dB]	Angle [deg]	Height [cm]	Polar. [H/V]	Result [dBuV]	Limit [dBuV]	Margin [dB]
30.0	15.2	13.3	1.0	0	278	V	28.5	40.0	11.5
36.0	22.1	13.4	1.0	345	265	V	35.5	40.0	4.5
48.0	25.0	10.2	1.3	324	268	V	35.2	40.0	4.8
55.3	21.4	10.9	1.4	323	264	V	32.3	40.0	7.7
72.0	24.5	9.4	1.6	321	244	V	33.9	40.0	6.1
84.0	21.4	7.4	1.6	182	235	V	28.8	40.0	11.2
86.7	23.0	7.2	1.7	175	224	V	30.2	40.0	9.8
196.7	24.5	8.8	2.5	12	228	H	33.3	43.5	10.2
200.0	29.0	8.5	2.5	13	247	H	37.5	43.5	6.0
204.2	26.8	8.5	2.5	344	216	H	35.3	43.5	8.2
206.7	27.0	8.4	2.5	324	222	H	35.4	43.5	8.1
210.0	23.0	8.3	2.5	326	220	H	31.3	43.5	12.2
211.7	23.3	8.3	2.5	349	235	H	31.6	43.5	11.9
213.4	23.3	8.4	2.6	135	216	H	31.7	43.5	11.8
240.0	23.0	10.3	2.9	245	218	H	33.3	46.0	12.7
253.3	25.1	10.9	2.8	0	219	H	36.0	46.0	10.0