



EMC Technologies Pty Ltd
ABN 82 057 105 549
176 Harrick Road
Keilor Park Victoria Australia 3042

Ph: + 613 9365 1000
Fax: + 613 9331 7455
email: melb@emctech.com.au

**EMI TEST REPORT FOR CERTIFICATION
to
FCC PART 15 Subpart C (Section 15.249) & RSS-210**

FCC ID: PTK-0038
IC ID: 10655A-0038

Test Sample: Recording and Feedback Device v5
Model Number: RFD

Report Number M120346R_RFD_Cert

Tested for: dorsaVi Pty Ltd

Re-Issue Date: 29th January 2013

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.

  Accreditation No. 5292	Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports. This document shall only be reproduced in full, with the exception of the certificate on p3
---	--

EMI TEST REPORT FOR CERTIFICATION
to
FCC PART 15 Subpart C (Section 15.249) & RSS-210
EMC Technologies Report No. M120346R_RFD_Cert
Re-Issue Date: 29th January 2013

CONTENTS

1.0	INTRODUCTION
2.0	GENERAL INFORMATION
3.0	CONDUCTED EMISSION MEASUREMENTS
4.0	RADIATED EMISSION MEASUREMENTS
5.0	ANTENNA REQUIREMENT
6.0	COMPLIANCE STATEMENT
7.0	MEASUREMENT UNCERTAINTIES
8.0	MEASUREMENT INSTRUMENT
CONFIDENTIAL 1	OPERATIONAL DESCRIPTION
CONFIDENTIAL 2	BLOCK DIAGRAM
CONFIDENTIAL 3	SCHEMATICS
ATTACHMENT 1	EXTERNAL PHOTOGRAPHS
ATTACHMENT 2	INTERNAL PHOTOGRAPHS
ATTACHMENT 3	TEST SETUP PHOTOGRAPHS
ATTACHMENT 4	LABEL
ATTACHMENT 5	USER MANUAL



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

EMI TEST REPORT FOR CERTIFICATION
to
FCC PART 15 Subpart C (Section 15.249) & RSS-210

Report Number: M120346R_RFD_Cert

Test Sample: Recording and Feedback Device v5

Model Number: RFD

Manufacturer: dorsaVi Pty Ltd

Equipment Type: Intentional Radiator

Tested for: dorsaVi Pty Ltd

Address: Level 1, 120 Jolimont Road, Melbourne East
VIC 3002, Australia

Phone: +61 (0)3 9652 2191

Contact: Daniel Ronchi

Test Standards: FCC Part 15, Subpart C – Intentional Radiators
Section 15.249: Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, 5725 – 5875 MHz and 24.0 – 24.25 GHz.
ANSI C63.4 – 2009
RSS-210 Issue 8, Licence-Exempt Radio Apparatus
Annex 2, A2.9: bands 902 – 928 MHz, 2400 – 2483.5 MHz and 5725 – 5875 MHz
RSS-Gen Issue 3, General Requirements and Information for the Certification of Radiocommunication Equipment

Test Dates: 4th May 2012 to 18th January 2013



Test Engineers: Rob Weir
Chieu Huynh

Attestation: *I hereby certify that the device(s) described herein were tested as described in this report and that the data included is that which was obtained during such testing.*



Authorised Signatory: Chieu Huynh
EMC Technologies Pty Ltd

Issued by EMC Technologies Pty. Ltd., 176 Harrick Road, Keilor Park, VIC, 3042, Australia.
Phone: +61 3 9365 1000 Fax: +61 3 9331 7455 www.emctech.com.au



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

EMI TEST REPORT FOR CERTIFICATION to FCC PART 15 Subpart C (Section 15.249) & RSS-210

1.0 INTRODUCTION

EMI testing was performed on the Recording and Feedback Device v5, model number: RFD.

The test sample **complied** with the requirements of 47 CFR, Part 15 Subpart C - Section 15.249.

The test sample also complied with the Industry Canada RSS-210 and RSS-Gen.

1.1 Summary of Results

Test results and procedures were performed in accordance with the following Federal Communications Commission (FCC) and Industry Canada standards/regulations.

FCC Part 15, Subpart C	Industry Canada RSS-210 and RSS-Gen	Test Performed	Result
15.203	RSS-Gen (7.1.2)	Antenna Requirement	Complied
15.207	RSS-Gen (7.2.4)	Conducted Emissions	Complied
15.209	RSS-Gen (7.2.5)	Radiated Emissions	Complied
15.249 (a)	A2.9(a)	Fundamental Field Strength	Complied
15.249 (a)	A2.9(a)	Harmonics Emissions	Complied
15.249 (b)		Fixed, point to point	Not Applicable
15.249 (c)	A2.9(a)	Field strength limits @ 3 meters	Noted
15.249 (d)	A2.9(b)	Spurious Emissions	Complied
15.249 (e)		20 dB Peak to Average	Complied
15.249 (f)			Noted

The measurement procedure used was in accordance with ANSI C63.4-2009. The instrumentation conformed to the requirements of ANSI C63.2-1996.

1.2 EUT – Voltage Power Conditions

The test sample is powered by the internal battery and also via the USB port.

1.3 Modifications

No modifications were performed.

2.0 GENERAL INFORMATION

(Information supplied by the Client)

2.1 Product Details

Test Sample:	Recording and Feedback Device v5
Model Number:	RFD
Manufacturer:	dorsaVi Pty Ltd
RF Operating frequency:	2405 MHz to 2475 MHz (channels 5 to 75)
Modulation	GFSK

2.2 Operational Description

Recording and Feedback Device v5 (RFD) is a portable processing and recording unit that receives acquired data from the MD sensor units via a wireless interface operating in the 2.45 GHz ISM band. It also beeps, vibrates and displays the information on a LCD based on user parameters.

2.3 Test Configuration

The RFD was configured to transmit with modulation or without as needed.

Measurements were performed in two configurations:

- The EUT is powered by the internal battery (new battery fitted)
- The EUT is powered via the USB port (charging)

and rotated around 3 orthogonal planes. Worst-case results are reported.

2.4 Test Procedure

Emissions measurements were performed in accordance with the procedures of ANSI C63.4-2009. Radiated emissions tests were performed at a distance of 10 metres from the EUT for frequencies 30 – 1000 MHz and 3 metres for frequency bands: > 1000MHz and 0.009 – 30 MHz.

2.5 Test Facility

2.5.1 General

EMC Technologies Pty Ltd is listed by the FCC as a test laboratory able to perform compliance testing for the public. EMC Technologies is listed as an FCC part 47CFR2.948 test lab and may perform the testing required under Parts 15 and 18 – **FCC Registration Number 90560**

EMC Technologies Pty Ltd has also been accredited as a Conformity Assessment Body (CAB) by Australian Communications and Media Authority (ACMA) under the APECTEL MRA and is designated to perform compliance testing on equipment subject to Declaration of Conformity (DoC) and Certification under Parts 15 & 18 of the FCC Commission's rules – **Registration Number 494713 & Designation number AU0001.**

EMC Technologies has also been accepted by Industry Canada for the performance of radiated measurements in accordance with RSS 212, Issue 1 (Provisional) - **Industry Canada number 3569B.**



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

Measurements were performed at EMC Technologies' laboratory in Keilor Park, Victoria Australia.

2.5.2 NATA Accreditation

EMC Technologies is accredited in Australia to test to the following standards by the National Association of Testing Authorities (NATA).

“FCC Part 15 unintentional and intentional emitters in the frequency range 9kHz to 18 GHz excluding TV receivers (15.117 and 15.119), TV interface devices (15.115), cable ready consumer electronic equipment (15.118), cable locating equipment (15.213) and unlicensed national information infrastructure devices (Sub part E).”

The current full scope of accreditation can be found on the NATA website: www.nata.asn.au It also includes a large number of emissions, immunity, SAR, EMR and Safety standards.

NATA is the Australian national laboratory accreditation body and has accredited EMC Technologies to operate to the IEC/ISO17025 requirements. A major requirement for accreditation is the assessment of the company and its personnel as being technically competent in testing to the standards. This requires fully documented test procedures, continued calibration of all equipment to the National Standard at the National Measurements Institute (NMI) and an internal quality system to ISO 9002. NATA has mutual recognition agreements with the National Voluntary Laboratory Accreditation Program (NVLAP) and the American Association for Laboratory Accreditation (A²LA).

2.6 Test Equipment Calibration

Measurement instrumentation and transducers were calibrated in accordance with the applicable standards by an independent NATA registered laboratory such as Agilent Technologies (Australia) Pty Ltd or the National Measurement Institute (NMI). All equipment calibration is traceable to Australia national standards at the National Measurements Institute. The reference antenna calibration was performed by NMI and the working antennas (biconilog and horns) calibrated by the EMC Technologies. The complete list of test equipment used for the measurements, including calibration dates and traceability is contained in the Measurement Instrument Details.

  Accreditation No. 5292	Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports. This document shall only be reproduced in full, with the exception of the certificate on p3
---	--

3.0 CONDUCTED EMISSION MEASUREMENTS

3.1 Test Procedure

The arrangement specified in ANSI C63.4-2009 was adhered to for the conducted EMI measurements. The EUT was placed in the RF screened enclosure and a CISPR EMI Receiver as defined in ANSI C63.2-1996 was used to perform the measurements.

The EMI Receiver was operated under program control using the Max-Hold function and automatic frequency scanning, measurement and data logging techniques. The specified 0.15 MHz to 30 MHz frequency range was sub-divided into sub-ranges to ensure that all short duration peaks were captured.

3.2 Peak Maximising Procedure

The various operating modes of the system were investigated. For each of the sub-ranges, the EMI receiver was set to continuous scan with the Peak detector set to Max-Hold mode. The Quasi-Peak detector and the Average detector were then invoked to measure the actual Quasi-Peak and Average level of the most significant peaks, which were detected.

3.3 Calculation of Voltage Levels

The voltage levels were automatically measured in software and compared to the test limit. The method of calculation was as follows:

$$VEMI = VRx + LBPF$$

Where: **VEMI** = the Measured EMI voltage in dB μ V to be compared to the limit.
VRx = the Voltage in dB μ V read directly at the EMI receiver.
LBPF = the insertion loss in dB of the cables and the Limiter and Pass Filter.

3.4 Plotting of Conducted Emission Measurement Data

The measurement data pertaining to each frequency sub-range were concatenated to form a single graph of (peak) amplitude versus frequency. This was performed for both Active and Neutral lines and the composite graph was subsequently plotted. A list of the highest relevant peaks and the respective Quasi-Peak and Average values were also plotted on the graph.

3.5 Results of Conducted Emission Measurement

Worst case emissions occurred complied with the FCC Class B, quasi peak and average limits by margins of > 10 dB.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

Active Line


Grey Innovation
Transmitter in Charging Cradle

Active line

Job No: m120346 Graph No. 1
Test Date: 18/01/2013

Limit1: FCC_BQPN FCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)
Limit2: FCC_BAVN FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)

Trace 2: Active Line
R:\FME\B\2012\MAR\M120346\M120346CC\GraphA.bmp
t:L0220914 c1:C4320613 c2:C3990313 p:NONE a:L0180813
Site ID: Room#2, 176 Harriek Rd, Keilor Park, Vic
Test Officer: Chieu Huynh Plot date: 01-23-2013 14:45:55

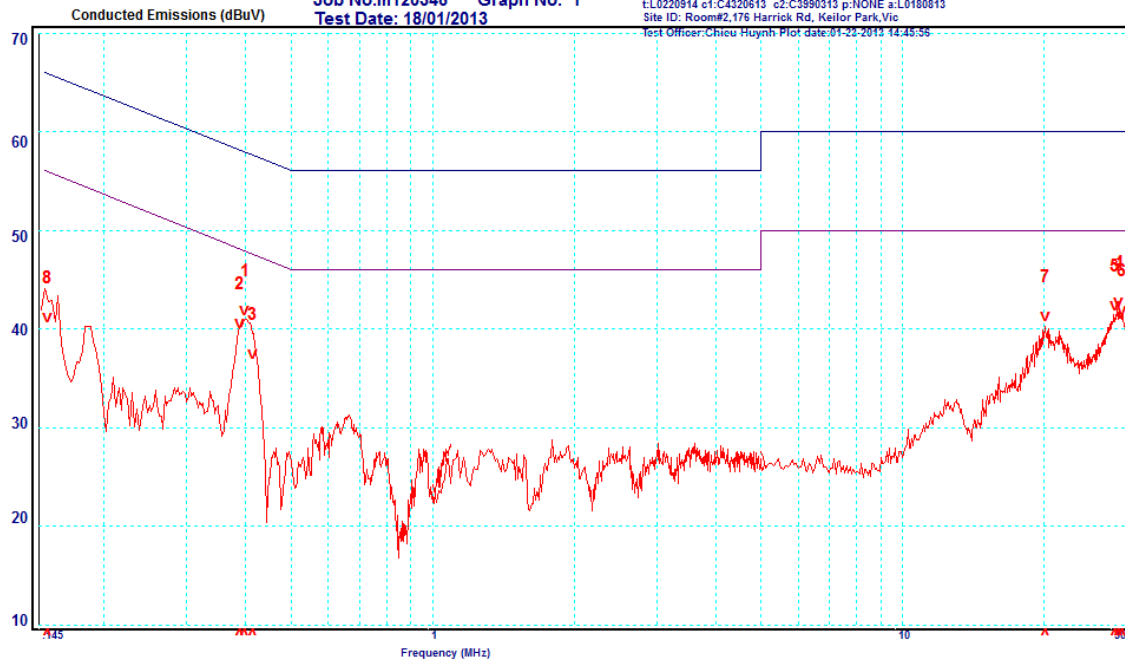

Peak	Frequency MHz	Line	Measured QP Level dBμV	QP Limit dBμV	ΔQP ±dB	Measured AV Level dBμV	AV Limit dBμV	ΔAV ±dB
1	0.399	Active	40.7	57.9	-17.2	29.8	47.9	-18.1
2	0.389	Active	36.7	58.1	-21.4	28.9	48.1	-19.2
3	0.415	Active	36.2	57.6	-21.4	29.0	47.6	-18.6
4	28.91	Active	38.0	60.0	-22.0	33.4	50.0	-16.6
5	28.34	Active	37.7	60.0	-22.3	33.1	50.0	-16.9
6	29.35	Active	36.8	60.0	-23.2	32.3	50.0	-17.7
7	20.18	Active	33.6	60.0	-26.4	27.3	50.0	-22.7
8	0.152	Active	36.0	65.9	-29.9	26.5	55.9	-29.4



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

Neutral Line

Grey Innovation
Transmitter in Charging Cradle

Neutral line

Conducted Emissions (dB μ V)


Job No: m120346 Graph No. 2
Test Date: 18/01/2013

Limit1: FCC_BQPN
Limit2: FCC_BAVN

FCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)
FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)

Trace 2: Neutral Line

R:\FMELB\2012\MAR\M120346\M120346CC\GraphN.bmp
L10220914 c1:1:4320613 c2:C3990313 p:NONE z:L0180813
Site ID: Room#2,176 Harrick Rd, Keilor Park,Vic
Test Officer: Chieu Huynh Plot date: 01-22-2013 14:46:27

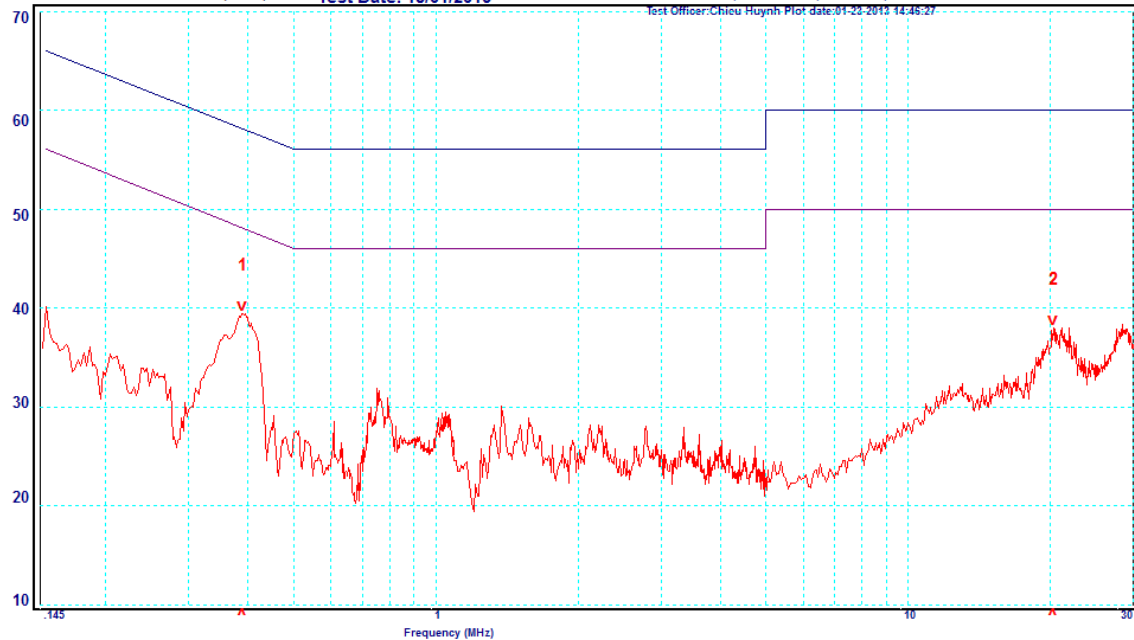

Peak	Frequency MHz	Line	Measured QP Level dB μ V	QP Limit dB μ V	Δ QP $\pm$ dB	Measured AV Level dB μ V	AV Limit dB μ V	Δ AV $\pm$ dB
1	0.390	Neutral	38.1	58.1	-20.0	31.2	48.1	-16.9
2	20.34	Neutral	31.9	60.0	-28.1	25.1	50.0	-24.9



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

4.0 RADIATED EMISSION MEASUREMENTS

4.1 Test Procedure

Testing was performed in accordance with the requirements of FCC Part 15.249.

The EUT was set up on the table top (placed on turntable) of total height 80 cm above the ground plane, and operated as described in section 2 of this report. The EMI Receiver was operated under software control via the PC Controller through the IEEE.488 Interface Bus Card Adaptor. The test frequency range was sub-divided into smaller bands with sufficient frequency resolution to permit reliable display and identification of possible EMI peaks while also permitting fast frequency scan times. A calibrated loop antenna was used for measurements between 0.009 MHz to 30 MHz. A calibrated Biconilog antenna was used for measurements between 30 MHz to 1000 MHz. Calibrated EMCO 3115 and ETS standard gain horn antennas were used for measurements between 1 to 25 GHz.

The Receiver bandwidth was set to 6.0 dB.

The following bandwidth settings were used:

RBW = 1 kHz and VBW = 3 kHz for frequency band 9 kHz – 150 kHz

RBW = 9 kHz and VBW = 30 kHz for frequency band 150 kHz – 30 MHz

RBW = 120 kHz and VBW = 300 kHz for frequency band 30 MHz – 1000 MHz

Peak measurements above 1 GHz: RBW = VBW = 1 MHz

The EUT was slowly rotated with the Peak Detector set to Max-Hold. This was performed for two antenna heights. When an emission was located, it was positively identified and its maximum level found by rotating the automated turntable, and by varying the antenna height. Each significant peak was investigated with the Quasi-Peak/Average Detectors. The software for cable losses automatically corrected the measurement data for each frequency range, antenna factors and preamplifier gain and all data was then stored on disk in sequential data files. This process was performed for both horizontal and vertical antenna polarisations.

4.2 Calculation of field strength

The field strength was calculated automatically by the software using all the pre-stored calibration data. The method of calculation is shown below:

E = V + AF - G + L Where:

E = Radiated Field Strength in dB μ V/m.

V = EMI Receiver Voltage in dB μ V. (measured value)

AF = Antenna Factor in dB(m⁻¹). (stored as a data array)

G = Preamplifier Gain in dB. (stored as a data array)

L = Cable loss in dB. (stored as a data array of Insertion Loss versus frequency)

- Example Field Strength Calculation**

Assuming a receiver reading of 34.0 dB μ V is obtained at 90 MHz, the Antenna Factor at that frequency is 9.2 dB. The cable loss is 1.9 dB while the preamplifier gain is 20 dB. The resulting Field Strength is therefore as follows:

$$34.0 + 9.2 + 1.9 - 20 = 25.1 \text{ dB}\mu\text{V/m}$$



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.


This document shall only be reproduced in full, with the exception of the certificate on p3

4.3 Transmitter Fundamental and Spurious Emissions


4.3.1 Frequency Band: 0.09 MHz - 30 MHz

Initial investigations were performed with all three frequencies (low, middle and high). No significant differences in emissions were observed. Final testing was performed while the transmitter continuously operated at 2.440 GHz.

0.09MHz to 30MHz – Perpendicular

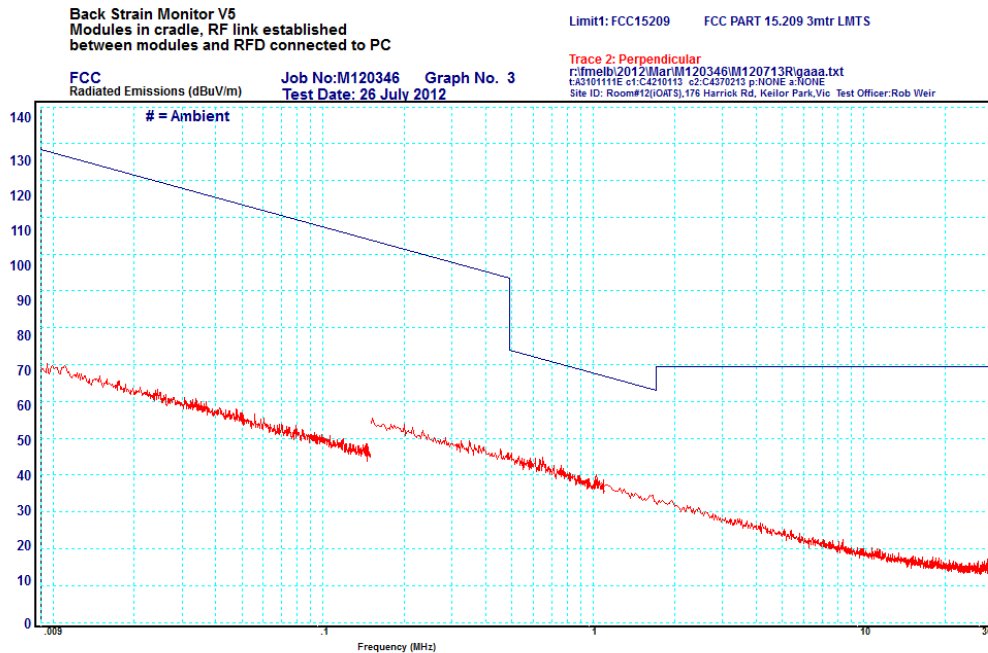

0.09MHz to 30MHz – Parallel

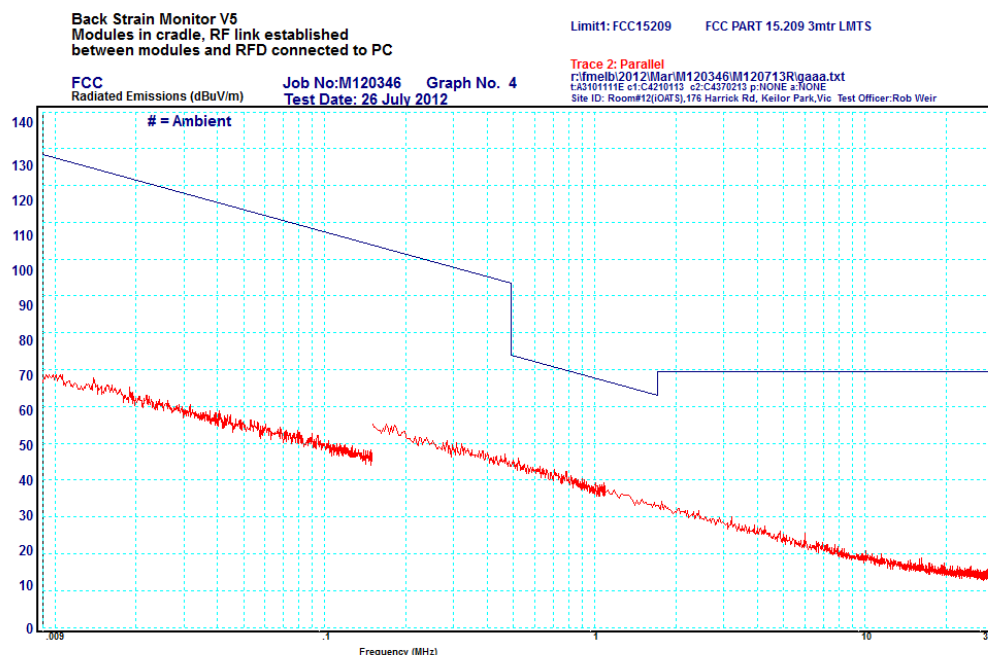


Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

4.3.2 Frequency Band: 30 MHz - 1000 MHz

Initial investigations were performed with all three frequencies (low, middle and high). No significant differences in emissions were observed. Final testing was performed while the transmitter continuously operated at 2.440 GHz.

30MHz to 1000MHz - Vertical

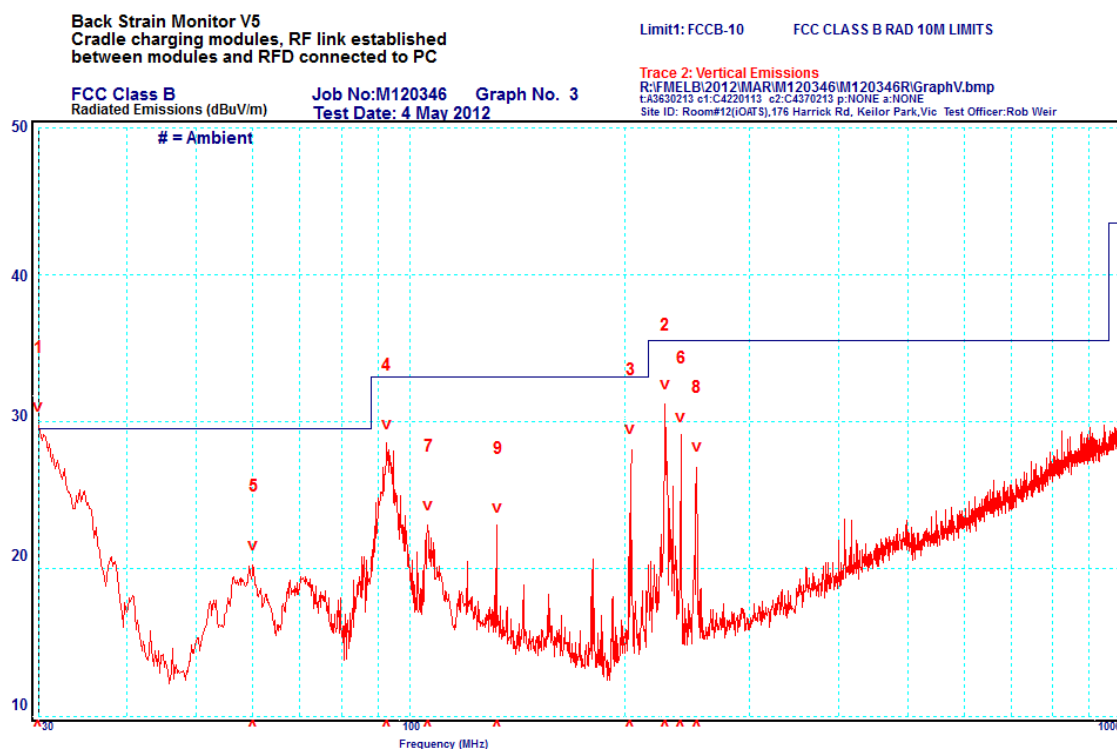

Peak	Frequency MHz	Polarisation	QP Measured dBμV/m	QP Limit dBμV/m	ΔQP ± dB
1	30.04	Vertical	25.2	29.5	-4.3
2	228.03	Vertical	28.1	35.5	-7.4
3	204.03	Vertical	24.1	33.0	-8.9
4	92.64	Vertical	23.9	33.0	-9.1
5	60.24	Vertical	16.1	29.5	-13.4
6	239.95	Vertical	21.3	35.5	-14.2
7	106.06	Vertical	17.7	33.0	-15.3
8	252.78	Vertical	17.5	35.5	-18.0
9	132.71	Vertical	12.2	33.0	-20.8



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

30MHz to 1000MHz - Horizontal

Back Strain Monitor V5
Cradle charging modules, RF link established
between modules and RFD connected to PC

Limit1: FCCB-10


FCC CLASS B RAD 10M LIMITS

FCC Class B
Radiated Emissions (dBuV/m)

Job No: M120346 Graph No. 4
Test Date: 4 May 2012

Trace 2: Horizontal Emissions

R:\FMELBI\2012\MAR\M120346\M120346R\GraphH.bmp
t:A3630213 c1:C4220113 e2:C4370213 p:NONE a:NONE
Site ID: Room#12(IQATS),176 Harrick Rd, Kellor Park, Vic Test Officer: Rob Weir

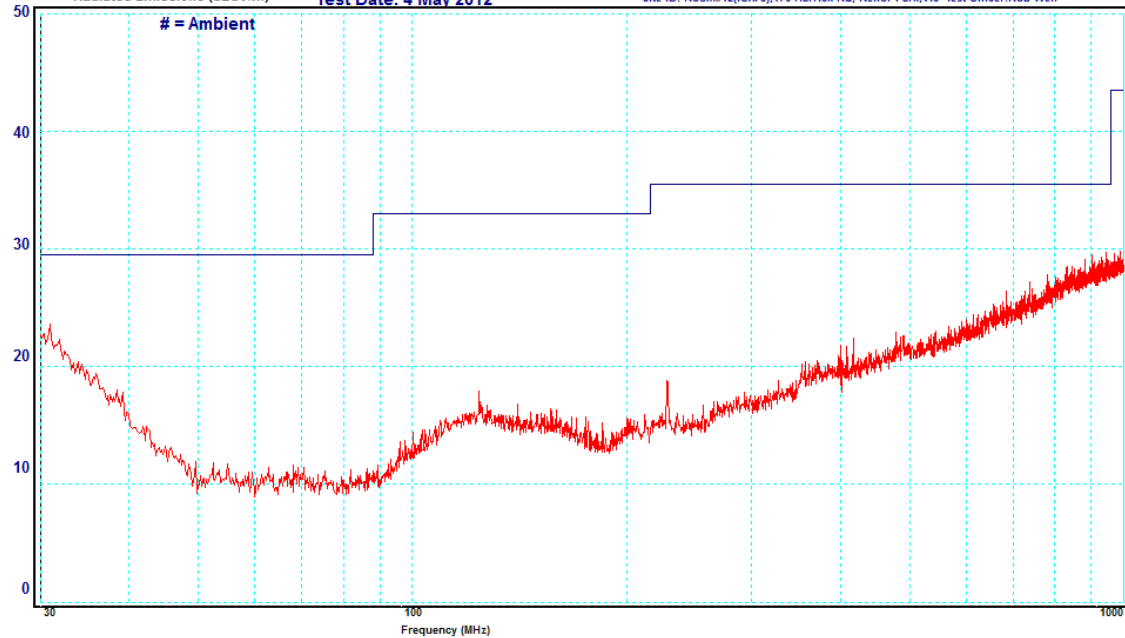

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

4.3.3 Frequency Band: 1 – 25 GHz

The measurements were made with a peak detector. The average measurement results were calculated by subtracting 20dB to compensate for the pulse desensitization correction factor. Refer to section 4.3.6 for duty cycle calculation.

Low Frequency - Tx at 2405 MHz

Frequency GHz	Peak Detector dBμV/m	Average Detector dBμV/m	Peak Limit dBμV/m	Average Limit dBμV/m	Result
2.405	104.9	84.9	114.0	94.0	Complied
4.810	65.6	45.6	74.0	54.0	Complied
7.215	57.5	37.5	74.0	54.0	Complied
9.620	53.0	33.0	74.0	54.0	Complied
12.025	46.0	26.0	74.0	54.0	Complied

Middle Frequency - Tx at 2440 MHz

Frequency GHz	Peak Detector dBμV/m	Average Detector dBμV/m	Peak Limit dBμV/m	Average Limit dBμV/m	Result
2.440	105.4	85.4	114.0	94.0	Complied
4.880	67.3	47.3	74.0	54.0	Complied
7.320	56.8	46.8	74.0	54.0	Complied
9.760	53.0	33.0	74.0	54.0	Complied
12.200	46.1	26.1	74.0	54.0	Complied

High Frequency - Tx at 2475 MHz

Frequency GHz	Peak Detector dBμV/m	Average Detector dBμV/m	Peak Limit dBμV/m	Average Limit dBμV/m	Result
2.475	106.0	86.0	114.0	94.0	Complied
4.950	69.1	49.1	74.0	54.0	Complied
7.425	57.4	37.4	74.0	54.0	Complied
9.900	53.0	33.0	74.0	54.0	Complied
12.375	51.0	31.0	74.0	54.0	Complied

Results: The fundamental and harmonic emissions complied with the FCC limits in sections 15.209 and 15.249.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3


4.3.4 Band Edge Measurements

The test sample transmit frequency was adjusted to the lowest and highest frequency. 30 dB down from the peak was measured and the frequency recorded. At 3 metres the transmitted signal was 30 dB above the 15.209 spurious emission limit.


Lowest band edge = 2.404060 GHz (requirement > 2.4000 GHz)

Upper band edge = 2.47582 GHz (requirement < 2.4835 GHz)

Band-Edge Low

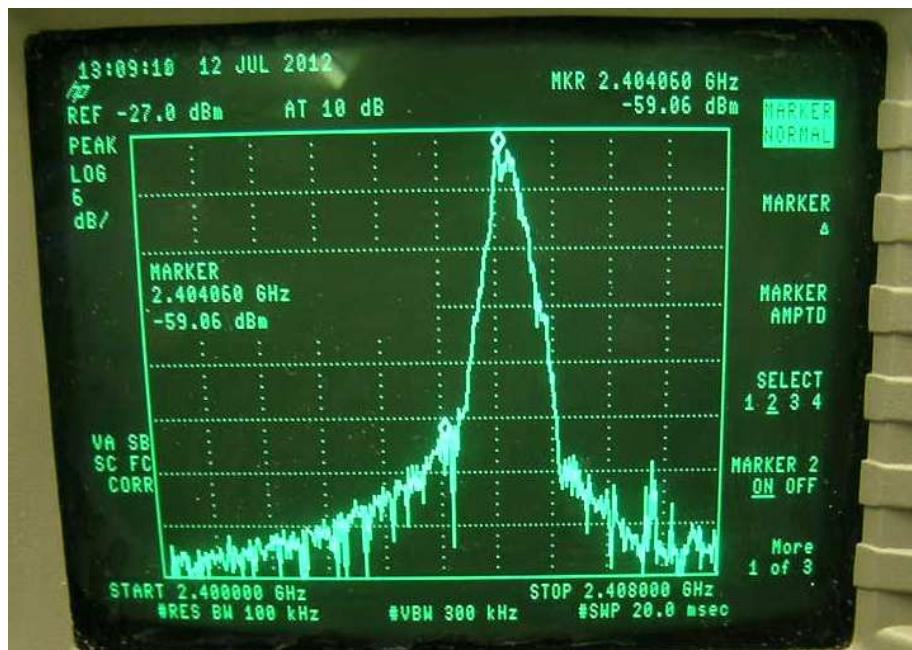

Band-Edge High

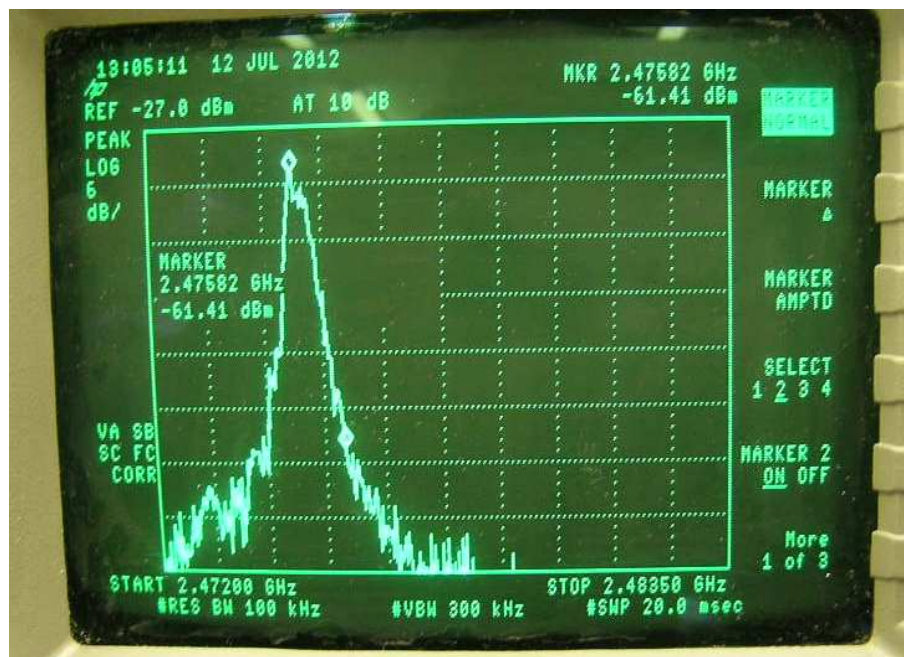


Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.


This document shall only be reproduced in full, with the exception of the certificate on p3

4.3.5 Band Width Measurements

The 6 dB down bandwidths were measured at the upper, middle and lower frequencies. They were all similar; below is the bandwidth with the transmit frequency adjusted to 2.44 GHz.

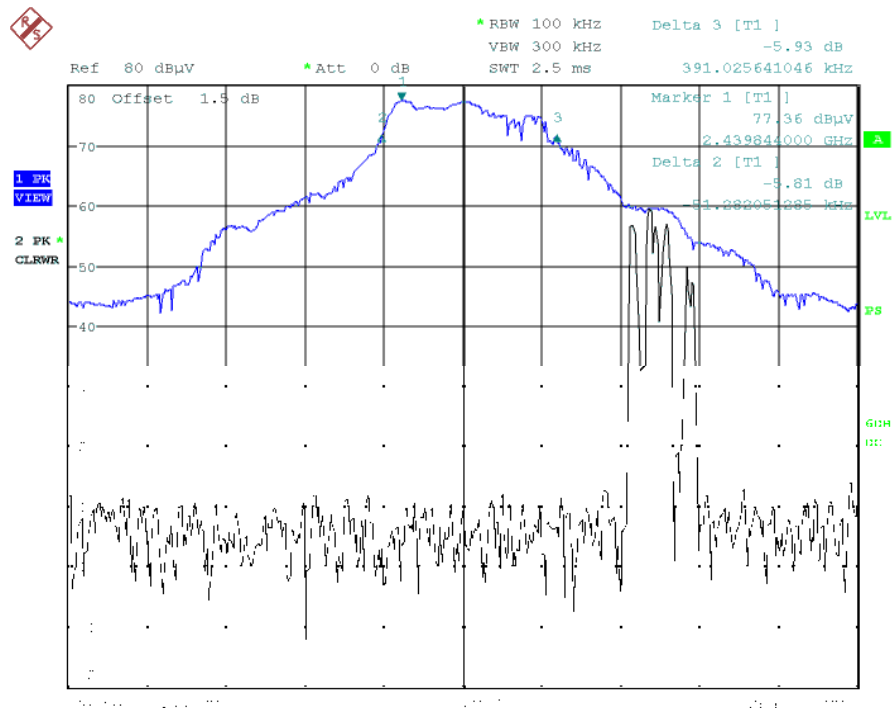

6dB down bandwidth = 391.026 kHz

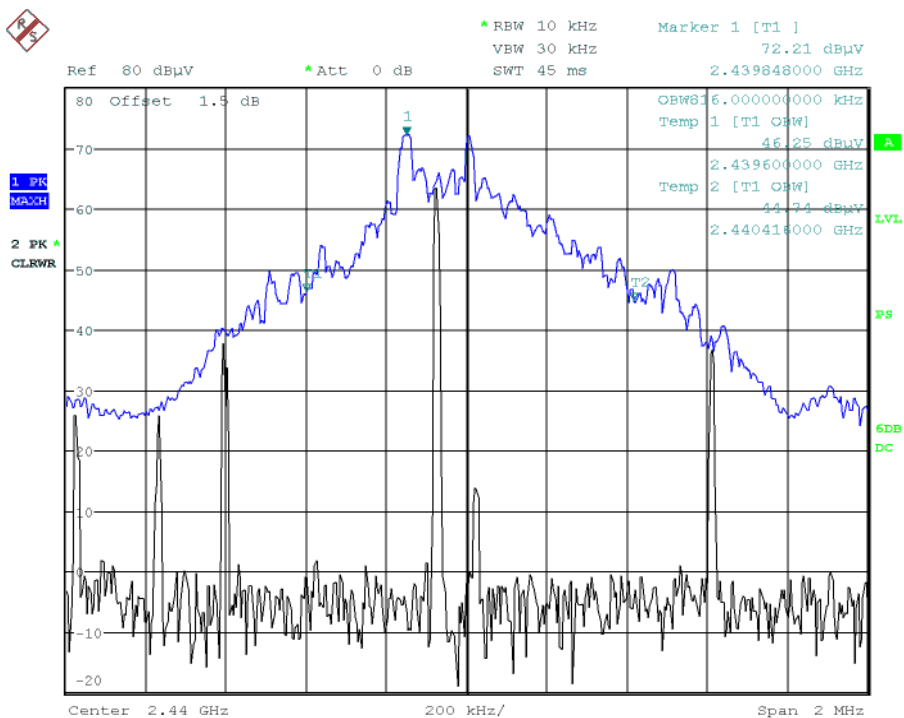

99% power bandwidth = 816 kHz




Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.


This document shall only be reproduced in full, with the exception of the certificate on p3

4.3.6 Duty Cycle Measurements

The time that the transmitter was on for was $T_{ON} = 472 \mu s$

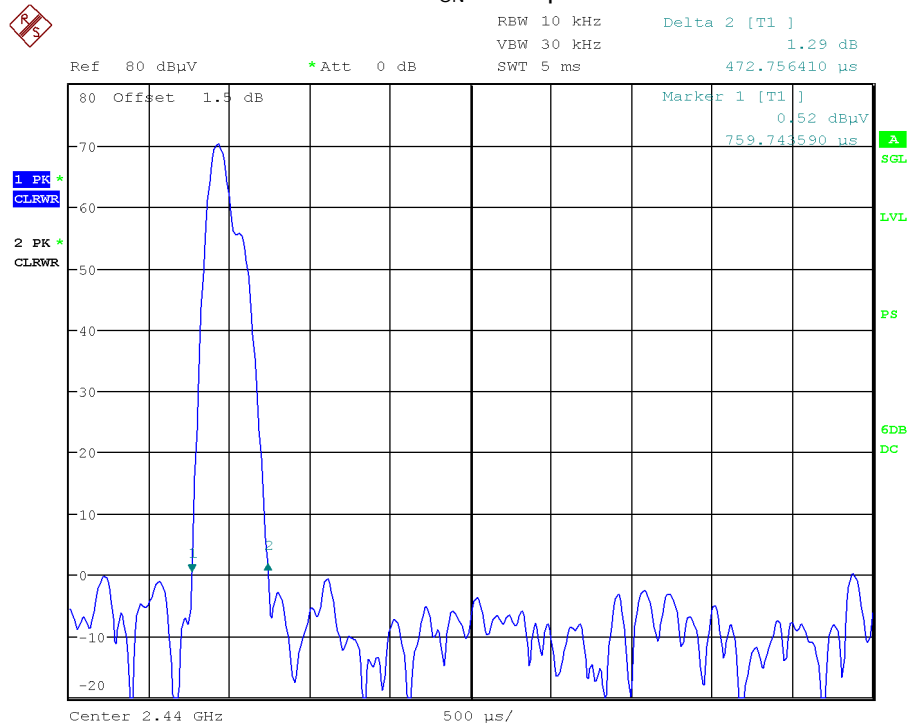

In any 100ms the highest number of transmissions was 15:

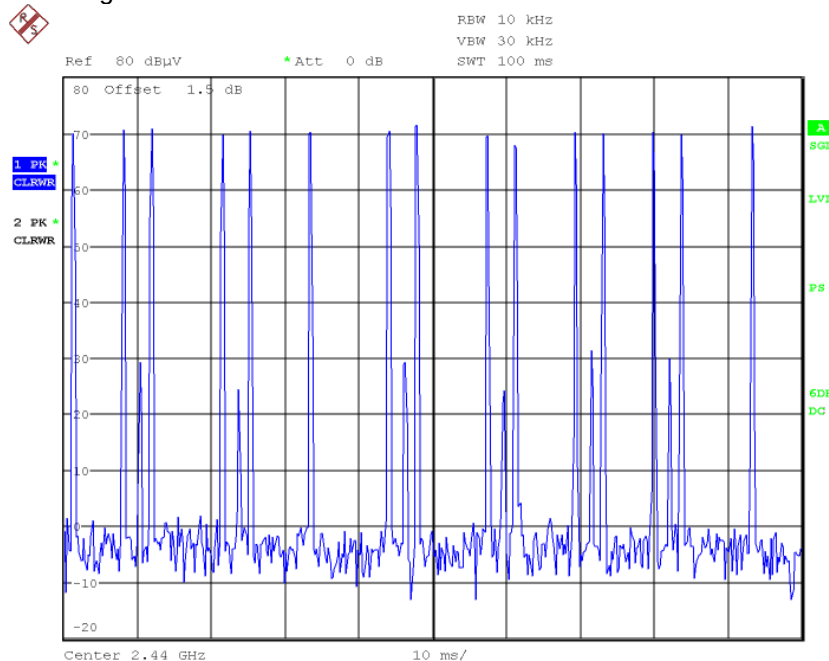

* The smaller signals were from the other modules as a link was required between the modules to work correctly.

Duty Cycle:

$$(T_{ON} \times 15) \div (100ms) \times 100\% = 7.08\%$$

Pulse desensitization correction factor = -22.5dB (applied maximum -20dB factor).



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

5.0 ANTENNA REQUIREMENT

This intentional radiator was designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.0 COMPLIANCE STATEMENT

The Recording and Feedback Device v5, model number: RFD tested on behalf of dorsaVi Pty Ltd, **complied** with the requirements of 47 CFR, Part 15 Subpart C - Rules for Radio Frequency Devices (intentional radiators), Section 15.249.

The test sample also complied with the Industry Canada RSS-210 and RSS-Gen.

Results were as follows:

FCC Part 15, Subpart C	Industry Canada RSS-210 and RSS-Gen	Test Performed	Result
15.203	RSS-Gen (7.1.2)	Antenna Requirement	Complied
15.207	RSS-Gen (7.2.4)	Conducted Emissions	Complied
15.209	RSS-Gen (7.2.5)	Radiated Emissions	Complied
15.249 (a)	A2.9(a)	Fundamental Field Strength	Complied
15.249 (a)	A2.9(a)	Harmonics Emissions	Complied
15.249 (b)		Fixed, point to point	Not Applicable
15.249 (c)	A2.9(a)	Field strength limits @ 3 meters	Noted
15.249 (d)	A2.9(b)	Spurious Emissions	Complied
15.249 (e)		20 dB Peak to Average	Complied
15.249 (f)			Noted

7.0 MEASUREMENT UNCERTAINTIES

EMC Technologies has evaluated the equipment and the methods used to perform the emissions testing. The estimated measurement uncertainties for emissions tests shown within this report are as follows:

Conducted Emissions: 9kHz to 30 MHz ± 3.2 dB

Radiated Emissions:

9 kHz to 30 MHz	± 4.1 dB
30 MHz to 300 MHz	± 5.1 dB
300 MHz to 1000 MHz	± 4.7 dB
1 GHz to 18 GHz	± 4.6 dB

The above expanded uncertainties are based on standard uncertainties multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

8.0 MEASUREMENT INSTRUMENT

EQUIPMENT TYPE	MANUFACTURER, MODEL NUMBER and SERIAL NUMBER	CALIBRATION DUE DD/MM/YYYY
EMI RECEIVER	Hewlett Packard 8546A, 9kHz to 6.5GHz SN: 3549A00290	05/09/2013
	HP 8546A Sn: 3520A00249 (R-017)	14/11/2013
	Rohde & Schwarz ESU40 20Hz to 40GHz, SN: 1302.6005.40	13/01/2013
ANTENNAS	EMCO Active Receiving Loop Antenna 6502 9kHz-30 MHz, SN: 2021	19/11/2012
	Sunol Sciences Corporation JB6 Hybrid 30MHz to 6GHz, SN: A012312	02/02/2013
	EMCO 3115 Double Ridged Horn 1GHz to 18GHz, SN: 8908-3282	16/01/2015
	ETS-Lindgren Standard Gain Horn 3160-09 18-26.5 GHz, SN: 66032	08/02/2014
LISN	EMCO 3825/2 (L-022) Sn. 9607-1505	05/09/2014
LIMITER	HP LIMITER TRANSIENT (L-017) (9 kHz – 200 MHz) 11947A Sn. 3107A02888	23/08/2014



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall only be reproduced in full, with the exception of the certificate on p3